


Curve Tracers

▶ 370B • 371B

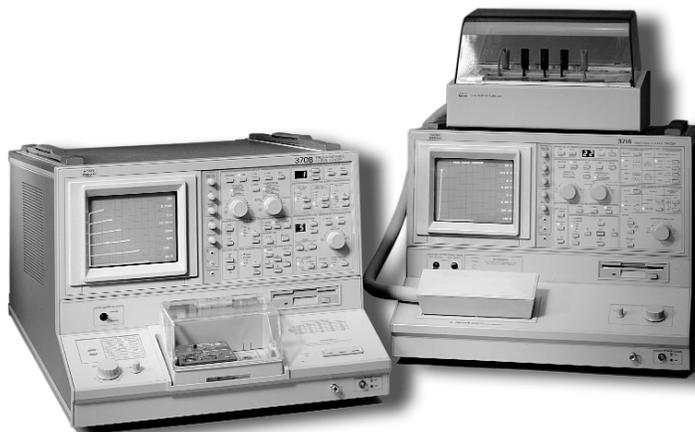

370B and 371B Programmable Curve Tracers

Tektronix curve tracers offer power and versatility to test the DC characteristics of semiconductor devices. The 370B and 371B curve tracers combine a simple-to-use front panel, digital acquisition and display, and programmability to serve a variety of application needs.

In the R&D lab, Tektronix curve tracers are used for characterization of new designs, extraction of SPICE parameters, failure analysis and data sheet generation. In manufacturing test, Tektronix curve tracers are used to verify device quality and process monitoring. They are also used for incoming inspection to verify device performance, perform failure analysis and match components.

▶ Features

High-resolution DC Parametric Measurements With the 370B (Resolution Down to 1 pA or 2 μ V)

High Voltage and Current Sourcing With the 371B (Up to 3,000 V or 400 A)

Built-in Cursor Measurements – Dot, Window and Function Line

Kelvin Sense Measurements

Sweep Measurement Mode

Waveform Comparison and Averaging

Fully Programmable

1.44 MB Floppy Drive Stores Setup and Bitmap of Curves

Direct Hardcopy with Third-party Printer

▶ Applications

Parametric Characterization of Semiconductors

Failure Analysis

Data Sheet Generation

Manufacturing Test

Process Monitoring and Quality Control

Incoming Inspection

Component Matching

COMPUTING

COMMUNICATIONS

VIDEO

Curve Tracers

▶ 370B • 371B


The World Standard for High-resolution Curve Tracers



▶ 370B.

The 370B, the world standard for high-resolution curve tracers, provides up to 20 A/2,000 V sourcing capability combined with 1 pA and 50 μ V measurement resolution. The 370B performs DC parametric characterization of integrated circuits, transistors, thyristors, diodes, SCRs, MOSFETs, electro-optic components, solar cells, solid-state relays and other semiconductor devices. It has pushbutton source and measurement configuration so it's easy to change from one test to the next.

The Industry Leader in High-power Curve Tracers

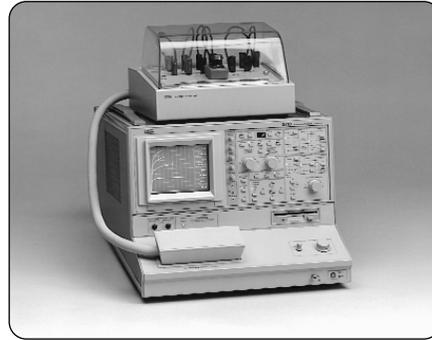

▶ 371B.

The 371B, the industry leader in high-power curve tracers, performs DC parametric characterization on a wide variety of power semiconductors including thyristors, SCRs, IGBTs and power MOSFETs. The high-voltage collector mode permits testing the Off-Characteristics of a device up to 3,000 volts. The pulsed high-current collector mode provides output current pulses greater than 400 amps peak to test On-Characteristics and permits high-power testing up to 3,000 watts. In the sweep measurement mode, the 371B automatically constructs a family of curves while stimulating the device with low-duty-cycle pulses. With this capability, power curves can be displayed without excessive heating of the device.

Interactive Programmable Control

Interactive control of all 370B and 371B measurements is accomplished from the full-featured front panel or over the GPIB. Every operating parameter can be controlled using the GPIB controller. 370B and 371B Series LabView drivers are available at the Tektronix.com web site. These drivers have many of the building blocks to create a custom measurement solution.

Store and Recall Setups and Digitized Curves

Up to 80 digitized characteristic curves can be stored on a diskette or in internal non-volatile memory and recalled at the touch of a button. A live curve can then be compared with a previously stored curve to assess temperature drift or other changes in operating parameters. To help identify the data, up to 24 characters of text may be used to label or annotate the curve data.

Operating parameters can be adjusted, stored and recalled using several storage methods including the 370B and 371B system memory, the built-in 1.44 MB floppy drive, or sent externally via the GPIB controller.

Automated Cursor

The 370B and 371B provide three cursor measurement modes. The dot cursor provides direct screen readout of voltage, current, gm or DC beta at any point. The window cursor can be positioned between two curves to measure small signal beta or gm and can also be used for visual go/no-go tests. The function line cursor provides screen readout of a slope or intercept value.

Test Fixturing

A test fixture is a standard accessory that provides safe device enclosure to ensure operator protection during measurements. The test fixture accommodates standard adapters with Kelvin sensing.

Sweep Measurement Mode

In the sweep measurement mode, the curve tracer automatically constructs a family of curves. The 371B achieves this with low duty-cycle pulses. With this capability, power curves can be displayed without excessive heating of the device.

Direct Hardcopy Printouts

Curve output data can be sent directly from the 370B and 371B to a Citizen iDP-3240 thermal printer. Printing can continue while the 370B and 371B perform the next tasks.

▶ Characteristics

▶ 370B Curve Tracer Characteristics

Collector Supply

Polarity Modes	AC, ± DC, ± Leakage, ± Rectified Sine			
Pulse Voltage (Range)	16 V	80 V	400 V	2,000 V
Available Current				
Peak Current	10 A	2 A	0.4 A	0.05 A
Peak Current (PULSE mode)	20 A	4 A	0.8 A	0.1 A
Available Resistance				
Minimum Series Resistance	0.26 Ωs	6.4 Ωs	160 Ωs	20 kΩs
Maximum Series Resistance	800 Ωs	20 kΩs	500 kΩs	12.5 MΩs
Available Peak Power				
16, 80 and 400 V Range	0.08, 0.4, 2, 10, 50, 220 W			
2,000 V Range	0.08, 0.4, 2, 10, 50 W			
Variable Collector Supply Settings As a % of Maximum Peak Voltage	0 to 100% in 0.1% increments			
Looping Compensation (typical) Range	at least 100 pF			

Step Generator

Accuracy –

Incremental: 1.5%.

Absolute: Less than 1.5% of total output + 3% x STEP AMPLITUDE setting + 1 mV or 1 nA.

Offset Control Range: Variable from –10 to +10 times STEP AMPLITUDE.

Resolution: STEP AMPLITUDE setting x 1%.

Current Mode –

Amplitude Range: 50 nA to 200 mA in a 1-2-5 sequence of 21 steps.

Maximum Current: 20x STEP AMPLITUDE setting, 10x STEP AMPLITUDE setting when control is set to 200 mA.

Maximum Voltage: At least 10 V.

Maximum Opposing Offset Current: 10x STEP AMPLITUDE.

Maximum Opposing Volts: Less than 15 V.

Ripple Plus Noise: Less than 0.5% x STEP AMPLITUDE + 10 nA.

Voltage Mode –

Amplitude Switch Range: 50 mV to 2 V, in a 1-2-5 sequence of 6 steps.

Maximum Voltage: 20x STEP AMPLITUDE.

Maximum Current: At least 500 mA at 10 V or less, at least 200 mA at 15 V, at least 10 mA at 40 V.

Short Circuit Current Limiting: 500 mA, +50%, –20%.

Maximum Opposing Offset Current: 10x STEP AMPLITUDE.

Maximum Opposing Current: Less than 20 mA.

Ripple Plus Noise: Less than 0.5% x STEP AMPLITUDE + 10 mV.

Step Rates – 2x line frequency (1 x line frequency in AC collector supply mode). Steps occur at 0 collector voltage.

Pulsed Steps – 80 μs or 300 μs wide, ±10%.

Steps and Offset Polarity – Corresponds to Collector Supply Polarity when STEP GENERATOR POLARITY INVERT is disabled. Opposite to Collector Supply Polarity when STEP GENERATOR POLARITY INVERT is selected or CONFIGURATION switch is set to BASE COMMON. BASE COMMON configuration disables STEP GENERATOR POLARITY INVERT.

Number of Steps – Ranges from 0 to 10.

AUX Supply

Range – From –40 to +40 volts, with 20 mV step resolution.

Accuracy (typical): Within 50 mV + 1.5% of total output.

Output Current:

At least 100 nA at ±20 V.

At least 10 mA at ±40 V.

Ripple Plus Noise: Less than 50 mV_{p-p}.

Curve Tracers

▶ 370B • 371B

Non-store Vertical Deflection System

Collector/Base Current				
Range	1 μ A/div to 2 A/div in a 1-2-5 sequence. X10 MAG extends maximum sensitivity to 100 nA/div (1 nA resolution)			
Accuracy (typical)	Within 2% of WINDOW cursor readout + 0.1 x VERT/DIV setting			
Emitter Current				
Range	1 nA/div to 2 mA/div in a 1-2-5 sequence X10 MAG extends maximum sensitivity to 100 pA/div			
Accuracy (typical)	Within 2% of WINDOW cursor readout + 0.1 x VERT/DIV settings + 1 nA			
Maximum Displayed Noise or Ripple	Depending on setting of MAX PEAK VOLTS			
Max. Volts Range	16 V	80 V	400 V	2000 V
Noise or Ripple	1 nA _{p-p}	1 nA _{p-p}	2 nA _{p-p}	5 nA _{p-p}
Step Generator Display				
Range	1 step/division 1 step/10 divisions with X10 MAG 10 steps/division with STEP MULTI .1x			
Accuracy	Within 0.3 division			
Display Offset (typical)				
Range	\pm 10 divisions with 0.1 div resolution			
Accuracy	Within 1.5% of offset + 0.1 x VERT/DIV setting			
Display X10 MAG (typical)				
Accuracy	Within 1.5% of window cursor readout + 0.3 x VERT/DIV setting			
Display Invert (typical)				
Accuracy	Within 0.1 x VERT/DIV setting			

**Digital Storage
Vertical Acquisition**

A/D Converter –

Resolution: 10-Bits for 10.24 divisions,
100 counts per division.

Max. Data Points: 1024.

Max. Sampling Rate: Line frequency x 1024.

Min. Sampling Rate: Line frequency x 2.

Collector/Base Current –

Range: 1 μ A/div to 2 A/div in a 1-2-5 sequence.
X10 MAG extends maximum sensitivity to 100 nA/div
(1 nA resolution).

Accuracy: Within 1.5% of DOT cursor readout
+0.05 x VERT/DIV setting.

Emitter Current –

Range: 1 nA/div to 2 mA/div in a 1-2-5 sequence.
X10 MAG extends max sensitivity to 100 pA/div
(1 pA resolution).

Accuracy: Within 1.5% of DOT cursor readout
+0.05 x VERT/DIV setting + 1 nA.

Step Generator Display –

Range: 1 step/division, 1 step/10 divisions with
X10 MAG, 10 steps/division with STEP MULTI .1x.

Accuracy: Within 0.3 division.

Display Offset (typical) –

Range: ± 10 divisions with 0.1 div resolution.

Accuracy: Within 1.5% of offset + 0.06 x
VERT/DIV setting.

Display X10 MAG (typical) –

Accuracy: Within 1.5% of window cursor readout
+ 0.3 x VERT/DIV setting.

Display Invert (typical) –

Accuracy: Within 0.04 x VERT/DIV setting.

**Non-store Horizontal
Deflection System**

Collector Volts –

Range: 50 nV/div to 500 V/div in a 1-2-5 sequence.
X10 MAG extends maximum sensitivity to 5 mV/div
(50 μ V resolution).

Accuracy (typical): Within 2% of WINDOW cursor
readout + 0.1 x HORIZ/DIV setting.

Base/Emitter Volts –

Range: 50 mV to 5 V/div in a 1-2-5 sequence.
X10 MAG extends maximum sensitivity to 5 mV/div
(50 μ V resolution).

Accuracy (typical): Within 2% of WINDOW cursor
readout + 0.1 x HORIZ/DIV setting.

Step Generator Display –

Range: 1 step/division, 1 step/division with X10 MAG,
10 steps/division with STEP MULTI .1x.

Accuracy: Within 0.3 division.

Display Offset –

Range: ± 10 divisions in 0.1 division steps.

Accuracy: Within 1.5% of offset +0.1 x HORIZ/DIV
setting.

Display X10 MAG –

Accuracy: Within 1.5% of window cursor readout
+ 0.3 x HORIZ/DIV setting.

Display Invert –

Accuracy: Within 0.1 x HORIZ/DIV setting.

**Digital Storage
Horizontal Acquisition**

A/D Converter –

Resolution: 10 bits for 10.24 divisions, 100 counts
per division.

Max. Data Points: 1024.

Max. Sampling Rate: Line frequency x 1024.

Min. Sampling Rate: Line frequency x 2.

Collector Volts –

Range: 50 mV/div to 500 V/div in a 1-2-5 sequence.
X10 MAG extends maximum sensitivity to 5 mV/div
(50 μ V resolution).

Accuracy: Within 1.5% of DOT cursor readout +
0.05 x HORIZ/DIV setting.

Acquisition Modes

Normal, Envelope, and Average. Envelope is Vertical
or Horizontal. Average is moving average with weight
of 1/16.

Safety

Standards Met – UL3111-1, CAN/CSA C22.2 NO.
1010.1, EN 61010-1 with second amendment.

Curve Tracers

▶ 370B • 371B

▶ 371B Curve Tracer Characteristics

Collector Supply

Modes (positive and negative polarities for both modes)	High current: 250 μ s pulses with maximum peak of 30 V High voltage: Full rectified sine wave with maximum peak of 3,000 V					
Polarity Modes	NPN + PNP –					
	High Voltage Mode				High Current (pulsed) Mode	
Peak Power Watts (range)	30 mW	300 mW	3 W	30 W	300 W	3 kW
Collector Peak Current	0.4 mA $\pm 20\%$	4 mA $\pm 20\%$	4 mA $\pm 20\%$	40 mA $\pm 20\%$	40 A	400 A
Maximum Peak Voltage	300 V +15% –0%	300 V +15% –0%	3 kV +10% –0%	3 kV +10% –0%	30 V +10% –5%	30 V +10% –5%
Variable Collector Supply Range	Continuously variable from 0% to 100% in 0.1% increments					
Looping Compensation (high voltage mode)	Stray capacitance between collector terminal and ground is compensated for up to a maximum of 100 pF					
Pulsed Collector Supply Repetition Rate	3 kW: 1/4 (0.25 x) line frequency 300 W: 1/2 (0.5 x) line frequency					
Pulse Width (half amplitude)	250 μ s $\pm 10\%$ (More than 30% of collector supply)					
Circuit Breakers	Both the high-voltage and the high-current supplies have breakers which operate independently. The high-current output breaker opens automatically in an over-current condition. Both breakers can be operated manually					

Step Generator

Offset Control Range – Variable 0 to 10 times STEP/OFFSET AMPLITUDE setting. However, 0 to 5 times when STEP/OFFSET AMPLITUDE is 5 V or 2 A.

Number of Steps – 0 to 10. However, 0 to 5 when STEP/OFFSET.

Step Polarity – Positive, Negative.

Step Rate –

Pulse:

3 kW: 1/4 (0.25x) the line frequency, 300 W:
1/2 (.5X) the line frequency.

Stairstep:

300 W, 3 W, 300 mW, 30 mW: 2x the line frequency.

Current Mode

Amplitude Range –

Normal Step: 1 μ A to 2 mA in 1-2-5 sequence.
COLLECTOR SUPPLY HIGH VOLTAGE MODE
(30 W/3 W and 300 mW/30 mW).

Pulsed Step: 1 mA to 2 A in 1-2-5 sequence.
COLLECTOR SUPPLY HIGH CURRENT MODE
(3 kW/300 W).

Maximum Current – 20 x step amplitude, except 10 times STEP/OFFSET AMPLITUDE when control is set to 2 A per step.

Maximum Voltage – 12 V $\pm 30\%$.

Accuracy: At least 5 V.

Ripple Plus Noise – Within 1% of STEP AMPLITUDE + 10 nA.

Voltage Mode

Step Amplitude Range – 200 mV to 5 V in 1-2-5 sequence.

Short Circuit Current Limiting – 100 mA +50%, –20%.

Maximum Voltage – 10 x STEP AMPLITUDE, with 5 V setting.
20 x STEP AMPLITUDE, except 5 V setting.

Ripple Plus Noise – Within 1% of STEP AMPLITUDE + 10 mV.

Vertical Deflection System

Collector Current (Ic) Range –

- 3 kW Peak Power: 1 A/DIV to 50 A/DIV.
- 300 W Peak Power: 500 mA/DIV to 5 A/DIV.
- 30 W Peak Power: 100 μ A/DIV to 5 mA/DIV.
- 3 W Peak Power: 10 μ A/DIV to 500 μ A/DIV.
- 0.3 W Peak Power: 10 μ A/DIV to 500 μ A/DIV.
- 0.03 W Peak Power: 1 μ A/DIV to 50 μ A/DIV.

Collector Current (Ic) Accuracy – Within 0.1 DIV to the Vertical graticule lines.

Collector Current (Ic) Cursor Accuracy – Within 1.5% of readout +0.1 DIV of the CURRENT/DIV setting.

Horizontal Deflection System

Collector Supply Volts (Vce) Range –

- 3 kW, 300 W Peak Power: 100 mV/DIV to 5 V/DIV in a 1-2-5 sequence.
- 30 W, 3 W Peak Power: 50 V/DIV to 500 V/DIV in a 1-2-5 sequence.
- 300 mW, 30 mW Peak Power: 5 V/DIV to 50 V/DIV in a 1-2-5 sequence.

Step Generator Volts (Vbe) Range – 100 mV/DIV to 5 V/DIV in a 1-2-5 sequence.

Step Generator Volts (Vbe) Accuracy – Within 0.1 DIV of Horizontal graticules.

Digital Storage Acquisition

A/D Converter –

- Resolution: 10 bits for 1024 division, 100 points per one division.
- Tolerance: Within ± 2 counts.
- Max. Data Point: 1024.
- Max. Sample Rate: 1024 x line frequency.
- Min. Sample Rate: 1/8 x line frequency.

Safety

Standards Met – UL3111-1, CAN/CSA C22.2 NO. 1010.1, EN 61010-1 with second amendment.

▶ Ordering Information

370B Standard Accessories

- A1001** – Blank adapter for mounting custom sockets.
- A1002** – In-line transistor adapter.
- A1005** – Axial diode lead adapter.
- User Manual** – Order 070-A838-00 (English).
- Protective Cover** – Order 337-3344-02.
- Power Cord** – Order 161-0066-00.
- Fuses** –
Order 159-0260-00 (125 V, 4 A).
Order 159-0259-00 (250 V, 2 A).
- Utility Software** – Order 063-3341-02.

370B Recommended Accessories

- A1003** – TO-3/TO-66 adapter for power transistors.
- Service Manual** – Order 071-A842-00.
- K4000** – Instrument cart.
- Rackmount Kit** – Order 016-0930-00 (Opt. 1R).

371B Standard Accessories

- A1002** – In-line transistor adapter.
- A1003** – TO3/TO66 adapter for power transistors.
- Test Fixture** – Order 016-A328-00.
- User Manual** – Order 070-A840-00 (English).
- Power Cord** – Order 161-0066-00.
- Wire Set** – Order 012-1371-00.
- Fuses** –
Order 159-0291-00 (250 V, 1 A).
Order 159-0238-00 (250 V, 4 A).
- Utility Software** – Order 063-3341-02.

371B Recommended Accessories

- A1001** – Blank adapter for mounting custom sockets.
- A1005** – Axial lead adapter.
- Service Manual** – Order 070-A843-00.
- K4000** – Instrument cart.
- Rackmount Kit** – Order 016-0930-00 (Opt. 1R).

Power Cord Options (370B and 371B)

- Opt. A1** – Universal Euro, 220 V, 50 Hz.
- Opt. A2** – UK 240 V, 50 Hz.
- Opt. A3** – Australian, 240 V, 50 Hz.
- Opt. A5** – Switzerland, 220 V, 50 Hz.
- Opt. AC** – China, 240 V.
- Opt. A9** – No power cord, set to 220/240 V.

Service Options

- Opt. D1** – Calibration data report.
- Opt. C3** – Additional two years of Calibration Service.
- Opt. D3** – Calibration data report for Option C3.
- Opt. R3** – Additional two years of repair warranty.
- Opt. C5** – Additional four years of Calibration Service.
- Opt. D5** – Calibration data report for Option C5.
- Opt. R5** – Additional four years of repair warranty.

Curve Tracers

▶ 370B • 371B

Contact Tektronix:

ASEAN / Australasia / Pakistan (65) 6356 3900

Austria +43 2236 8092 262

Belgium +32 (2) 715 89 70

Brazil & South America 55 (11) 3741-8360

Canada 1 (800) 661-5625

Central Europe & Greece +43 2236 8092 301

Denmark +45 44 850 700

Finland +358 (9) 4783 400

France & North Africa +33 (0) 1 69 86 80 34

Germany +49 (221) 94 77 400

Hong Kong (852) 2585-6688

India (91) 80-2275577

Italy +39 (02) 25086 1

Japan 81 (3) 3448-3111

Mexico, Central America & Caribbean 52 (55) 56666-333

The Netherlands +31 (0) 23 569 5555

Norway +47 22 07 07 00

People's Republic of China 86 (10) 6235 1230

Poland +48 (0) 22 521 53 40

Republic of Korea 82 (2) 528-5299

Russia, CIS & The Baltics +358 (9) 4783 400

South Africa +27 11 254 8360

Spain +34 (91) 372 6055

Sweden +46 8 477 6503/4

Taiwan 886 (2) 2722-9622

United Kingdom & Eire +44 (0) 1344 392400

USA 1 (800) 426-2200

USA (Export Sales) 1 (503) 627-1916

For other areas contact Tektronix, Inc. at: 1 (503) 627-7111

Updated 17 June 2002

Our most up-to-date product information is available at:
www.tektronix.com



Copyright © 2002, Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

09/02 HB/WWW

76W-10757-1B

