

27" built-in single ovens

	GE Profile™	GE®		
	27" convection single ovens	27" single ovens		
	PK916SM PK916WM PK916CM PK916BM	JKP70SM JKP70WM JKP70BM	JKP30SM JKP30WM JKP30CM JKP30BM	JKS10BM
ADA-compliant	●	●	●	●
Features				
Oven	Convection/self-clean	Convection/self-clean	Self-clean	Standard-clean
Cleaning time	Variable	Variable	Variable	
Automatic self-clean oven door lock	●	●	●	
Self-clean oven w/Delay Clean option	●	●	●	
Light self-clean option	●	●	●	
TrueTemp™ system	●	●	●	●
Hidden bake oven interior	●	●	●	●
Variable broil/Four-pass broil	●	●	●	●
Eight-pass bake element	●	●	●	●
PreciseAir™ convection system	●	●		
Multi-rack convection bake	●	●		
Single-rack convection bake	●			
Convection roast	●	●		
Auto Recipe™ conversion	●	●		
SmartSet controls	Glass touch	●	●	●
Proof mode	●			
Warm mode	●			
Oven meat probe	●			
Temperature display	●	●	●	●
Delay bake option	●	●	●	●
C° and F° programmable	●	●	●	●
Audible preheat signal	●	●	●	●
Auto oven shut-off w/override	●	●	●	●
Electronic clock and kitchen timer	●	●	●	●
Control lock capability	●	●	●	●
Oven light	●	●	●	●
Certified Sabbath mode	●	●	●	●
Flat convection cover	●	●		
QuietBake™ fan system	●	●	●	●
Oven racks	3 heavy-duty	3 heavy-duty	2 heavy-duty	2 heavy-duty
Self-clean oven racks	●			
Embossed rack positions	7	7	7	7
Appearance				
	SS WW CC BB	SS WW BB	SS WW CC BB	BB
Color appearance*	Stainless steel White glass Bisque glass Black glass	Stainless steel White glass Black glass	Stainless steel White glass Bisque glass Black glass	Black glass
Frameless oven door	●	●	●	●
Big ClearView™ window	●	●	●	●
	Sculptured stainless steel Sculptured white Sculptured bisque Sculptured black	Stainless steel White Black	Stainless steel White Bisque Black	Black
Oven door handle	●	●	●	●
Undercounter installation	●	●	●	●
Weights & Dimensions				
Approx. shipping wt. (lbs.)	120	125	120	97
Oven cabinet width required (in.)	27	27	27	27
Overall dimensions (WxHxD in inches)	26-5/8 x 29 x 23-5/8	26-5/8 x 29 x 23-5/8	26-5/8 x 29 x 23-5/8	26-5/8 x 29 x 23-5/8
Overall oven interior dimensions (WxHxD in inches)	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4
Power/Ratings				
KW rating @	240V 208V	3.4 2.6	3.4 2.6	3.4 2.6
Amps @	240V 208V	20 20	20 20	20 20
Convection wattage	2500	2500		
Broiler/bake wattage	3400/2100	3400/2100	3400/2100	3400/2100

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.




Listed by
Underwriters
Laboratories

27" built-in single ovens (continued)

27"/24" built-in single oven dimensions (in inches)

27" models PK916, JKP70, JKP30, JKS10

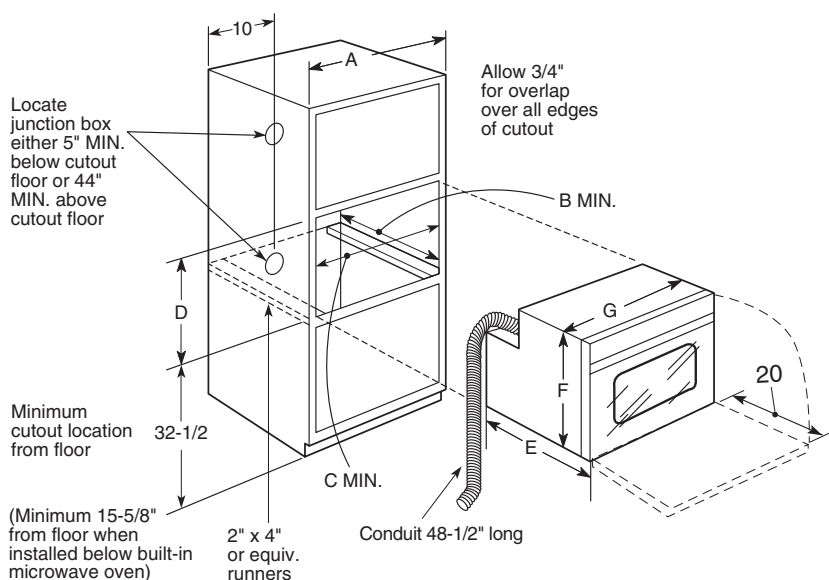

Note: These ovens are not approved for stackable or side-by-side installations.

Note: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.


Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: For 27" built-in single ovens, if marks, blemishes or the cutout opening is visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

Undercounter installation dimensions (in inches)

Models PK916, JKP70, JKP30 and JKS10

Gas or electric cooktops may be installed over this oven. See cooktop installation instructions for cutout size. See label on top of oven for approved cooktop models.

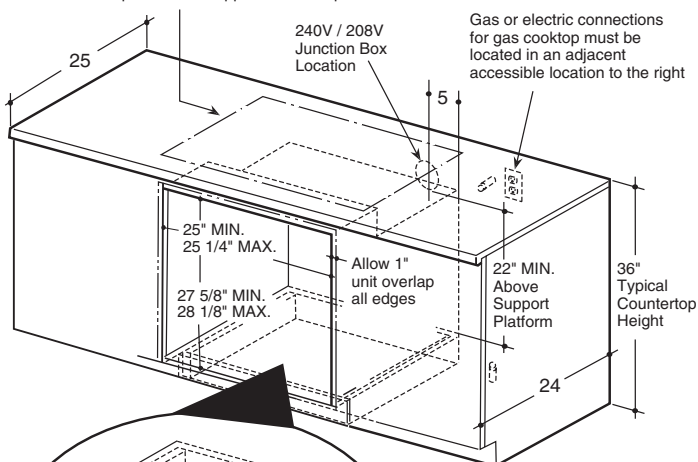

Note: 36" ribbon cooktops are approved for use over GE 30" single wall ovens* and warming drawers. 30" ribbon cooktops are approved for use over GE 30" and GE 27" single wall ovens* and warming drawers. Refer to cooktop and wall oven installation information packed with products for current dimensional data.


*Except wall ovens with Trivection® technology.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.


Note: Oven is rated for use only under 30" standard or sealed burner gas and selected 30" CleanDesign and Calrod® electric cooktops.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

Oven support
for 27" models

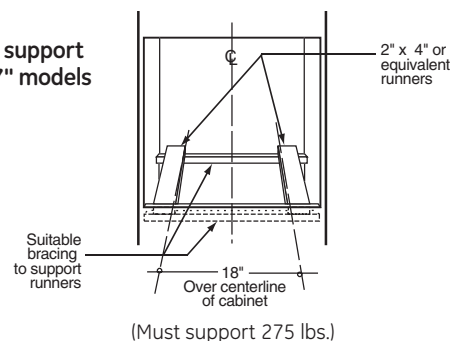


Oven support
for 24" models




Cabinet	PK916, JKP70/30, JKS10
A – Cabinet width required	27" min.
B – Minimum cabinet depth	23-5/8"
C – Opening width	25" min. - 25-1/4" max.
D – Opening height	27-5/8" min. - 28-1/8" max.
Oven	
E – Overall depth*	23-5/8"
	w/o trim 29"
F – Overall height with trim	29-7/8" - 30-3/4"
G – Overall width	26-5/8"

*Depth including door handle is approximately 26-7/8" min to 26-8/10" max. 26-5/8" on models PK916, JKP70/30 and JKS10.

Sealed burner gas cooktop installation dimensions (in inches)

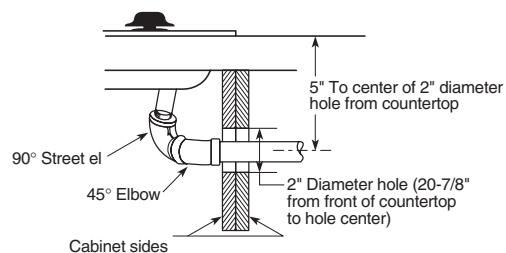

Standard burner gas cooktop installation dimensions (in inches)

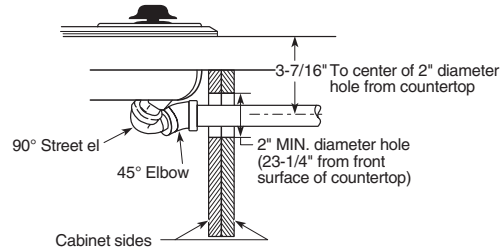

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.