




Monogram™

ZEK737BWBB—Single Convection Oven

Dimensions and Specifications (in inches)

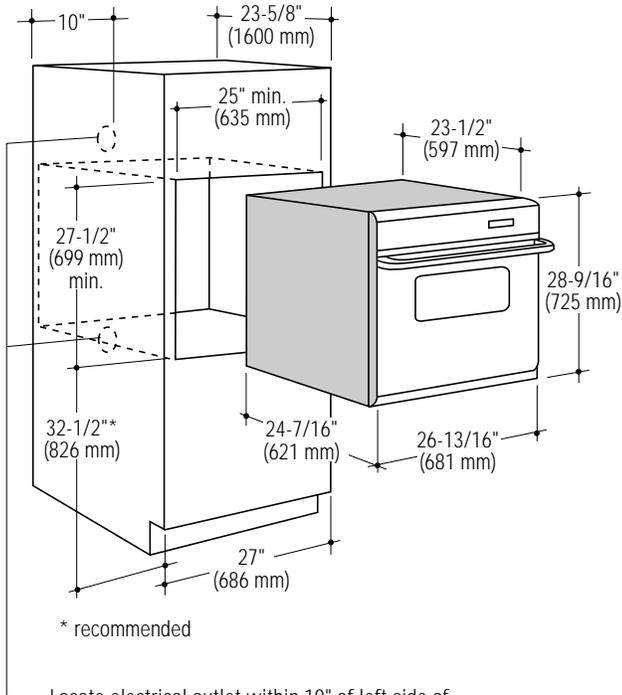

Locate electrical outlet within 10" of left side of opening 34" above cutout floor or 5" below cutout floor.

Cutout Dimensions:

H 27-1/2" min. (699 mm)

W 25" min. (635 mm)

D 23-5/8" (600 mm)

cabinet depth required from front frame to inside rear cabinet wall.

Monogram built-in double ovens require a separate, properly grounded 3-wire 120/208 or 120/240 volt, 60 Hz power supply, protected by a time delay fuse or circuit breaker. Ovens are supplied with a flexible power cable, which must be attached to a junction box. The cable length for convection type ovens is 54".

Double ovens are rated 6.8 KW at 240 volt, and 5.1 KW at 208 volt.

Single ovens are rated 3.4 KW at 240 volt, and 2.6 KW at 208 volt.

Installation Information:

Before installing, consult installation instructions, Pub. No. 49-8804, packed with the product for current dimensional data and for alternate installation options.





Monogram™

ZEK737BWBB—Single Convection Oven



Features and Benefits

- Black on black Model
- Convection Self-Cleaning Oven
- Independent Cook/Clean Electronic Controls with Convection Conversion
- Electronic Clock and Minute Timer
- Convection Bake and Convection Roast
- Delay Bake Option with Warm Mode
- Automatic Meat Thermometer
- Porcelain-Enameled Broiler Pan With Chrome-Plated Grid
- Roasting Rack
- Interior Oven Light
- 3 Removable Racks and 4 Rack Positions
- Frameless Glass Oven Door with Window
- 27" Oven Cabinet Width Required
- Flush Appearance Installation
- Model ZEK737WWWW—White on white
- Model ZEK737BWBB—Black on black