

EXTERIOR CONSTRUCTION

- 430 stainless steel front, top, sides and back
- 4" (102 mm) adjustable legs
- Powder coated handle
- Cool to the touch pull down door with microwave seal

INTERIOR CONSTRUCTION

- Fully insulated and sealed cook chamber
- 304 stainless steel liner with large radius corners
- 304 stainless steel removable grease collection pan


STANDARD FEATURES

- Integral recirculating catalytic converter system for UL listed ventless operation (UL KNLZ)
- Variable speed High H recirculating impingement airflow system
- Forced vertical recirculated impingement hot air system
- Bottom-launched microwave system
- Smart Menu System capable of storing up to 128 recipes
- Built-in self-diagnostics for monitoring oven components and performance
- Stackable design (requires stacking kit)
- Includes plug and cord (5 ft.)
- Catalytic Converter eliminates flavor transfer between foods, reduces emissions/qualifies for ventless operation
- Ceramic cooking platter




PERFORMANCE

- The C3 roasts, browns, and caramelizes a wide variety of foods up to 10x faster and at a quality that meets or exceeds traditional cooking

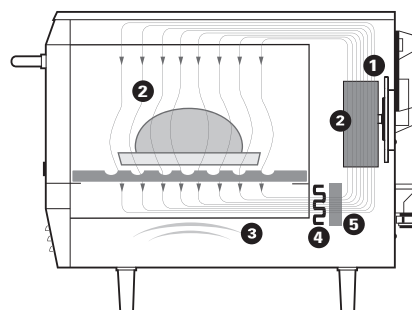

1. Blower Motor
2. Impinged Air
3. Microwave Bursts
4. Impingement Heater
5. Catalytic Converter

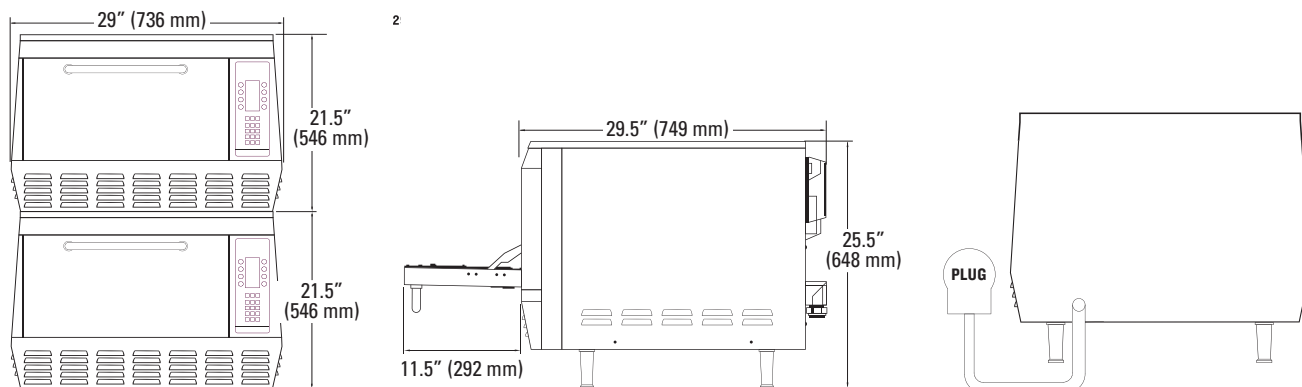

DIMENSIONS

Single Units

Height	21.5"	(546 mm)
on legs	25.5"	(648 mm)
Width	29"	(736 mm)
Depth	29.5"	(749 mm)
with handle	32.25"	(819 mm)
Weight	255 lbs.	(116 kg)

Stacked Units

(Stacking Kit Required)

Height	43"	(1092 mm)
Width	29"	(737 mm)
Depth	29.5"	(749 mm)
with handle	32.25"	(819 mm)
Weight	510 lbs.	(231 kg)

Cook Chamber

Height	7.1"	(180 mm)
Width	17.8"	(452 mm)
Depth	14.5"	(368 mm)
Volume	1.1 cu. ft.	(31 liters)

Wall Clearance

Top/Sides	2"	(51 mm)
-----------	----	---------

ELECTRICAL SPECIFICATIONS

EUROPE/ASIA/PACIFIC/AUSTRALIA

C3/C Multi Model (3 Phase, TC3-0602-1w)

Phase	3 Phase	
Voltage	380-415 VAC	
Frequency	50 or 60 Hz	
Current	16 amp	
Cord	5 Wire (inc. ground), 1.5m; H07RN-F	
Plug	IEC 309, 5 pin, 32 amp, (red)	
Max Input	7.4 kW	
Microwave Power In	2 kW	

C3/C Multi Model

Phase	3 Phase	
Voltage	230 VAC	
Frequency	50 Hz	
Current	30 amp	
Cord	4 Wire (inc. ground)	
Plug	IEC 309, 4 pin, 32 amp, (blue)	
Max Input	7.4 kW	

*All C3 multi-phase ovens can be field configured to allow single to 3 Phase operation.

**TurboChef recommends installing a type D circuit breaker for all installations.

MOFFAT®

Australia

www.moffat.com.au

New Zealand

www.moffat.co.nz

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
Email vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
Email nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
Email vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
Email qldsals@moffat.com.au

Western Australia
Telephone 08-9202 6820
Email bgarcia@moffat.com.au

New Zealand
Moffat Limited
Christchurch
Telephone 03-389 1007
Email sales@moffat.co.nz
www.moffat.co.nz

Auckland
Telephone 09-574 3150
Email sales@moffat.co.nz

