




QuickStartGuide

RIR200
www.rcaaudiovideo.com

Congratulations on purchasing your new RCA Wi-Fi Internet Radio.
Please follow these instructions to set up and start using the radio.

1 Unpack the unit

You should find the following items in the box:



Radio




Power adapter




Ethernet cable



AM loop antenna



Quick Start Guide (this leaflet)



Setup Information Card

Additional requirements

- Broadband Internet service
- Broadband (cable/DSL) modem, usually supplied by your Internet service provider
- An 802.11 b or g (Wi-Fi) wireless home network or Ethernet router/switch/hub with available LAN port

For Wi-Fi connections, you may also need:

- Your wireless network's SSID
- Your access password (for secure networks)


2 Setup your RCA Infinite Radio accounts



To simplify setup and avoid manual configuration on the radio please complete these steps:

1. Find the Setup Information Card that contains your radio's MAC address number (MAC: 00-00-00-00-00-00) and activation PIN # (PIN: 0000). (This number is also found in the Device Info screen under the Settings menu in your radio.)
2. Using any Internet-connected computer, go to www.rcainfiniterradio.com/setup and follow the online instructions.
- You will need to input your radio's MAC address and PIN # to associate your radio with your personal settings.

3 Insert AAA batteries in the base of the radio

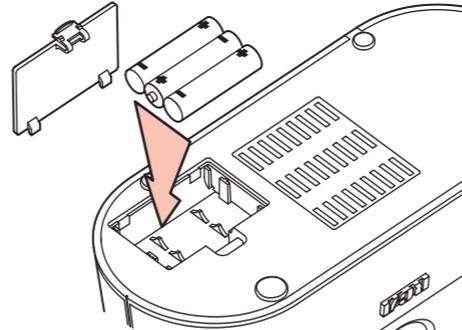


Follow the polarity markers in the battery compartment.

The batteries (not included) power the clock and alarm whenever the radio loses electricity.


4 Optional: Connect the radio using an Ethernet cable

Use an Ethernet cable if you do not have a Wi-Fi access point.

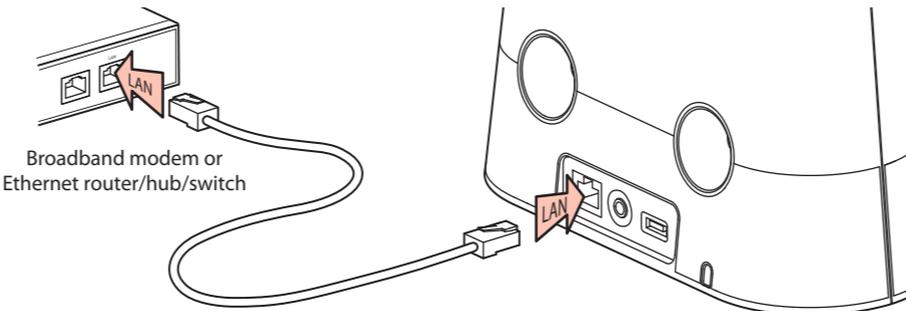

Broadband modem or Ethernet router/hub/switch

5 Plug in and turn on the radio

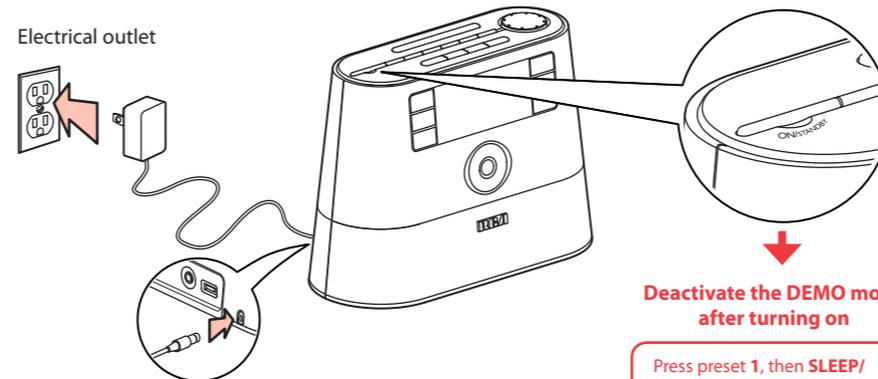

Electrical outlet

Deactivate the DEMO mode after turning on

Press preset **1**, then **SLEEP/SNOOZE**, then preset **6**.

6 Set up the radio


1. **NOTE:** When you turn on the radio for the first time, it will be in "DEMO" mode. To exit this mode, press preset **1**, then **SLEEP/SNOOZE**, then preset **6** on top of the radio.

2. After exiting the DEMO mode, the radio displays the **Select Language** screen. Choose your preferred language.




3. The **Internet Setup** screen then displays:

- **Connecting via Ethernet**
 - In the Internet Setup screen, choose **Wired**. The radio should then connect to the Internet.
- **Connecting via wireless**
 - In the Internet Setup screen, choose **Wireless**.
 - To display a list of available networks, choose **Detect Networks**, then choose your network.
 - To use a known network SSID, choose **Enter SSID** and then input your SSID.




3. If the network is secure, enter your password in the Network Security screen. The radio should then connect to the Internet.

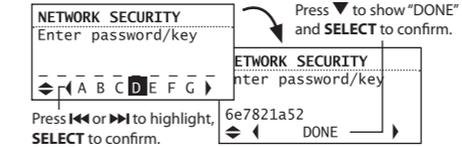

After connecting to the Internet

- If you did not activate your Infinite Radio accounts, or if the radio cannot get your details from the Infinite Radio server, the radio may ask for your ZIP code. Input your code.



- If your radio has successfully connected to the Internet you will hear a welcome message.

Learn more about your Internet Radio

Read the user manual (download from www.rcainfiniterradio.com) for more information on the player's features, safety and warranty information, and answers to Frequently Asked Questions (FAQ's).

Need more help? Do not return this product to the store.

Visit www.rcainfiniterradio.com to get the latest firmware updates and FAQ's.

Use the navigation controls to make choices and input information:




- ▲ – move highlight up
- ▼ – move highlight down
- ◀ – move selection/navigate left
- ▶ – move selection/navigate right
- SELECT** - confirm selected option or character

When inputting characters, press ▲ or ▼ to choose among uppercase, lowercase, numeric, or special characters. To insert spaces or correct mistakes, press ▼ to display the Commands list and then press ◀ or ▶ to choose the desired command.


About passphrase:

- This radio supports secured access points using the Wireless Equivalent Privacy (WEP) keys or Wi-Fi Protected Access (WPA and WPA2) standards.
- WEP keys are either 10 or 26 characters long (e.g. 6e78214a52). Some access points for WEP support passphrases (e.g. changing entertainment again) which do not conform to the industry standard and are not supported in this radio.
- If you are using a WEP secured access point, enter the WEP key (HEX format) instead of the passphrase.

Controls

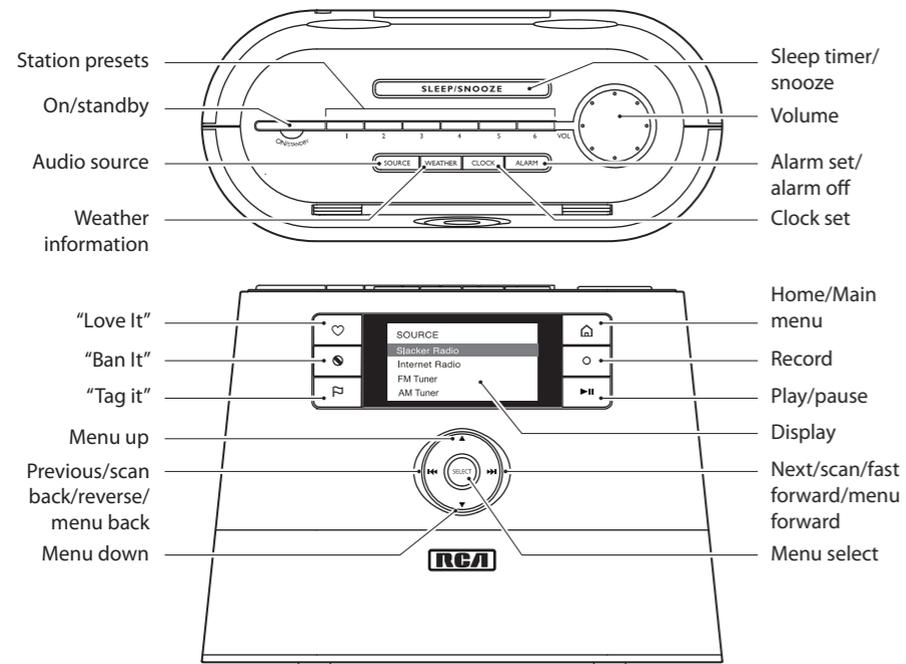

Rear panel connections

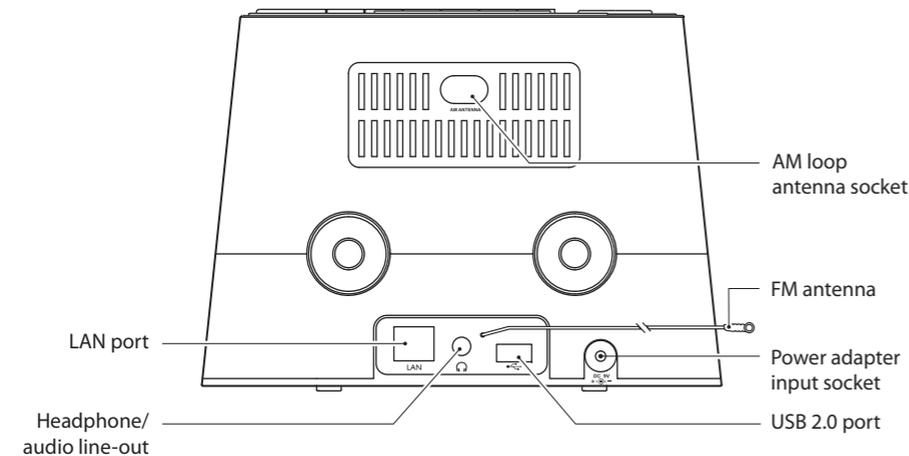

You can connect USB devices to the USB port: The radio can play MP3, WMA and RealAudio audio files stored on the connected USB device.

Using the radio

General procedures

Turn on/off (standby) the radio	Press ON/STANDBY .
Choose an audio source	Press SOURCE to cycle through the audio sources (Slacker Radio, Internet Radio, FM/AM Tuner, Internal Memory, or USB Input).
Choose a preset radio station	Press SOURCE to choose the radio source (Slacker, Internet, FM, or AM), then press a preset button (1–6).
Assign the current radio station to a preset	Press and hold a preset button (1–6) until the radio beeps.
Display the menu while listening	Press ⏠ .
Record the current AM/FM/Internet radio station	Press Ⓞ . Press Ⓞ again to stop recording.
Start the sleep timer	Press SLEEP/SNOOZE .
Add time or cancel the sleep timer	Press SLEEP/SNOOZE repeatedly.
Display the time	Press CLOCK .
Set the time	Press and hold CLOCK until the hour is highlighted. Press ⏪ or ⏩ to choose hours, minutes or AM/PM. Press ▲ or ▼ to change the time. Press SELECT to set the time.

Listening to FM/AM radio


Tune in an FM/AM radio station	Press SOURCE to choose FM or AM radio. Press and hold ⏪ or ⏩ until the radio beeps to auto-tune to the previous or next available station.
Step through the radio frequencies	Press ⏪ or ⏩ .
Use the current station as the alarm sound	Press ⏠ to display the options menu. Press ▼ to choose Send to Alarm and then press SELECT .

Listening to Slacker™ radio

Choose a Slacker™ station	Press SOURCE to choose Slacker Radio. Press ▲ or ▼ to move up and down the menu options and press SELECT to choose the desired genre and station.
Start playing the selected station	Press SELECT .
Pause playback	Press ⏸ . Press again to resume.
Skip to the next song	Press ⏩ .
Mark the current song as a favorite	Press ♥ .
Create a custom station based on the current artist	Press and hold ♥ .
Ban the current song from the station	Press Ⓞ .
Ban the current artist from the station	Press and hold Ⓞ .
Use the current station as the alarm sound	Press ⏠ to display the options menu. Press ▼ to choose Send to Alarm and then press SELECT .

Listening to Internet radio

Choose an Internet radio station	Press SOURCE to choose Internet Radio. Press ▲ or ▼ to move up and down the menu options and press SELECT to navigate to the desired station.
Start playing the selected station	Press SELECT .
Mark the current station as a favorite	Press ♥ or press ⏠ to display the options menu. Press ▼ to choose Add to Favorites and then press SELECT .
Remove the current station from My Favorites	Press Ⓞ .
Use the current station as the alarm sound	Press ⏠ to display the options menu. Press ▼ to choose Send to Alarm and then press SELECT .



Playing recordings and audio files

Play a recording	Press SOURCE to choose Internal Memory. Press ▲ or ▼ to highlight a recording and press SELECT .
Play an audio file from a connected USB device	Press SOURCE to choose USB. Press ⏪ or ⏩ to exit or enter folders. Press ▲ or ▼ to highlight a file and press SELECT to start playback.
Pause playback	Press ⏸ . Press again to resume.
Skip to the next recording/audio file	Press ⏩ .
Skip to the previous recording/audio file	Press ⏪ within the first 3 seconds of the current recording/file.

Listening to Weather Forecasts

Listen to today's local forecast	Press WEATHER once.
Listen to 3-day local forecast	Press WEATHER twice.

For information on new and upcoming products and to register your new radio, visit www.rcaaudiovideo.com.