

Kable Lite Sun

700KESUN_


1.6



GENERAL PRODUCT INFORMATION:




This product is suitable for indoor dry locations only.

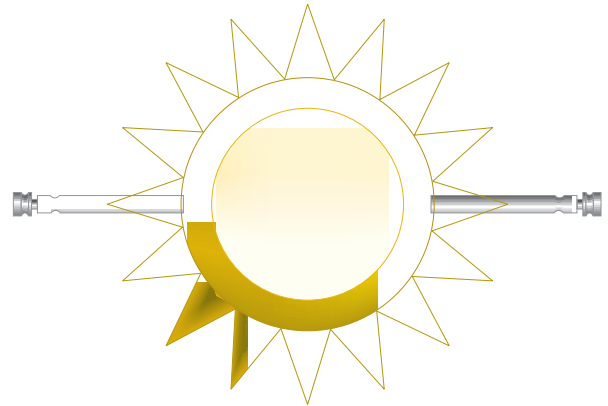


Installing the Lamp

1A

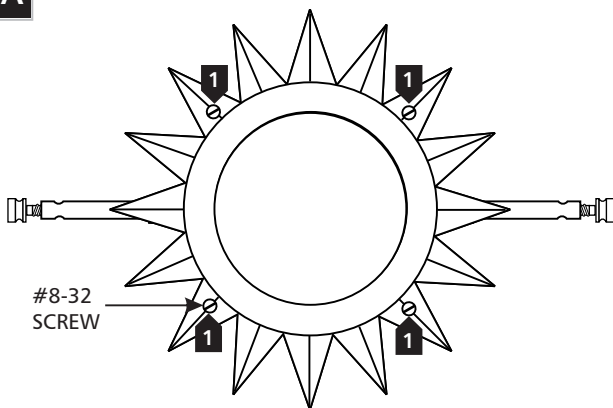


- 1** Remove all four #8-32 screws on Sun fixture so that it splits into two parts.

1B

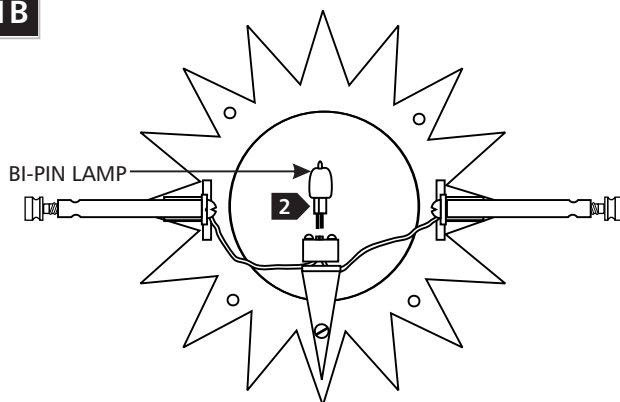

- 2** Remove the old lamp.

1C

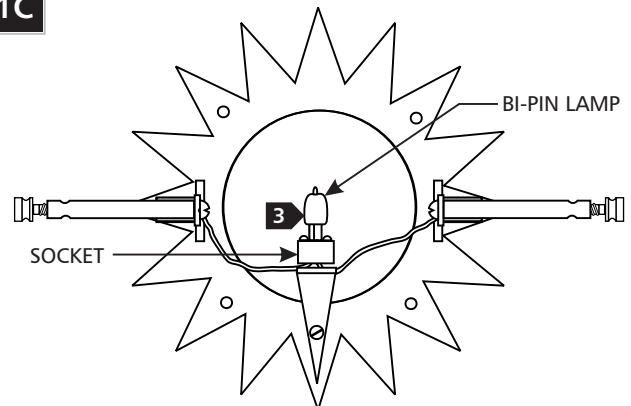

CAUTION: To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

NOTE: Use only your fingers and a soft cloth to replace the lamp.


Use **MAX 20 Watt, Bi-Pin Halogen Lamp.**



- 3** Gently insert the new lamp pins into the socket holes.
- 4** Put the two Sun sections back together.
- 5** Align the screw holes, replace and tighten the four #8-32 screws.

Installing the Sun Fixture


2A

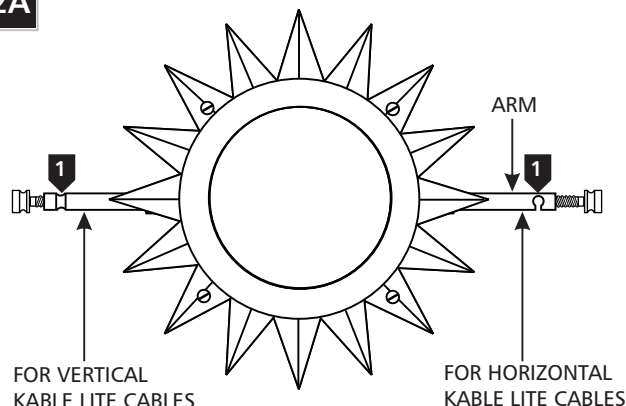

NOTE: The Kable Lite cable separation must be between 7.5" to 8".

- 1 Sun can be connected to horizontal or vertical Kable Lite cables by rotating the arms 90°.

2B

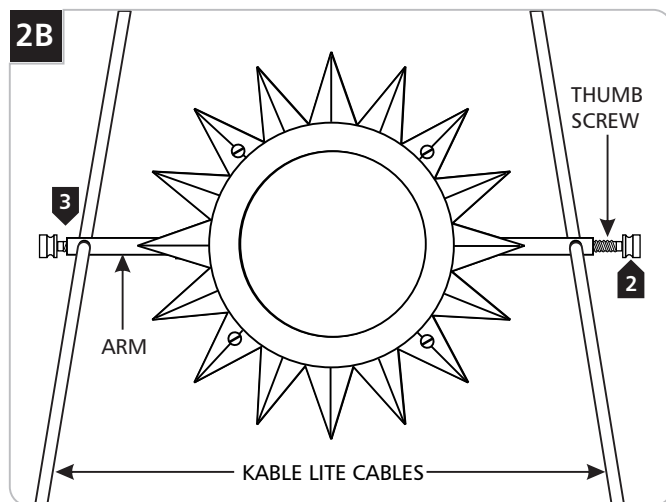

- 2 Loosen the thumb screws.
- 3 Place one arm slot on each Kable Lite cable and tighten the thumb screws.

SAVE THESE INSTRUCTIONS!

IMPORTANT SAFETY INSTRUCTIONS

To reduce the risk of fire, electrical shock, exposure to excessive UV radiation, or injury to person:

- Use this fixture indoors only.
- Do not look directly at the lighted lamp.
- Do not remain in light if skin feels warm.
- Risk of fire: Use only the type of lamp and maximum wattage indicated in this instruction manual.
- Never cover the halogen lamp with anything other than a Tech Lighting lamp shield and never place flammable material close to your fixture.
- Never turn the fixture on and off by connecting and disconnecting the halogen lamp.
- Do not touch the fixture shades or lamp shield while the fixture is on. These surfaces may be HOT.

Halogen Lamp General Information

- A new halogen lamp may smoke slightly when it is used for the first time. This is perfectly normal; the protective coating is simply being vaporized.

Two Tips For Prolonging Halogen Lamp Life

- First avoid touching the lamp with bare hands during installation. Any contaminant, even the oil from your hands can deteriorate the lamp. Rubbing alcohol can be used to remove any contaminant.
- Second, do not run the lamps at full power when you do not need to. However, if dimming the fixture for an extended period of time, occasionally bring the light up to full brightness for a few minutes to complete the halogen cycle.



TECH LIGHTING®

7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.
A Generation Brands Company