

AS마크란? 사후봉사가 우수한 기업에 대해 국가기관인
국립기술품질원이 품질을 보증하는 인증마크입니다.



SAMSUNG

SAMSUNG DIGITall
everyone's invited™

Inkjet
Plain Paper Facsimile

CF-3200
CF-3200T

1588-3366

02-3451-3366 051-550-3366
033-652-3366 063-240-3366
053-430-3366 062-250-3366
042-480-3366 064-742-3366

- 02-541-3000, 080-022-3000
051-861-3000, 080-051-3000
- PC ()
GO SEC (, , , ,)
- <http://www.sec.co.kr/fax>

P/N:JB68-00643A Rev.1.00

CF-3200/CF-3200T



. ()

가

CF-3200, CF-3200T,

Copyright 2001

()



가

1

.....	1-2
CF-3200/	
CF-3200T	1-2
CF-3200T	1-2
.....	1-3
.....	1-3
.....	1-3
()	1-4
()	1-5
.....	1-6
.....	1-8
.....	1-8
.....	1-9
.....	1-9
.....	1-10
(CF-3200T)	1-11
.....	1-12
.....	1-12
.....	1-13
(2-up)	1-13
.....	1-14

2

.....	2-2
.....	2-2
.....	2-3
.....	2-4
.....	2-4
.....	2-5
()	2-6
.....	2-6
()	2-7
.....	2-8
.....	2-8
.....	2-9

3

.....	3-2
.....	3-2

		3-3
()		3-4
		3-5
		3-5
		3-6
		3-6
FAX MODE		3-7
TEL MODE		3-7
AUTO MODE		3-8
TAM MODE (CF-3200)		3-8
TAM MODE (CF-3200T)		3-9
		3-10
		3-10
(CF-3200)		3-11
(CF-3200T)		3-12
		3-13
		3-13
		3-13

4 (CF-3200T)

		4-2
		4-2
		4-2
(TAM)		4-3
		4-3
		4-3
		4-4
		4-4
		4-4
		4-4
		4-5
		4-5
		4-5
		4-6
		4-7
		4-7
		4-8
		4-8
		4-9

5

.....	5-2
.....	5-3
.....	5-3
.....	5-3
.....	5-4
()	5-5
.....	5-6
()	5-6
()	5-6
.....	5-7

6

.....	6-2
.....	6-2
.....	6-3
.....	6-3
/	6-4
.....	6-4
.....	6-4
.....	6-4
.....	6-5
.....	6-5
.....	6-5
.....	6-6
.....	6-7
.....	6-7
(HELP)	6-7
(SENT JOURNAL) (RECEIVED JOURNAL)	6-7
(PHONEBOOK)	6-7
(SENDING CONFIRM)	6-7
(SCHEDULE INFORM)	6-8
(SYSTEM DATA)	6-8
(CID LIST)	6-8
(VOICE STATUS, CF-3200T)	6-8
(MULTI- COMMUNICATION)	6-8
(CALL BACK MESSAGE)	6-8
(POWER FAIL REPORT)	6-8
.....	6-9
(TAM)	6-9
()	6-10
(, CF-3200T)	6-12
.....	6-13
.....	6-14

7

.....	7-2
.....	7-4
.....	7-6
.....	7-7
.....	7-8
.....	7-9
.....	7-9
.....	7-10
.....	7-12
.....	7-12
.....	7-13
.....	7-13
.....	7-14
.....	7-14
.....	7-15
.....	7-15
.....	7-15

8

.....	8-2
..... (ASF)	8-3
..... (ADF)	8-4
ITU 4% (60.5%)	8-5
.....	8-6
.....	8-8
.....	8-8
.....	8-8

9

1





1


CF-3200/ CF-3200T


- 가 .
- .
- SAVE ()
- (: 1-14)
- (: 1-13)
- (: 5-3)
-
- (14.4Kbps)
- (80)
- (7) (: 6-10)
-
- (99)
- 15 (Skew Free)
- (10) (80)
-
- (5)
- TEL, FAX, AUTO, TAM, DRPD
- *TAM CF-3200
- 가 .
-
-
- /
-
- (10)
-
- , ,
- (:10.1W)

CF-3200T

- (TAM)
-
- (가
-)
- (
-)

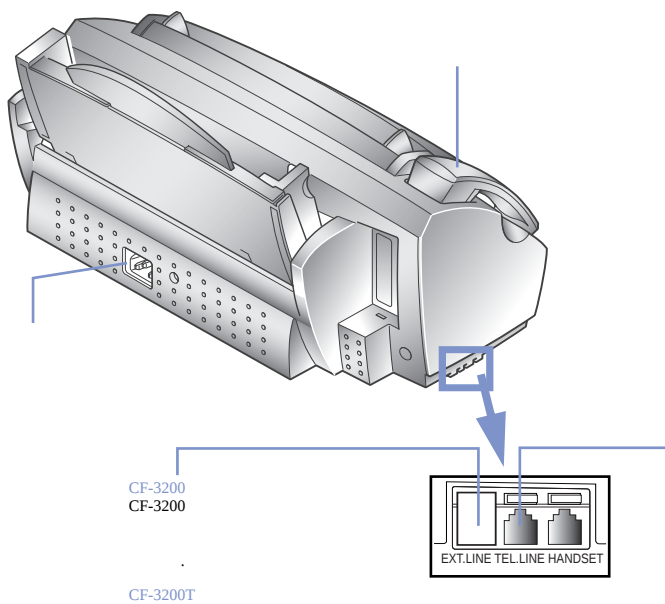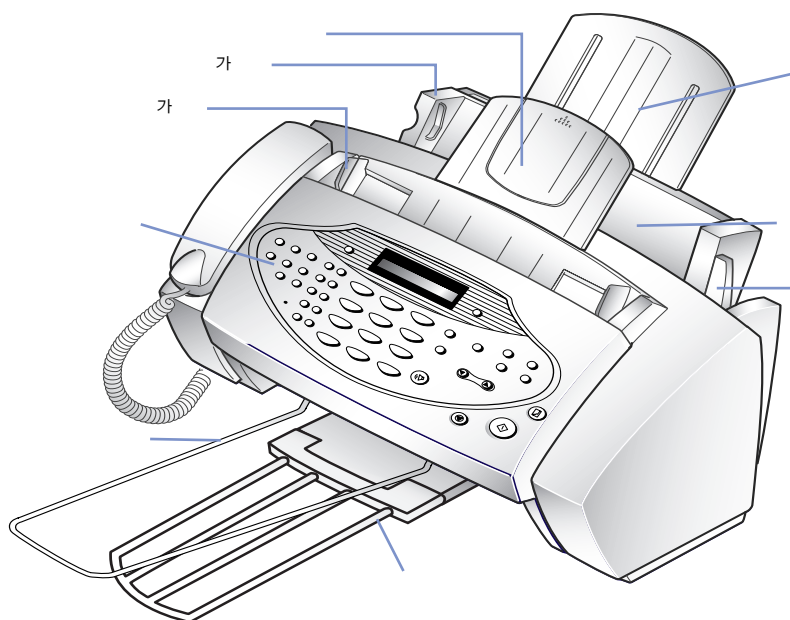

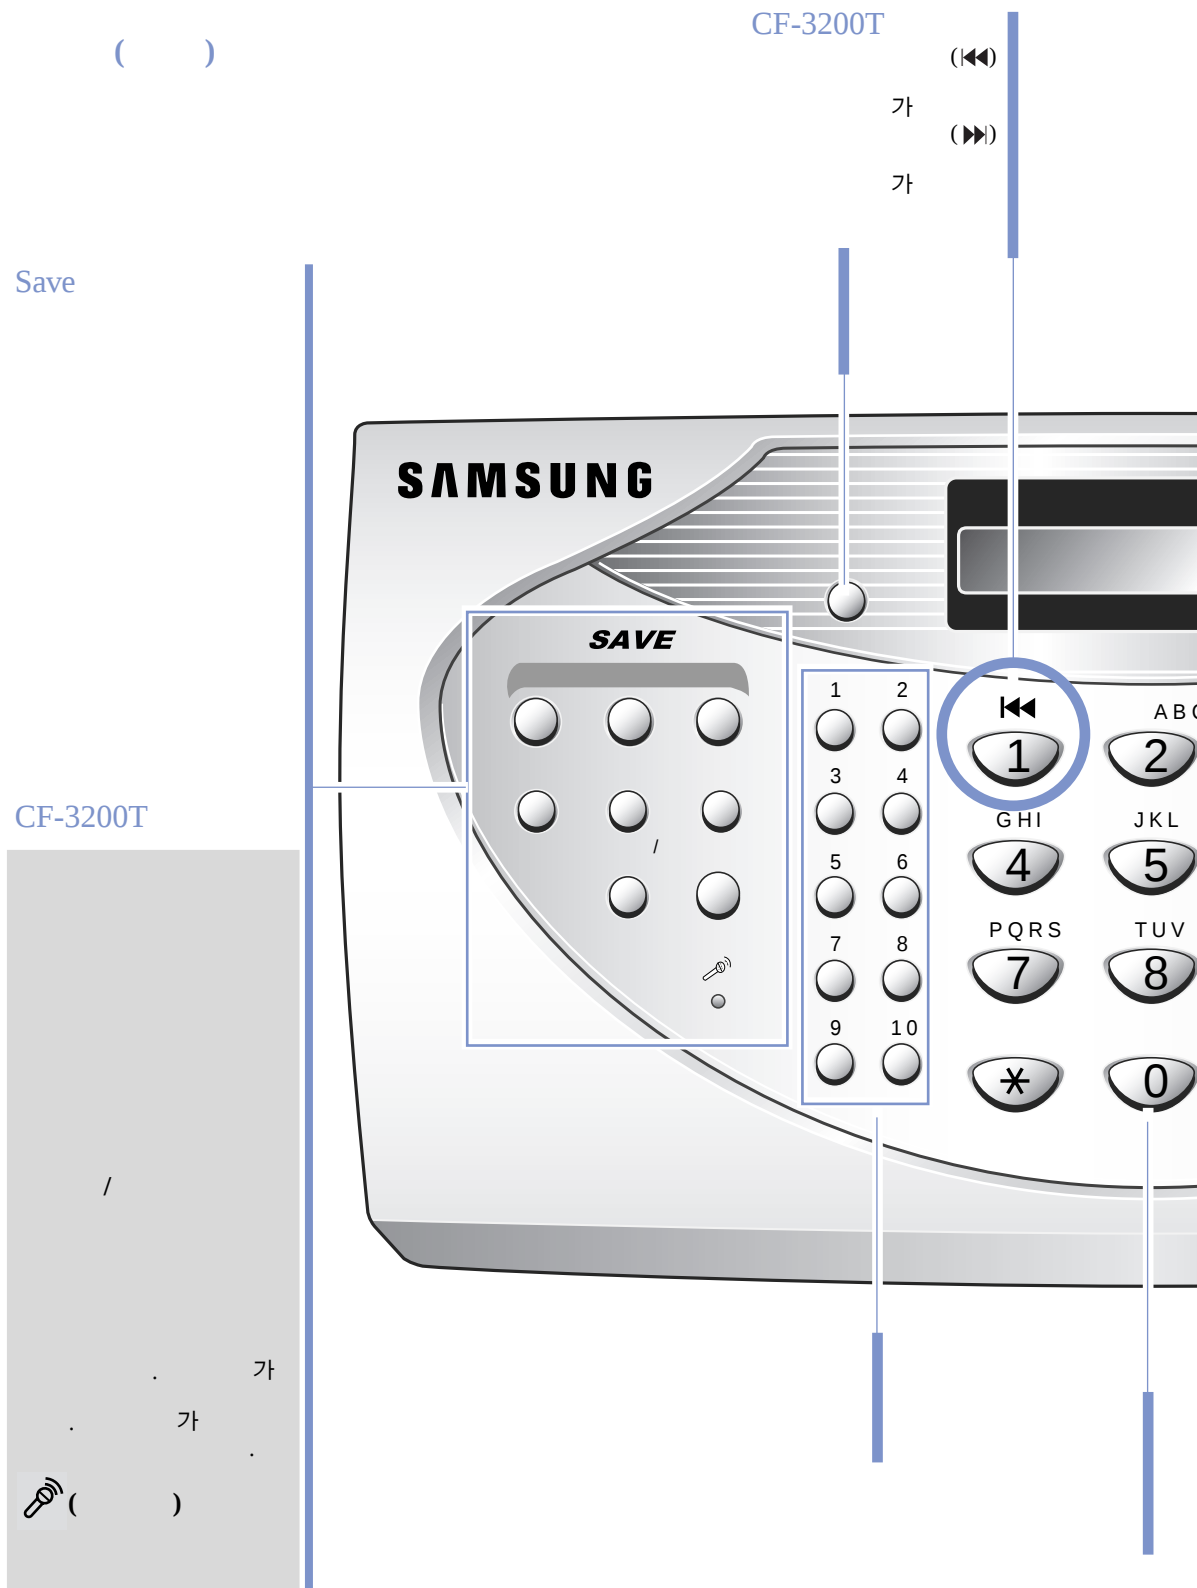


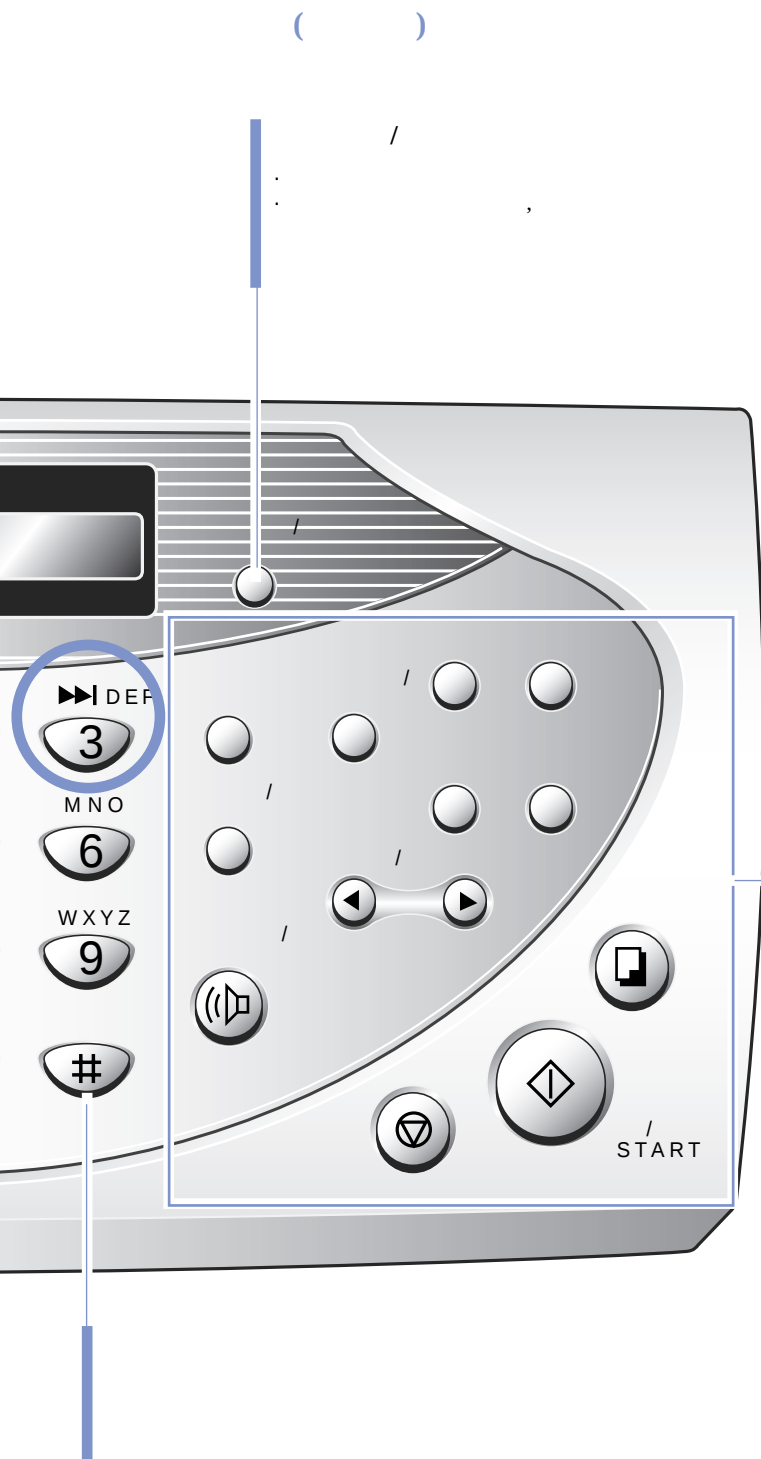

()


(/)
START

()

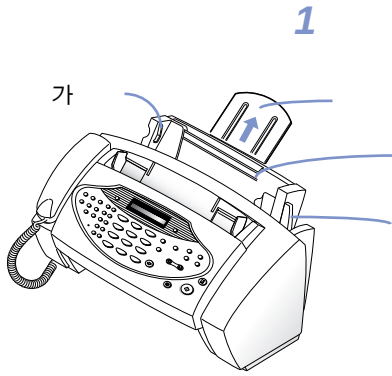

2

3



가



가

6-10

가

- : (: 1-8)
- : (: 6-10)

,





- ()
- (5)
- MULTIPLE ID(ID)
- MULTIPLE
- ID
- .(: 6-10)
- 1** []
- 2** [^] [□] 'FAX NUMBER/
NAME' [/]
- 3** 'FAX NUMBER' 가
[/]
- 4**
- 20 ()
 - , [/] #
 - (+) *
 - [^] [□]
- 5** [/]
- 6** 'FAX NAME'
[/]
- 7**
(40 ,)
- 1-9
- 8** [/]
- MULTIPLE ID
'ANOTHER ID?' 가 [^]
[□] 'Y'
'N' [/]




- 1 가 .
- 가
 - ,N , 'MNO'가 6
2
가
) M->N-> O -> 6

- 2 가 .
- 가 가
 - 가 [^]
[ㅁ]

- 3 [/] .

1	1
2	A B C 2
3	D E F 3
4	G H I 4
5	J K L 5
6	M N O 6
7	P Q R S 7
8	T U V 8
9	W X Y Z 9
0()	+ - , . ' / * # & 0



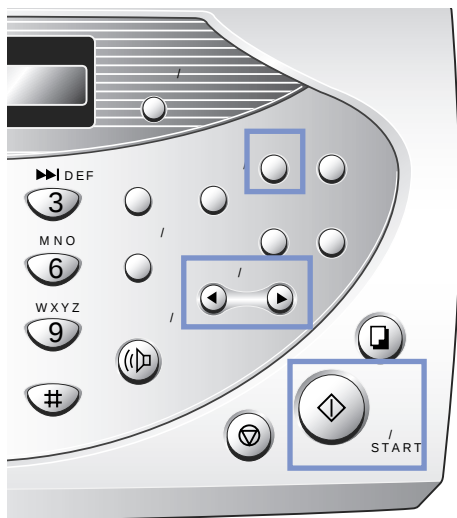

- 1 [] .
- 2 [^] [] 'TIME/DATE SETUP'
[/] .
- 3 , , , , .
- 4 [/] .



(CF-3200T)

가 (TAM) 가
(TAM)
(: 3-6)

1 ' ' 가 []

• 'RECORD'

2 30cm



• 60
• 15
• 60 가 [] []


• 가
• , 가
•

, (TAM) 가
(: 4-1)

가

• Page to page:

• 2-up():




1

가

2

3

가



4

[]
COPIES' 가

'NUMBER OF

[/]

'NUMBER OF COPIES'

가
RATE'

[^] [□]
[/]

'COPY

70%

150%

97%

5

[]

가



가

'CHECK PAPER' 가

가 [/]

가

가

:

가

가

:

- 1



1 [] .
 • 'ON' 'OFF' .

2 'ON' []

• 'OFF' 가 .

(2-up)

1 가 .

2 .

3 가 .

• 3-3 .

4 [] .

• 'COPY[2-UP] 1/2' 가
 ()가 .
 ()가 가 'COPY[2-
 UP] 2/2' 가 가
 , '1/2' 가
 '2/2' 가 .

.(: 1-14)



- 1 [] 'ON' 'OFF' 가
- 2 'ON' []
- 가 []
- 30% 가 가
-



2





1

- 가
- 가
- [^] [□] 'N(N0)' [/]
- 'Y(Yes)' [/]

2

- .(46)
- , [/]
- 'P' 가 .
- .(: 6-4)
- [^] [□]

3

- [/]

4

- .
- 20 , .
- .(: 1-9)

5

- [/]

1

(1~10)

- 가
- 가 , 'NO.NOT ASSIGNED' ,
-
- .(: 6-7)
- []
- (가)
가
- (가)
가
가 'RETRY'
REDIAL?' [/]
, []



01 80

- 1 [] 2 .
- 2 2 [/]
- 가
 - 가
 - [^] [▣] 'N(N0)' [/]
 - 'Y(Yes)' [/]
- 3 (46)
- , [/]
 - 'P' 가 [^] [▣]
- 4 [/]
- 5
- :
 - 20 ,
 - .(: 1-9)
- 6 [/]
- 2
- 7 []

1 [] .

2 2 .

3 [/] .

-
-
- .(: 6-7)
- []
- (가)
- 가
- (가)
- 가
- 가 'RETRY
- REDIAL?' [/]
- , []



()

가 . 가

1 []
2 [^] [*] 'GROUP DIAL SETUP'
[/]

3



- 'GROUP NO.:Txx', 가 . xx

- 'GROUP xx USED' 'DELETE? Y/N' 가

'N(N0)' [/]

'Y(Yes)'

[/]

- 'DELETE? Y/N'

'N(No)'

[/] 3

'Y(Yes)'

[/]

4 [/]

5 (01~80)

- 가

6 [/] .
• 5 6

7 가 []

8 .
• 가 .
20 .
(: 1-9)

9 [/] .
()

, ,
가 .

1 .
• 가
• 가
• .
(: 5-2)
• .
(: 5-5)



- 가 가 .
- A~Z .
- 1 [/] .
- 2 [^] [Ⓜ] .
- 가 .
- [Ⓜ] (A~Z) .
- , [^] (Z~A) .
- 가 가 .
-
- 'T' .
- 'S' .
- 'G' .
- 가
- 1 . ('T01' 가 .)
- 3 가 [/] .
- 가 가 .

1 [/]



2 가 .

/
 •
 • , 'NEWYORK' 'MNO'가
 • '6'
 [□] [^]
 •
 - 'T'
 - 'S'
 - 'G'

가
(, T01 가
(.)
,
,
'NOT FOUND' 가
.

3

가 .

- [α] (A~Z), [^] (Z~A)가 .

4 가

가 가



3






ID

(ON)
ID


(, ,)

1




가 ,
가 ,
.(: 8-4)

2

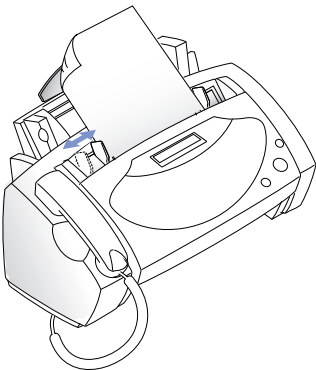

가 15
'DOCUMENT'
READY' 가
가
가
가
가
가

3

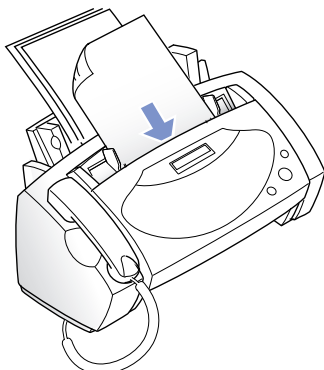

[/]
[]
STANDARD
NORMAL
.(: 3-3)



[/]
가

1

- 가 [] .
- STANDARD: 가
- FINE: 가
- SUPER FINE: (가 SUPER FINE 가 .)

2

- 가 [/] .
- NORMAL: 가
- LIGHTEN: 가
- DARKEN: (FINE ,)
- PHOTO: 가 ,)



()

- 1 .
- 2 .
- 3 .
 - [/]
 - 'PHONE'
 - 가 [^] [▣]
- 4 .
 - [/]
 - ID ON
 - [/] 'CHANGED ID? Y/N'
 - ID(#1) ID
 - 'Y' ID [^] [▣]
 - ID
- 5 .
 - [/]
 - .(: 3-13)

FAX MODE, TEL MODE, AUTO MODE, TAM MODE
가 .

FAX MODE	CF-3200/ CF-3200T	가 . 가	FAX MODE (: 3-7)
TEL MODE		가 [/] 가 .	TEL MODE (: 3-7)
AUTO MODE			AUTO MODE (: 3-8)
TAM MODE	CF-3200 ()	가 가 .	TAM MODE (CF-3200) (: 3-8)
	CF-3200T		TAM MODE (CF-3200T) (: 3-9)

- FAX AUTO
- 가 [] 2 ,
- 가 가 [] .

FAX MODE



[/] 2
'FAX MODE' 가

- FAX
FAX MODE

- 'RING TO ANSWER'(
가)
.(: 6-10)

TEL MODE

[/] 2
'TEL MODE' 가

- TEL
TEL MODE

1

- CF-3200T , 13

2

[/]

- , 가
[/]
- 'RX'

3

AUTO MODE



[/] 2
'AUTO MODE' 가

- AUTO
AUTO MODE . 가
- 가 . ,
5

TAM MODE (CF-3200)

[/] 2
'TAM MODE' 가

- TAM
TAM MODE .
- 가 .
- TAM MODE 가
- '4
- 가
- 가 가 TEL MODE
- 가 가
- 가

TAM MODE

(CF-3200T)

CF-3200T

[/]


[]

TAM MODE

/

. TAM MODE

[]



가
가

가

. TAM

[]

.

TAM MODE


.

가

. TAM

TAM MODE
(RECORD TAM OGM!)

(: 4-2)



TAM

가

가

.

가

.

가

가

가

가

.



가

*, #, *

.

가

.

. (: 4-7)

가

.

1

.

2

(' -) 가 *9* ()

.

•

• ,

.

•

9

*()

0~9

.(: 6-10)

3

.

[]

.

.

(CF-3200)



- 1 []
 - 2 [^] [□] FORWARD
[/]
- OFF:
 - FORWARD:
 - PRINT/FORWARD:

- 3
 - 4 [/]
 - 5 [/]
 - 6 [/]
 - 7 [/]
- 'START TIME'
 - 'END TIME'
 - 'INVALID TIME'
 - 'FWD' 가

(CF-3200T)

가

CF-3200T

.()

1 [/] .
• 'FAX' 'MSG' 가 .

.(: 4-7)

2 'FAX' [/] .

3 [^] [□] FORWARD
PRINT/FORWARD [/]

- OFF:
- FORWARD:
- PRINT/FORWARD:

4 .

5 [/] .
• 'START TIME' .

6 [/] .
• , ' ' .

7 [/] .
• 'END TIME' .
• 'INVALID TIME' ' ' .

8 [/] .
• 'FWD' 가



1 / [/]

- 'VOICE REQUEST' 가
- [/]
-

가
(CALL BACK MASSAGE) 가

2 가

3

1

- 가 가

2 가



4

(CF-3200T)



CF-3200T . CF-3200
(TAM) 가
CF-3200T (OGM) (ICM) 가 12 .



- 1 [] .
· ' ' 가
- 2 30cm
·
1 15
- 3 [] .
· []
· []
·
[]
[]
'RECORD TAM OGM!'
가



(TAM)
[]

가

1

[]

가

50s(01/03) , '01'

'03'

'50s' 가

's' [^] [□]

가

2

가

[]

가

[]

[]

가

가

(◀◀(1))

가

(▶▶(3))

가

가

가

가

·
· ,
· ,
·
·



가
[]

1 가 []

·
· 'ERASING'
·

1 []

· 가


2 [/]

· 'ERASING...'
·
· 'ERASE ALL
MSG.?' 가 []


(TAM)

(CALL MONITOR)

(: 6-12)



가



CF-3200T

· () 가 ,
·
· (: 4-8)
· (: 3-12)

1 가
·
2 ' ' 55
가 ' ' .

·
· (: 6-12)
3 , ' ' ,
·
· (: 4-9)

ON
·
1 [/] [^]
[□] 'MSG' .
2 [/] .
3 [^] [□] 'ON' .
· 'OFF' .
4 [/] .
5 [/] .

- .
- :
- (TAM) .
 - .
 - '#139#' .
 - .
- (User Options)
- . (: 6-12) .
- 1** .
- 2** .
- , ' ' .
- .()
- 3** .
- ' ' 가 .
 - .
- .
- .(: 4-9)
- 4** #0 .
- '#0' .
- 가
- .

	# 0	.
	# 1	.
	# 2	가 .
	# 3	(#2,#5) .
()	# 4	가 .
	# 5	.
()	# 6	가 .
	# 7	가 .
	# 8	가 .
	# 9	가 .
	# * 1	.
	# * 2	.
	# * 3	.
	* # *	.

(CF-3200T)



5



) , (,) (.



가 가

1
2 [] [^] [Ⓜ]
'BROADCASTING'

3 [/]

4
.
/ / 가

5 [/]
'ANOTHER? Y/N' 가

. 'Y' 4
. 'N' [/]

6
.
[/]

7 [/]



가
'Y' [/]
'N' [/]
'MEMORY FULL' 'CANCEL JOB? Y/N'
가 가



1 [] [^] []
'SYSTEM SETUP'

2 [/]

3 [^] []
'SAVE TOLL TIME'

4 [/]

5 24

• 10:30 2230

6 [/]

가

1

2 []

• 'SET SAVE
TOLL TIME IN SYSTEM SETUP'

3

• (, ,)

-
- 4** [/] .
- 'ANOTHER? Y/N' 가
 - 가
 - 'Y(Yes)' 3 .
 - 'N(No)' [/] .

- 5** .
-
- (; 11-DEC 22:05 FAX <-> SAVE TOLL TIME 22:30)



가 'Y' [/] 'MEMORY FULL' 'CANCEL JOB? Y/N' 가
 . 'N' [/] 가 .

- 1** [] .
- 'CANCEL JOB? Y/N' .
- 2** [^] [□] 'Y' 'N'
 [/] .
- 'Y' 가 .



()

- 1
- 2 [] [^] [Ⓜ]
'DELAYED FAX'
- 3 [/]
- 4



- 5
 . (: 5-7)
 -
 . (: 6-7)
 - 가
 'MEMORY FULL'
 'CANCEL JOB? Y/N'
 . 'Y'
 [/]
 가
 가 . 'N'
 [/]

- 5 [/]
'ANOTHER? Y/N' 가
 . 가
 'Y(Yes)' 4
 .
 'N(No)' [/]
 .
- 6 [/]
 .
 . [/]
 .
- 7
 .
 24
 10:30 2230
 .
- 8 [/]
 .
- 9
 .
 가



가
(POLL CODE) 가

?

가

가

가

()

1

2

[] [^] [*]
'SEND POLLING'

3

[/]

• 'SEND
POLLING' 가 TEL
FAX
• 가

.(:5-7)

()

1

[/]

2

[]

• 'RECEIVE POLLING?'

3

[/]



(: 6-7)

- 1 [] [^] [□]
'CANCEL SCHEDULE'
- 2 [/]
- 3 [^] [□]
- 4 [/]



6



(Calling Identity Delivery Service)

-
-
-
-
-

(Type1)



가 (Type2)
(PABX)

1


	0312131451	가 .
	????????	가 . 가
	*****	.

* : 가
가 .



- 1 [] 2 .
- 2 [^] [Ⓜ] 'CID' .
[/] .
- 가 가
- 가
- 'CID NOT ASSIGNED' 가 .
- 3 [^] [Ⓜ] 가 .
- 30 30 가 .
- 4 [] .

- 1 [] .
- 2 [^] [Ⓜ] 'CID LIST' .
- 3 [/] .
- 가 .



/



[/] 가 .

·

1 [/] .

· 가 , .

2 .

1 [/] ² .

'MULTI REDIAL' .

[/] .

2 [^] [□] .

· 10 .

3 [/] .

· 가 , .

4 .

(9)

.

9

[/] .

.



가

[]
가

() .

.

1 가 [] .

2 .


3 .

1 [] .

· 가 .

2 .

· .

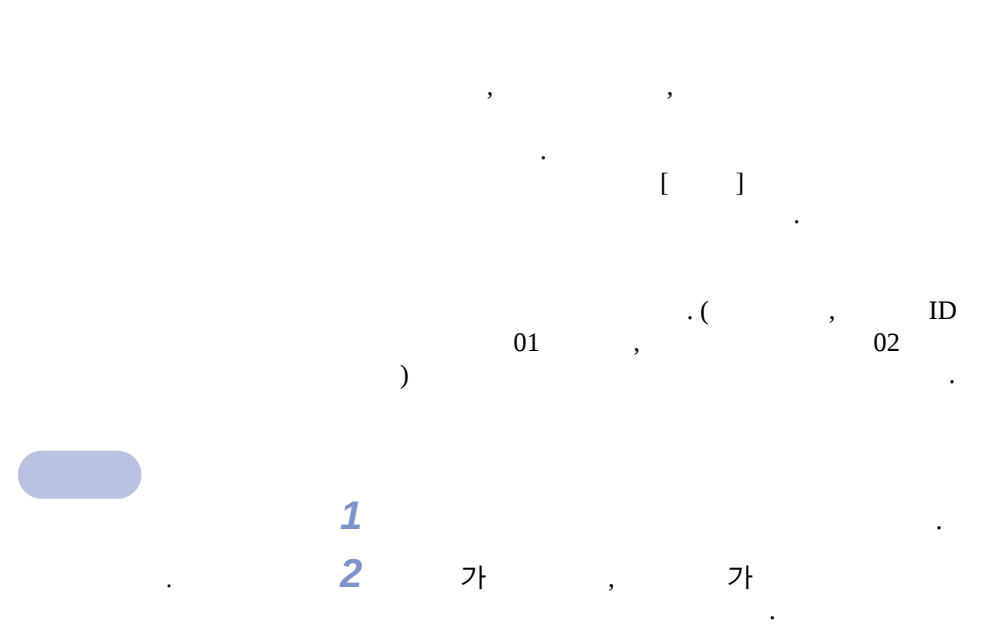

CF-3200/3200T

1 [/] .

2 [^] [Ⓜ]

• 가 .

가 가 .

(HELP)

가 .

(SENT JOURNAL)
(RECEIVED JOURNAL)

40

. (: 6-10)

(PHONEBOOK)

, , .

(SENDING CONFIRM)

가 , 가

. (: 6-10)

(SCHEDULE INFORM)

가 ,

(SYSTEM DATA)

(CID LIST)

(VOICE STATUS, CF-3200T

)

(

)

가

(MULTI- COMMUNICATION)

(CALL BACK MESSAGE)

가

(POWER FAIL REPORT)

가

() 가
가

.(: 6-7)

(TAM)

- 1 [] .
- 2 [^] [Ⓜ] 'SYSTEM SETUP'
'TAM SETUP'(CF-3200T) .
 - SYSTEM SETUP
TAM SETUP
- 3 [/] .
- 4 [^] [Ⓜ]
[/] .
- 5 [^] [Ⓜ] .
- 6 [/] .
 - [] .
[]

()

'SYSTEM SETUP'

[^]

[□]

LANGUAGE		ENGLISH () GERMAN () FRENCH () ITALIAN () SPANISH () PORTUGUESE () DUTCH () * KOREAN (-)
SENDING CONFIRM		* ERROR: ON : OFF:
PAPER SIZE		* A4 (210 x 297 mm) LEGAL (216 x 356 mm) LETTER (216 x 279 mm)
AUTO REDUCTION	가 A4 A4 가	* ON () OFF ()
DISCARD SIZE		[00~30mm] * 1 5mm
RINGS TO ANSWER	FAX 가	[2~7] * 2

RCV. START CODE (CF-3200)	EXT.LINE *9* 가	[0~9] * 9
ECM MODE (Error Correction Mode)	가	* ON (,) OFF ()
SAVE TOLL TIME	. 24	
AUTO JOURNAL	40 가 40 ,	* ON () OFF ()
MULTIPLE ID	5	* OFF () ON ()

*

.

(, CF-3200T)

[] "TAM SETUP" [^] [□]

CHARGE SAVE	가 가 가 2	* OFF () ON ()
CALL MONITOR		* ON () OFF()
RECORDING TIME		30SEC(30) * 60SEC(60) 90SEC(90) OFF()
REMOTE PASSWORD	'#139#' 가	* #139#[000-999]
BATTERY ALARM	가 'LOW' 'BATTERY', 'NO BATTERY' 가	* ON () OFF ()
SILENCE CHECK	(TAM) 가 10	* DISCONNECT () RECEIVE (FAX) RECORD ()
HOWLER CHECK	(TAM) 가	* ON () OFF ()

*

가

- 1 [] .
- 2 'VOLUME SETUP' 가 [^]
[▢] .
- 3 [/] .
 - 가 .
ALARM VOLUME() KEY VOLUME()
- 4 [^] [▢]
[/] .
- 5 [^] [▢] ON,OFF .
 - ON: .
 - OFF: .

1 [] .

2 [^] [□] 'MEMORY CLEAR'

3 [/] .

4 [^] [□]

-
- FAX NUMBER/NAME:
- DIAL/SCHEDULE: , ,
- JOURNAL:
- DEFAULT SETUP:
(SYSTEM SETUP TAM SETUP)

5 [/] .

• 가 .




7




가




1




2





3



4

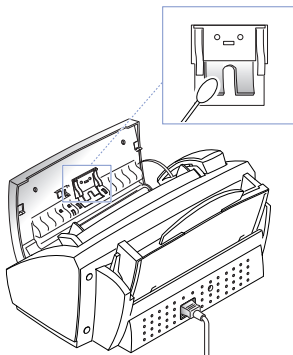

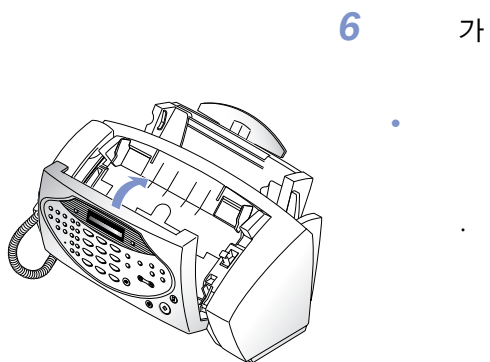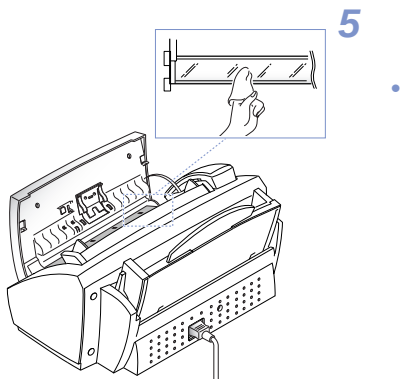




'INK LOW'가

가
INK-M10

1




()

2


[]

'NEW'가

3



4





5

가



6





7 [^] [□] 'NEW' 'OLD'

- NEW : OLD:
- NEW OLD

8 [/]

•

1 [] [^] [¢]
'MAINTENANCE' .

2 [/] [^] [ɔ]
'CLEAN HEAD' .

3 [/] .

4. What is the purpose of the study?


.(: 7-7)

가 가 .

•
•
•


1 [] .

'NEW' 가




2

3



4



5



6

7

가

'MONO : 1/8' '1'
'8'
'MONO : 8/8' 가

1 [] [^] [□]
'MAINTENANCE'

2 [/] [^] [□]
'INK LEVEL VIEW'

3 [/]
•

1

) (

2

[] [^] [□]
'MAINTENANCE'

3

[/] [^] [□]
'ADJUST SHADING'

4

[/]
'SHADING...'
'LOAD WHITE DOC.' 가 - 가

가

:

가

가

CHECK PAPER	가 가 [/]
DOCUMENT JAM	가 .(: 7-14)
INK LOW	가 .(: 7-4) 가
LOAD DOCUMENT!	, .
LOW BATTERY *	가
MEMORY FULL[TAM] *	가 가 가 .(: 4-5)
MEMORY FULL MEMORY LOW	가 가 가
MEMORY RECEIVED	가 .
INK LOW	.(: 7-4)
CHECK PAPER	[/] .(: 7-14) 가
NO CARTRIDGE	.
NO ANSWER	.
NO BATTERY*	가 []
NO CARTRIDGE	가
NO MESSAGE *	가
NO NEW MESSAGE *	가
NO. NOT ASSIGNED	가
POLLING ERROR	가 가

RECEIVE ERROR	가 가 가 가
RETRY REDIAL?	[/]
SEND ERROR	가 가 가
SET SAVE TOLL TIME IN SYSTEM SETUP	.(: 6-10) []

* CF-3200T

가

	가
	TEL.LINE
가	가 (: 6-7)
가 가	가 가
	' TEL' .TEL 가 가 'MEMORY FULL'
	[/]
	'TX' 가 /] 가
	가
	가 가
	가 가
가	
가	가
	(: 7-2)

	가
	가 'MEMORY LOW' 가 'MEMORY FULL'
가	(: 6-10)


	가 'INK LOW' 가 (: 7-8) (: 7-4) 가 (: 7-4)
가	가 가 (: 7-7)
	'INK LOW' 가 (: 7-4). (: 7-6).
	(: 7-7).

가	(: 7-14) [/]
가 2~3	100 가
가	
가	가


/

'DOCUMENT JAM'

1




2



3

가



⋮
⋮

가

PAPER' 가 'CHECK



1



2

3 [/]



8



	(PSTN),	(PABX)
	ITU G3	
	MH/MR/MMR (ECM)	
	14400/12000/9600/7200/4800/2400 bps	
	(CIS)	
	216 mm	
	210 mm	
	8"(203 mm)	
	: 10.1 W	
	: 6.9 W	
	(): 20 W	
	10°C ~ 35°C	
	20 ~ 80%	
(WxDxH)	382 x 310 x 210 mm	
	3.8 Kg ()	
	AC 220V, 50~60Hz	
	0.5A	
	200 dpi	
	15	
	100	
	: 3.85 lines/mm	
가	: 7.7 lines/mm	
	: 15.4 lines/mm	
	300 x 300 dpi	
	64	
	1 MB(80)	
	12 (+ , CF-3200T)	
	6F22 (FC-1) 9V	
	1000 (ITU 4% - 8-5)	

(ASF)

*ASF , 100 가 .


-
-
-

가 . 가 , ,

-
-
-
-
-
-

1

	(mm)	()	
Letter	216 x 279	8.5 x 11.0	70 g/m ² ~ 90 g/m ² (20 ~ 24lb)
A4	210 x 297	8.3 x 11.7	
Legal	216 x 356	8.5 x 14.0	



(ADF)

		1	2
		8.5" () x 14" () (216 mm x 356 mm)	8.5" () x 11.7" () (216 mm x 297 mm)
		5.8" () x 5.0" () (148 mm x 128 mm)	
		8.26" (210 mm)	
		-	15
		0.07 mm ~ 0.15 mm	0.075 mm ~ 0.12 mm

* ADF

-
-
-
- 0.07mm
- 0.15mm
-
-
-
-

가

ITU 4% (60.5%)

THE SLEREXE COMPANY LIMITED

SAPORS LANE - BOOLE - DORSET - BH12 5 EH

TELEPHONE BOOLE (040 1) 58111 - TELEX 32486

Our Ref. 356/DJC/EAC

18th January, 1972.

Mr. F.W. Cundall
Mining Surveys Ltd.,
Holroyd Road,
Beeding,
Berks.

Dear Pete,

Permit me to introduce you to the facility of facsimile transmission.

In facsimile a photocell is caused to perform a raster scan over the subject copy. The variations of print density on the document cause the photocell to generate an analogous electrical video signal. The signal is used to modulate a carrier, which is transmitted to a remote destination over a radio or cable communications line.

At the remote terminal, demodulation reconstructs the video signal, which is used to modulate the density of print produced by a printing device. This device is scanning in a raster scan synchronised with that at the transmitting terminal. As a result, a facsimile copy of the subject document is produced.




Probably you have uses for this facility in your organisation.





Yours Sincerely,

Phil.

P.J. CROSS
Group Leader - Facsimile Research

Registered in England: No. 208
Registered Office: 46 Years Late, Hard, Four.

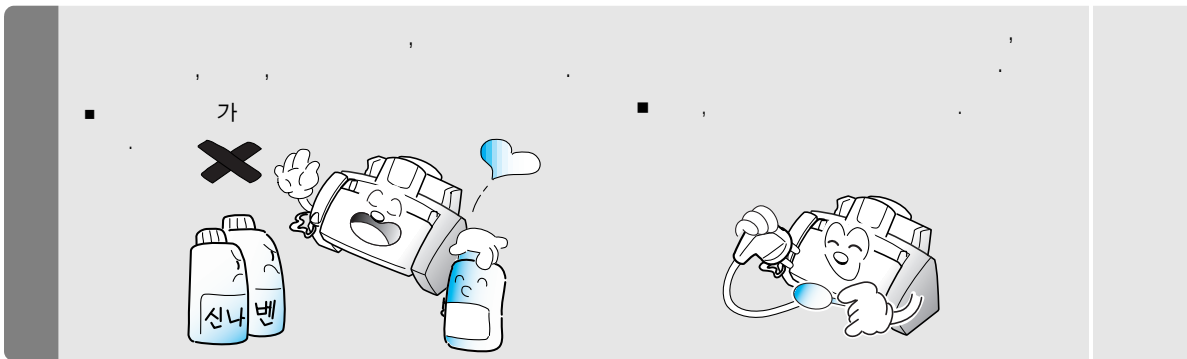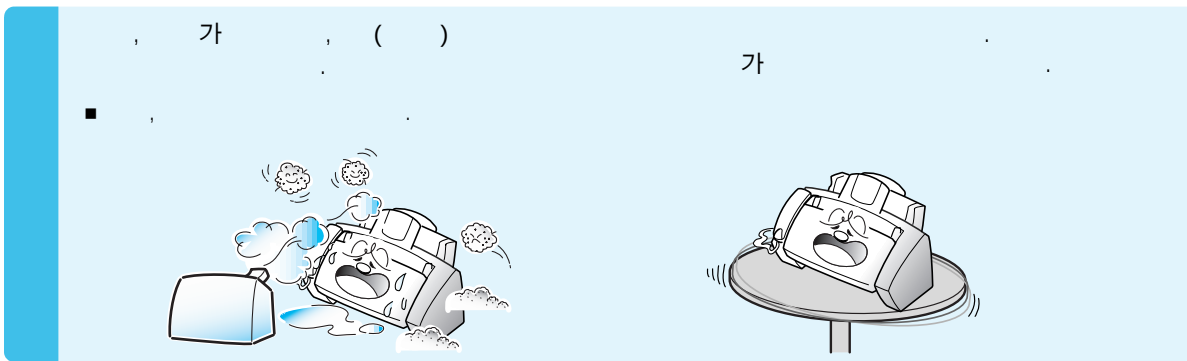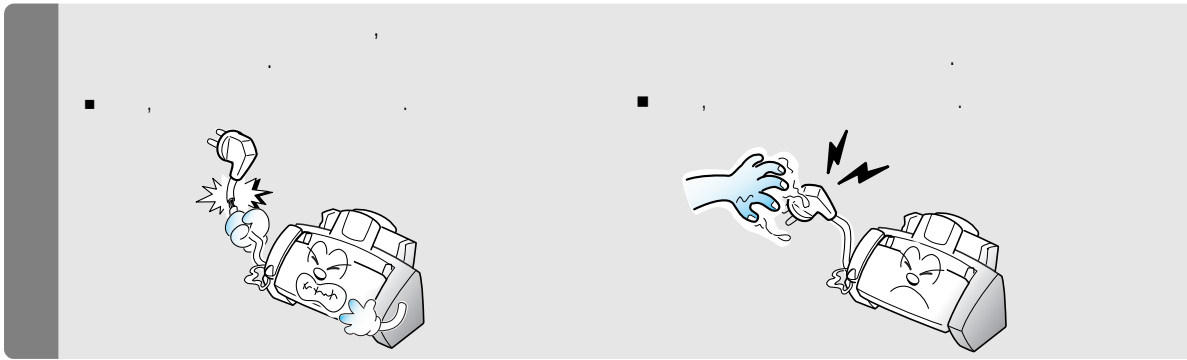

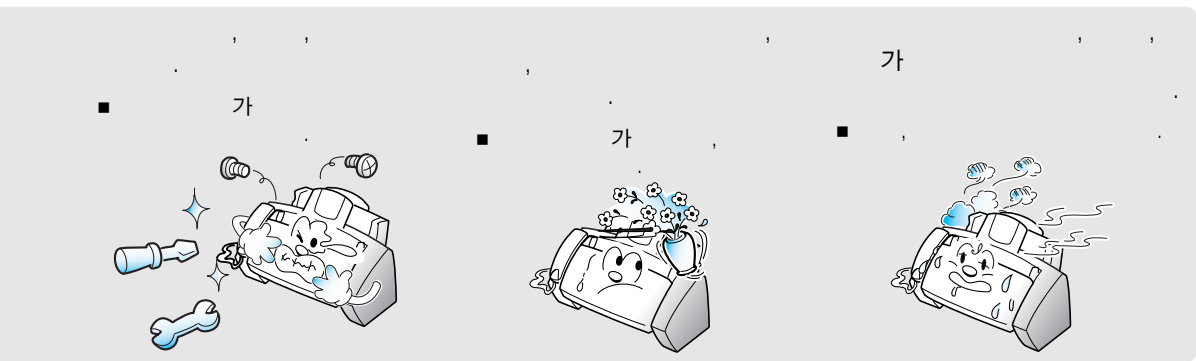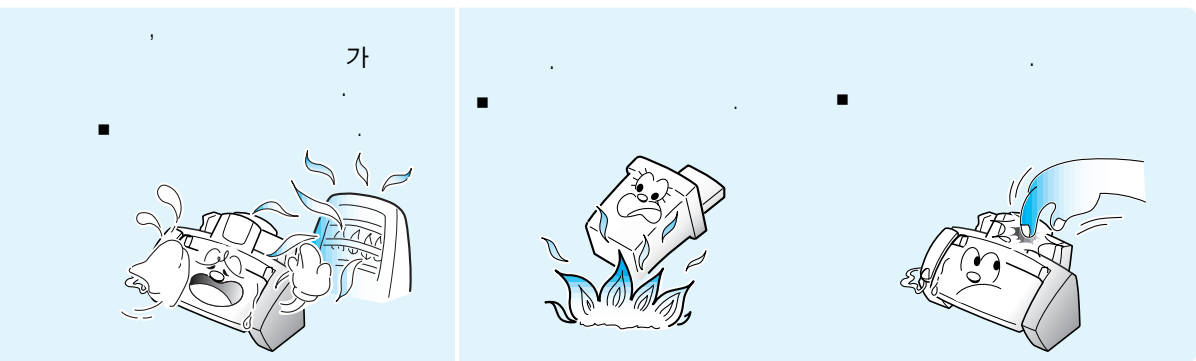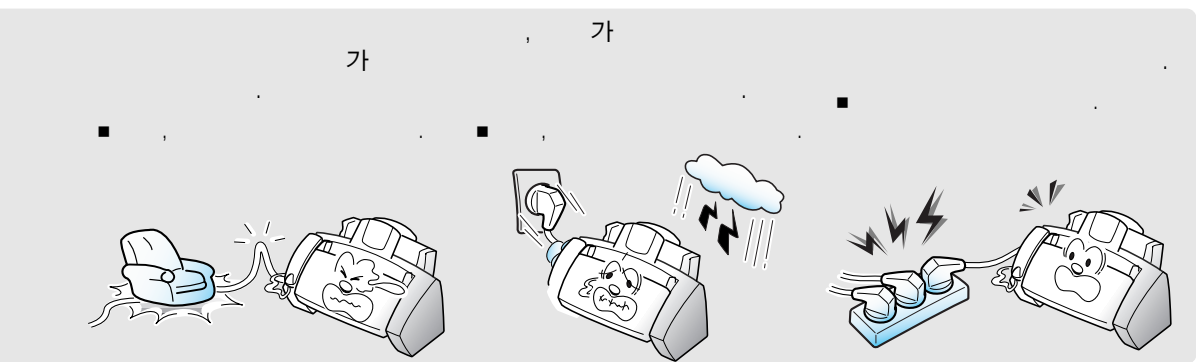

	INK-M10	http://www.sec.co.kr/fax 080-023-8484() 가 C&C A/S
(A4/100)	P-PREMIUM	

•

6

•

가

•


•

•

(가)



		SERIAL NO.	



:
 • (2000-21)
 • ()
 • 7 14

	10	가	
	1		
	1	가	
	가		
	가	3	
		4	
		5	
	가 가	가	가 가
	가 가		10% 가
	가 가		가
	가 가		



(가 '가 ')

• • () • •	2 1
• • • •	1

•
 •
 • () 가 ()
 • (, ,)
 • (, ,) , ,



9



A

AUTO MODE

3-8

가

1-3

5-2

F

7-1

FAX MODE

3-7

() 2-7
() 2-6

T

1-4

TAM MODE

(CF-3200) 3-8

3-3

TAM MODE

(CF-3200T) 3-9

7-15

TEL MODE

3-7

1-10

retry, redial 7-11
save toll 7-11

3-10
(SCHEDULE INFORM) 6-8
5-7
/ 1-5
4-8
1-6
8-2
(ASF) 8-3
7† 1-6
4-9
3-2
/
1-4 7-14
2-3
2-2
2-2
8-2
1-4
1-4
5-1
1-5
/
1-5
1-9
2-9
4-4
1-4
(CF-3200T) 1-11, 4-2
8-2
7-15
7-13
1-4
8-2
7-8
1-14
7-4
7-9
7-7
7-6

battery alarm 6-12
call monitor 6-12

charge save 6-12
howler check 6-12
recording time 6-12
remote password 6-12
silence check 6-12
(CF-3200T) 6-12
3-5
2-1
3-5
(CF-3200T) 4-1
/ 1-5
/ 6-4
1-5
6-5
1-4
7-14
(CALL BACK MESSAGE)
6-8
(PHONEBOOK) 6-7
/ 1-5
(POWER FAIL REPORT) 6-8
8-2
7-10
() 1-5
() 1-4
1-4
6-6
6-4
7-13
1-5
1-4
5-4
5-3
5-3
5-3
3-13
3-13
3-13

6-1
1-4

1-8

8-2

6-4

5-6

3-1

() 5-6

3-6

() 5-6

3-2

() 3-4

(CF-3200) 3-11

(CF-3200T) 3-12

(2-up) 1-13

1-12

7-12

7-9

1-8

