



# Single Wall Ovens

FGB24T3E C/S/B

24" Gas



## Product Dimensions

Height	42-3/8"
Width	23-17/32"
Depth	21"

## More Easy-To-Use Features

### Bright Oven Lighting

Our bright lighting makes it easy to see what's inside.

### Timer Function

### Manual-Clean Ovens

### Attractive Stainless Steel Exterior<sup>1</sup>

Available in:



<sup>1</sup>Select models only.

## Signature Features

### Ready-Select™ Controls

Easily select options or control cooking temperature with our easy-to-use controls.

### Large Capacity

Large capacity oven and broiler give you room to cook more at once.

### Vari-Broil™ Option

Allows you to choose between two heat levels.

### Large Windows


Our large oven windows let you easily see what's inside.

# Single Wall Ovens

FGB24T3E C/S/B 24" Gas

Features	
Oven Control/Timing System	Ready-Select™
Windows	Large
Exterior Door Finish	Real Stainless Steel (C), Color-Coordinated (S/B)
Handle Design	Black (C), Color-Coordinated. (S/B)
Oven Cleaning System	Manual Clean
Oven Controls	
Bake/Broil	Yes/ Variable (Hi - Lo)
Convection Conversion	
Convection Bake/Broil/Roast	
Quick Bake Convection	
PowerPlus™/Quick Preheat	
My Favorite	
Chicken Nugget Button	
Pizza Button	
Keep Warm	
Add-a-Minute	
Delay Bake	
Self-Clean	
Rapid/Quick Clean Option	
Delay Clean	
Kitchen Timer	Yes
Timed Cook Option	
Control Lock	
Auto Oven Shutoff	
Oven Lock-Out	
Upper Oven Features	
Capacity (Cu. Ft.)	2.7
Convection System	
Oven Light	1
Hidden Bake Element	
Rack Configuration	2 Racks
Baking System	Regular
Broiling System	
Bake Element (BTU)	18,000
Lower Broiler Features	
Capacity (Cu. Ft.)	2.7
Convection System	
Oven Light	1
Hidden Bake Element	
Rack Configuration	2 Racks
Baking System	
Broiling System	Vari-Broil™
Broil Element (BTU)	18,000
Certifications	
A.D.A. Compliant	
Sabbath Mode (Star-K® Certified)	
Specifications	
Oven Interior (H x W x D)	14" x 19" x 17-5/8"
Power Supply Connection Location	Right Bottom Rear
Gas Supply Connection Location	Right Bottom Rear
Voltage Rating	240V / 208V / 60Hz
Connected Load (kW Rating) @ 240/208 Volts¹	.001/.001
Amps @ 240/208 Volts	5.0/5.0
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	165 Lbs.

¹Single phase 3- or 4-wire cable, 120 / 240 or 120 / 208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

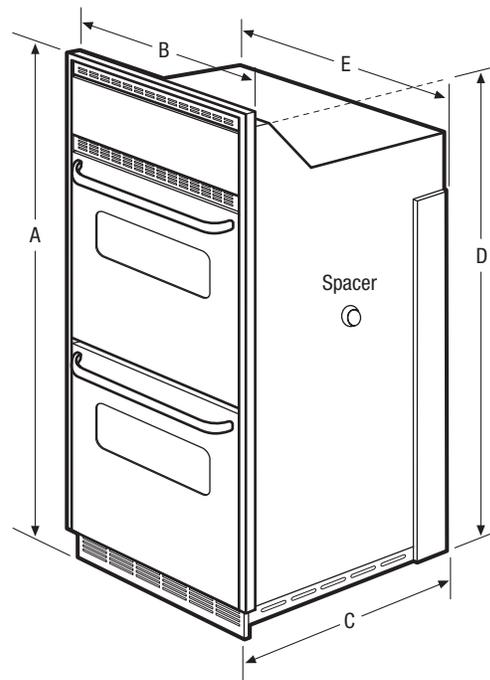

NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).



Product Dimensions	
A - Height	42-3/8"
B - Width	23-17/32"
C - Depth	21"
D - Height (Wrapper)	41-13/16"
E - Width (Wrapper)	22-5/16"
Depth with Doors Open 90°	40-3/8"

Cutout Dimensions	
Height (Min.)	42-1/8"
Width (Min.)	22-1/2"
Depth (Min.)	24"

Accessories information available on the web at [frigidaire.com](http://frigidaire.com)

## FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • [frigidaire.com](http://frigidaire.com)  
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](http://frigidaire.ca)

FGB24T3E 10/10

© 2010 Electrolux Home Products, Inc.

Specifications subject to change.  
 Printed in the U.S.A.