


# BTH-300 User Manual


## FEATURES:

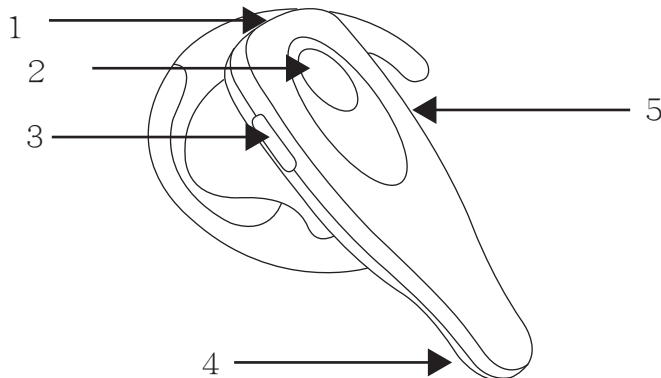

1. Charging port 2. Power/Talk button with Status Indicator light 3. Volume + button  
4. Microphone 5. Volume - button

## CHARGING:

Connect the charger to AC power and then to your BTH-300. The red Status Indicator light will be steady on while charging and turn off when the BTH-300 is fully charged.

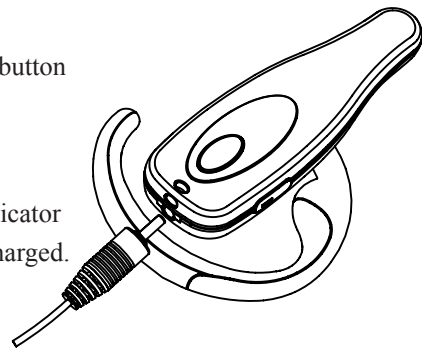

## POWER ON/OFF:

Press and hold the Power/Talk Button for two seconds (long press) to turn the BTH-300 On. When in Stand by, press and hold the Power/Talk Button for five seconds (long press) to turn the BTH-300 Off. The Status Indicator flashes blue when the BTH-300 is on. When the battery becomes low, the red Status Indicator will be on, and you hear the beep tones through the device.

## PAIRING and CONNECTING

1. Place the BTH-300 in pairing mode by pressing and holding the Power/Talk button for five seconds. Release the buttons when the Status Indicator light begins to flash red then blue.
2. Use your phone's menu to search for Bluetooth audio devices and select "BTH-300" when it appears on the display.  
Note: In some circumstances the pairing process can take up to 2 minutes to complete.
3. When the phone display asks for a passkey, enter: 0000. The Status Indicator flashes blue twice quickly, once the BTH-300 is successfully paired and connected. If pairing fails, try again following the steps.

## USING YOUR BTH-300

To answer or end a call, short press the Power/Talk button. ( Less than 1 sec.)

To place a call using voice dialing, press the Power button once, you will hear a tone. If you are on a call using your phone handset, you can transfer the call to your **BTH-300** by a long press of the Power/Talk button.

The following additional features may be available if your phone supports the Handsfree Profile.

Call Transfer back to phone - To transfer a call from your BTH-300 back to your phone, press and hold the Power/Talk button. When you hear a tone, the transfer has been completed and you can release the button.

Call Reject - To reject a call without answering when the handset is ringing, press and hold the Power/Talk button. When you hear a tone, the call has been rejected and you can release the button.

Last Number redial - To redial the last number, double short press the Power/Talk button, until you hear a tone, the last number has been redialed.

During a call, press the Volume +/- button to adjust the volume.

During a call, simultaneously press the Volume +/- button once to mute the microphone. When muted, the red Status Indicator light will be on. To take the microphone off mute, simultaneously press the buttons again.