


### Overview

HP recommends  
Windows Vista® Business


#### Ultra-slim Desktop

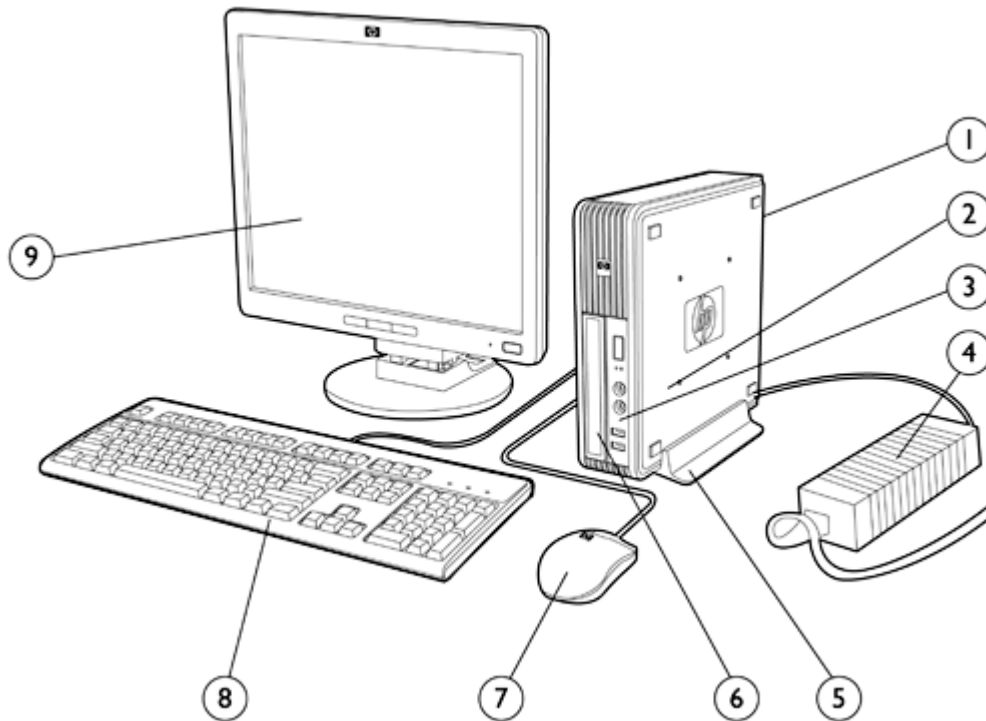

- |  |  |
|--|--|
| 1. Rear I/O: (6) USB 2.0, (1) DVI-D graphics port, (2) PS/2, (1) RJ-45, (1) VGA, (1) audio in, (1) audio out | 6. (1) Slimline Drive Bay  |
| 2. (1) 2.5" internal bay for 2.5" Internal Hard Drive  | 7. 2-Button Optical Scroll Mouse (PS/2 or USB)                     |
| 3. Front I/O: (2) USB 2.0, headphone and microphone  | 8. HP Standard Keyboard (PS/2 or USB) or HP USB Smartcard Keyboard |
| 4. 135W external power supply, 85% efficient, Active Power Factor Correction (PFC)                           | 9. Monitor (sold separately)                                       |
| 5. Tower Stand (sold separately)   |  |

## Overview


### Small Form Factor

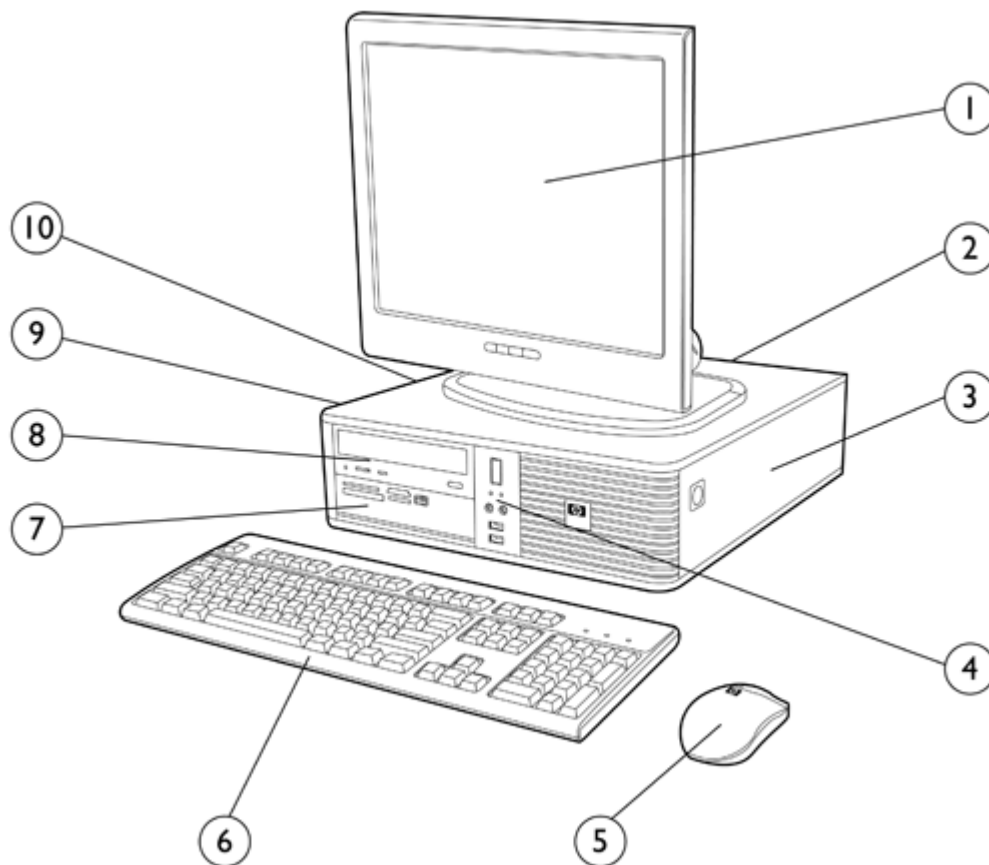

1. Monitor (sold separately)
2. Rear I/O: (6) USB 2.0, (1) standard serial port, (1) optional serial port, (1) parallel port, (2) PS/2, (1) RJ-45, (1) VGA, (1) audio in, (1) audio out
3. (1) low profile PCI slot, (2) low profile PCI Express x1 slot, (1) low profile PCI Express x16 (ADD2/SDVO) slot; (2) full-height PCI slots optional (require PCI riser card)\*
4. Front I/O: (2) USB 2.0, headphone and microphone
5. 2-Button Optical Scroll Mouse (PS/2 or USB)
6. HP Standard Keyboard (PS/2 or USB) or HP USB Smartcard Keyboard
7. (1) 3.5" external bay for optional HP 16-in-1 Media Card Reader, diskette drive, or other 3.5" device
8. (1) 5.25" external bay for optional optical drive, or other 5.25" device (bay tilts up for device removal and insertion)
9. (1) 3.5" internal bay
10. 240-watt or 240-watt 80 PLUS® power supply, 80% efficient, Active Power Factor Correction (PFC)

\* With PCI riser card option, PCI Express x1 and x16 slots are inaccessible.

### Overview

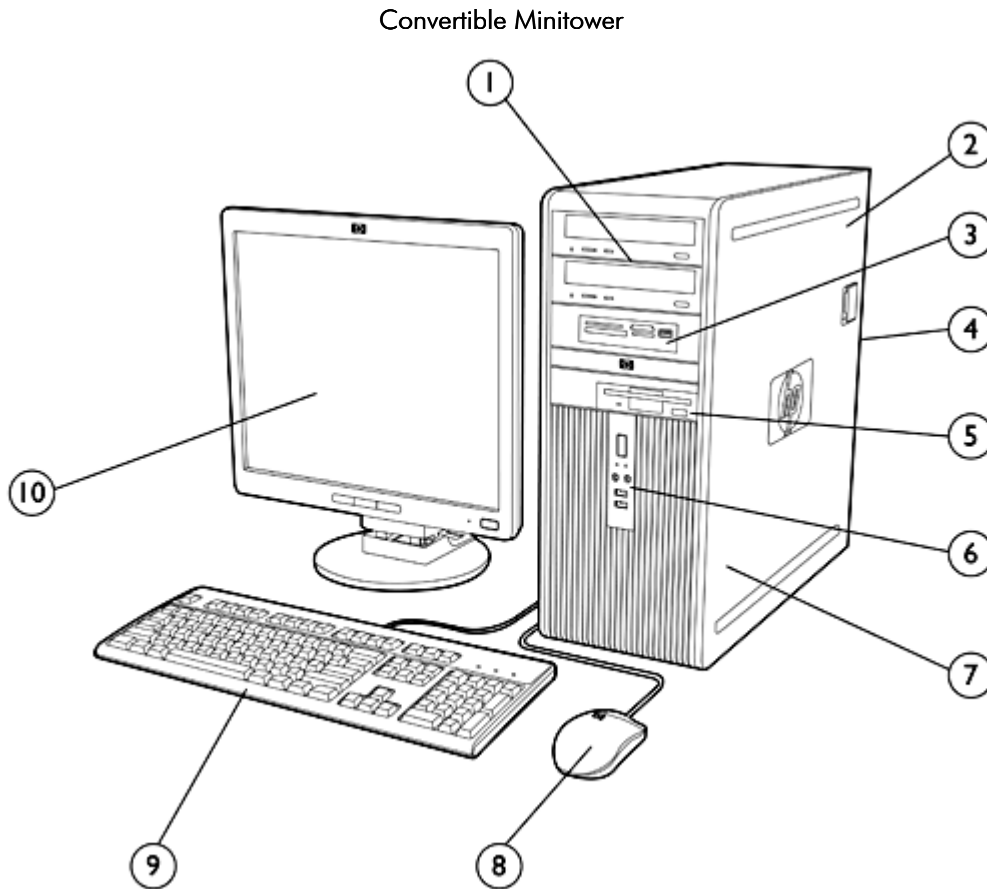

- |  |  |
|--|--|
| 1. (3) 5.25" external bays and (2) 3.5" internal bays  | 6. Front I/O: (2) USB 2.0, headphone and microphone  |
| 2. 365-watt or 365-watt 80 PLUS® power supply, 80% efficient, Active Power Factor Correction (PFC)   | 7. (3) full-height PCI slots, (2) full-height PCI Express x1 slots, (1) full-height PCI Express x16 (ADD2/SDVO) slot |
| 3. Media Card Reader or other 5.25" device   | 8. 2-Button Optical Scroll Mouse (PS/2 or USB)   |
| 4. Rear I/O: (6) USB 2.0, 1 standard serial port, (1) optional serial port, (1) parallel port, (2) PS/2, (1) RJ-45, (1) VGA, (1) audio in, (1) audio out | 9. HP Standard Keyboard (PS/2 or USB) or HP USB Smartcard Keyboard   |
| 5. Diskette drive or Media Card Reader   | 10. Monitor (sold separately)  |

### Overview

#### At A Glance


- Designed for long-term, networked deployment within medium and large organizations in commercial business, finance and public sector organizations
- Created using industry leading Design for Environment standards. Upgradeable, recyclable and energy efficient.
- Optional 80% efficient power supplies
- Long purchase lifecycles and image stability for demanding enterprise environments
- Support for new Intel technologies introduced in 2007: Intel® Q35 Express chipset, Intel Core™ 2 Duo Processors, Intel Core 2 Quad Processors and Intel Graphics Media Accelerator 3100 integrated graphics
- Select models with Intel vPro technology (iAMT 3.0) support the latest in manageability and security technology
- Value-added software on select models
  - HP Total Care Advisor
  - HP ProtectTools Security Software Suite, including embedded security, preinstalled standard
  - HP Backup and Recovery Manager
  - HP Software Agent
  - Altiris Deployment Solution Agent
  - McAfee Anti-Virus with 60 day Live Update Subscription
  - HP Insight Diagnostics software
  - Microsoft Office 2007
  - PDF Complete
  - HP Power Manager
- Value-added software available for free download from the Web (<http://www.hp.com/go/easydeploy>)
  - HP Client Configuration Manager, Basic Edition
  - HP Out-of-Band Management Console (for Intel AMT enabled models)
  - HP Client Manager for Altiris
  - Altiris Out-of-Band Management Solution (for Intel AMT enabled models)
  - HP SoftPaq Download Manager
  - HP System Software Manager
  - HP Client Catalog for Microsoft SMS
  - Verdiem Surveyor remote power management agent
- Fully compatible software OS image across all three models (Ultra-slim Desktop, Small Form Factor, and Convertible Minitor)
- HP BIOS for better security, manageability and software image stability
- Selected configurations with global availability easily set up and ordered through HP.com Business to Business portals (<http://h10019.www1.hp.com/business-site/index.html>)
- Tailored HP Factory Express deployment and lifecycle services available (<http://h71028.www7.hp.com/enterprise/cache/97688-0-0-225-121.aspx>)
- Protected by HP Services, including standard warranties up to 5-5-5 (terms and conditions vary by country; certain restrictions and exclusions apply)
- Security
  - HP ProtectTools Security Software Suite, including embedded security, preinstalled standard
  - Embedded TPM1.2 compliant security module\* (uses HP ProtectTools Embedded Security software)
  - Redundant Array of Independent Disks (RAID) 1 configurations to protect data against hardware failures
  - HP Backup and Recovery Manager to protect data against software corruption or incompatibilities due to patching or upgrades
  - Computrace agent in HP BIOS
- Tool-less serviceability features for easier upgrades and repairs
- Choice of professional chassis form factors to accommodate the desired mix between expandability and size

\* TPM module and cryptographic software disabled where use is restricted by law; for example, Russia.

### Configurable Components - Select Models (localized by Regions)

#### Model Key and Example

**NOTE:** This diagram is an example that illustrates how to read the model number. It is not intended to give every available configuration choice specified in the body of this document and may include references to modules that are out of date and no longer available.

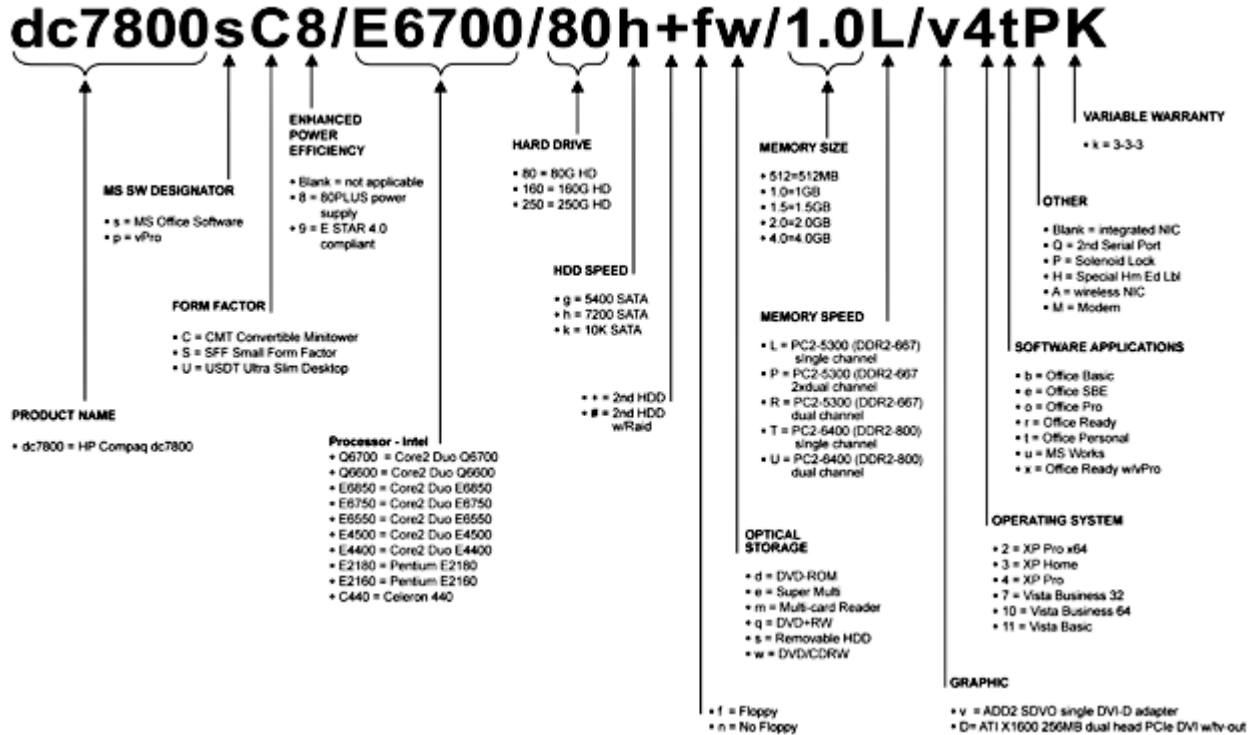

### Standard Features and Configurable Components

#### Operating System – One of the following

#### Preinstalled

Genuine Windows Vista Business 32\*  
Genuine Windows Vista Business 64\*  
Genuine Windows Vista Home Basic 32\*  
Genuine Windows Vista Business 32 downgrade to  
Genuine Windows XP Professional 32\*+  
Genuine Windows XP Professional SP2  
Genuine Windows Vista Service Pack 1 Tier 1  
FreeDOS†

#### Supported

Windows XP Home 32, Vista Enterprise 32, Vista Enterprise 64

#### Limited Support

Windows 2000

\* Certain Windows Vista product features require advanced or additional hardware. See <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit <http://www.windowsvista.com/upgradeadvisor>.

+ Windows Vista Business disk also included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order annually at least 25 customer systems with the same custom image.

† The following features are not supported by Linux:

- HP 16-in-1 Media Card Reader
- Intel PRO/1000 PT PCIe Gigabit NIC
- Broadcom NetXtreme Gigabit PCIe NIC
- Wireless A+G PCI Card
- Mini PCIe wireless
- HP BT450 USB Bluetooth Wireless Printer and PC adapter
- Agere 2006 PCI 56K International SoftModem
- ATI Radeon X1600XT 256MB dual head graphics adapter
- NVIDIA GF 8400 GS 256MB single head graphics adapter
- NVIDIA GF 8400 GS 256MB dual head graphics adapter
- NVIDIA Quadro NVS 290 256MB dual head graphics adapter
- HP USB Biometric Fingerprint Reader
- HP USB Smartcard Keyboard
- HP 2<sup>nd</sup> Serial Port
- HP FireWire / IEEE 1394 PCI Card

### Standard Features and Configurable Components

<b>Value-added Software</b> (on select models; not included with FreeDOS)	HP ProtectTools Security Solutions	HP Total Care Advisor
	Altiris Deployment Solution Agent	Microsoft Office 2007 Basic
	HP Software Agent	Microsoft Office 2007 Personal
	HP Insight Diagnostics	Microsoft Office 2007 Professional
	(available via HP Backup and Recovery Manager)	Microsoft Office 2007 Small Business
	Computer Setup Utility	Microsoft Works 8.5
	HP Backup and Recovery Manager	Microsoft Internet Explorer with Google Toolbar
	McAfee Total Protection Anti-Virus with 60 day trial Subscription	PDF Complete
	Sonic/Roxio DigitalMedia Plus 7.2 (select models)	Computrace for Desktops*
	or	Verdiem Surveyor agent
	Easy Media Creator 9 (select models)	
	HP Power Manager	InterVideo WinDVD 5.0 (select models)

\* Computrace agent is in HP BIOS. For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.

<b>Value-added Services and Features</b>	HP Stable Platform Program	Factory Express Deployment and Lifecycle Services
	Business-to-Business Portals	TPM 1.2 Security
	HP Global Series Services	Intel vPro technology

<b>Value-added Software</b> (available for free download from the Web <a href="http://www.hp.com/go/easydeploy">http://www.hp.com/go/easydeploy</a> )	HP Client Configuration Manager, Basic Edition	HP Out-of-Band Management Console (for Intel AMT enabled models)
	HP Client Manager for Altiris	Altiris Out-of-Band Management Solution (for Intel AMT enabled models)
	HP SoftPaq Download Manager	HP Systems Software Manager
	HP Client Catalog for Microsoft SMS	Verdiem Surveyor agent

<b>Service and Support</b>	On-site Warranty and Service <sup>1</sup> : This three-year (3-3-3), limited warranty and service offering delivers three years of parts, labor and on-site repair. Response time is next business-day <sup>2</sup> and includes free telephone support <sup>3</sup> 24 x 7. Global coverage <sup>2</sup> ensures that any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. Some countries/regions do not offer one year onsite and labor.
	<sup>1</sup> Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	<sup>2</sup> On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	<sup>3</sup> Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

	Ultra-slim Desktop	Small Form Factor	Convertible Minitower
--	--------------------	-------------------	-----------------------

### Standard Features and Configurable Components

Dimensions			
Chassis Dimensions (H x W x D)	2.60 x 9.90 x 10 in (66.0 x 251.5 x 254 mm)	3.95 x 13.3 x 14.9 in (100.3 x 337.8 x 378.5)	17.63 x 7.0 x 17.8 in (447.8 x 177.8 x 452.12 mm)
Optional Tower Stand Dimensions (H x W x D)	1.26 x 4.82 x 6.69 in (32.0 x 122.3 x 170.0 mm)	1.05 x 6.95 x 7.83 in (26.75 x 176.46 x 198.87 mm)	N/A
System weight*	7.0 lb (3.18 kg)	18.75 lb (8.50 kg)	26.2 lb (11.89 kg)
System volume	4.21 liters	13 liters	36 liters
Shipping weight*	14.34 lb (6.52 kg)	26.10 lb (11.86 kg)	34.60 lb (15.72 kg)
Maximum supported weight (desktop orientation)	77.1 lb (35 kg)	77.1 lb (35 kg)	77.1 lb (35 kg)
Shipping box dimensions (H x W x D)	8.60 x 15.68 x 19.68 in (218.4 x 398.3 x 499.9 mm)	9.00 x 19.68 x 23.38 in (228.6 x 499.9 x 593.85 mm)	24.25 x 12.33 x 22.13 in (616.0 x 313.2 x 562.1 mm)
* Configured with 1 hard drive, 1 optical drive, no diskette drive, and no PCI card.			
Standard Power Supply	N/A	240W power supply, active PFC	365W power supply, active PFC
Energy Efficient Power Supply	135W external power supply, 85% efficient, active PFC	240W 80 PLUS® power supply, 80% efficient, active PFC	365W 80 PLUS® power supply, 80% efficient, active PFC
	External power supply dimensions: 6.7 x 2.6 x 1.5 in Total length of external power supply and power cord: 12 feet 8 inches		
* This energy efficient power supply is a requirement for ENERGY STAR® compliance in conjunction with a select range of processors and modules.			
** Ultra-slim Desktop power supply is > 85% efficient at nominal load with 115V AC input.			
Ports			
USB 2.0	8 (2 front, 6 rear)	8 (2 front, 6 rear)	8 (2 front, 6 rear)
Serial	N/A	1 standard with 2nd optional	1 standard with 2nd optional
Parallel	N/A	1	1
PS/2	1 keyboard, 1 mouse		
Video	analog for integrated graphics		
DVI output	1 standard	available via ADD2 card or optional graphics cards	
Support for Multi-Monitor	Yes	available via ADD2 card or optional graphics cards	
Audio	Front – mic and headphone Rear – input (supports microphone or line input), line out		
NIC (RJ-45)	Integrated Intel 82566DM Gigabit Network Connection Ethernet		

		USDT	SFF	CMT
Chipset	Intel Q35 Express chipset	X	X	X



### Standard Features and Configurable Components

		USDT	SFF	CMT
<b>Processor and Speed*</b> One of the following	<b>Intel Celeron Processors:</b>			
	Intel Celeron 420 Processor (1.6-GHz, 512K L2 cache, 800-MHz FSB)	X	X	X
	Intel Celeron 430 Processor (1.8-GHz, 512K L2 cache, 800-MHz FSB)	X	X	X
	Intel Celeron 440 Processor (2.0-GHz, 512K L2 cache, 800-MHz FSB)	X	X	X
	<b>Intel Celeron Dual-Core Processors</b>			
	Intel Celeron Dual-Core E1200 (1.6-GHz, 512K L2 cache, 800-MHz FSB)	X	X	X
	Intel Celeron Dual-Core E1400 (2.0-GHz, 512K L2 cache, 800-MHz FSB)	X	X	X
	<b>Intel Pentium dual-core Processors:</b>			
	Intel Pentium dual-core E2160 Processor (1.8-GHz, 1-MB L2 cache, 800-MHz FSB)	X	X	X
	Intel Pentium dual-core E2180 Processor (2.0-GHz, 1-MB L2 cache, 800-MHz FSB)	X	X	X
	Intel Pentium dual-core E2200 Processor (2.2-GHz, 1-MB L2 cache, 800-MHz FSB)	X	X	X
	<b>Intel Core 2 Duo Processors:</b>			
	Intel Core 2 Duo E4500 Processor (2.20-GHz, 2 MB L2 cache, 800-MHz FSB)	X	X	X
	Intel Core 2 Duo E4600 Processor (2.40-GHz, 2 MB L2 cache, 800-MHz FSB)	X	X	X
	Intel Core 2 Duo E4700 Processor (2.6-GHz, 2 MB L2 cache, 800-MHz FSB)	X	X	X
	Intel Core 2 Duo E6550 Processor (2.33-GHz, 4 MB L2 cache, 1333-MHz FSB)**	X	X	X
	Intel Core 2 Duo E6750 Processor (2.66-GHz, 4 MB L2 cache, 1333-MHz FSB)**	X	X	X
	Intel Core 2 Duo E6850 Processor (3.0-GHz, 4 MB L2 cache, 1333-MHz FSB)**	X	X	X
	Intel Core 2 Duo E7200 Processor (2.53 GHz, 3 MB L2 cache, 1066 MHz FSB)			
	Intel Core 2 Duo E8200 Processor (2.66-GHz, 6 MB L2 cache, 1333-MHz FSB)	X	X	X
	Intel Core 2 Duo E8300 Processor (2.83-GHz, 6 MB L2 cache, 1333-MHz FSB)	X	X	X
	Intel Core 2 Duo E8400 Processor (3.00-GHz, 6 MB L2 cache, 1333-MHz FSB)	X	X	X
	Intel Core 2 Duo E8500 Processor (3.16-GHz, 6 MB L2 cache, 1333-MHz FSB)	X	X	X
	<b>Intel Core 2 Quad Processors:</b>			
	Intel Core 2 Quad Q6600 Processor (2.40-GHz, 8 MB L2 cache, 1066-MHz FSB)		X	X
	Intel Core 2 Quad Q6700 Processor (2.66-GHz, 8 MB L2 cache, 1066-MHz FSB)		X	X
	Intel Core 2 Quad Q9300 Processor (2.50-GHz, 6 MB L2 cache, 1333-MHz FSB)		X	X
	Intel Core 2 Quad Q9450 Processor (2.66-GHz, 12 MB L2 cache, 1333-MHz FSB)		X	X
	Intel Core 2 Quad Q9550 Processor (2.83-GHz, 12 MB L2 cache, 1333-MHz FSB)		X	X

\* Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families.

\*\* These processors are compliant with Intel vPro Processor Technology and Intel Trusted Execution Technology (TXT)

Standard Features and Configurable Components

		USDT	SFF	CMT
Intel vPro Processor Technology*	Uses AMT 3.0 (Active Management Technology) for network alerting and management of systems regardless of power state or health of operating system. AMT is offered with all processor configurations sold with the dc7800. vPro enabled PCs are supported with select processors noted in the chart above and support AMT 3.0 as well as Intel Trusted Execution Technology (TXT) and Intel Virtualization Technology.	X	X	X
* vPro Processor Technology based PCs are referred to as HP Compaq dc7800 Business PCs with Intel vPro Technology (indicated as dc7800p in our naming convention).				

Memory	<p><b>DDR2 SYNCH DRAM NON-ECC MEMORY</b></p> <p>Memory upgrades are accomplished by adding single or multiple DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations. The Intel Q35 Express chipsets support non-ECC DDR2 PC2-5300 (667-MHz) and PC2-6400 (800-MHz) memory.</p> <p><b>CAUTION:</b> You must shut down the computer <b>and disconnect the power cord</b> before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.</p> <p><b>HP recommends dual-channel symmetric configurations for maximum performance.</b></p> <p>For best performance, add the same amount of total memory to each channel and do not mix speeds. For dual-channel symmetric performance, the total amount of memory in each channel must be equal. If speeds are mixed, speed will default to the slowest DIMM.</p>
--------	--

Ultra-slim Desktop

Maximum Memory*	<p>Supports up to 4 GB of DDR2 SYNCH DRAM. Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.</p> <p><b>NOTE:</b> For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements.</p>
-----------------	---

SO-DIMM Size	Slot	
	Channel A	Channel B
	1 (black)	2 (white)
512-MB	512-MB	
1-GB	1-GB	
1-GB (dual channel symmetric)	512-MB	512-MB
2-GB (dual-channel symmetric)	1-GB	1-GB
4-GB maximum (dual channel symmetric)	2-GB	2-GB

\* The Intel Q35 Express chipset includes a built-in Management Engine (ME), which allocates memory for manageability functions. Management Engine memory is shared with system memory. If the PC contains a single SO-DIMM, 16 MB of memory is pre-allocated for it at system startup. If the PC contains two SO-DIMMs, 32 MB of memory is pre-allocated. This memory is not made available to the operating system, just as pre-allocated video memory is not available.

## Standard Features and Configurable Components

### Small Form Factor and Convertible Minitower

#### Maximum Memory\*

Supports up to 8 GB of DDR2 SYNCH DRAM. Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

**NOTE:** For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

DIMM Size	Slot			
	Channel A		Channel B	
	1 (black)	2 (white)	3 (white)	4 (white)
<b>512-MB</b>	512-MB			
<b>1-GB</b>	1-GB			
<b>1-GB</b> (dual-channel symmetric)	512-MB		512-MB	
<b>2-GB</b> (dual-channel symmetric)	1-GB		1-GB	
<b>2-GB</b> (dual-channel symmetric)	512-MB	512-MB	512-MB	512-MB
<b>4-GB</b> (dual-channel symmetric)	1-GB	1-GB	1-GB	1-GB
<b>8-GB maximum</b> (dual-channel symmetric)	2-GB	2-GB	2-GB	2-GB

\* The Intel Q35 Express chipset includes a built-in Management Engine (ME), which allocates memory for manageability functions. Management Engine memory is shared with system memory. If the PC contains a single DIMM, 16 MB of memory is pre-allocated for it at system startup. If the PC contains two DIMMs, 32 MB of memory is pre-allocated. This memory is not made available to the operating system, just as pre-allocated video memory is not available.

#### Memory Configurations –

One of the following\*

	USDT	SFF	CMT
512-MB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (1 x 512)	X	X	X
1-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (1 x 1GB)	X	X	X
1-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (2 x 512)	X	X	X
2-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (1 x 2GB)	X	X	X
2-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (2 x 1GB)	X	X	X
2-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (4 x 512)		X	X
3-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (3 x 1GB)		X	X
4-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (4 x 1GB)		X	X
4-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (2 x 2GB)	X	X	X
8-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (4 x 2GB)		X	X
512-MB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (1 x 512)	X	X	X
1-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (1 x 1GB)	X	X	X
1-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (2 x 512)	X	X	X
2-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (1 x 2GB)	X	X	X
2-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (2 x 1GB)	X	X	X

### Standard Features and Configurable Components


2-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (4 x 512)		X	X
3-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (3 x 1GB)		X	X
4-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (4 x 1GB)		X	X
4-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (2 x 2GB)	X	X	X
8-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (4 x 2GB)		X	X

\* Ultra-slim Desktop uses SODIMM modules. Small Form Factor and Convertible Minitower use DIMM modules.


Expandability	USDT	SFF	CMT
PCI slots	N/A	1 low-profile (2.5"), length (6.6") standard; 2 full-height (4.2"), length (6.875") via optional riser card. <b>NOTE:</b> With riser card option, PCIe x1 and PCIe x16 slots are not accessible.	3 full-height (4.2"), length (10.5")
Max power per slot	N/A	25W	25W
PCI Express x16 slot (Also functions as SDVO/ADD2 Slot)	N/A	1 low-profile (2.5"), length (6.6")	1 full-height (4.2"), full-length
Max power per slot	N/A	25W	75W
PCI Express x1 slot	N/A	2 low profile (2.5"), length (6.6")	2 full-height (4.2"), full-length
Max power per slot	N/A	10W	10W
External Bays	1 Slimline (WxDxH): 128 x 127 x 12.7 mm	2	4
3.5"	N/A	1	1
5.25"	N/A	1 (length 8.189")	3 (2 – length 8.189", 1 – length 5.71")
Internal 2.5" HDD Bays	1	0	0
Internal 3.5" HDD Bays	0	1	2
Hard Drive Controller (PCI) Supported	Serial ATA (support for SATA 1.5-Gb/s and 3.0-Gb/s hard drives)		
Hard Drive and Optical SATA Interfaces Supported	1 Serial ATA interface; 1 SATA to PATA converter	3 Serial ATA interfaces	4 Serial ATA interfaces

## Standard Features and Configurable Components


Ultra-slim Desktop

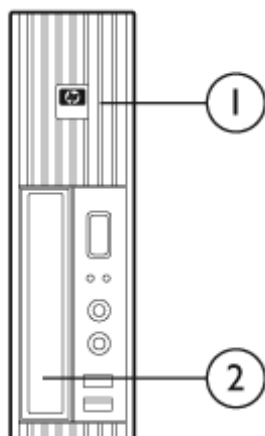

Small Form Factor

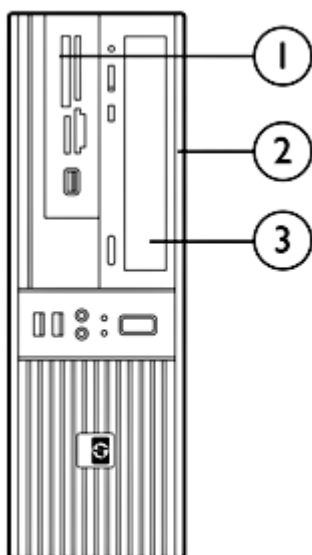

Convertible Minitower

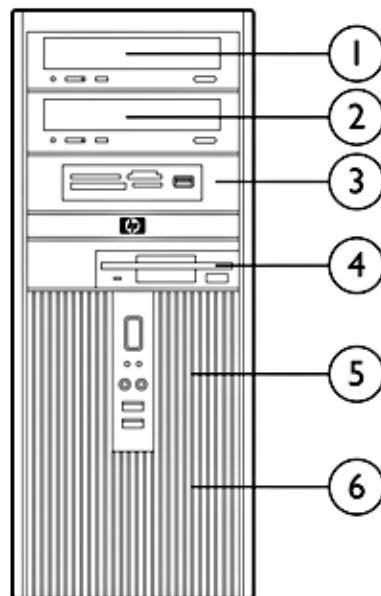

### Storage – Drive Support

	USDT		SFF			CMT			
	Slimline Drive Bay	2.5" Serial ATA Hard Drive or Solid State Drive	Diskette Drive or Media Card Reader (optional)	Optical Drives	3.5" Serial ATA Hard Drives	Diskette Drive	Media Card Reader (optional)	Storage Drive Bays	3.5" Serial ATA Hard Drives
Quantity Supported	1	1	1	1	2	1	1	2	2
Position Supported	②	①	①	③	①, ②	④	①, ②, ③, ④	①, ②	⑤, ⑥
Controller	SATA to IDE Bridge	SATA	Diskette Controller or USB header on PCA	SATA	SATA	Diskette Controller	USB header on PCA	SATA	SATA

### Standard Features and Configurable Components

		USDT	SFF	CMT
Hard Drives	80-GB SATA 1.5-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart III)	X		
	80-GB SATA 1.5-Gb/s Hard Drive (8MB Cache, 5400 RPM, NCQ, Smart III)	X		
	160-GB SATA 1.5-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart III)	X		
	80-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	160-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	250-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	500-GB SATA 3.0-Gb/s Hard Drive (16MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	80-GB SATA 3.0-Gb/s Hard Drive (16MB Cache, 10,000 RPM, NCQ, Smart III)		X	X
	160-GB SATA 3.0-Gb/s Hard Drive (16MB Cache, 10,000 RPM, NCQ, Smart III)		X	X
	3.5" Removable 80-GB SATA 3.0 Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	3.5" Removable 160-GB SATA 3.0 Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	3.5" Removable 250-GB SATA 3.0 Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	RAID 80-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	RAID 160-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	RAID 250-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	2 <sup>nd</sup> hard drive, 80-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	2 <sup>nd</sup> hard drive, 160-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	2 <sup>nd</sup> hard drive, 250-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	2 <sup>nd</sup> hard drive, 500-GB SATA 3.0-Gb/s Hard Drive (16MB Cache, 7200 RPM, NCQ, Smart IV)		X	X
	2 <sup>nd</sup> hard drive, 80-GB SATA 3.0-Gb/s Hard Drive (16MB Cache, 10,000 RPM, NCQ, Smart III)			X
	2 <sup>nd</sup> hard drive, 160-GB SATA 3.0-Gb/s Hard Drive (16MB Cache, 10,000 RPM, NCQ, Smart III)			X

**NOTE:** NCQ functionality requires a BIOS setting for RAID mode/ACHI support. This setting is the factory default for RAID configurations and requires user set-up in all non-RAID or single drive configurations.

### Standard Features and Configurable Components

		USDT	SFF	CMT
Solid State Drive*	16 GB Solid State Drive	X		
	* For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.			
<hr/>				
Removable Storage – One or more of the following depending on form factor (see Storage – Drive Support section above)	Diskette Drives	USDT	SFF	CMT
	1.44-MB Diskette Drive		X	X
	Optical Drives			
	SATA DVD-ROM Drive <sup>1</sup>		X	X
	SATA CD-RW/DVD-ROM Combo Drive <sup>1,2</sup>		X	X
	SATA SuperMulti LightScribe DVD Writer Drive <sup>1,2,3</sup>		X	X
	Slimline Optical Drives			
	PATA DVD-ROM Slim Drive <sup>1</sup>	X		
	PATA CD-RW/DVD-ROM Combo Slim Drive <sup>1,2</sup>	X		
	PATA Slim SuperMulti LightScribe DVD Writer <sup>1,2,3</sup>	X		
	<sup>1</sup> For playing DVDs, InterVideo WinDVD 5			
	<sup>2</sup> For writing CDs, choice of Sonic/Roxio DigitalMedia Plus 7.2 (Windows XP only) or Easy Media Creator 9 (Windows Vista and Windows XP)			
	<sup>3</sup> For writing CDs and DVDs, video editing and authoring DVDs, choice of Sonic/Roxio DigitalMedia Plus 7.2 (Windows XP only) or Easy Media Creator 9 (Windows Vista and Windows XP)			
<hr/>				
Media Card Reader – One of the following	HP 16-in-1 3.5" Media Card Reader		X	X
	HP 16-in-1 5.25" Media Card Reader		X	X
<hr/>				
Security	Integrated 1.2 TPM Embedded Security Chip*	X	X	X
	Drive Lock	X	X	X
	HP ProtectTools Embedded Security Software	X	X	X
	Serial, Parallel, USB Enable/Disable (via BIOS)	X	X	X
	Removable Media Write/Boot Control	X	X	X
	Power-On Password (via BIOS)	X	X	X
	Setup Password (via BIOS)	X	X	X
	* TPM module disabled where use is restricted by law; for example, Russia.			

### Standard Features and Configurable Components

NIC	Intel 82566DM Gigabit Network Connection (integrated on system board)	X	X	X
	Intel PRO/1000 PT PCIe Gigabit NIC (full height bracket)			X
	Intel PRO/1000 PT PCIe Gigabit NIC (low profile bracket)		X	
	Broadcom NetXtreme Gigabit PCIe NIC (full height bracket)			X
	Broadcom NetXtreme Gigabit PCIe NIC (low profile bracket)		X	
Wireless	Wireless A+G PCI Card (full height bracket)		X*	X
	Wireless A+G PCI Card (low profile bracket)		X	
	Broadcom 4311BG 802.11b/g WiFi Adapter	X		
	Mini PCIe wireless	X		
	* Requires optional PCI riser card.			
Modem	Agere 2006 PCI 56K International SoftModem (full height)			X
	Agere 2006 PCI 56K International SoftModem (low profile)		X	
Graphics	Integrated Intel Graphics Media Accelerator 3100	X	X	X
	Integrated DVI-D	X		
	HP ADD2 SDVO PCIe DVI-D adapter		X	X
	ATI Radeon X1600XT 256MB dual head graphics adapter (PCIe x16)			X
	ATI Radeon HD 2400XT (256MB DH) PCIe Graphics Card		X	X
	ATI Radeon HD 3650 (512MB DH) PCIe x16 Graphics Card			X
	NVIDIA GF 8400 GS 256MB single head graphics adapter (PCIe x16)*		X	X
	NVIDIA GF 8400 GS 256MB dual head graphics adapter (PCIe x1)**		X	X
	NVIDIA Quadro NVS 290 256MB dual head PCIe x16 Graphics Card		X	X
	* 1 GB of system memory required. Graphics cards use part of the total system memory to enhance graphics performance.			
	** 2 NVIDIA GF 8400 GS 256MB dual head (PCIe x1) graphics cards can be combined to provide support for multiple combinations of monitors.			



### Standard Features and Configurable Components

Audio	Integrated High Definition audio with ADI1884 codec (all ports are stereo)	X	X	X
	Microphone and Headphone front ports	X	X	X
	Line-out and Line-In rear ports*	X	X	X
	Multistreaming capable*	X	X	X
	Internal Speaker	X	X	X
	HP Thin USB Powered Speakers	X	X	
<p>* Rear audio input ports are re-taskable as Line-in or Microphone-in. External speakers must be powered externally. Multistreaming can be enabled in the ADI control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.</p>				
Input Devices	<b>Keyboard</b> – One of the following			
	HP PS/2 Standard Keyboard	X	X	X
	HP USB Standard Keyboard	X	X	X
	HP USB Smartcard Keyboard	X	X	X
	<b>Mouse</b> – One of the following			
	HP PS/2 2-Button Optical Scroll Mouse	X	X	X
	HP USB 2-Button Optical Scroll Mouse	X	X	X
Miscellaneous	HP FireWire / IEEE 1394 PCI Card (full height)		X*	X
	HP FireWire / IEEE 1394 PCI Card (low profile)		X	
	PCI riser card – adds 2 full-height PCI slots		X	
	<b>NOTE:</b> Low profile slots are unusable with riser card installed.			
	2nd serial port adapter (full height)			X
	2nd serial port adapter (low profile)		X	
	Tower stand	X	X	
	Configure dc7800 CMT in desktop orientation			X
	Rear Port Control Cover	X		
	1-GB Flash Module for ReadyBoost**	X	X	X
	* Requires optional PCI riser card.			
	** Available with Microsoft Vista OS in configurations with 1GB or less memory.			

After-Market Options (availability may vary by region)

		USDT	SFF	CMT	After-Market Options Part Number
Communications	<b>Wireless</b>				
	HP Wireless A+G PCI Card (North America only)		X	X	EA118AA
	HP Wireless A+G PCI Card (WW except North America)		X	X	PZ928AA
	HP BT450 USB Bluetooth Wireless Printer and PC Adapter	X	X	X	Q6398A
	<b>NICs</b>				
	Broadcom NetXtreme Gigabit Ethernet PCIe NIC Card		X	X	EA833AA
	Intel/PRO 1000 PT PCIe Gigabit NIC Card		X	X	EH352AA
	<b>Modem</b>				
	Agere 2006 PCI 56K International SoftModem		X	X	EK694AA
Office 2007 Media-less License Kits (MLKs)	MS Office Basic Edition 2007 – Media-less License Kit	X	X	X	RZ361A#ABA
	MS Office Small Business Edition 2007 – Media-less License Kit	X	X	X	RZ365A#ABA
	MS Office Professional Edition 2007 – Media-less License Kit	X	X	X	RZ363A#ABA
Graphics	<b>Single head solutions</b>				
	NVIDIA GeForce 256MB Single Head PCIe x16, low profile Graphics Card*	X	X		GJ119AA
	* 1 GB of system memory required. Graphics cards use part of the total system memory to enhance graphics performance.				
	<b>Multi head solutions</b>				
	NVIDIA GeForce 8400 GS 256MB Dual Head PCIe x16, low profile Graphics Card	X	X		GJ120AA
	NVIDIA Quadro NVS 290 Dual Head PCIe x16, low profile Graphics Card	X	X		KG748AA
	NVIDIA Quadro NVS 290 Dual Head PCIe x16, low profile Graphics Card	X	X		KN586AA
	ATI HD 2400 XT 256MB Dual Head PCIe x16, low profile Graphics Card	X	X		KD060AA
	ATI Radeon HD 3650 (512MB DH) PCIe x16 Graphics Card	X	X		KS505AA
	HP DMS59 DVI Dual-head Connector Cable	X	X		DL139A
	<b>Single head solution</b>				
	HP ADD2 SDVO PCIe DVI-D Adapter (Uses PCIe x16 slot)	X	X		DY674A

### After-Market Options (availability may vary by region)

#### Hard Drives

##### Serial ATA Hard Drives

HP 80-GB SATA (NCQ/Smart IV) 3.0-Gb/s Hard Drive	X	X	PY276AA
HP 160-GB SATA (NCQ/Smart IV) 3.0-Gb/s Hard Drive	X	X	PY277AA
HP 250-GB SATA (NCQ/Smart IV) 3.0-Gb/s Hard Drive	X	X	PY278AA
HP 500-GB SATA (NCQ/Smart IV) 3.0-Gb/s Hard Drive	X	X	PV943A
HP Removable SATA Hard Drive Enclosure (Frame & Carrier)	X	X	RY102AA
HP Removable SATA Hard Drive Enclosure (Carrier Only)	X	X	RY103AA

#### Input/Output Devices

##### Keyboards

HP PS/2 Standard Keyboard	X	X	X	DT527A
HP USB Standard Keyboard	X	X	X	DT528A
HP USB Gray Keyboard	X	X	X	DT529A

##### Pointing Devices

HP PS/2 2-Button Scroll Mouse	X	X	X	DD440B
HP PS/2 2-Button Optical Scroll Mouse	X	X	X	EY703AA
HP USB 2-Button Optical Scroll Mouse	X	X	X	DC172B
HP USB 2-Button Laser Mouse	X	X	X	GW405AA

#### Memory (DIMMs)

##### PC2-5300 (DDR2, 667 MHz) DIMMs Non-ECC

HP 2-GB PC2-5300 (DDR2-667) DIMM	X	X	PX977AA
HP 1-GB PC2-5300 (DDR2-667) DIMM	X	X	PX976AA
HP 512-MB PC2-5300 (DDR2-667) DIMM	X	X	PX975AA

##### PC2-5300 (DDR2, 667 MHz) SODIMMs Non-ECC

HP 2-GB PC2-5300 (DDR2-667) SODIMM	X	GM252AA
HP 1-GB PC2-5300 (DDR2-667) SODIMM	X	GK995AA
HP 512-MB PC2-5300 (DDR2-667) SODIMM	X	GK994AA

##### PC2-6400 (DDR2, 800 MHz) DIMMs Non-ECC

HP 2-GB PC2-6400 (DDR2 800 MHz) DIMM	X	X	AH060AA
HP 1-GB PC2-6400 (DDR2 800 MHz) DIMM	X	X	AH058AA
HP 512-MB PC2-6400 (DDR2 800 MHz) DIMM	X	X	AH056AA

##### PC2-6400 (DDR2, 800 MHz) SODIMMs Non-ECC

HP 2-GB PC2-6400 (DDR2 800 MHz) SODIMM	X	GV576AA
HP 1-GB PC2-6400 (DDR2 800 MHz) SODIMM	X	GM254AA
HP 512-MB PC2-6400 (DDR2 800 MHz) SODIMM	X	GM253AA

After-Market Options (availability may vary by region)

Monitors	CRTs				3PO Offering
	<b>Business LCD Monitors</b>				
	HP L1506 15-inch LCD Monitor				PX848AA#ABA
	HP L1710 17-inch LCD Monitor				GS917AA#ABA
	HP L1750 17-inch LCD Monitor				GF904AA#ABA
	HP L1745 17-inch LCD Monitor				GE178AA#ABA
	HP L1910 19-inch LCD Monitor				GS918AA#ABA
	HP L1950 19-inch LCD Monitor				GG458AA#ABA
	HP LP1965 19-inch LCD Monitor				RA373AA#ABA
	HP LP2065 20-inch LCD Monitor				EF227A4#ABA
	<b>Business Widescreen LCD Monitors</b>				GX007AA#ABA
	HP L1908w 19-inch Widescreen LCD Monitor				GP536AA#ABA
	HP L2045w 20-inch Widescreen LCD Monitor				RD125AA#ABA
	HP L2208w 22-inch Widescreen LCD Monitor				GX007AA#ABA
	HP L2245w 22-inch Widescreen LCD Monitor				GX008AA#ABA
	HP LP2465 24-inch Widescreen LCD Monitor				EF224A4#ABA
	HP LP3065 30-inch Widescreen LCD Monitor				EZ320A4#ABA
	<b>Business Widescreen LCD Monitor with Integrated Speakers</b>				
	HP L1908wm 19-inch Widescreen LCD Monitor with Built in Integrated Speakers				KA214AA#ABA
	<b>Business GSA Monitors</b>				3PO Offering
	<b>Business Touchscreen LCD Monitor</b>				
	HP L5006tm 15-inch Touch Screen LCD Monitor				RB146AA#ABA
	<b>Business LCD Monitor with Integrated Work Stand</b>				
	HP L1908wi 19-inch Widescreen LCD Monitor plus Integrated Work Stand				GP537AA#ABA
	HP L1910i 19-inch LCD Monitor plus Integrated Work Stand				GS581AA#ABA
	<b>Options</b>				
HP Flat Panel Speaker Bar				EE418AA	
HP Quick Release Kit				EM870AA	
HP Integrated Work Stand (stand alone)				GN783AA	
<hr/>					
Multimedia	HP USB Powered Speakers	X	X	X	RD628AA
	Thin USB Powered Speakers	X	X	X	KK912AA
	HP Flat Panel Speaker Bar	X	X	X	EE418AA

After-Market Options (availability may vary by region)

PATA Slim Optical Drives	DVD-ROM Drive				
	HP PATA DVD-ROM Slim Drive	X			AH041AA
	Combo Drive				
	HP PATA CD-RW/DVD-ROM Combo Slim Drive	X			AH042AA
	DVD Writer				
	HP PATA Slim SuperMulti LightScribe DVD Writer Drive	X			AH043AA
<hr/>					
SATA Half-Height Optical Drives	DVD-ROM Drive				
	HP SATA DVD-ROM Drive		X	X	AH047AA
	Combo Drive				
	HP SATA CD-RW/DVD-ROM Combo Drive		X	X	AH046AA
	DVD Writer				
	HP SATA SuperMulti LightScribe DVD Writer Drive		X	X	GF343AA
<hr/>					
Removable Storage	Diskette and Digital Drives				
	HP 1.44-MB External USB Diskette Drive	X	X	X	DC141B
	HP 1.44-MB Internal Diskette Drive		X	X	AH053AA
	Multimedia				
	HP 16-in-1 Media Card Reader with PCI Card		X	X	EM718AA
<hr/>					
Security	Kensington Lock	X	X	X	PC766A
	HP Business PC Security Lock	X	X	X	TBD
	HP USB Biometric Fingerprint Reader	X	X	X	EM717AA
	HP (dc7800 SFF) Solenoid Lock/Hood Sensor		X		GJ116AA
	HP (SFF) Wall Mount security sleeve		X		GF344AA
	HP (CMT) Solenoid Lock/Hood Sensor			X	DE618A
	HP (dc7800 USDT) Rear Port Controller Cover	X			GJ121AA
	Protect Tools (version 3.0)	X	X	X	KN780AA
	HP USB Smartcard Keyboard	X	X	X	ED707AA
	HP Smart Data Protection Service	X	X	X	BB731UT

### After-Market Options (availability may vary by region)

Software	HP Client Configuration Manager, Premium Edition	X	X	X	T3488AA (use T3489AA for 1000 licenses)
	Altiris Client Management Suite Level 1 Includes: Altiris Deployment Solution Altiris Inventory Solution Altiris Application Metering Solution Altiris Carbon Copy Solution Altiris Software Delivery Solution Altiris Application Management Solution Altiris Patch Management Solution	X	X	X	DR605A (use DR606A for 1000+ licenses)
Brackets/Stand	HP Compaq dc7800 Series Integrated Work Center Stand	X			GN783AA
Miscellaneous Accessories	HP 2nd Serial Port		X	X	PA716A
	HP (50 Pk) 5.25" Blank Bezel Kit		X	X	DC177B
	HP (dc7800 USDT) Tower Stand	X			GJ117AA
	HP 2007 SFF Tower Stand		X		GJ118AA
	HP (dc7800 SFF) PCI Riser Card		X		GJ115AA
	HP FireWire / IEEE 1394 PCI Card		X	X	PA997A
	Belkin USB to Serial Adapter	X	X	X	EM449AA
	Cat5e Patch Cable	X	X	X	AH122AA
	Firewire (1394) Cable	X	X	X	AH123AA
	DVI to DVI cable	X	X	X	DC198A
	7-outlet Surge Protector	X	X	X	AG290AA#ABA

## Technical Specifications

Unit Environment and Operating Conditions	Ultra-slim Desktop	Small Form Factor	Convertible Minitower
General Unit Operating Guidelines			
<ul style="list-style-type: none"><li>Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.</li><li>Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.</li><li>Never restrict airflow into the computer by blocking any vents or air intakes.</li><li>Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.</li><li>Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.</li><li>If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.</li></ul>			
Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (-30° to 60° C)		
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)		
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)		
* Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.			

Power Supply	Ultra-slim Desktop	Small Form Factor	Convertible Minitower
Power Supply	135W external power supply, 85% efficient, active PFC	240W power supply, active PFC	365W power supply, active PFC
Operating Voltage Range	90 – 264 VAC	90 – 264 VAC	90 – 264 VAC
Rated Voltage Range	100 – 240 VAC	100 – 240 VAC	100 – 240 VAC
Rated Line Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Operating Line Frequency Range	47 – 63 Hz	47 – 63 Hz	47 – 63 Hz
Rated Input Current	N/A	4A	6A
Rated Input Current with Energy Efficient* Power Supply	1.5A	3.5A	5A
Current Leakage (NFPA 99)	< 275 $\mu$ A	< 275 $\mu$ A	< 450 $\mu$ A
System Heat Dissipation	N/A	Typical 198 btu/hr (50 kg-cal/hr) Maximum 1260 btu/hr (318 kg-cal/hr)	Typical 222 btu/hr (56 kg-cal/hr) Maximum 1916 btu/hr (483 kg-cal/hr)
System Heat Dissipation with Energy Efficient* Power Supply	Typical 133 btu/hr (33.5 kg-cal/hr) Maximum 549 btu/hr (132 kg-cal/hr)	Typical 150 btu/hr (38 kg-cal/hr) Maximum 1024 btu/hr (258 kg-cal/hr)	Typical 171 btu/hr (43 kg-cal/hr) Maximum 1557 btu/hr (392 kg-cal/hr)
Power Supply Fan	N/A	80mm variable speed	92mm variable speed

### Technical Specifications

ENERGY STAR Compliant with Energy Efficient* Power Supply	X	X	X
FEMP Standby Power Compliant (<2W in S5 – Power Off)**	X	X	X
Power Consumption in ES Mode – Suspend to RAM (S3) (Instantly Available PC)	< 2.7W	< 2.7W	< 2.7W

\* Energy efficient power supply is a requirement for ENERGY STAR compliance in conjunction with a select range of processors and modules.

\*\* Power consumption in the Off/Apparent Off mode is measured and reported with the network interface controller "Wake on LAN" feature disabled in F10 Setup (default is "enabled").

### ROM BIOS Information

Key features of the HP BIOS in the dc7800 include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP Business desktop computer into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages. Select models offer Intel vPro technology including AMT 3.0 (Active Management Technology).
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Security – HP BIOS Configuration for ProtectTools offers a robust and flexible set of security features to help the system administrator secure their systems from removal of sensitive data, and help prevent access by unauthorized users.
- Computrace agent – For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance – Industry leading acoustic emissions across the range of operating conditions.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (Flashbin), BIOS updates from within Windows (HPQFlash, SSM), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.

### Additional HP BIOS Features

- Power-On password – Helps prevent an unauthorized user from powering on the system. After a TPM Basic User password is established in windows, the user or admin can require TPM hardware based authentication during the power-on process.
- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage (S3 enabled). HP Compaq dc7800 models use ACPI to provide power conservation features under Windows XP.



### Technical Specifications

Other Features	Description
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> <li>Allows the system to wake from a low power mode.</li> <li>Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.</li> </ul>
SMBIOS Ver. 2.5	System Management BIOS, for system management information
Wired for Management Support	Intel-driven, industry-wide initiative to make Intel architecture-based PCs, servers and mobile computers more inherently manageable right out of the box and over the network
Dual-State Power Button	Power button acts as both an on/off button and suspend-to-sleep button

Serviceability Features of System		
Dual Color Power LED on Front of Computer (Indicates Normal Operations and Fault Conditions)		
Diagnostic LED Explanation Table	Number of 1-second red LED blinks followed by 2-second pause, then repeats: 2-processor thermal protection activated 3-processor not installed 4-power supply failure 5-memory error 6-video error 7-PCA failure (ROM detected failure prior to video) 8-invalid ROM, bootblock recover mode	
• System/Emergency ROM	• Flash ROM	• CMOS Battery Holder for easy Replacement
• Flash Recovery with Video Configuration Record SW	• 5 Aux Power LED on System PCA	• Processor ZIF Socket for easy Upgrade
• Over-Temp Warning on Screen (Requires IM Agents)	• Clear Password Jumper	• DIMM Connectors for easy Upgrade
• HP Backup and Recovery Manager	• Clear CMOS Button	• NIC LEDs (integrated) (Green & Amber)

Serviceability Features of Chassis		
• Dual Color Power and HD LED – To Indicate Normal Operations and Fault Conditions	• Color coordinated cables and connectors	• Tool-less Hood Removal
• Front power switch	• System memory can be upgraded without removing the system board or any internal components	• Tool-less Hard Drive, CD & Diskette Removal
• Green Pull Tabs, and Quick Release Latches for easy Identification		

**NOTE:** [Thumb screw release mechanism](#) is used with the [Ultra-slim Desktop chassis cover](#).

Additional Features	Description
AMT 3.0 support (Active Management Technology)	Select models offer new Intel vPro Technology utilizing AMT 3.0 for network alerting and management of systems regardless of power state, as well as operating system-absent environments.  Supports existing AMT 2.1 features plus:

### Technical Specifications

	<ul style="list-style-type: none"><li>● Remote Configuration (RCFG) – Uses root certificate hashes for simpler deployment (existing PSK method remains supported)</li><li>● 802.1x – compatibility with Cisco NAC</li><li>● WS-Management – Web Services for Management interface</li></ul> <p>Network Heuristics – built-in basic capabilities to filter inbound and outbound network traffic. Backwards compatible with earlier management consoles</p>
DASH 1.0 support (Desktop and mobile Architecture for System Hardware)	A standards initiative for representing out-of-band management capability for computer systems. It is a secure, web-services based successor to ASF.
ASF 2.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
TXT (Trusted Execution Technology) and VT-d (Virtualized devices)	<ul style="list-style-type: none"><li>● TXT allows for secure management (via TPM) and measured launch of VMM, as well as teardown of secrets in unexpected reset case. TXT support provided in select Intel processors.</li><li>● VT-d is a chipset technology that virtualizes directed I/O</li></ul> <p>Together, TXT and VT-d may be used to support verified launch of a known trusted VMM that also may protect VMs from accessing each other's memory.</p>
Virtual Appliance support	Tested support for Virtual Appliance (VA) 2.6 ISV applications. Hardware ready for future VA 3.0 ISV applications (with VT-d and TXT support)
Computrace	Computrace agent support standard
Tower	Product can be oriented as a tower (in addition to desktop orientation) Tower stand recommended for USDT in tower mode
Drive Lock*	Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.
Drive Self Tests (DPS)*	<ul style="list-style-type: none"><li>● Drive Protection System</li><li>● A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user.</li><li>● Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced.</li><li>● The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures.</li></ul>
DPS Access through F10 Setup during Boot	
SMART Technology* (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted
SMART I – Drive Failure Prediction	<ul style="list-style-type: none"><li>● Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count</li><li>● By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure</li><li>● IOEDC: I/O Error Detection Circuitry</li><li>● Detects errors in Read/Write buffers on HDD cache RAM</li><li>● Interface in F10 setup for dc7800 CMT and SFF platforms provides confirmation of SMART IV support.</li></ul>
SMART II – Off-Line Data Collection	
SMART III – Off-Line Read Scanning with Defect Reallocation	
SMART IV – End-to-End CRC for hard drives	
* This feature is inoperable when a RAID (Redundant Array of Independent Disks) configuration is enabled.	

### Technical Specifications - Audio

High Definition Audio	Type	Integrated
	High Definition Stereo Codec	Yes – ADI 4-channel ADI 1884 codec
	Audio Jacks	Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out * (190 ohms Output Impedance, expects at least a 10-K ohm load) Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load)
	* Internal Speaker Amplifier is for Internal Speaker only. External Speakers need to be powered externally. Rear Line in audio port is re-taskable as Line-in or Microphone-in.	
	Multistreaming Capable	Multistreaming can be enabled in the ADI control panel to allow independent audio streams to be sent to/from the front and rear jacks.
	Sampling	8 kHz – 192 kHz
	Wavetable Syntheses (software)	Yes – Uses OS soft wavetable
	Analog Audio	Yes
	Number of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)
	Internal Audio Speaker Power Rating	1.5 W
HP Thin USB Powered Speakers	Internal Speaker	Yes
	External Speaker Jack (Line-Out)	Yes
	On/Off/Volume Controls	Right side of right speaker
	Power LED	Front of right speaker (green)
	Frequency response	FO to 20kHz
	Watts	2/3 watt (normal/maximum)
	Dimensions (H x W x D)	Speakers: 5.72 x 3.74 x 0.96 in (14.52 x 9.50 x 2.45 cm) per speaker
	Net weight	0.68 lbs (0.31kg)
	Environmental (all conditions non-condensing)	<b>Temperature</b> (operating) 14° to 104° F (-10° to 40° C) <b>Relative Humidity</b> (operating) 40% to 90%
	Speaker cable length	Input cord: 5.91 ft (1800mm±35mm) L-channel cord: 3.28 ft (1000mm±35mm) USB cord: 5.91 ft (1800mm±35mm)
	Color	HP Carbonite

### Technical Specifications - Communications

Integrated Intel 82566DM Gigabit Network Connection	Connector	RJ-45
	Controller	Intel Nineveh Gigabit platform LAN Connect Networking Controller
	Memory	Integrated 96KbB on chip buffer memory
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3 ab and 802.3u compliant,
	Bus architecture	GLCI, LCI interface. Intel specific MAC to PHY interface
	Data transfer mode	At gigabit GLCI (802.3 serdes) is for Data, LCI (parallel bus)for MDIO, at 10/100 LCI for both data and MDIO, GLCI is idle.
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power requirement	Require 3.3Vaux, 1.8V and 1.0V or just 3.3V with integrated regulators Power consumption 1.16 Watts for 82566, whole LOM 2.53 Watts
	ACBS	Intel Auto Connect Battery Saving feature
	Boot ROM support	Yes
	Network transfer mode	Full-duplex
		Half-duplex (not available for the 1000BASE-T transceiver)
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T (full-duplex) 2000 Mbps
Environmental	Operating temperature	32° to 131°F (0° to 55° C) To 70° C for external regulator
	Operating humidity	85% at 131° F (55° C)
Management capabilities	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic.	
Alerting	ASF 2.0 support, AMT 3.0 support	

### Technical Specifications - Communications

Intel PRO/1000 PT PCIe Gigabit NIC	Connector	RJ-45
	Controller	Intel 82572EI Gigabit Ethernet Controller
	Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI-E 1.0a
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
Environmental	Operating temperature	32° to 131°F (0° to 55° C)
	Operating humidity	85% at 131° F (55° C)
Dimensions	6.4 x 2.6 x 0.8 in (16.3 x 6.6 x 1.9 cm)	
Management capabilities	ASF, WOL, PXE, DMI, WFM 2.0.	

Broadcom NetXtreme Gigabit Ethernet PCIe NIC Card	Connector	RJ-45
	Controller	Broadcom 5751 PCI-Express LAN Controller
	Memory	Integrated 96Kb frame buffer memory
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI-E
	Data path width	Single channel, PCI-E
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power requirement	3.1 watts @ +3.3V AUX supply with 5V tolerance
	Boot ROM support	Yes
	Network transfer mode	Full-duplex
		Half-duplex (not available for the 1000BASE-T transceiver)
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)

### Technical Specifications - Communications

Environmental	Operating temperature	32° to 131°F (0° to 55° C)
	Operating humidity	85% at 131° F (55° C)
Dimensions	4.4 x 2.2 x 0.08 in (11.2 x 5.5 x 2 cm)	
Management capabilities	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility	
Alerting	ASF 2.0	

HP Wireless A+G PCI	Dimensions	4.99 x 2.54 x 0.71 in (126.8 x 64.4 x 18.0 mm)	
	Weight	0.268 lb (65 g)	
	Controller	Atheros AR5414X chipset	
	system interface	PCI Spec 2.2	
	Network standard	IEEE 802.11a/b/g	
	Frequency band	5.1500 to 5.8500 GHz	
		2.4000 to 2.4835 GHz	
		2.4465 to 2.4835 GHz (Europe, Middle East, Asia and Asia Pacific - excluding Japan)	
		2.4000 to 2.4697 GHz (Japan)	
	Operating temperature	32° to 140° F (0° to 60° C), operating	
	Storage temperature	-4° to 176° F (-20° to 80° C), non-operating	
	Humidity	10% to 85% non-condensing	
	Operating voltage	5V ± 5%	
	Power consumption	Tx/Rx peak 560/250mA @ 3.3V (max.)	
	Output power (approximately)	15 dBm ±2dB	
	Receive sensitivity	-90dBm at 11 Mbps (typical)	
	Data transfer rate	Standard rates of 1, 2, 5.5, 11, 6, 9, 12, 18, 24, 48, 54 and Super AG Mode108-Mbps	
	Spreading	DSSS (Direct Sequence Spread Spectrum)	
	Security	64(40h) bit, 128(104h) bit, WPA, IEEE802.1X, AES-OCB, AES-CCM, Microsoft PEAP,TKIP, WEP.	
	Antenna	External 5dBi antenna	
	Throughput	108 Mbps (only with Belkin 54G or 200 ft (60.96 m) – Indoor above router that supports 108 Mbps speed)	
		54 Mbps	200 ft (60.96 m) – Indoor
		11 Mbps	200 ft (60.96 m) – Indoor
	Certifications	Wi-Fi certified	
	Certifications for use by country	North America: United States, Canada	
		Europe: Austria, Belgium, Cyprus, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Liechtenstein, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, United Kingdom	
		Australia	
		New Zealand	

### Technical Specifications - Communications

Broadcom 4311BG 802.11b/g WiFi Adapter	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows 2000 and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security <sup>1</sup>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CCK) <sup>2</sup>	17.5 dBm
	Output Power (for OFDM; power varies by data rate) <sup>2</sup>	15 dBm
	Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode <sup>3</sup> : 390 mW (nominal) Sleep mode: 20 mW (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity <sup>4</sup>	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm
	Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
	Range	802.11 b - Typical (@1 Mbps) 1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment 802.11 g - Typical (@1 Mbps) 1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment
	Form Factor	PCI-Express MiniCard
	Weight	0.026 lb (12 g)
	Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)
	Operating Voltage	3.3v +/- 10%
	Temperature	Operating 32° to 176° F (0° to 80° C) Non-operating -40° to 176° F (-40° to 80° C)

### Technical Specifications - Communications

Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility <sup>5</sup>	Microsoft Windows 2000 or XP Choice of Configuration Utility:	
	<ul style="list-style-type: none"> <li>• Microsoft Windows XP Wireless Network Connection Manager</li> <li>• Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)</li> </ul>	
	Microsoft Windows Vista	
	<ul style="list-style-type: none"> <li>• Microsoft Windows Vista Wireless Network Connection Manager</li> </ul>	
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	
	<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. In Power Save Polling mode.</li> <li>4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> <li>5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows 2000 or XP. WLAN may also be compatible with certain third-party software supplicants.</li> </ol>	

### Agere 2006 PCI 56K International SoftModem

Data Transmission	Technology speeds: 56,000 Kbps maximum downstream data, controllerless
	<b>NOTE:</b> 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.
Data Speeds	(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/9,600/7,200/4,800/2,400/1,200/300
Data Standards	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis, V.32bis, Bell 212A, and Bell 103
Fax Speeds	14,400/12,000/9,600/7,200/4,800/2,400/1,200/300 b/s
Fax Mode Capabilities	ITU-T T.31 class 1 FAX, V.17, V.29, V.27ter, and V.21 Channel 2
Error Correction and Data Compression	V.44, 42bis, V.42 and MNP2-5
Power Management	ACPI; PPMI 1.1 and wake support with PME and Vaux; meets PCI 2.3 requirements and PC 2001 requirements
Upgradeability	Driver upgradeable for future enhancements
Video	ITU-T V.80 video ready interface
Other	TIA/EIA 602 standard AT command set Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface Optional ring wakeup signal
Operating Temperature	32° to 158° F (0° to 70° C)



### Technical Specifications - Communications

<b>Operating Humidity</b>	20% to 90%, non-condensing
<b>Power</b>	Requires a 3.3-V auxiliary power rail on PCI bus Uses only one PCI load (i.e., one grant/request pair), one shared IRQ, one electrical load
<b>Chipset</b>	Agere Systems SV92PL – Integrated PCI interface with 5-V tolerant buffers and CardBus support
<b>Dimensions (L X H)</b>	Complies with PCI low profile specifications-6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets
<b>Connection</b>	Single RJ-11 connector
<b>Other Features</b>	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
<b>Safety</b>	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark
<b>EMC</b>	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
<b>Telecom</b>	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
<b>Health</b>	Bare PCB material compliant to 94V-0 or better (marked as such)
<b>Other</b>	PC 2001 compliant, PCI version 2.3, WHQL approved; ACPI compliant

### Technical Specifications - Graphics

Integrated Graphics Media Accelerator 3100	3D/2D Controller	Microsoft DirectX® 9 based with support for Pixel Shader 2.0, 4:1 anisotropic filtering, Gaussian texture filtering, shadow maps, volumetric textures, double-sided stencil buffers, and 4 pixel pipes.
	VGA Controller	Integrated
	Bus Type	PCI Express™ x16 (If an external graphics card is installed in a PCI or PCIe x1 slot, the internal graphics can be enabled or disabled using the system's BIOS setup utility. If a graphics card other than an SDVO/ADD2 card is installed in the PCI Express™ x16 slot, the internal graphics cannot be enabled).
	RAMDAC	Integrated, 350 MHz (2048x1536@75 Hz)
	Memory	Graphics memory is shared with system memory. Graphics memory usage varies depending on the amount of system memory installed and system load. 8 MB is pre-allocated for graphics use at system boot time. Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.
		<b>System memory equal or greater than 512 MB</b> 8 MB pre-allocated + 248 MB DVMT = max frame buffer of 256 MB
	Overlay Planes	Single overlay support with 5x3 filtering
	Maximum Color Depth	32 bits/pixel
	Maximum Vertical Refresh Rate	85 Hz at up to 1920x1440, 75 Hz at 2048x1536. Varies with mode and configuration. See table below.
	Multi-display Support	Support for one CRT via the motherboard's VGA connector on SFF and CMT. USDT includes support for an additional DVI-D display. Support for an additional display on SFF/CMT can be accomplished with the addition of SDVO/ADD2 option installed in PCIe x16 slot.
	Graphics/Video API Support	Microsoft DirectX®9, DirectXVA®, VMR9, GDI/GDI+; OpenGL® 1.4.

Resolutions Supported	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

Technical Specifications - Graphics

\* Only supported when using a dual-link DVI or DP connection

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

ATI Radeon HD 2400XT (256MB DH) PCIe Graphics Card	Bus type	PCI Express (x16 lanes)	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	1900 x 1200 digital, 2048 x 1536 analog	
	Board display options	Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI cable kit part number: DL139A. 4-pin mini-DIN S-video connector for TV output	
	Board configuration	Specification	Description
		Graphics Chip	RV610
		Core clock	650 MHz
		Memory clock	500 MHz
		Frame buffer	256 MB DDR2, 128 bit wide
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish		
	Core power	21 W	
Compliance standards		EMC Emissions:	
		a. FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home & Office Use	
		b. CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment	
		c. Canadian Standard ICES-003 is equivalent to CISPR22	
		d. Taiwanese Standard BSMI	
		e. Japanese VCCI	
		f. Australian C-Tick	
		g. Korean (MIC)	
		EMC Immunity:	
		CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.	

ATI Radeon HD 2400XT (256MB DH) PCIe Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

### Technical Specifications - Graphics

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

\* Only supported when using a dual-link DVI or DP connection

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

#### ATI Radeon HD 3650 (512MB DH) PCIe x16 Graphics Card

Bus type	PCI Express (x16 lanes)	
Maximum vertical refresh rate	85 Hz	
Display support	Integrated 400 MHz RAMDAC	
Display max resolution	2560 x 1600 digital, 1920 x 1440 analog	
Board display options	Supports two displays via included two DisplayPort and one Dual Link DVI connectors.	
Board configuration	Specification	Description
	Graphics Chip	RV635
	Core clock	600 MHz
	Memory clock	500 MHz
	Frame buffer	512 MB DDR2, 128 bit wide
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
Core power	56 W	
Compliance standards	EMC Emissions:	
	<ul style="list-style-type: none"> <li>a. FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home &amp; Office Use</li> <li>b. CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment</li> <li>c. Canadian Standard ICES-003 is equivalent to CISPR22</li> <li>d. Taiwanese Standard BSMI</li> <li>e. Japanese VCCI</li> </ul>	

Technical Specifications - Graphics

- f. Australian C-Tick
- g. Korean (MIC)

EMC Immunity:  
CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

ATI Radeon HD 3650 (512MB DH) PCIe x16 Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

\* Only supported when using a dual-link DVI or DP connection

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

DVI ADD2 Graphics

Models	HP ADD2 SDVO DVI-D Out Adapter
Form Factor	Low-profile card
DVI-D Connector	Digital connection only
Dual Head Support	Yes, when used with the integrated VGA connector
Display Devices Supported	HP L1740 HP L1940T HP L2045W HP LP1965

**NOTE:** These graphics adapters offer optimal performance with any display that meets applicable VESA standards.

Color Depth	All modes support 8-bpp, 16-bpp, and 24-bpp color depths
Host Interface Connector	Mechanically compliant with PCI-E standard Complies with the Intel ADD2 and Intel Serial Digital Video Output (SDVO) specifications
Dot Clock	165 MHz maximum
Display Modes	Supports display modes that require up to 165-MHz bandwidth on the link, as shown in the following table.

Resolution	60-Hz LCD	60-Hz	75-Hz	85-Hz
Blanking	5% reduced	GTF	GTF	GTF

### Technical Specifications - Graphics

640 x 480	VGA	Yes	Yes	Yes	Yes
800 x 600	SVGA	Yes	Yes	Yes	Yes
1024 x 768	XGA	Yes	Yes	Yes	Yes
1280 x 1024	SXGA	Yes	Yes	No	No
1600 x 1200	UXGA	Yes	Yes	No	No

#### NVIDIA GeForce 8400 GS (256 MB SH) PCIe x16 Graphics Controller

Bus type	PCI Express (x16 lanes)	
Maximum vertical refresh rate	85 Hz	
Display support	Integrated 400 MHz RAMDAC	
Display max resolution	2048 x 1536 (analog), 2560 x 1600 (digital)	
Input/Output connectors	DVI-I (DVI port supports dual-link and HDCP) TV-out (4 pin S-video)	
Board display options	DVI-I + TV DVI-I supports analog CRT or flat panel or digital flat panel (using DVI-A, DVI-D or DVI-I connector) DVI-I supports analog CRT or flat panel (with VGA connector and DVI-I to VGA dongle) TV connector is a 4-pin mini-DIN S-video connector	
Board configuration	Specification	Description
	Graphics Chip	NVIDIA GeForce 8400 GS
	Core clock	460 MHz
	Memory clock	200 MHz
	Frame buffer	256 MB DDR2
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
Core power	25 W (Max board power)	

#### NVIDIA GeForce 8400 GS (256 MB SH) PCIe x16 Graphics Controller display resolutions and refresh rates

**NOTE:** Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

## Technical Specifications - Graphics

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

\* Only supported when using a dual-link DVI or DP connection

**NOTE:** 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

NVIDIA GeForce 8400 GS (256 MB DH) PCIe x1 Graphics Controller	Bus type	PCIe x1	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	2048 x 1536 (analog), 2560 x 1600 (digital)	
	Input/Output connectors	DMS59 (DMS-59 port supports Dual VGA or Dual DVI connections) TV-out (4 pin S-video)	
	Board display options	DMS59 + TV DMS59 supports either 2 VGA displays with the included cable or 2 DVI displays with optional HP DMS59 DVI Dual-head Connector Cable kit #DL139A TV connector is a 4-pin mini-DIN S-video connector	
	Board configuration	Specification	Description
		Graphics Chip	NVIDIA GeForce 8400 GS
		Core clock	460 MHz
		Memory clock	200 MHz
	Languages supported	Frame buffer	256 MB DDR2
		24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
	Core power	25 W (Max board power)	

Technical Specifications - Graphics

NVIDIA GeForce 8400 GS (256 MB DH) PCIe x1 Graphics Controller display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

\* Only supported when using a dual-link DVI or DP connection  
NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

ATI RADEON X1600XT (256 MB DH) FH PCIe Graphics Card	Bus type	PCI Express (x16 lanes)	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	2560 x 1600 digital, 2048 x 1536 analog	
	Board display options	2 DVI-I ports (one port supports dual link DVI). DVI-I supports an analog CRT or flat panel with a VGA connector via the provided DVI-I to VGA adapter	
		4-pin mini-DIN S-video connector for TV output	
	Board configuration	Specification	Description
		Graphics Chip	RV530
		Core clock	590 MHz
		Memory clock	690 MHz
Core power		Frame buffer	256 MB GDDR3, 128 bit wide
		56 W (Max board power)	



## Technical Specifications - Graphics

NVIDIA Quadro NVS 290	Form Factor	Low Profile
256MB PCIe Dual Head	Bus Type	PCIe x16
	Memory	256 MB 400MHz DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connector	DMS-59, includes DMS-59 to Dual DVI-I cable. DMS-59 to Dual VGA cable available as an option.
	Display resolution support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
	RAMDAC	Integrated dual 400MHz
	Color planes	32-bit color buffer
	Overlay planes	Hardware supported
	nView architecture	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows.
	Multi-Monitor support	Dual monitor support
	DVI support	DMS-59 (to dual DVI-SL)
	High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	Supported graphics APIs	OpenGL 2.1 & DirectX 10 Support; Shader Model 4.0

### Technical Specifications - Hard Drives

Serial ATA (NCQ and Smart III) 1.5-Gb/s Hard Drives

80 GB 5400 RPM

Capacity	80,026,361,856 bytes		
Dimensions (H x W x D)	0.37 x 3.94 x 2.75 in (0.94 x 10.0 x 6.98 cm)		
Physical width	4 in (10.2 cm)		
Interface	Serial ATA (1.5 Gb/s)		
Synchronous Transfer Rate (Maximum)	Up to 1.5 Gb/s		
Cache	8 MB		
Seek Time	Read (typical)		
	Track to Track	2 ms	
	Average	15 ms	
	Full-Stroke	23 ms	
	Average latency	5.6 ms	
Rotational Speed	5,400 RPM		
Buffer (max)	4 sec		
Operating Temperature	41° to 131° F (5° to 55° C)		

80 GB 7200 RPM

Capacity	80,026,361,856 bytes		
Dimensions (H x W x D)	0.37 x 3.94 x 2.75 in (0.94 x 10.0 x 6.98 cm)		
Physical width	4 in (10.2 cm)		
Interface	Serial ATA (1.5 Gb/s)		
Synchronous transfer rate (Maximum)	Up to 1.5 Gb/s		
Cache	8 MB		
Seek Time	Read (typical)		
	Track to Track	1 ms	
	Average	13 ms	
	Full-Stroke	22 ms	
	Average latency	4.2 ms	
Rotational Speed	7,200 RPM		
Buffer (max)	4 sec		
Operating Temperature	41° to 131° F (5° to 55° C)		

160 GB 7200 RPM

Capacity	160,041,885,696 bytes
Dimensions (H x W x D)	0.37 x 3.94 x 2.75 in (0.94 x 10.0 x 6.98 cm)
Physical width	4 in (10.2 cm)
Interface	Serial ATA (1.5 Gb/s)
Synchronous transfer rate (Maximum)	Up to 1.5 Gb/s
Buffer	8 MB

## Technical Specifications - Hard Drives

Seek Time	Read (typical)
	Track to Track 1 ms
	Average 13 ms
	Full-Stroke 22 ms
	Average latency 4.2 ms
Rotational Speed	7,200 RPM
Buffer (max)	4 sec
Operating Temperature	41° to 131° F (5° to 55° C)

### 7200 RPM Serial ATA Hard Drives

#### 500-GB

Capacity	500,107,862,016 bytes
Height	1 in (2.54 cm)
Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)
Interface	Serial ATA (3.0 Gb/s)
Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s
Buffer	16 MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 2.0 ms Average 11 ms Full-Stroke 21 ms
Rotational Speed	7,200 RPM
Logical Blocks	976,773,168
Operating Temperature	41° to 131° F (5° to 55° C)

#### 250-GB

Capacity	250,059,350,016 bytes
Height	1 in (2.54 cm)
Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)
Interface	Serial ATA (3.0 Gb/s)
Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s
Buffer	8 MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 1.0 ms Average 8.5 ms Full-Stroke 18 ms
Rotational Speed	7,200 RPM
Logical Blocks	488,397,168
Operating Temperature	41° to 131° F (5° to 55° C)

#### 160-GB

Capacity	160,041,885,696 bytes
Height	1 in (2.54 cm)
Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)

## Technical Specifications - Hard Drives

### 80-GB

<b>Interface</b>	Serial ATA (3.0 Gb/s)	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s	
<b>Buffer</b>	8 MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.9 ms
	<b>Average</b>	9.3 ms
	<b>Full-Stroke</b>	18 ms
<b>Rotational Speed</b>	7,200 RPM	
<b>Logical Blocks</b>	312,581,808	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>Capacity</b>	80,026,361,856 bytes	
<b>Height</b>	1 in (2.54 cm)	
<b>Width</b>	Media diameter: 3.5 in (8.89 cm)	
	Physical size: 4 in (10.2 cm)	
<b>Interface</b>	Serial ATA (3.0 Gb/s)	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 Gb/s	
<b>Buffer</b>	8 MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2.0 ms
	<b>Average</b>	9.3 ms
	<b>Full-Stroke</b>	21 ms
<b>Rotational Speed</b>	7,200 RPM	
<b>Logical Blocks</b>	156,301,488	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### 10,000 RPM Serial ATA Hard Drives 160-GB

<b>Capacity</b>	160,041,885,696 bytes	
<b>Height</b>	1 in (2.54 cm)	
<b>Width</b>	Media diameter: 3.0 in (7.62 cm)	
	Physical size: 4 in (10.2 cm)	
<b>Interface</b>	Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3.0 Gb/s	
<b>Cache</b>	16 Mbytes	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 ms
	<b>Average</b>	4.6 ms
	<b>Full-Stroke</b>	10.2 ms
<b>Rotational Speed</b>	10,000 RPM	
<b>Logical Blocks</b>	312,581,808	
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	

### Technical Specifications - Hard Drives

80-GB	Capacity	80,026,361,856 bytes	
	Height	1 in (2.54 cm)	
	Width	Media diameter: 3.0 in (7.62 cm) Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	Up to 3.0 Gb/s	
	Cache	16 Mbytes	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 ms
		Average	4.6 ms
		Full-Stroke	10.2 ms
	Rotational Speed	10,000 RPM	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 131° F (5° to 55° C)	

16 GB Solid State Drive	Capacity*	16 GB	
	NAND Flash Memory	Single Level Cell (SLC) with wear leveling controller	
	Interface type	SATA 1.5Gb/sec	
	Dimensions-external (W x H x D)	2.74 x 0.37 x 4 in (6.98 x 0.95 x 10.2 cm)	
	Weight	0.21 lb (96 g)	
	Internal transfer rate	Write speed	Up to 47 MB/s
		Read speed	Up to 67 MB/s
		Ultra DMA mode	Up to 150 MB/s
	Host transfer rate	Up to 150 MB/s	
	Power	DC power requirement	5 VDC 5%-100 mV ripple p-p
		Total power consumption	<1.1 Watt
		Temperature (operating)	32° to 158° F (0° to 70° C)
	Environmental (all conditions, non-condensing)	Relative Humidity (operating)	5% to 95%
		Maximum Wet Bulb Temperature (operating)	84° F (29° C)
		Temperature (operating)	
	Operating systems supported	Windows XP Professional, Windows XP Professional x64 or Windows XP Home. No driver is required for this device. Native support is provided by the operating system. Language support is limited to English only at this time.	
	Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, R1113 and C1172 Class B	

\* For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

### Technical Specifications - Input/Output Devices

USB Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC $\pm$ 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		System interface	USB Type A plug connector
		ESD	CE level 4, 15-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft® PC 99 – 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 – 2001	Mechanically compliant
		Acoustics	43-dBA maximum sound pressure level
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
	Kit contents	Keyboard, installation guide, warranty card, safety and comfort guide	

### Technical Specifications - Input/Output Devices

PS/2 Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC $\pm$ 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		System interface	PS/2 6-pin mini din connector
		ESD	CE level 4, 15-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft PC 99 – 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 – 2001	Mechanically compliant
	Environmental	Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP USB Smartcard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Form factor	USB basic Smart Card keyboard
		Colors	Carbonite/Silver
		Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC $\pm$ 5%

### Technical Specifications - Input/Output Devices

Mechanical	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI – RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 – 2001	Functionally compliant
	Languages	30+ available
	Keycaps	Low-profile design
	Switch actuation	55 g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant membrane
Environmental	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
SMARTCARD function	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Support	All ISO 7816 smart cards
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)
	Chipset	SCM STCII
	Standard APIs supported	PC/SC, EMV2000, SET
	Power	USB Port Short circuit detection (protects smart card and reader) Power supply compliant with ISO7816 and EMV (5V, 60 mA) Supports 3-V and 5-V cards
	Power consumption	250-mA maximum draw (50 mA for the keyboard with three LEDs ON and 200-mA maximum startup current using a high-current, 60-mA smart card)



### Technical Specifications - Input/Output Devices

Communication	From card	Programmable from 9,600 baud to 115,200 baud
	From computer	Up to 38,400 baud
Landing mechanism	Contact device	Friction contact
	Card insertions rating	Up to 100,000 insertion cycles
Interface modes	USB communications through USB port SCM protocol Automatic card insertion/removal detection	
Reader performance interface	USB connection	
Electro-magnetic standards	Europe	89/336/CEE guideline
	USA	USAFCC part 15

HP USB Gray Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC $\pm$ 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		System interface	USB Type A plug connector
		ESD	CE level 4, 15-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft PC 99 – 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 – 2001	Mechanically compliant
	Environmental	Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces

### Technical Specifications - Input/Output Devices

Approvals	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, BG Prufzert Mark	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
Kit contents	Keyboard, installation guide, warranty card, safety and comfort guide	

HP PS/2 Optical Scroll Mouse	Dimensions (H x L x W)	3.95 x 6.21 x 11.7 cm (1.56 x 2.44 x 4.61 in)		
	Weight	4.44 oz (126 g)		
	Environmental	Operating temperature	-32° to 104°F (0° to 40° C)	
		Non-operating temperature	-4° to 140°F ( -20° to 60° C)	
		Operating humidity	10% to 90% (non condensing at ambient)	
		Non-operating humidity	10% to 90% non condensing	
		Operating shock	40 g, 6 surfaces	
		Non-operating shock	80 g, 6 surfaces	
		Operating vibration	2 g peak acceleration	
		Non-operating vibration	4 g peak acceleration	
		Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face	
		Electrical	Operating voltage	5 VDC ± 10%
	Power consumption		100mA	
	System consumption		PS/2 mini-din connector	
	ESD		CE level 4, 15 kV air discharge	
	EMI-RFI		Conforms to FCC rules for a Class B computing device	
	Mechanical	Microsoft PC99 – 2001	Functionally compliant	
		Resolution	400 ± 20% DPI	
		Tracking speed	10 in/s (25.4 cm/s) maximum	
		Acceleration	100 in/s/s (2.54 m/s/s)	
		Switch actuation	61 g nominal peak force	
		Switch life	3,000,000 operations (using Hasco modified tester)	
		Switch type	Low force micro-switches	
		Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s	
		Cable length	6 ft (1.8 m)	
		Microsoft PC99 – 2001	Mechanically compliant	
	Scroll wheel	Width	8 mm	
		Diameter	1.01 in (25.6 mm)	

Technical Specifications - Input/Output Devices

	Regulatory approvals	Maximum rotation speed	48 rats/sec
		Switch type	Light force micro-switch
		Switch life	1 million operations
		Mechanical life	Minimum 200,000 revolutions
		Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
<hr/>			
HP USB Optical Scroll Mouse	Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)	
	Weight	0.27 lb (0.12 kg)	
	Cable length	72.8 in (185 cm)	
	System requirements	Microsoft Windows 95, 98, 2000, Me, XP and Vista Available USB port	

## Technical Specifications - Optical Storage

### HP SATA SuperMulti LightScribe DVD Writer Drive

<b>Height</b>	5.25-inch, half-height, tray-load																		
<b>Orientation</b>	Either horizontal or vertical																		
<b>Interface type</b>	SATA/ATAPI																		
<b>Disc capacity</b>	8.5 GB DL or 4.7 GB standard																		
<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)																		
<b>Weight (max)</b>	2.6 lb (1.2 kg)																		
<b>Write speeds</b>	<table> <tr><td>DVD-RAM</td><td>Up to 12X</td></tr> <tr><td>DVD+R</td><td>Up to 16X</td></tr> <tr><td>DVD+RW</td><td>Up to 8X</td></tr> <tr><td>DVD+R DL</td><td>Up to 8X</td></tr> <tr><td>DVD-R DL</td><td>Up to 8X</td></tr> <tr><td>DVD-R</td><td>Up to 16X</td></tr> <tr><td>DVD-RW</td><td>Up to 6X</td></tr> <tr><td>CD-R</td><td>Up to 48X</td></tr> <tr><td>CD-RW</td><td>Up to 32X</td></tr> </table>	DVD-RAM	Up to 12X	DVD+R	Up to 16X	DVD+RW	Up to 8X	DVD+R DL	Up to 8X	DVD-R DL	Up to 8X	DVD-R	Up to 16X	DVD-RW	Up to 6X	CD-R	Up to 48X	CD-RW	Up to 32X
DVD-RAM	Up to 12X																		
DVD+R	Up to 16X																		
DVD+RW	Up to 8X																		
DVD+R DL	Up to 8X																		
DVD-R DL	Up to 8X																		
DVD-R	Up to 16X																		
DVD-RW	Up to 6X																		
CD-R	Up to 48X																		
CD-RW	Up to 32X																		
<b>Read speeds</b>	<table> <tr><td>DVD-RAM</td><td>Up to 12X</td></tr> <tr><td>DVD+RW, DVD-RW, DVD+R DL, DVD-R DL</td><td>Up to 8X</td></tr> <tr><td>DVD-ROM DL</td><td>Up to 8X</td></tr> <tr><td>DVD-ROM, DVD+R, DVD-R</td><td>Up to 16X</td></tr> <tr><td>CD-ROM, CD-R</td><td>Up to 48X</td></tr> <tr><td>CD-RW</td><td>Up to 32X</td></tr> </table>	DVD-RAM	Up to 12X	DVD+RW, DVD-RW, DVD+R DL, DVD-R DL	Up to 8X	DVD-ROM DL	Up to 8X	DVD-ROM, DVD+R, DVD-R	Up to 16X	CD-ROM, CD-R	Up to 48X	CD-RW	Up to 32X						
DVD-RAM	Up to 12X																		
DVD+RW, DVD-RW, DVD+R DL, DVD-R DL	Up to 8X																		
DVD-ROM DL	Up to 8X																		
DVD-ROM, DVD+R, DVD-R	Up to 16X																		
CD-ROM, CD-R	Up to 48X																		
CD-RW	Up to 32X																		
<b>Access time</b> (typical reads, including settling)	<table> <tr><td><b>Random</b></td><td>DVD: &lt; 140 ms (typical), CD: &lt; 125 ms (typical)</td></tr> <tr><td><b>Full Stroke</b></td><td>DVD: &lt; 250 ms (seek), CD: &lt; 210 ms (seek)</td></tr> </table>	<b>Random</b>	DVD: < 140 ms (typical), CD: < 125 ms (typical)	<b>Full Stroke</b>	DVD: < 250 ms (seek), CD: < 210 ms (seek)														
<b>Random</b>	DVD: < 140 ms (typical), CD: < 125 ms (typical)																		
<b>Full Stroke</b>	DVD: < 250 ms (seek), CD: < 210 ms (seek)																		
<b>Power</b>	<table> <tr><td><b>Source</b></td><td>SATA DC power receptacle</td></tr> <tr><td><b>DC Power Requirement</b></td><td>5 VDC <math>\pm</math> 5%-100 mV ripple p-p 12 VDC <math>\pm</math> 5%-200 mV ripple p-p</td></tr> <tr><td><b>DC Current</b></td><td>5 VDC (&lt; 1000 mA typical, 1600 mA maximum) 12 VDC (&lt; 600 mA typical, 1400 mA maximum)</td></tr> </table>	<b>Source</b>	SATA DC power receptacle	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p	<b>DC Current</b>	5 VDC (< 1000 mA typical, 1600 mA maximum) 12 VDC (< 600 mA typical, 1400 mA maximum)												
<b>Source</b>	SATA DC power receptacle																		
<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p																		
<b>DC Current</b>	5 VDC (< 1000 mA typical, 1600 mA maximum) 12 VDC (< 600 mA typical, 1400 mA maximum)																		
<b>Environmental conditions</b> (operating – non-condensing)	<table> <tr><td><b>Temperature</b></td><td>41° to 122° F (5° to 50° C)</td></tr> <tr><td><b>Relative Humidity</b></td><td>10% to 90%</td></tr> <tr><td><b>Maximum Wet Bulb Temperature</b></td><td>86° F (30° C)</td></tr> </table>	<b>Temperature</b>	41° to 122° F (5° to 50° C)	<b>Relative Humidity</b>	10% to 90%	<b>Maximum Wet Bulb Temperature</b>	86° F (30° C)												
<b>Temperature</b>	41° to 122° F (5° to 50° C)																		
<b>Relative Humidity</b>	10% to 90%																		
<b>Maximum Wet Bulb Temperature</b>	86° F (30° C)																		

### SATA DVD-ROM Drive

<b>Height</b>	5.25-inch, half-height, tray-load
<b>Orientation</b>	Either horizontal or vertical
<b>Interface type</b>	SATA/ATAPI

## Technical Specifications - Optical Storage

<b>Disc capacity</b>	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)		
<b>Dimensions</b> (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
<b>Weight</b> (max)	2.6 lb (1.2 kg)		
<b>Read speeds</b>	DVD+R/-R/+RW/-RW/+R DL /-R DL	Up to 8X	
	DVD-ROM	Up to 16X	
	DVD-RAM	Up to 4X	
	CD-ROM, CD-R	Up to 48X	
	CD-RW	Up to 32X	
<b>Removable Storage – Media Compatibility – DVD-ROM</b>	<b>Media</b>	<b>Read</b>	<b>Write</b>
	CD-ROM	Yes	No
	CD-R	Yes	No
	CD-RW	Yes	No
	DVD-ROM	Yes	No
	DVD-ROM DL	Yes	No
	DVD-RAM	Yes	No
	DVD+R	Yes	No
	DVD+R DL	Yes	No
	DVD+RW	Yes	No
	DVD-R	Yes	No
	DVD-RW	Yes	No
	DVD-R DL	Yes	No
<b>Access times</b> (typical reads, including setting)	<b>Random</b>	DVD: < 140 ms (typical), CD: < 125 ms (typical)	
	<b>Full Stroke</b>	DVD: < 250 ms (seek), CD: < 210 ms (seek)	
	<b>Cache Buffer</b>	2 MB (minimum)	
	<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s -default)	
<b>Power</b>	<b>Source</b>	SATA DC power receptacle	
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p	
	<b>DC Current</b>	5 VDC – <1000 mA typical, < 1600 mA maximum 12 VDC – < 600 mA typical, < 1400 mA maximum	
<b>Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)	
	<b>Relative Humidity</b>	10% to 90%	
	<b>Maximum Wet Bulb Temperature</b>	86° F (30° C)	

## Technical Specifications - Optical Storage

SATA CD-RW/DVD-ROM Combo Drive	Height	5.25-inch, half-height, tray-load	
	Orientation	Either horizontal or vertical	
	Interface type	SATA/ATAPI	
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)	
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
	Weight (max)	2.6 lb (1.2 kg)	
	Write speeds	CD-R	Up to 48X
		CD-RW	Up to 32X
	Read speeds	DVD+R/-R/+RW/-RW/+R DL /-R DL	Up to 8X
		DVD-ROM	Up to 16X
		CD-ROM, CD-R	Up to 48X
		CD-RW	Up to 32X
	Access time (typical reads, including settling)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
		Full Stroke	DVD: < 250 ms (typical), CD: < 210 ms (typical)
	Power	Source	SATA DC power receptacle
		DC Power Requirement	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
		DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
	Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
		Relative Humidity	10% to 90%
		Maximum Wet Bulb Temperature	86° F (30° C)

PATA Slim SuperMulti LightScribe DVD Writer Drive	Height	5.25-inch, half-height, tray-load	
	Orientation	Either horizontal or vertical	
	Interface type	ATAPI/EIDE	
	Disc recording capacity	Up to 8.5 GB DL or 4.7 GB standard	
	Dimensions (W x H x D)	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)	
	Weight (max)	0.42 lb (190 g)	
	Write speeds	DVD-RAM	Up to 5X
		DVD-R DL	Up to 4X
		DVD+R	Up to 8X
		DVD+RW	Up to 4X
		DVD+R DL	Up to 4X
		DVD-R	Up to 8X
		DVD-RW	Up to 6X

## Technical Specifications - Optical Storage

Read speeds	CD-R	Up to 24X
	CD-RW	Up to 16X
	DVD-RAM	Up to 5X
	DVD-RW, DVD+RW	Up to 8X
	DVD-R DL, DVD+R DL	Up to 6X
	DVD+R, DVD-R	Up to 8X
	DVD-ROM DL, DVD-ROM	Up to 8X
Access time (typical reads, including settling)	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)
	Stop Time	< 4 seconds
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s - default)
Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, 1600 mA maximum) 12 VDC (< 600 mA typical, 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
Audio output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Environmental conditions (operating – non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)

## Technical Specifications - Optical Storage

PATA CD-RW/DVD-ROM Combo Slim Drive	Height	12.7mm height slim CD-RW
	Orientation	Either horizontal or vertical
	Interface type	PATA/ATAPI
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM)
	Dimensions (W x H x D)	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)
	Weight (max)	0.42 lb (190 g)
	Write speeds	CD-R Up to 24X CD-RW Up to 24X
	Read speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL Up to 4X DVD-ROM Up to 8X CD-ROM, CD-R Up to 24X CD-RW Up to 24X
	Access time (typical reads, including settling)	Random DVD DVD: < 140 ms (typical), CD: < 125 ms (typical) Random CD DVD: < 250 ms (typical), CD: < 210 ms (typical)
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4); ATA Multi-word DMA mode 2; ATA UltraDMA mode 0; ATA UltraDMA mode 1, mode 2; ATA UltraDMA Mode 3 (default)
	Power	Source Four-pin, DC power receptacle DC Power Requirement 5 VDC $\pm$ 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, < 1600 mA maximum) Total Drive Power (standby mode) < 2.5 Watt
	Audio output level	0.7 Vrms (typical)
	Environmental (all conditions non- condensing)	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 5% to 85% Maximum Wet Bulb Temperature (operating) 86° F (30° C)



## Technical Specifications - Optical Storage

PATA DVD-ROM Slim Drive	Height	12.7mm
	Orientation	Either horizontal or vertical
	Interface type	PATA/ATAPI
	Dimensions (W x H x D)	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)
	Weight (max)	0.42 lb (190 g)
	Read speeds	DVD+R/-R/+RW/-RW/+R DL /-R DL Up to 4X
		DVD-ROM Up to 8X
		CD-ROM, CD-R Up to 24X
		CD-RW Up to 24X
	Access time (typical reads, including settling)	Random DVD DVD: < 140 ms (typical), CD: < 125 ms (typical)
		Random CD DVD: < 250 ms (seek), CD: < 210 ms (seek)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s)
	Power	Source Four-pin, DC power receptacle
		DC Power Requirement 5 VDC $\pm$ 5%-100 mV ripple p-p
		DC Current 5 VDC - <1000 mA typical, < 1600 mA maximum
		Total Drive Power (standby mode) < 2.5 Watt
	Audio output	Line-Out 0.7 VRMS
		Signal-to-Noise Ratio 74 dB
		Channel Separation 65 dB
	Environmental (all conditions non-condensing)	Temperature 41° to 122° F (5° to 50° C)
		Relative Humidity 5% to 85%
		Maximum Wet Bulb Temperature (operating) 86° F (30° C)

Technical Specifications - Removable Storage

HP 16-in-1 Media Card Reader	USB Interface	USB 2.0 High-speed device	
	Dimensions	5.7 x 5.86 x 1.68 in (145 x 148.9 x 42.7 mm)	
	Weight	4 lbs (1.81 kg)	
	Advance protocol support	Supports hardware ECC (Error Correction Code) function	
		<ul style="list-style-type: none"><li>• Supports hardware CRC (Cyclic Redundancy Check) function</li><li>• Supports MS 4-bit parallel transfer mode</li><li>• Supports MS-PRO 4-bit parallel transfer mode</li><li>• Supports SD 4-bit parallel transfer mode</li><li>• Supports high-speed 50-MHz SD 4-bit card (version 1.1)</li><li>• Support high-speed 52-MHz MMC 8-bit card</li></ul>	
	Supported media type with card adapter	<ul style="list-style-type: none"><li>• MicroSD (T-Flash)</li><li>• Memory Stick Micro</li></ul>	
	Mechanical		
	Environmental	Operational	Test Parameters/Conditions – Power applied, unit operating on system ±5% nominal supply voltage. 10°C 10% R.H. = 24 hours 10°C 90% R.H. = 24 hours 20°C 90% R.H. = 24 hours 30°C 90% R.H. = 24 hours 40°C 90% R.H. = 24 hours 50°C 90% R.H. = 24 hours 50°C 10% R.H. = 24 hours
		Environmental Extremes	
		Storage Environmental Extremes	Test Parameters/Conditions 60°C @ 80% R.H. for 96 hours -30°C @ 20% R.H. for 48 hours No power applied Delta °C < 1.0°C/min Delta % R.H. < 1.5% R.H./min
	Approvals	USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.2 FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV-T	

## Technical Specifications - Environmental Data

### Eco-Label Certifications and declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- ENERGY STAR\*
- US Federal Energy Management Program (FEMP)
- Taiwan Green Mark
- China Energy Conservation Program
- ECO declaration
- EPEAT Gold Rated
- Korea Eco-label
- Japan PC Green label\*\*

\* Select configurations available for ENERGY STAR compliance.

\*\* This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'

### Ultra-slim Desktop with External 85% Efficient Power Adapter

#### System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Ultra-slim Desktop model is based on a model with an Intel Core 2 Duo E6850 Processor, 1-GB memory, and 80-GB HD.

Energy Consumption	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
Normal Operation On-Idle (ENERGY STAR Idle [S0])	38.7 W	39.8 W	36.8 W
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Enabled)	2.85 W	3.12 W	2.8 W
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Disabled)	2.83 W	3.13 W	2.85 W
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Enabled)	2.4 W	1.85 W	1.55 W
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Disabled)	0.98 W	1.15 W	0.94 W
Heat Dissipation*	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
Normal Operation On-Idle (ENERGY STAR Idle [S0])	132.044 BTU/hr	135.797 BTU/hr	125.561 BTU/hr
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Enabled)	9.724 BTU/hr	10.645 BTU/hr	9.553 BTU/hr
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Disabled)	9.655 BTU/hr	10.679 BTU/hr	9.724 BTU/hr

Technical Specifications - Environmental Data

ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Enabled)	8.188 BTU/hr	6.312 BTU/hr	5.288 BTU/hr
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Disabled)	3.343 BTU/hr	3.923 BTU/hr	3.207 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions

(in accordance with  
ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
System Fan Off		
Idle	3.9	29
Fixed Disk (random writes)	3.9	29

**Longevity and Upgrading** This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- Intel LGA775 processor socket
- 8 USB ports
- 1 internal drive slot
- 1 Slimline optical drive slot
- 2 memory slots

Spare parts are available throughout the warranty period and or for up to 5 years after the end of production.

Batteries

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000ppm by weight.

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with the IEEE 1680 (EPEAT) standard (see <http://www.epeat.net>)
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

### Technical Specifications - Environmental Data

- This product contains 0% recycled materials (by wt.)
- This product is 90% recyclable when properly disposed of at end of life.

<b>Packaging Materials</b>	Corrugated Paper	1116 g
	EPE Foam	145 g
	LDPE Bag	36 g

- The EPE foam packaging material is made from 30 to 40% industrial recycled content.
- The corrugated paper packaging materials contain at least 25% post consumer recycled content.

### Small Form Factor with 80% Efficient Power Supply

**System Configuration** The configuration used for the Energy Consumption and Declared Noise Emissions data for the Small Form Factor Desktop model is based on a model with an Intel Core 2 Duo E6850 Processor, 1 GB memory and 160-GB HD.

<b>Energy Consumption</b>	<b>AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz</b>	<b>AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz</b>	<b>AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz</b>
Normal Operation On-Idle (ENERGY STAR Idle (S0))	63.1 W	62 W	63.4 W
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Enabled)	2.36 W	2.55 W	2.34 W
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Disabled)	2.32 W	2.57 W	2.31 W
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Enabled)	1.58 W	1.75 W	1.56 W
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Disabled)	0.87 W	1.05 W	0.87 W
<b>Heat Dissipation*</b>	<b>AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz</b>	<b>AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz</b>	<b>AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz</b>
Normal Operation On-Idle (ENERGY STAR Idle (S0))	215.297 BTU/hr	211.544 BTU/hr	216.32 BTU/hr
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Enabled)	8.052 BTU/hr	8.7 BTU/hr	7.984 BTU/hr
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Disabled)	7.915 BTU/hr	8.768 BTU/hr	7.881 BTU/hr
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Enabled)	5.39 BTU/hr	5.971 BTU/hr	5.322 BTU/hr
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Disabled)	2.968 BTU/hr	3.582 BTU/hr	2.968 BTU/hr

## Technical Specifications - Environmental Data

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

### Declared Noise Emissions\*

(in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.8	29
Fixed Disk (random writes)	4.0	30

\*Not for systems containing 10,000 RPM hard drives.

**Longevity and Upgrading** This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- Intel LGA775 processor socket
- 8 USB ports
- 1 empty PCI slot
- 2 empty PCIe x1 slot
- 1 empty PCIe x16 slot
- 1 internal drive bay
- 1 SATA optical drive bay
- 1 3.5-inch external drive bay
- 4 memory slots
- 1 second Serial port (optional)

Spare parts are available throughout the warranty period and or for up to 5 years after the end of production.

### Batteries

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000ppm by weight.

Battery size: CR2032 (coin cell)

Battery type: Lithium

### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level (see: <http://www.epeat.net>)

### Technical Specifications - Environmental Data

- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 0% recycled materials (by wt.)
- This product is >91% recyclable when properly disposed of at end of life.

<b>Packaging Materials</b>	Corrugated Paper	1736 g
	EPE Foam	293 g
	LDPE Bag	36 g

- The EPE foam packaging material is made from 30 to 40% industrial recycled content.
- The corrugated paper packaging materials contains at least 25% post consumer recycled content.

### Convertible Minitower with 80% Efficient Power Supply

<b>System Configuration</b>	The configuration used for the Energy Consumption and Declared Noise Emissions data for the CMT Desktop model is based on a model with an Intel Core 2 Duo E6850 Processor, 1 GB memory and 160-GB HD.		
<b>Energy Consumption</b>	<b>AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz</b>	<b>AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz</b>	<b>AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz</b>
Normal Operation On-Idle (ENERGY STAR Idle (S0))	62.762 W	61.212 W	62.27 W
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Enabled)	3.08 W	3.444 W	3.07 W
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Disabled)	3.09 W	3.42 W	3.05 W
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Enabled)	1.53 W	1.79 W	1.46 W
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Disabled)	0.79 W	1.08 W	0.77 W
<b>Heat Dissipation*</b>	<b>AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz</b>	<b>AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz</b>	<b>AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz</b>
Normal Operation On-Idle (ENERGY STAR Idle (S0))	214.143 BTU/hr	208.855 BTU/hr	212.465 BTU/hr
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Enabled)	10.508 BTU/hr	11.75 BTU/hr	10.474 BTU/hr
ENERGY STAR "Sleep" (S3) (Wake On LAN (WOL) Disabled)	10.543 BTU/hr	11.669 BTU/hr	10.406 BTU/hr
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Enabled)	5.22 BTU/hr	6.107 BTU/hr	4.981 BTU/hr
ENERGY STAR "Standby" (Off) (S5) (Wake On LAN (WOL) Disabled)	2.695 BTU/hr	3.684 BTU/hr	2.627 BTU/hr

Technical Specifications - Environmental Data

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions\*

(in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
System Fan Off		
Idle	3.8	22
Fixed Disk (random writes)	3.8	22

\*Not for systems containing 10,000 RPM hard drives.

**Longevity and Upgrading** This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- Intel LGA775 processor socket
- 8 USB ports
- 3 empty full-height PCI slots
- 2 empty full-height PCIe x1 slot
- 1 empty full-height PCIe x16 slot
- 2 internal 3.5-inch drive bays
- 3 external 5.25-inch SATA drive bays
- 1 external 3.5-inch drive bay
- 4 memory slots
- 1 second Serial port (optional)

Spare parts are available throughout the warranty period and or for up to 5 years after the end of production.

**Batteries** This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000ppm by weight.

Battery size: CR2032 (coin cell)

Battery type: Lithium

**Additional Information**

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level (see: <http://www.epeat.net>)



Technical Specifications - Environmental Data

- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
  - This product contains 0% recycled materials (by wt.)
  - This product is >91% recyclable when properly disposed of at end of life.
- |                     |                  |        |
|---------------------|------------------|--------|
| Packaging Materials | Corrugated Paper | 1687 g |
|                     | EPE Foam         | 308 g  |
|                     | LDPE Bag         | 63 g   |
- The EPE foam packaging material is made from 30 to 40% industrial recycled content.
  - The corrugated paper packaging materials contains at least 25% post consumer recycled content.

Ultra-slim Desktop, Small Form Factor, Convertible Minitower

**RoHS Compliance** Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. From July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

**Material Usage** This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at: [http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

**Packaging** HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.

### Technical Specifications - Environmental Data

- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

[link to new HP white paper now in progress]

Global Citizenship Report:

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications:

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

---

© Copyright 2008 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Intel and Pentium are U.S. registered trademarks of Intel Corporation. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.