


Installation manual
VIP MINI

VIP Mini



230V/50HZ

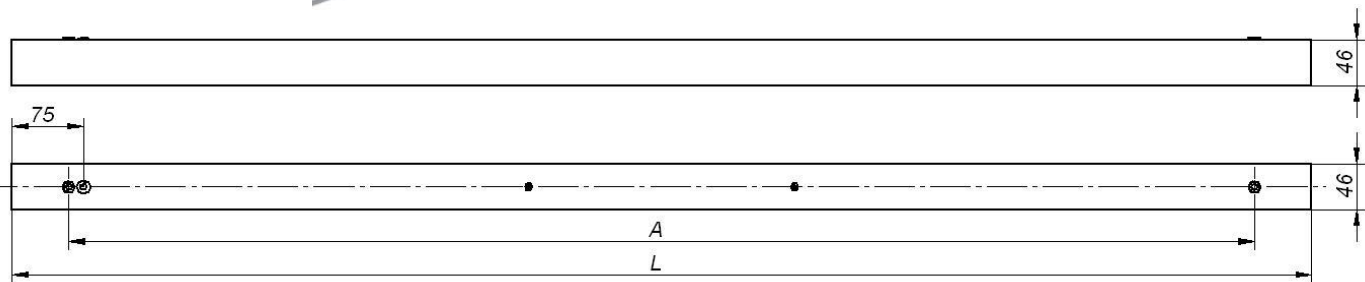

Moc [W]	L [mm]	A [mm]	Waga [kg]
1x21/39 (T5)	1020	910	1,1
1x28/54 (T5)	1320	1210	1,6
1x35/49 (T5)	1620	1510	2,0

- a) turn off the power in the circuit where the fixture will be installed;
- b) pull the diffuser and flaps out of fixture;
- c) put the connector in the fixture (in case of installation of the lighting line);
- d) screw the line regulators in the set with electric suspension to the fixture (in case of suspended versions);
- e) pull the feeding cable through the hole in the base of a fixture;
- f) connect the feeding wires as shown on the cube;
- g) if the fixture is adjustable and has an emergency module connect it's wire to separate, dedicated cube;
- h) installation on the wall/on the ceiling:
 - installation on the ceiling:
 - connect the upper part of ceiling assembly to ceiling, screw the down part of ceiling assembly to fixture into bush control with a M8 screws;
 - put the lower part of the assembly into upper part of the assembly and screw them with a two M4 screws;



installation on the wall:

- screw wall fixing to the wall with wall plugs,
- screw wall fixing to fixture in bush controls with a M8 screw;

suspended installation:

- screw universal suspension on to the ceiling;
- screw the electric suspension on to the ceiling;
- pull the lines through the line regulators and adjust.

i) installation of the lamps

- slip the fluorescent lamps of proper power into the holders;
- rotate the lamp by 90 degrees holding it in the middle;
- put the diffuser and flaps in.

Important warnings:

The manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.

Luminaries may be installed by qualified personnel only.

Any manipulation inside the luminaire when power supply is on causes the risk of electric shock.

Manufacturer is not responsible for any flaws caused by avoid using this manual.

Manufacturer reserves a right to change the construction of the product.

Do not assembly in places without air circulation.

To guarantee safety of luminaire functions, please assembly according to instruction.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remind obligations towards separate collection. For correct disposal, please use authorized waste disposal facilities or return to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting to the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

