

RANGE COMPOSITION

N 900: a range of over 150 models for the professional caterer designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected in the total modularity of the range that ensures innumerable configurations, either free-standing, bridged or cantilever. N900 demonstrates how advanced technology can satisfy the needs of the professional caterer. The models detailed on this sheet are 18 litres electric fryers with internal heating elements.



Model 200344

N 900

ELECTRIC FRYERS - 18 LT ZANUSSI PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Incoloy armoured elements easily tilted up for cleaning of the well.
- ◆ Worktop in 20/10 stainless steel. Front and side panels in stainless steel with Scotch Brite finish.
- ◆ Working temperature from 105°C

to 185°C.

- ◆ All models have right-angled side edges to allow flush-fitting joints between units, eliminating gaps and possible dirt traps.
- ◆ Additional overheat safety thermostat.
- ◆ Oil drainage via a tap into a drainage container positioned under the well thus simplifying the

consumed oil management and guaranteeing the operator safety.

- ◆ The units are supplied, as standard, with 2 half baskets for each well (50 mm adjustables in height).
- ◆ Feet in stainless steel 50 mm adjustables in height.


TECHNICAL DATA				
CHARACTERISTICS	MODELS			
	NFRE410 200344	NFRE810 200345	NFRE4102 200346	NFRE8102 200347
Power supply	Electric	Electric	Electric	Electric
External dimensions - inch				
width	15 3/4"	31 1/2"	15 3/4"	31 1/2"
External dimensions - mm				
depth	900	900	900	900
height	850	850	850	850
height adjustment	50	50	50	50
N° of wells	1	2	1	2
Usable well dimensions - mm				
width	340	340	340	340
depth	400	400	400	400
height	290	290	290	290
Maximum Well Capacity -lt	18, 20	18, 20	18, 20	18, 20
Power - kW				
installed-electric	16.5	33	16.5	33
Net weight - kg.	57	115	57	115
Supply voltage	400 V, 3N, 50/60	400 V, 3N, 50/60	230 V, 3, 50/60	230 V, 3, 50/60
INCLUDED ACCESSORIES				
2 HALF SIZE BASKETS FOR HD FRYERS	1	2	1	2
LEFT SIDE DOOR FOR OPEN BASE CUPBOARD		1		1
RIGHT SIDE DOOR FOR OPEN BASE CUPBOARD	1	1	1	1

- ◆ The special design of the control knob system guarantees against water infiltration.
- ◆ All models can be installed on cantilever system.
- ◆ Door with handles in stainless steel.
- ◆ Main connections can be via the base of the unit.
- ◆ All models provided with service duct to facilitate installation.

OPTIONAL ACCESSORIES				
ACCESSORIES	MODELS			
	NFRE410 200344	NFRE810 200345	NFRE4102 200346	NFRE8102 200347
1 FULL SIZE BASKET FOR HD 900 FRYERS	927226	927226	927226	927226
2 HALF SIZE BASKETS FOR HD FRYERS	927223	927223	927223	927223
2 PANELS FOR SERVICE DUCT (BACK TO BACK)	206202	206202	206202	206202
2 PANELS FOR SERVICE DUCT (SINGLE INST.)	206181	206181	206181	206181
2 SIDE COVERING PANELS FOR TOP-D=900MM	206278	206278	206278	206278
2 SIDE COVERING PANELS H=700 D=900	206134	206134	206134	206134
2 SIDE KICKING STRIPS	206180	206180	206180	206180
2 SIDE KICKING STRIPS F.CONCRETE INSTAL.	206157	206157	206157	206157
4 FEET FOR CONCRETE INSTALLATION	206210	206210	206210	206210
4 WHEELS (2 WITH BRAKE)		206188		206188
CHIMNEY UPSTAND 400MM	206303		206303	
CHIMNEY UPSTAND 800MM		206304		206304
EXTENSION FOR OIL DRAINAGE	206209	206209	206209	206209
FRONT.KICK.STRIP F.CONCRETE INST.1000 MM	206150	206150	206150	206150
FRONT.KICK.STRIP F.CONCRETE INST.1200 MM	206151	206151	206151	206151
FRONT.KICK.STRIP F.CONCRETE INST.1600 MM	206152	206152	206152	206152
FRONT.KICK.STRIP F.CONCRETE INST.200 MM	206146	206146	206146	206146
FRONT.KICK.STRIP F.CONCRETE INST.400 MM	206147	206147	206147	206147
FRONT.KICK.STRIP F.CONCRETE INST.800 MM	206148	206148	206148	206148
FRONTAL HANDRAIL 1200 MM	206191	206191	206191	206191
FRONTAL HANDRAIL 1600 MM	206192	206192	206192	206192
FRONTAL HANDRAIL 400 MM	206166	206166	206166	206166
FRONTAL HANDRAIL 800 MM	206167	206167	206167	206167
FRONTAL KICKING STRIP 1000 MM	206177	206177	206177	206177
FRONTAL KICKING STRIP 1200 MM	206178	206178	206178	206178
FRONTAL KICKING STRIP 1600 MM	206179	206179	206179	206179
FRONTAL KICKING STRIP 200 MM	206174	206174	206174	206174
FRONTAL KICKING STRIP 400 MM	206175	206175	206175	206175
FRONTAL KICKING STRIP 800 MM	206176	206176	206176	206176
JUNCTION SEALING KIT	206086	206086	206086	206086
LARGE HANDRAIL(PORIONING SHELF)400 MM	206185	206185	206185	206185
LARGE HANDRAIL(PORIONING SHELF)800 MM	206186	206186	206186	206186
LEFT SIDE DOOR FOR OPEN BASE CUPBOARD	206195	206195	206195	206195
OIL FILTER FOR FRYERS	206143	206143	206143	206143
PAIR OF COVERING STRIPS FOR END ELEMENTS	206234	206234	206234	206234
RIGHT SIDE DOOR FOR OPEN BASE CUPBOARD	206194	206194	206194	206194
SIDE HANDRAIL-RIGHT/LEFT HAND	206165	206165	206165	206165
SUPPORT FOR "BRIDGE" SYSTEM 1000 MM	206138	206138	206138	206138
SUPPORT FOR "BRIDGE" SYSTEM 1200 MM	206139	206139	206139	206139
SUPPORT FOR "BRIDGE" SYSTEM 1400 MM	206140	206140	206140	206140
SUPPORT FOR "BRIDGE" SYSTEM 1600 MM	206141	206141	206141	206141
SUPPORT FOR "BRIDGE" SYSTEM 400 MM	206154	206154	206154	206154
SUPPORT FOR "BRIDGE" SYSTEM 800 MM	206137	206137	206137	206137
UNCLOGGING ROD F.23LT FRYER DRAIN.PIPE	927227	927227	927227	927227



www.zanussiprofessional.com

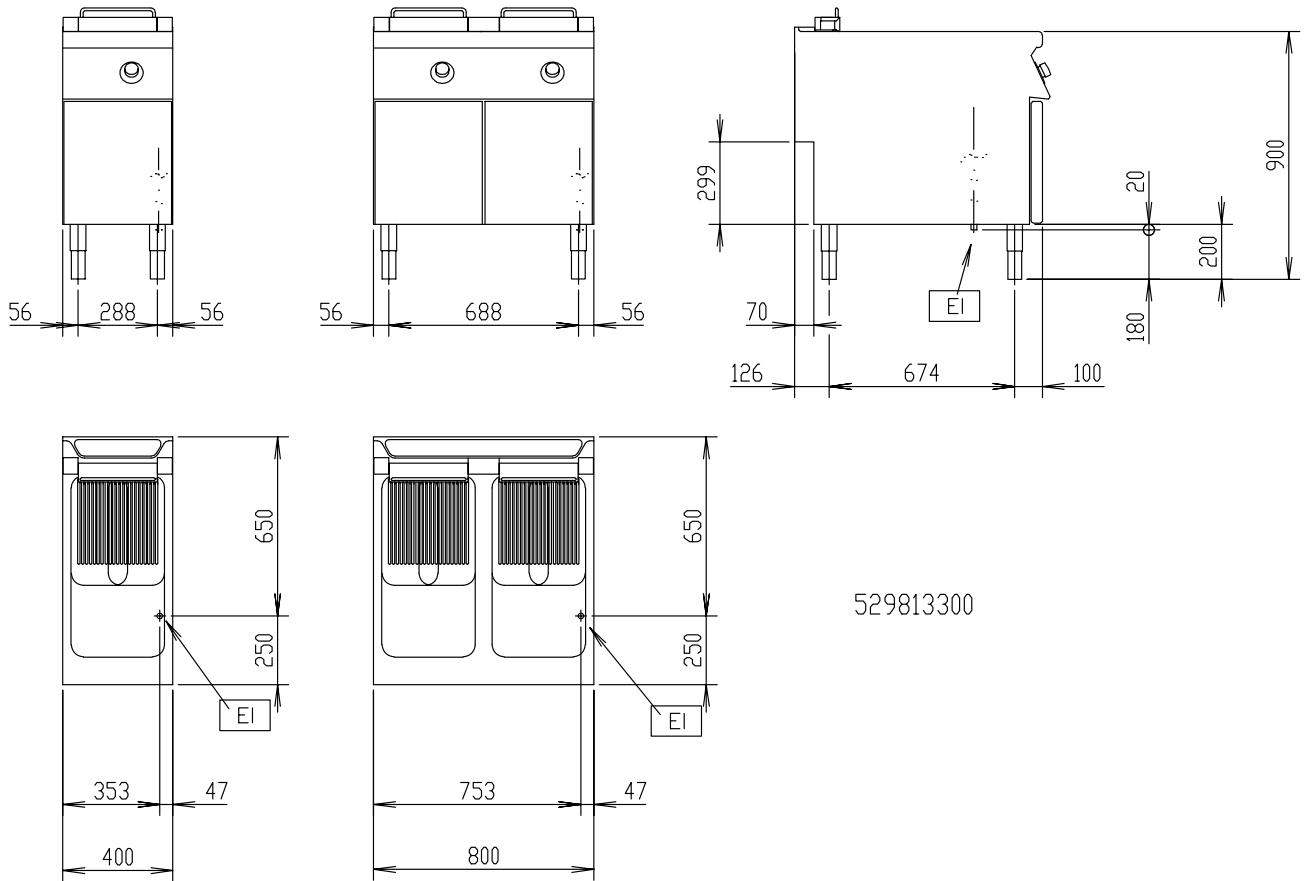

LEGEND

	NFRE410 200344	NFRE810 200345	NFRE4102 200346	NFRE8102 200347
EI - Electrical connection	400 V, 3N, 50/60	400 V, 3N, 50/60	230 V, 3, 50/60	230 V, 3, 50/60



www.zanussiprofessional.com