
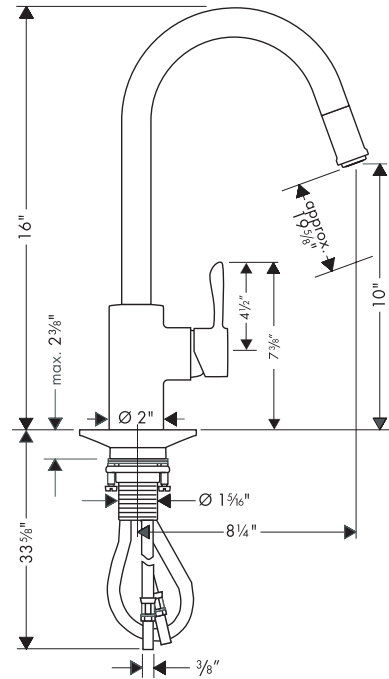


Solaris HighArc 1 Spray Pull-Out 06675XX0

Available in Chrome (00), Steel Optik (86)

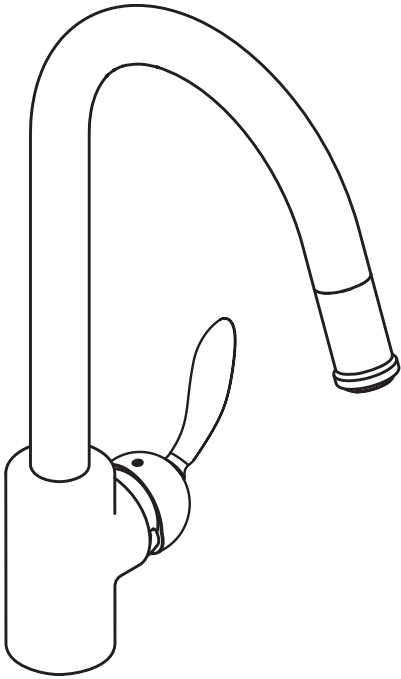

Product Specification

ADA compliant
Solid brass body
Spout swivels 360°
Ceramic cartridge operation
Flow rate 2.2 gpm
Pull-out spray
Protection against back siphonage provided by check valve in sprayhead
Hole size in mounting surface 1 3/8"
Max. mounting surface thickness 2 3/8"
3/8" supply hoses – requires stops with 3/8" compression fittings (not included)

hansgrohe