




SteamPro™ 120 Plumbing Kit (Optional) Installation Instructions

IMPORTANT: Read all instructions before beginning installation.

H121000 Plumbing Kit contains:

- 12 feet of silicone tubing
- 11-1/2 feet of corrugated hose
- 2 hose clamps

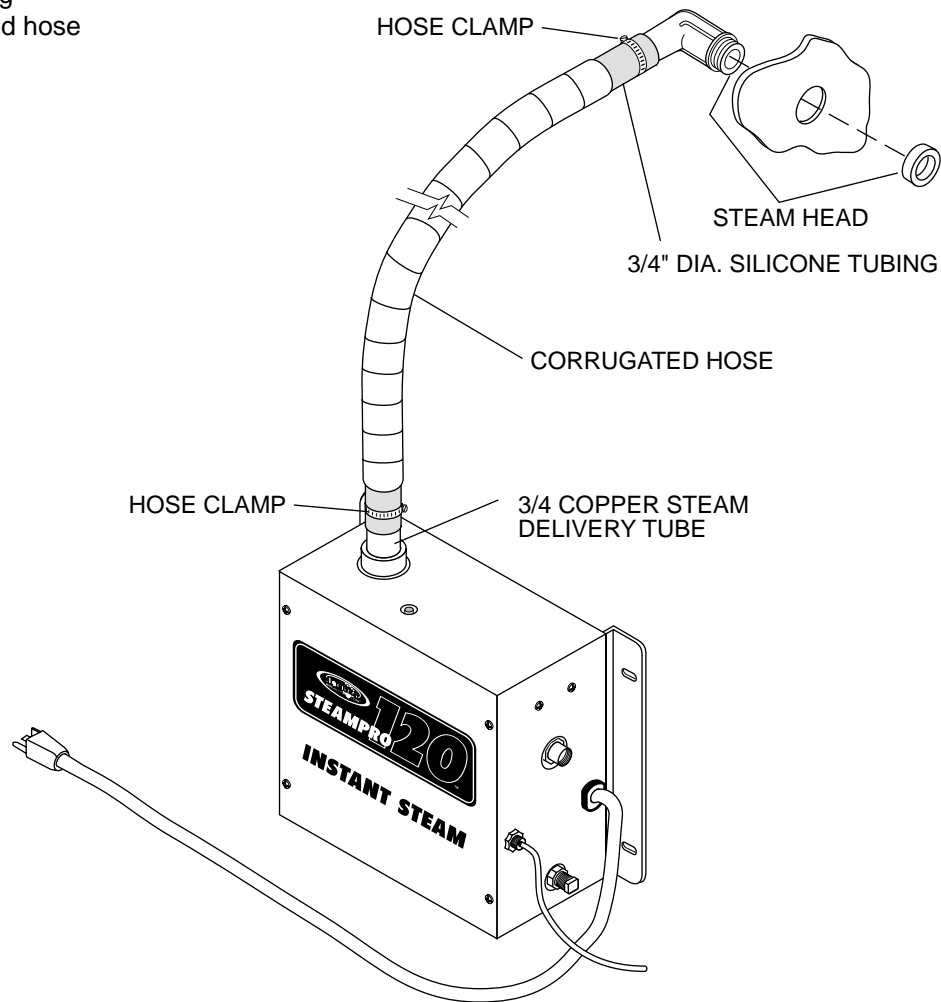

Installation of optional plumbing kit (see above figure and SteamPro 120 Installation and Operating manual):

1. Use a cord to pull the silicone tubing through the corrugated hose.
2. Wet the ends of the silicone tubing with a water/soap solution so that it will easily slip onto the steam delivery tube and the steam head.
3. Secure the hose clamps on the ends of the silicone tubing.

When steam delivery plumbing is not accessible, codes may require the use of only copper and brass pipe and fittings (1/2 inch minimum).

Caution: Do not install any valves or create restrictions in the steam line. Do not construct any dips or valleys in the steam line as condensation will accumulate in these and block the tubing with water. Pitch the steam line such that condensation will run to the steam generator (preferable) or to the steam head.

