


### Features

- Cast iron with Safeguard® finish
- 1.5 hp variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 8 Flexjets™
- Less all trim
- 66" (167.6 cm) x 36" (91.4 cm) x 24" (61 cm)

### 5.5' BATH WHIRLPOOL K-856-H2 ALSO K-856-LH, K-856-RH

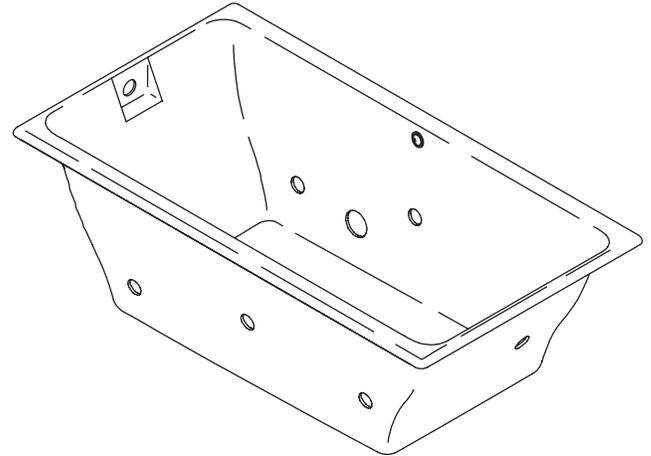

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- IAPMO/UPC
- Underwriter's Laboratories (UL)
- ASME A112.19.1M
- ASME A112.19.7M

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

### Specified Model

Model	Description	Colors/Finishes	
K-856-H2	Bath whirlpool, drop-in rim style	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-856-LH	Bath whirlpool with integral flange, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-856-RH	Bath whirlpool with integral flange, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

#### Required Accessories

K-9698	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7147-AF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

#### Recommended Accessory

K-587	Undermount installation kit (template and installation instructions)	<input type="checkbox"/> NA
-------	--	-----------------------------

### Product Specification

The bath whirlpool shall be 66" (167.6 cm) in length, 36" (91.4 cm) in width, and 24" (61 cm) in height. Bath whirlpool shall be made of cast iron with Safeguard finish. Bath whirlpool shall have 8 Flexjets, 1.5 hp variable speed pump, 1.5 kW heater, and back-lit user control. Bath whirlpool shall be less all trim. Bath whirlpool shall be Kohler Model K-856-\_\_\_\_\_-\_\_\_\_\_.

# TEA-FOR-TWO™

## Technical Information

Fixture*:	Basin area	Top area	Weight
Bathing well	45" (114.3 cm) x 25" (63.5 cm)	58" (147.3 cm) x 29" (73.7 cm)	510 lbs (231.3 kg)
Water depth		Capacity	
19-1/2" (27.3 cm)		105 gal (397.5 L)	
* Approximate measurements for comparison only.			

Pump	Heater	V	A*
1.5 hp	1.5 kW	240	11
* Approximate measurements for comparison only.			

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):

Pump/control 208-240 V, 20 A, 50/60 Hz

## Installation Notes

Install this product according to the installation guide.

Floor support under the whirlpool must provide for a minimum of 2000 lbs (907.2 kg) loading.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

A pump/control access panel is required.


For a drop-in installation, the cut-out dimension is 64-1/2" (163.8 cm) x 34-1/2" (87.6 cm).

For an undermount installation, the K-587 template is required.

The hot water supply should be 70% of capacity or greater. Installations will vary.

**K-856-H2**

No change in measurements if connected with drain illustrated. (K-7147-AF or K-7147M-AF)

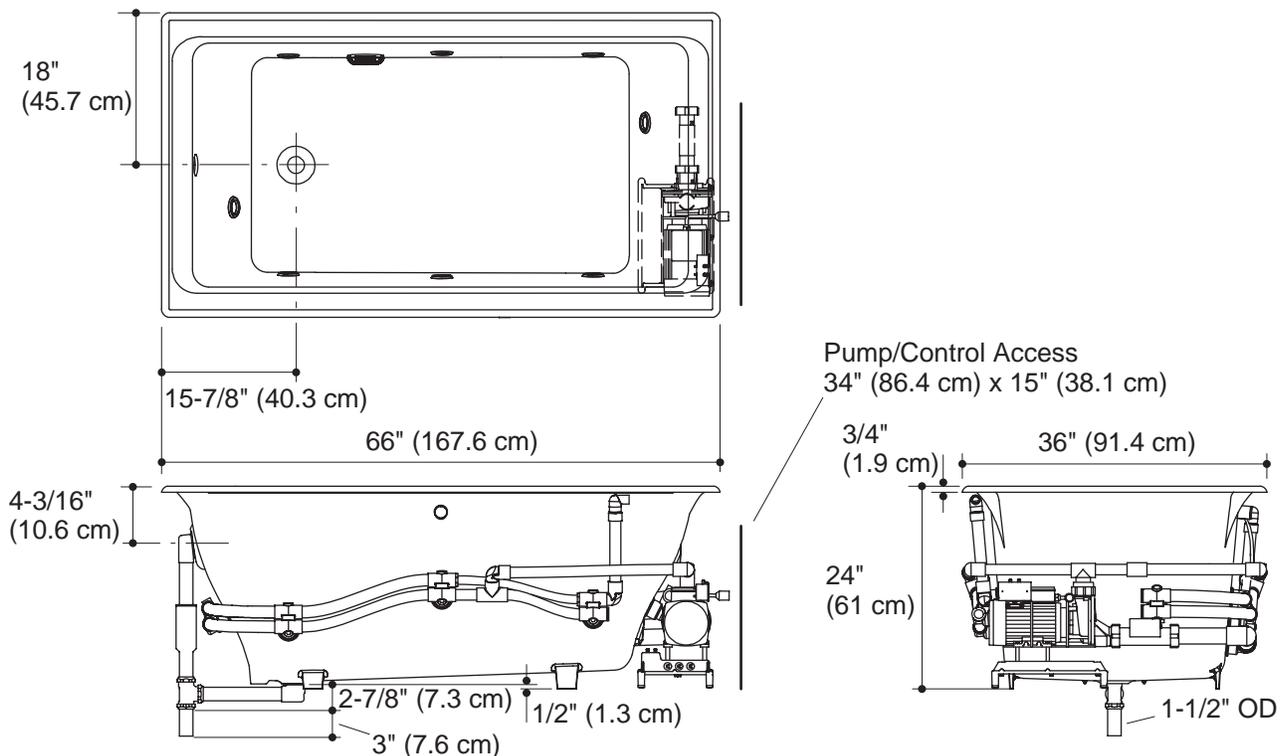

**Product Diagram**