

Touch Screen Smart Terminal QT-6600

User's Manual

Introduction

Table of Contents

Introducing QT-6600

Display/Keyboard

Basic Operations & Setups

Registrations

Programs

Advanced Operations

Useful Features

Reports

Troubleshooting

Error Code Table

Index



Eu

Di

U.K.

CI

Canada

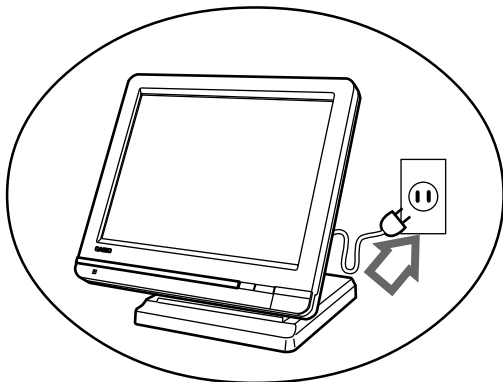
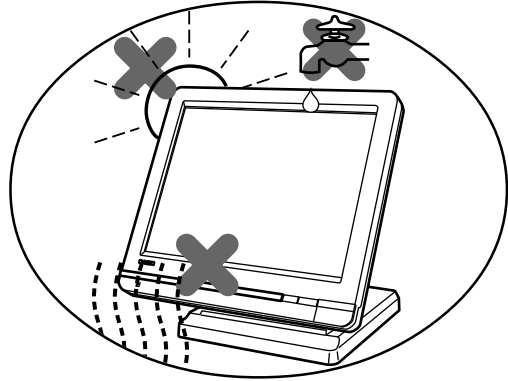
CASIO®

Introduction & Contents

Important!



Your new terminal has been carefully tested before shipment to ensure proper operation. Safety devices eliminate worries about breakdowns resulting from operator errors or improper handling. In order to ensure years of trouble-free operation, however, the following points should be noted when handling the terminal.

Do not locate the terminal where it will be subjected to direct sunlight, high humidity, splashing with water or other liquids, or high temperature (such as near a heater).




Be sure to check the sticker on the side of the terminal to make sure that its voltage matches that of the power supply in the area.

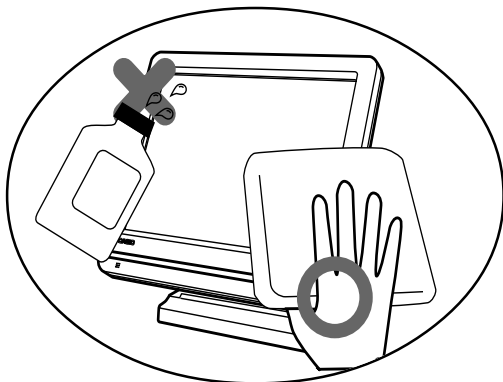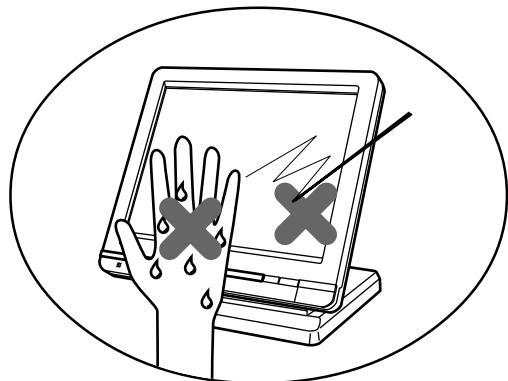*Never operate the terminal while your hands are wet.
Never apply strong pressure to the screen or subject it to strong impact.*



Use a soft, dry cloth to clean the exterior of the terminal. Never use benzene, thinner, or any other volatile agent.

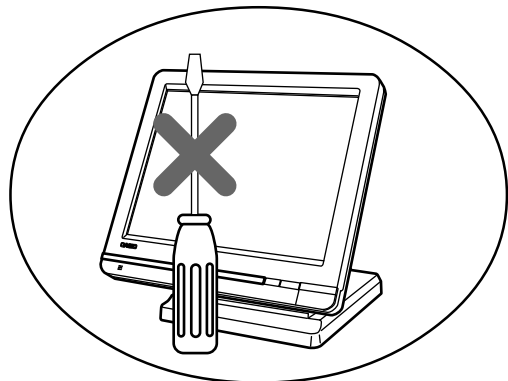
Never try to open the terminal or attempt your own repairs. Take the terminal to your authorized CASIO dealer for repairs.



Introduction

Congratulations on your selection of a CASIO QT-6600 touch screen smart terminal. This terminal is the product of the world's most advanced electronic technology, for outstanding versatility and reliability. Simplified operation is made possible by a specially designed touch screen and a wide selection of automated, programmable functions.

A specially designed keyboard layout and a bright, easy-to-read color display help to take the fatigue out of long hours operation.


 Manufacturer:
 CASIO COMPUTER CO., LTD.
 6-2, Hon-machi 1-chome, Shibuya-ku, Tokyo 151-8543, Japan
 Representative within the European Union:
 CASIO EUROPE GmbH
 Bornbarch 10, 22848 Norderstedt Germany

Warning: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Please keep all information for future reference.

GUIDELINES LAID DOWN BY FCC RULES FOR USE OF THE UNIT IN THE U.S.A. (Not applicable to other areas)



WARNING: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Laite on liitettävä suojamaadoituskostkettimilla
 vaurstettuun pistorasiaan
 Apparatet må tilkoples jordet stikkontakt
 Apparaten skall anslutas till jordat nätuttag.

This mark applies in EU countries only.




 Batterij niet
 weggooien, maar
 inleveren als KCA.
 

This product Contains Mercury and must be recycled or Deposited of Properly.
 Este producto contiene mercurio y debe ser reciclado o eliminado apropiadamente.

The main plug on this equipment must be used to disconnect mains power. Please ensure that the socket outlet is installed near the equipment and shall be easily accessible.

In the operation examples contained in this manual, the print and display samples are not actual size. Also, all samples are just images.

Safety Precautions

- To use this product safely and correctly, read this manual thoroughly and operate as instructed.
After reading this guide, keep it close at hand for easy reference.
Please keep all informations for future reference.
- Always observe the warnings and cautions indicated on the product.

About the icons

In this guide various icons are used to highlight safe operation of this product and to prevent injury to the operator and other personnel and also to prevent damage to property and this product. The icons and definitions are given below.



Indicates that there is a risk of severe injury or death if used incorrectly.



Indicates that injury or damage may result if used incorrectly.

Icon examples

To bring attention to risks and possible damage, the following types of icons are used.



The Δ symbol indicates that it includes some symbol for attracting attention (including warning). In this triangle the actual type of precautions to be taken (electric shock, in this case) is indicated.



The \otimes symbol indicates a prohibited action. In this symbol the actual type of prohibited actions (disassembly, in this case) will be indicated.



The \bullet symbol indicates a restriction. In this symbol the type of actual restriction (removal of the power plug from an outlet, in this case) is indicated.

Warning!

Handling the terminal



Should the terminal malfunction, start to emit smoke or a strange odor, or otherwise behave abnormally, immediately shut down the power and unplug the AC plug from the power outlet. Continued use creates the danger of fire and electric shock.

- Contact CASIO service representative.



Do not place containers of liquids near the terminal and do not allow any foreign matter to get into it. Should water or other foreign matter get into the terminal, immediately shut down the power and unplug the AC plug from the power outlet. Continued use creates the danger of shorting, fire and electric shock.

- Contact CASIO service representative.



Should you drop the terminal and damage it, immediately shut down the power and unplug the AC plug from the power outlet. Continued use creates the danger of shorting, fire and electric shock.

- Attempting to repair the terminal yourself is extremely dangerous. Contact CASIO service representative.
-

Warning!



Never try to take the terminal apart or modify it in any way. High-voltage components inside the terminal create the danger of fire and electric shock.

- Contact CASIO service representative for all repair and maintenance.
-

AC adaptor, Power plug and AC outlet



Use only a proper AC electric outlet (100V~240V) . Use of an outlet with a different voltage from the rating creates the danger of malfunction, fire, and electric shock. Overloading an electric outlet creates the danger of overheating and fire.

Please use the adaptor in the carton box for this terminal. Use another adaptor may cause fire, electrical shock, or malfunction.



Make sure the power plug is inserted as far as it will go. Loose plugs create the danger of electric shock, overheating, and fire.

- Do not use the terminal if the plug is damaged. Never connect to a power outlet that is loose.
-



Use a dry cloth to periodically wipe off any dust built up on the prongs of the plug. Humidity can cause poor insulation and create the danger of electric shock and fire if dust stays on the prongs.



Do not allow the power cord or plug to become damaged, and never try to modify them in any way. Continued use of a damaged power cord can cause deterioration of the insulation, exposure of internal wiring, and shorting, which creates the danger of electric shock and fire.

- Contact CASIO service representative whenever the power cord or plug requires repair or maintenance.
-

Caution!



Do not place the terminal on an unstable or uneven surface. Doing so can cause the terminal — especially when the drawer is open — to fall, creating the danger of malfunction, fire, and electric shock.



Do not place the terminal in the following areas.

- Areas where the terminal will be subject to large amounts of humidity or dust, or directly exposed to hot or cold air.
- Areas exposed to direct sunlight, in a close motor vehicle, or any other area subject to very high temperatures.

The above conditions can cause malfunction, which creates the danger of fire.



Do not overlay bend the power cord, do not allow it to be caught between desks or other furniture, and never place heavy objects on top of the power cord. Doing so can cause shorting or breaking of the power cord, creating the danger of fire and electric shock.



Be sure to grasp the plug when unplugging the power cord from the wall outlet. Pulling on the cord can damage it, break the wiring, or cause short, creating the danger of fire and electric shock.



Never touch the plug while your hands are wet. Doing so creates the danger of electric shock. Pulling on the cord can damage it, break the wiring, or cause short, creating the danger of fire and electric shock.

Never touch the printer head and the platen.

Introduction & Contents	6
Introducing QT-6600	10
General guide	10
Touch screen panel	13
Main display part	14
Keyboard part	16
Keyboard part with pop-up window	18
List pop-up window	18
Check number pop-up window	18
Allocatable functions	19
Keys in check No. pop-up window	21
Basic Operations and Setups	22
How to use the terminal	22
Clerk sign on/off and mode change	23
Assigning a clerk	23
Clerk key	23
Clerk number key	23
i-Button key	23
Mode change	24
Mode pop-up window	24
Displaying the time and date	25
To display and clear the date/time	25
Adjusting the time and date	25
To adjust the time	25
To adjust the date	25
Preparing and using flat-PLU keys	26
Registering flat-PLU keys	26
Programming to flat-PLU	27
Flat-PLU unit price programming procedure	27
Registering flat-PLU keys by programming data	28
Preset price	28
Preset tax status	28
Preparing and using discounts/reductions	29
Programming discount rate and reduction amount	29
Registering discounts	30
Discount for items and subtotals	30
Registering reductions	31
Reduction for items	31
Reduction for subtotal	31
Registering returned goods in the REG mode	32
Registering returned goods in the REF mode	33
Normal refund transaction	33
Reduction of amounts paid on refund	33
Registering money received on account	34
Registering money paid out	34

Making corrections in a registration	35
To correct an item you input but not yet registered	35
To correct an item you input and registered	36
To correct the item you registered previously in this receipt	37
To cancel all items in a transaction	37
No sale registration	37
Printing the daily sales reset report	38
Procedure	38
Printout (by optional remote printer)	39
Advanced Operations	40
Post-finalization receipt	40
Inputting the number of customers	41
Clerk interrupt function	42
Printing slip	43
Printing slips	43
To perform auto batch printing 1	43
To perform auto batch printing 2	44
About the maximum number of slip lines	44
Check tracking systems	44
Check tracking system	44
Opening a check	45
Adding to a check	45
Issuing a guest receipt	46
Closing a check memory	46
New/old check key operation	47
Add check	48
Separate check	49
Clerk transfer	50
Table transfer	50
Condiment/preparation PLUs	51
Text recall	51
Deposit registrations	52
Deposit from customer	52
Deposit from customer during sales transaction	52
List-# registrations	52
Set menu	53
Tips	53
Single item cash sales	54
Addition	55
Addition (plus)	55
Premium (%+)	55
Coupon transactions	56
Coupon registration using <COUPON> (coupon key)	56
Coupon registration using <CPN2> (coupon 2 key)	56
Registering the second unit price	57
Currency exchange function	58

Introduction & Contents


Registering foreign currency	58
Full amount tender in a foreign currency	58
Partial tender in a foreign currency	59
Temporarily releasing compulsion	60
VAT breakdown printing	61
Registering loan amounts	62
Registering pick up amounts	62
Changing media in drawer	62
Stock check	63
Actual stock quantity inquiry	63
Scanning PLU	64
Item registration	64
Mix and match discount registration	64
Price change registration	65
Not found PLU registration	65
Unit price inquiry	66
Programming descriptors and messages	67
Programming item descriptor (flat-PLU) procedure	67
Programming function key character procedure	68
Programming receipt/slip message procedure	69
Entering characters	70
Entering characters	70
Editing characters	72
Correcting a character just entered	72
Correcting and adding/deleting an item descriptor already set	72
Printing read/reset reports	73
The tree of X/Z menu window	73
To print the individual key (department, subdepartment, PLU/flat-PLU, function) read report	74
Procedure	74
Report (by optional remote printer)	74
Financial read report (by optional remote printer)	75
Individual clerk read/reset report (by optional remote printer)	75
Daily sales read/reset report (by optional remote printer)	75
Periodic 1/2 sales read/reset reports (by optional remote printer)	75
PLU read/reset report (by optional remote printer)	76
Hourly sales read/reset report (by optional remote printer)	76
Monthly sales read/reset report (by optional remote printer)	76
Reading the terminal's program	77
The tree of P6 (program read) menu window	77
Procedure	78
Report example (It is necessary to connect optional remote printer to print out these reports.)	78
Unit price and quantity	78
Item descriptor	79
Character and Message	80
Clerk	80
Key feature	80

Troubleshooting	82
When an error occurs	82
When the terminal does not operate at all	85
In case of power failure	86
Options	86
Specifications	87
Index	88


Introducing QT-6600

General guide

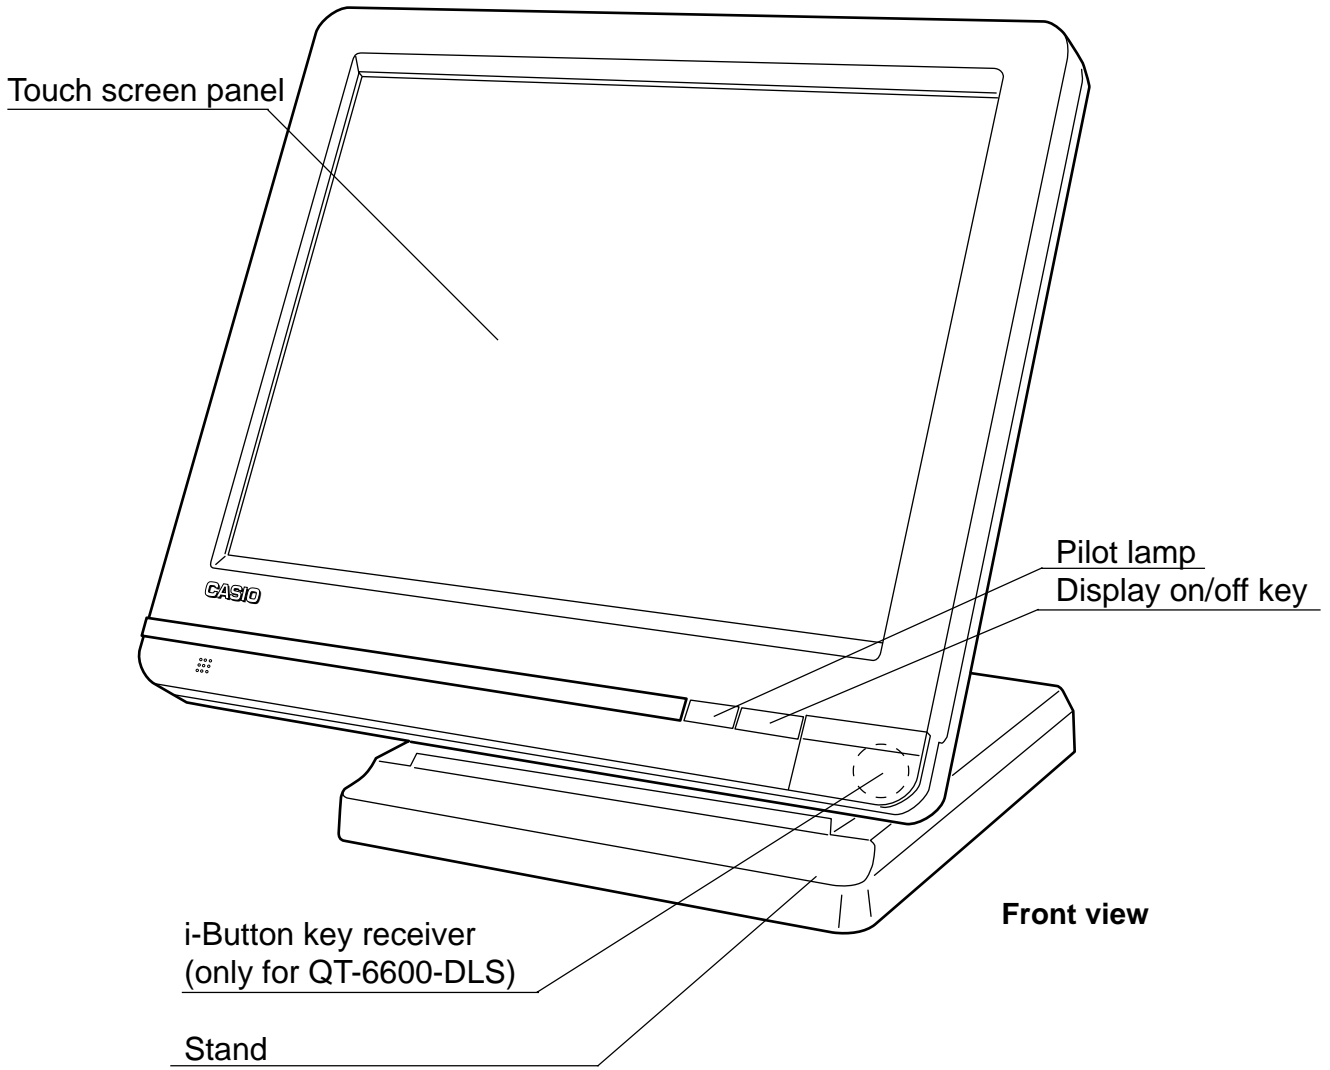This part of the manual introduces you to the terminal and provides a general explanation of its various parts.




Accessories




Dust cover



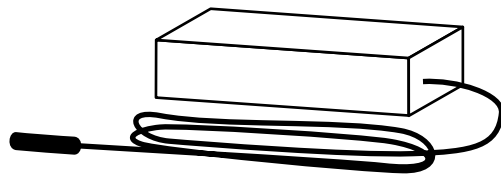Drawer positioning screws




AC adaptor

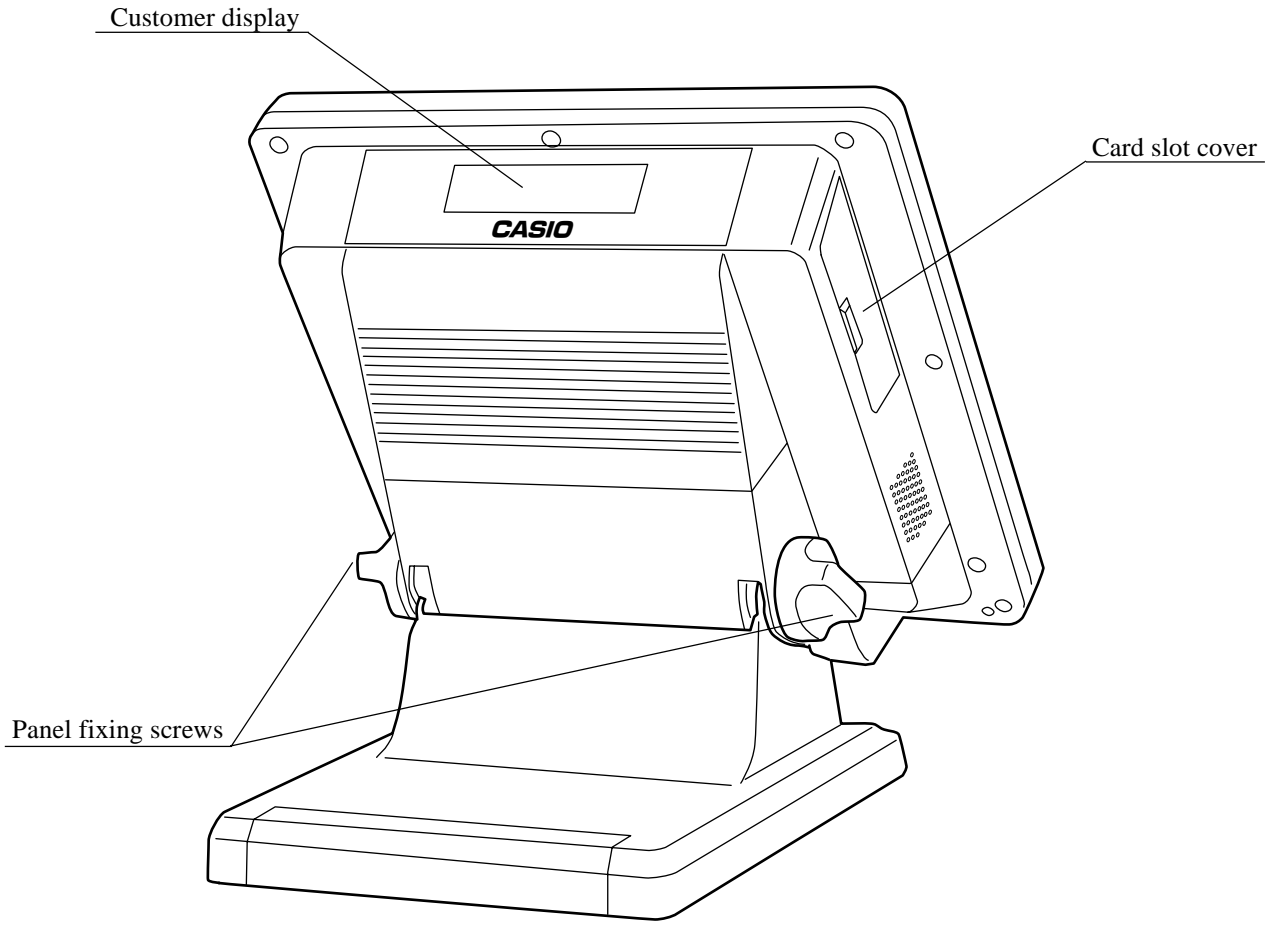

Rear view

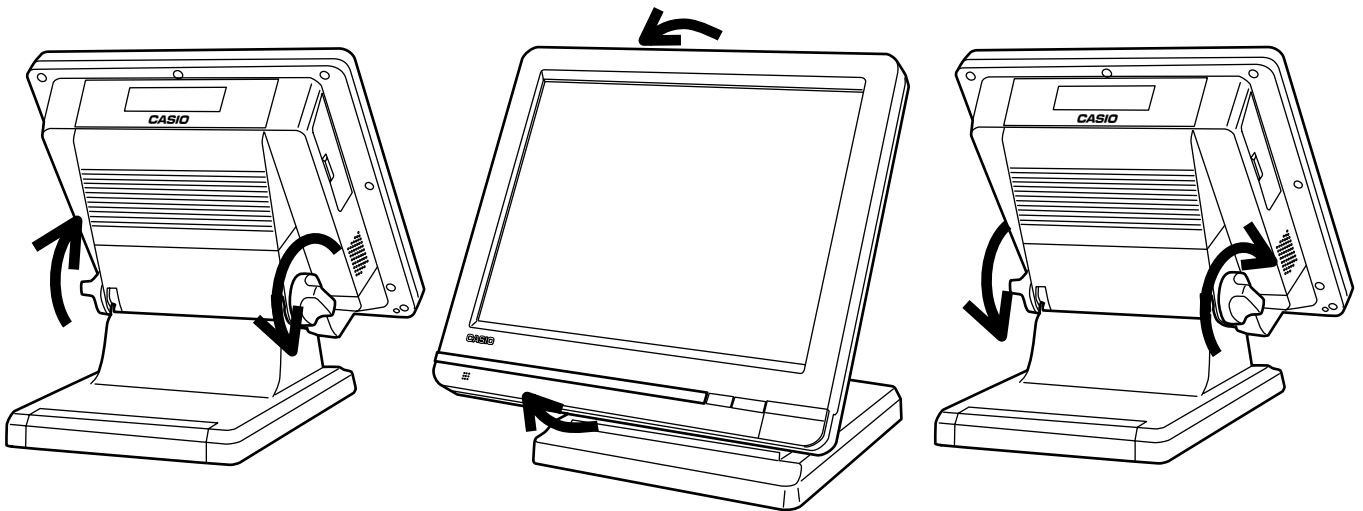Tilt the touch screen panel



1. Loosen the panel fixing screws.
(Turn the screw more than one round.)
2. Tilt the touch screen panel.
3. Tighten the panel fixing screws.

Important!

Do not tilt without loosening the screws.

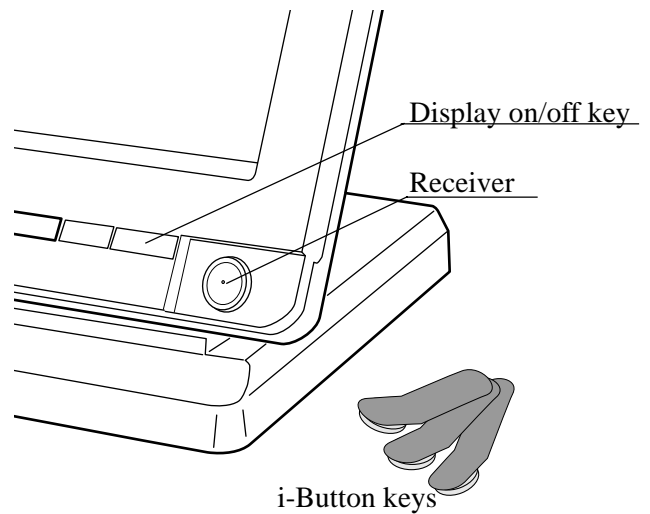
Introducing QT-6600

Display on/off key

This key is used for turning on/off the terminal display.

i-Button key (only for QT-6600-DLS)

You can assign the clerk or cashier by attaching an i-Button key to the receiver.



Drawer (option)

The drawer opens automatically whenever you finalize a registration and you issue a read or reset report.

Drawer lock (for medium size drawer)

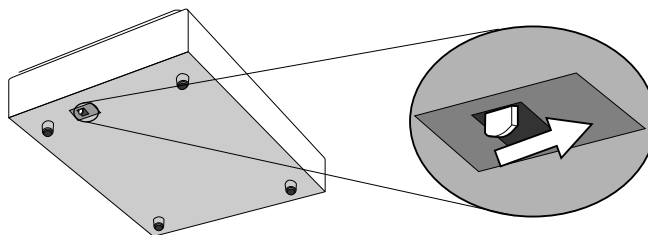
Use the drawer key to lock and unlock the drawer.

Drawer open key (for large size drawer)

Use the drawer open key to open the drawer.

When the cash drawer does not open! (for medium size drawer only)

In case of power failure or the machine is in malfunction, the cash drawer does not open automatically. Even in these cases, you can open the cash drawer by pulling drawer release lever (see below).



Important!

The drawer will not open, if it is locked with a drawer lock key.

Touch screen panel

You can use this panel both for display and for keyboard.

- This panel consists of 2 parts; display part and keyboard part.
- ① Main display part: Used for displaying numeric entries, registration, subtotal amount, etc.
- ② Menu level display part: Used for displaying the current shift PLU, menu sheet and 2nd unit price level.
- ③ Keyboard part: Mainly used for keyboard (sometimes it is used for pop-up window)

REG C01 31-10-08 12:34 PM 001234						②							
①						HOME	PLU010	PLU020	PLU030	PLU040	PLU050	PLU060	PLU070
						PAGE UP	PLU009	PLU019	PLU029	PLU039	PLU049	PLU059	PLU069
						↑	PLU008	PLU018	PLU028	PLU038	PLU048	PLU058	PLU068
						↓	PLU007	PLU017	PLU027	PLU037	PLU047	PLU057	PLU067
						PAGE DOWN	PLU006	PLU016	PLU026	PLU036	PLU046	PLU056	PLU066
·0.00						END	PLU005	PLU015	PLU025	PLU035	PLU045	PLU055	PLU065
ESC/SKIP	MODE	SEARCH	←	YES	NO	→	PLU004	PLU014	PLU024	PLU034	PLU044	PLU054	PLU064
CLK#	C	X	VOID	#/NS	COVERS	MENU	PLU003	PLU013	PLU023	PLU033	PLU043	PLU053	PLU063
RECEIPT	7	8	9	SEAT#	POST ENTRY	SEP CHK	PLU002	PLU012	PLU022	PLU032	PLU042	PLU052	PLU062
TABLE RECEIPT	4	5	6	FUNC LIST	FIN. LIST	TBL TRANS	PLU001	PLU011	PLU021	PLU031	PLU041	PLU051	PLU061
PLU#	1	2	3	SUBTOTAL		NB	LIST 1	LIST 2	LIST 3	LIST 4	LIST 5	LIST 6	LIST 7
REPORTS	0	00	.	CASH/AMT /TEND		NEW/OLD CHK	MENU 1	MENU 2	MENU 3	MENU 4	MENU 5	MENU 6	MENU 7

Note:

Use only your fingers to perform screen operations. Never use pencil, a mechanical pencil, or any other pointed object. Such objects can damage the screen.

Introducing QT-6600

Main display part

REG	C01	31-10-08	12:34 PM	001234
1	Spagetti		·20.00	T1
1	Spagetti		·20.00	T1
	7.5%			
	%-		-1.50	T1
1	Coffee		·8.00	
1	Hamburger		·2.00	T1
	15%			
	%-		-0.30	T1
1	Milk		·2.00	
2	Apple Juice		·5.00	
1	Coffee		·8.00	!
Spagetti			·20.00	
12			·76.50	

Labels for the main display part:

- Mode: REG
- Clerk: C01
- Date: 31-10-08
- Time: 12:34 PM
- Consecutive number: 001234
- Scroll area: The list of items and their prices.
- Current transaction: The total amount for the current transaction (76.50).
- Status Icons: Communication, Master/BM error, Cut off Master or BM.
- Items sold: 12
- Amount (total/change): 76.50

- Communication:
- Master/BM error:
- Cut off Master or BM:
- Receipt on:
- Character size:
 - Double size:
 - Standard size:

Menu level display part

SHIFT PLU 1	Menu shift 1	2nd@
Shift PLU level (1 ~ 8)	Menu sheet (1 ~ 15)	2nd unit Price level (1 ~ 2)

Display part example

Main display

Customer display

Normal registration

REG	C01	31-10-08	12:34 PM	000122
1	PLU0001		-1.00	T1
2	PLU0002		-2.00	
1	PLU0003		-3.00	
	TL		-6.00	
	CASH		-10.00	
	CG		-4.00	
CG			·4.00	

Please sign on

CG	·4.00
----	-------

Check tracking registration

REG	C01	31-10-08	12:34 PM	000123
CHECK No. 123456		5CT	#001029	
1	PLU0001		-1.00	
2	PLU0002		-2.00	
1	PLU0003		-3.00	
1	PLU0004		-2.00	
3	PLU0005		-3.00	
2	PLU0006		-2.00	
1	PLU0007		-3.00	
1	PLU0008		-2.00	
3	PLU0009		-3.00	
1	PLU0010		-1.00	
PLU0010			·1.00	
			22	·102.00

PLU010	
1	·1.00

① **Registered item quantity**

This part of the display shows item count of each item.

② **Item/key descriptor**

When you register an item or a transaction key, the item descriptor or key descriptor appears here.

③ **Tax status**

When you register a taxable item, the corresponding tax status appears here by programming.

④ **Check number**

When you enter a check number, it appears here.

⑤ **Number of customer**

When you enter number of customers, it appears here.


⑥ **Table number**


When you enter a table number, it appears here.


Keyboard part


REG C01 31-10-08 12:34 PM 001234						24 HOME PLU010 PLU020 PLU030 PLU040 PLU050 PLU060 PLU070							
						25 PAGE UP PLU009 PLU019 PLU029 PLU039 PLU049 PLU059 PLU069							
						12 ↑ PLU008 PLU018 PLU028 PLU038 PLU048 PLU058 PLU068							
						12 ↓ PLU007 PLU017 PLU027 PLU037 PLU047 PLU057 PLU067							
						26 PAGE DOWN PLU006 PLU016 PLU026 PLU036 PLU046 PLU056 PLU066							
						27 END PLU005 PLU015 PLU025 PLU035 PLU045 PLU055 PLU065							
1 ESC/SKIP	7 MODE	10 SEARCH	12 ←	14 YES	20 NO	12 →	PLU004 PLU014 PLU024 PLU034 PLU044 PLU054 PLU064						
2 CLK#	8 C	11 X	13 VOID	15 #/NS	21 COVERS	28 MENU	PLU003 PLU013 PLU023 PLU033 PLU043 PLU053 PLU063						
3 RECEIPT	9 7	8 8	9 9	16 SEAT#	22 POST ENTRY	29 SEP CHK	PLU002 PLU012 PLU022 PLU032 PLU042 PLU052 PLU062						
4 TABLE RECEIPT	4 4	5 5	6 6	17 FUNC LIST	23 FIN. LIST	30 TBL TRANS	PLU001 PLU011 PLU021 PLU031 PLU041 PLU051 PLU061						
5 PLU#	1 1	2 2	3 3	18 SUBTOTAL		31 NB	34 LIST 1	LIST 2	LIST 3	LIST 4	LIST 5	LIST 6	LIST 7
6 REPORTS	0 0	00 00	.	19 CASH / AMT / TEND		32 NEW / OLD CHK	35 MENU 1	MENU 2	MENU 3	MENU 4	MENU 5	MENU 6	MENU 7


• Register Mode


- ① **ESC/SKIP key** 


Use this key to terminate a program sequence, X/Z sequence, and return the primary status. This key is also used to terminate a report being issued in PGM, X, and Z mode.
- ② **Clerk number key** 


Use this key to sign clerk on and off the terminal by clerk number.
- ③ **Post receipt key** 


Use this key to produce a post-finalization receipt.
- ④ **Table receipt key** 


Use this key to issue table receipt.
- ⑤ **PLU # key** 


Use this key to enter PLU number.
- ⑥ **Reports key** 

Use this key to issue reports.
- ⑦ **Mode key** 


Use this key to change mode. This key shows the allowable mode keys in the pop-up window.
- ⑧ **Clear key** 


Use this key to clear an entry that has not yet been registered.
- ⑨ **Ten key pad** 

Use the keys to input numbers.
- ⑩ **Search key** 

Use this key to search an items by its name.
- ⑪ **Multiplication/Date/Time key** 

Use this key to input a quantity for a multiplication operation. Between transactions, this key displays the current time and date.
- ⑫ **Left, right, up, down arrow key**



Use these keys to move the cursor.
- ⑬ **Error correct/Void key** 

Use this key to correct the last registered item, discount, premium, amount tendered etc. This key also invalidates proceeding data registered for PLUs or set menus etc.

- ⑭ **Yes key** YES
Use this key to consent the selection and proceeding steps.
- ⑮ **Non-add/No sale key** # / NS
Non-add key: To print reference number (to identify a personal check, credit card, etc.) during a transaction, use this key after some numerical entries.
No sale key: Use this key to open the drawer without registering anything.
- ⑯ **Seat # key** SEAT#
Use this key to enter and print seat number.
- ⑰ **Function list key** FUNC LIST
Use this key to show the programmed function key list.
- ⑱ **Subtotal key** SUB TOTAL
Use this key to display and print the current subtotal (includes add-on tax) amount.
- ⑲ **Cash/Amount tendered key** CA / AMT / TEND
Use this key to register a cash tender.
- ⑳ **No key** NO
Use this key to cancel the selection and proceeding steps.
- ㉑ **Number of customer key** COVERS
Use this key to register the number of customers.
- ㉒ **Post entry key** POST ENTRY
Use this key to indicate the reserved item of set menu and register it as a fixed item later on.
- ㉓ **Finalization list key** FIN. LIST
Use this key to show the programmed finalization key list.
- ㉔ **Home position key** HOME
Use this key to return the cursor to the home position.
- ㉕ **Page up key** PAGE UP
Use this key to turn the window forwards.
- ㉖ **Page down key** PAGE DOWN
Use this key to turn the window backwards.
- ㉗ **End key** END
Use this key to turn the cursor to the end position.
- ㉘ **Menu shift key** MENU SHIFT
Use this key to shift Flat-PLU key to n-th (1 ~ 15) menu.
- ㉙ **Separate check key** SEP CHK
Use this key in a check tracking system to separate selected items from one check to another check.
If this key is registered, a pop-up window for separating a check is opened.
- ⑳ **Table transfer key** TABLE TRANS
Use this key to transfer the contents of a check to another check.
- ㉑ **New balance key** NB
Use this key to add the current registered total amount to the previous balance to obtain a new balance. When this key is pressed, the total amount of the transaction is calculated. Normally, a receipt is issued.
- ㉒ **New/Old check key** NEW / OLD
Use this key in a check tracking system to input check numbers in order to open new checks and to reopen existing checks. When the clerk inputs a check number, the register checks to see if that number already exists in the check tracking memory. If there is no matching number in the memory, a new check is opened under the input number. If the check number matches a number already stored in the memory, that check is reopened for further registration or finalization.
- ㉓ **Flat-PLU key** PLU 001, PLU 002 ~
Use these keys to register items to flat-PLUs.
- ㉔ **List 1 ~ 7 key** LIST 1 ~
Use this key to display menu lists.
- ㉕ **Menu 1 ~ 7 key** MENU 1 ~
Use this key to display n-th menu window.

Introducing QT-6600

Keyboard part with pop-up window

List pop-up window

Keys of the list




REG C01 31-10-08 12:34 PM 001234						HOME						How to Cook 0/1-1							
						PAGE UP						Rare							
						↑						Medium							
						PAGE DOWN						Well-done							
						↓													
· 0.00						END													
ESC/SKIP	MODE	SEARCH	←	YES	NO	→													
CLK#	C	X	VOID	#/NS	COVERS	MENU													
RECEIPT	7	8	9	SEAT#	POST ENTRY	SEP CHK													
TABLE RECEIPT	4	5	6	FUNC LIST	FIN. LIST	TBL TRANS													
PLU#	1	2	3	SUBTOTAL		NB	LIST 1	LIST 2	LIST 3	LIST 4	LIST 5	LIST 6	LIST 7						
REPORTS	0	00	.	CASH/AMT /TEND		NEW/OLD CHK	MENU 1	MENU 2	MENU 3	MENU 4	MENU 5	MENU 6	MENU 7						

Staydown counters
(registered/minimum maximum numbers)

Check number pop-up window

Check/Table number window

REG C01 31-10-08 12:34 PM 001234						HOME						Select Check/Table number						
						PAGE UP						#1 · 1.45 #2 · 23.00						
						↑						#3 · 76.45 #4 · 7.00						
						PAGE DOWN						#5 · 1.95 #6 · 8.01						
						↓						#7 · 231.45 #9 · 4.00						
· 0.00						END												
ESC/SKIP	MODE	SEARCH	←	YES	NO	→												
CLK#	C	X	VOID	#/NS	COVERS	MENU												
RECEIPT	7	8	9	SEAT#	POST ENTRY	SEP CHK												
TABLE RECEIPT	4	5	6	FUNC LIST	FIN. LIST	TBL TRANS												
PLU#	1	2	3	SUBTOTAL		NB												
REPORTS	0	00	.	CASH/AMT /TEND		NEW/OLD CHK												

Table area 1			
#1 · 1.45			
	#2 · 7.00		
#3 · 1.95	#4 · 8.01		
#5 · 231.45	#6 · 4.00		
#7 · 2,356.45			
#8 · 103.00	#9 · 8.00		
Next	Prev	Rcpt	Esc
View-1	View-2	View-3	View-4

Add-on new number type

Show table layout type

Allocatable functions

You can tailor a keyboard to suit your particular type of business.

Consult your CASIO dealer for detail information.

Add check

Use this key in a check tracking system to combine the details of more than one check into a single check.

Arrangement

Use this key to activate an arrangement program programmed in the arrangement file. Any operation that can be performed from the keyboard, as well as mode, can be programmed in an arrangement program, and can be performed merely by pressing this key. In addition, one numeric entry can be included in an arrangement program. In this case, input the number and press this key. The mode control function of this key can be programmed for all modes except for the OFF mode.

Bill copy

Use this key to issue bill copy.

Break-in/out

Use this key to register the starting/finishing time when employees have a recess.

Cancel

Invalidates all preceding data registered for departments, PLUs and set menus within a transaction. This key must be pressed before the transaction involving the data to be invalidated is finished. It is also effective ever after calculation of subtotal amount.

Charge

Use this key to register a charge sale.

Check

Use this key to register a check tender.

Check endorsement

Use this key to print a preset check endorsement message using the slip printer.

Check print

Use this key to print the check on the slip printer.

Clerk number

Use this key to assign a clerk's secret number.

Clerk transfer

Use this key to transfer opened checks to another clerk.

Clock-in/out

Use this key to register the time when the employees start/finish their job.

Coupon

Use this key for registering coupons.

Coupon number

Use this key for registering mix and match discount by entering coupon number.

Coupon 2

Use this key to declare the next item registration as coupon.

Credit

Use this key to register a credit sale.

Cube

This key provides the same functions as the Square key. In addition, this key also has a cube multiplication function.

Currency exchange

Use this key to convert foreign currency to local currency or vice versa using the exchange rate preset for the key and displays the result.

Use this key for conversions of a home currency subtotal or merchandise subtotal to equivalent of another country's currency.

Use this key for conversions of another country's currency to the equivalent of the home currency.

Customer ID number

Use this key to enter customer ID number.

Declaration

Use this key to declare in drawer amount for money declaration.

Department

Use this key to register department.

Department number

Use this key to enter department number.

Deposit

Use this key to register deposits.

Discount

Use this key to register discounts.

Display mode

Use this key to choose item consolidation display format or non-item consolidation display format.

Eat-in

Use this key to specify if the customer eats in the restaurant. Before closing a transaction press this key.

EBT (electronic benefit transfer)

Use this key to register an EBT amount with a tender amount input.

Electronic journal display

Use this key to display the stored journal.

Euro/Paid out

Euro key: Use this key to convert the main currency to the sub currency (the euro/the local money), when registering the subtotal amount. This key is also used for specifying sub currency while entering an amount of payment.

Paid out key: Use this key following a numeric entry to register money paid out from the drawer.

1st unit price

Use this key to register a specific item at the first unit price.

Food stamp shift

Use this key to change food stamp status.

Food stamp subtotal

Use this key to obtain the food stamp applicable amount.

Food stamp tender

Use this key to register a food stamp payment amount with a tender amount input.

House Bon

Use this key to register items for in-store use.

List

Use this key to display menu lists.

List number

Use this key to enter list number.

Introducing QT-6600

Loan

Use this key to input the amount of money provided making change.

Location change

Use this key to select the window which shows the table layout of each floor/part of the restaurant.

Ketten Bon

Use this key to enter quantities for multiplication. Multiplication by this key issues singular order prints.

Media change

Use this key to change media in drawer amounts.

Merchandise subtotal

Use this key to obtain subtotal excluding the add-on tax amount and the previous balance.

Minus

Use this key register subtraction.

New check

Use this key in a check tracking system to input a new check number in order to open a new check under that number.

No sale

Use this key to open the drawer between transaction.

Non-add

Use this key to print reference numbers (personal check number, card number, etc.)

Normal receipt

Use this key to change the order status from Bon to normal.

Not found PLU

Use this key to declare the following registration as not found PLU.

OBR (Optical barcode reader)

Use this key to input optical barcodes manually.

Old check

Use this key in a check tracking system to input the number of an existing check (previously created by the New check key) whose details are stored in the check tracking memory. Existing checks are reopened to perform further registration or to finalize them.

One touch NLU

Use this key to register scanning PLU directly from the keyboard. There is one One touch NLU key for one scanning PLU, and multiple One touch NLU keys can be set on the keyboard.

Open

Use this key to temporary release a limitation on the number of digits that can be input for a unit price.

Open 2

Use this key to suspend the compulsory specifications.

Open check

Use this key to issue an open check report of an assigned clerk.

Operator number

Use this key to enter a clerk number during clerk transfer.

Operator X/Z

Use this key to issue a clerk's individual X/Z report.

Order character change

Use this key to change the order character. The order characters not only of the item but in the order character table can be printed.

Payment

Use this key to declare the following transactions as payment.

PLU number

Use this key to enter PLU number.

Plus

Use this key for registering surcharge.

Pick up

Use this key to pick up media in drawer.

Premium

Use this key to apply a preset % or manual input % to obtain the premium amount for the last registered item or subtotal.

Price

Use this key to register an open PLU.

Price change

Use this key to change scanning PLU unit price temporarily.

Price inquiry

Use this key to confirm the price and descriptors of PLU without registering.

Quantity/for

This key provides the same functions as the multiplication key. In addition, this key also has a split price function.

Recall

Use this key for recalling the transferred check number by the store key. When this key is pressed, the check number will appear in order of the oldest record.

Receipt on/off

Use this key to change the setting "Receipt issue"/"No receipt issue" in REG/REF/REG- modes.

Received on account

Use this key following a numeric entry to register money received for non-sale transaction.

Refund

Use this key to input refund amounts and void certain entries.

Room number

Use this key to recall the room information.

Room message

Use this key to display/ print the message for resident.

Round repeat

Use this key to register the same items which were ordered just before.

Scale

Use this key to read the weight of the item and shows it on the display. This key is also used to input the weight manually.

2nd unit price

Use this key to register a specific item at the second unit price.

Separate check

Use this key in a check tracking system to separate selected items from one check to another check.

Selective item subtotal

Use this key to obtain the selective item 1/2 of subtotal amount.

Shift PLU

Use this key to shift flat-PLU key to the n-th (1 ~ 8) level.

Slip feed/release

Use this key to feed slips inserted into the slip printer. This is done by specifying the number of feed lines. This key is also used to release the slip paper holder if numbers are not entered.

Slip back feed/release

Use this key to back feed slips inserted into the slip printer. This is done by specifying the number of feed lines. This key is also used to release the slip paper holder if numbers are not entered.

Slip print

Use this key to execute a slip batch printing on the slip printer. Pressing this key prints the sales details. Actual printing is performed following receipt issuance.

Split payment (Dutch account)

Use this key to share the total payment by customers.

Square

This key provides the same functions as the Multiplication key. In addition, this key also has a square multiplication function.

Stock inquiry

Use this key to check the current stock quantity for a PLU without registering.

Store

Use this key for storing the check number of the registered items. When this key is pressed, registered item data will be stored, and then these data will transfer to the youngest check number.

Subdepartment

Use this key to register items for the subdepartment.

Subdepartment number

Use this key to enter subdepartment number.

Substitution

Use this key to replace group PLU with a PLU which is not preset in the pulldown menu.

Swipe

Use this key to declare card swipe or card scan.

Table number

Use this key to input table numbers.

Table sharing

Use this key to assign one table to two or more customer groups.

Takeout

Use this key to specify if the customer takes out items, before total a transaction. Press this key for the tax exemption.

Tare

Use this key to input tare weight.

Tax exempt

Use this key to change taxable amounts to nontaxable amounts.

Tax shift

Use this key to activate the tax table which is specified by the same tax status programmed for this key.

Taxable amount subtotal

Use this key to obtain taxable amount subtotal.

Text print

Use this key to enter characters to print.

Text recall

Use this key to print preset characters.

Tip

Use this key to register tips.

Tray total

Use this key to display the total amount for all registrations from the last registration until this key is pressed or registrations between presses of this key.

Validation

Use this key to validate item or transaction amounts on the slip.

VAT

Use this key to print VAT breakdowns.

Worktime

Use this key to register the time when the employee start/finish their job.

Keys in check No. pop-up window

Special function keys to control check No. pop-up window are located at the bottom of the screen.

Next (Page up)

Use this key to turn the pop-up window forwards.

Previous (Page down)

Use this key to turn the pop-up window backwards.

Escape

Use this key to terminate the operation of the pop-up window and close it.

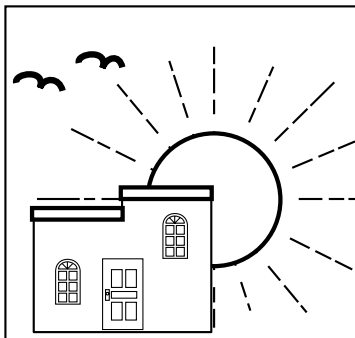
View-1 ~ (Location change)

Use this key to select the pop-up window which shows the table layout of each floor/part of the restaurant.

How to use the terminal

The following describes the general procedure you should use in order to get the most out of the terminal.


BEFORE business hours...




- Check to make sure that the terminal is plugged in securely.
- Check to make sure there is enough paper left on the roll of the remote printer.
- Read the financial totals to confirm that they are all zero. Page 75
- Loan operation Page 34, 62
- Check the date and time. Page 25

DURING business hours...

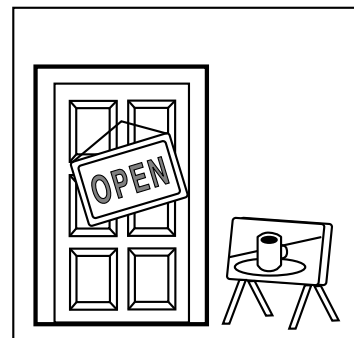- Regular registrations Page 26 ~
- Clerk interrupt Page 42
- Check/ table tracking Page 44
- Scanning PLU Page 64



AFTER business hours...

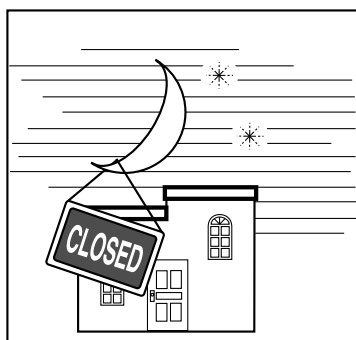

- Pickup operation Page 34, 62
- Reset operation Page 38, 39
- Presetting (Programming: PGM 1 and 2) Page 27, 29, 67 ~ 72

Others...

- Error list Page 82 ~ 85
- Troubleshooting Page 85, 86

Clerk sign on/off and mode change

Assigning a clerk



You can assign clerks by attaching an i-Button key to the receiver or by clerk secret number.

Clerk number key

The key is used for the clerk secret number key.

i-Button key

You can assign the clerk or cashier by attaching an i-Button key to the receiver.

Clerk sign on

	OPERATION	
	Clerk number key	i-Button key
Signing clerk 1 on:	* <input type="text" value="1"/> <input type="text" value="CLK#"/>	attach i-Button key 1
Signing clerk 2 on:	* <input type="text" value="2"/> <input type="text" value="CLK#"/>	attach i-Button key 2
	⋮	⋮
Signing clerk 6 on:	* <input type="text" value="6"/> <input type="text" value="CLK#"/>	attach i-Button key 6
	Clerk secret number (1 ~ 10 is set as default.)	

* If you do not want the clerk secret number to be shown on the display, press before entering the number.

Clerk sign off

	OPERATION	
	Clerk number key	i-Button key
Signing clerk off:	<input type="text" value="0"/> <input type="text" value="CLK#"/>	remove i-Button key

- The current clerk is also signed off whenever you turn off the terminal or finalize a transaction.

Important!

- A clerk cannot sign on unless other clerk is signed off.
- The signed on clerk is identified on the receipt/journal.

Basic Operations and Setups

Mode change

Even the mode switch is not allocated on the terminal, you can change the mode of the terminal by pressing the **MODE** key.

Mode pop-up window

When you press the **MODE** key, the mode pop-up window is appeared. In the mode pop-up window, only the allowable mode icons of the signed on clerk is appeared. You can change the mode of the terminal by pressing the mode icons in the mode pop-up window.


REG C01 31-10-08 12:34 PM 001234							HOME	Select mode		
							PAGE UP	REG	RF	REG-
							↑			
							↓			
							PAGE DOWN	X/Z	Manager	In line
-0.00							END	AUTO PGM	CF CARD	
ESC/SKIP	MODE	SEARCH	←	YES	NO	→	PGM1	PGM2	PGM3	
CLK#	C	X	VOID	#/NS	COVERS	MENU	PGM4	PGM5	PGM6	
RECEIPT	7	8	9	SEAT#	POST ENTRY	SEP CHK				
TABLE RECEIPT	4	5	6	FUNC LIST	FIN. LIST	TBL TRANS				
PLU#	1	2	3	SUBTOTAL		NB				
REPORTS	0	00	.	CASH/AMT/TEND		NEW/OLD CHK				

Mode pop-up window

Mode icons

All available modes of the clerk are displayed.

Displaying the time and date



You can show the time or date on the display of the terminal whenever there is no registration being made.

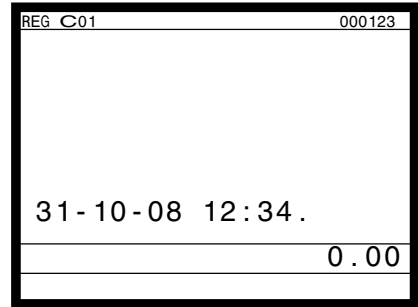
To display and clear the date/time

OPERATION




Date/time appears on the display.

DISPLAY



Clears the date/time display.

Adjusting the time and date



You can adjust the time or date in the PGM 1 mode.

To adjust the time

OPERATION



Press <MODE> key and press <PGM1> icon.

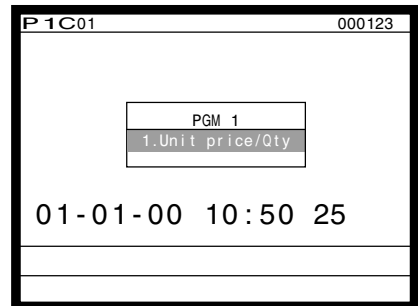


Enter the current time in 4 digits (hour, minutes order) and press the [X] key.



Clear the date/time display.

DISPLAY



To adjust the date

OPERATION



Press <MODE> key and press <PGM1> icon.

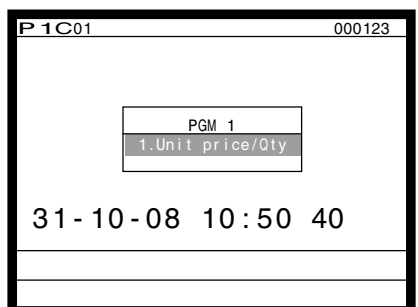


Enter the current date in 6 digits (year, month, day order) and press the [X] key.



Clear the date/time display.

DISPLAY



Preparing and using flat-PLU keys

Registering flat-PLU keys



The following examples show how you can use the flat-PLU keys in various types of registrations.

Single item sale

Example 1

OPERATION (by optional remote printer)

Item	Unit price	\$1.00
	Quantity	1
	Flat-PLU	1
Payment	Cash	\$1.00

1 00
 Unit price
PLU 001
 Flat-PLU
CA/AMT TEND

REG	C01	31-10-2008 09:05 AM 000002	MC #01
1	PLU001		.1.00
	TL		- 1.00
	CASH		.1.00

Machine No.
Mode/Clerk/Date/
Time/Consecutive No.
PLU No./unit price
Total amount

Example 2 (Subtotal registration and change computation)

OPERATION (by optional remote printer)

Item	Unit price	\$12.34
	Quantity	1
	Flat-PLU	1
Payment	Cash	\$20.00

1 2 3 4
 Unit price
PLU 001
 Flat-PLU
SUB TOTAL
2 0 00 **CA/AMT TEND**
 Amount tendered

REG	C01	31-10-2008 09:10 AM 000003	MC #01
1	PLU001		.12.34
	TL		- 12.34
	CASH		.20.00
	CG		.7.66

Total amount
Amount tendered
Change

Repeat, menu shift

OPERATION (by optional remote printer)

Item 1	Unit price	\$1.50
	Quantity	3
	Flat-PLU	1
Item 2	Unit price	\$2.50
	Quantity	2
	Flat-PLU	71
Payment	Cash	\$10.00

1 5 0 **PLU 001**
PLU 001
PLU 001
MENU
2 5 0 **PLU 001**
YES
SUB TOTAL
1 0 00 **CA/AMT TEND**

REG	C01	31-10-2008 09:15 AM 000004	MC #01
1	PLU001		.1.50
1	PLU001		.1.50
1	PLU001		.1.50
1	PLU071		.2.50
1	PLU071		.2.50
	TL		- 9.50
	CASH		.10.00
	CG		.0.50

Repeat
Repeat
Repeat

Multiplication

OPERATION PRINTOUT (by optional remote printer)

Item	Unit price	\$1.00
	Quantity	12
	Flat-PLU	1
Payment	Cash	\$20.00

1 2 X
 Quantity
 (4-digit integer/3-digit decimal)

1 00 PLU
001


2 0 00 CA/
AMT
TEND

		MC #01	
REG	C01	31-10-2008 09:20 AM	000005
12	PLU001	.12.00	Quantity/result
	TL	- 12.00	
	CASH	.20.00	
	CG	.8.00	
		SUB TOTAL	


Programming to flat-PLU

Flat-PLU unit price programming procedure

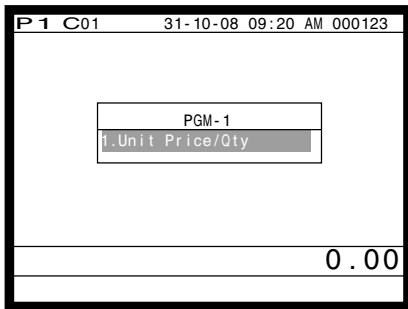- Step 1. Press MODE and <PGM1> icon to turn "PGM-1" and press YES.
- Step 2. Select "1.PLU" and press YES.




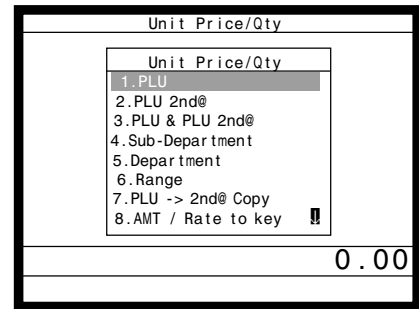Step 1. screen



Step 2. screen

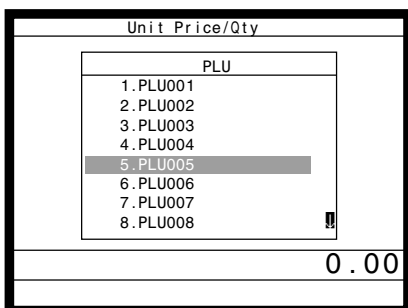- Step 3. Select the PLU record you want to program by pressing the flat-PLU key directly, by entering PLU record No. and YES, or by entering random PLU code and PLU.
- Step 4. Enter appropriate unit price and YES.



Step 3. screen


No.	Descriptor	Price
5	PLU005	@50.00
6	PLU006	@0.00
7	PLU007	@0.00
8	PLU008	@0.00
9	PLU009	@0.00
10	PLU010	@0.00
11	PLU011	@0.00
12	PLU012	@0.00
13	PLU013	@0.00
14	PLU014	@0.00
15	PLU015	@0.00!
		0.00

Step 4. screen

- Step 5. Repeat the step 4., if you program the next record.
 Press ESC/
SKIP and repeat the step 3. and 4., if you program to the other record.
- Step 6. Press ESC/
SKIP repeatedly to return to the "Step 1. screen".

Basic Operations and Setups


Registering flat-PLU keys by programming data



Preset price

OPERATION PRINTOUT (by optional remote printer)

Item	Unit price	(\$1.00) _{preset}
	Quantity	1
	Flat-PLU	2
Payment	Cash	\$1.00




		MC #01	
REG	C01	31-10-2008 09:30 AM 000007	
1	PLU002	.1.00	
	TL	- 1.00	
	CASH	.1.00	

Preset tax status

OPERATION PRINTOUT (by optional remote printer)

Item 1	Unit price	(\$2.00) _{preset}
	Quantity	5
	Flat-PLU	3
	Taxable	(1) _{preset}
Item 2	Unit price	(\$2.00) _{preset}
	Quantity	1
	Flat-PLU	4
	Taxable	(2) _{preset}
Payment	Cash	\$20.00



		MC #01	
REG	C01	31-10-2008 09:35 AM 000008	
5	PLU003	.10.00	T1 Tax status
1	PLU004	.2.00	T2 Taxable Amount 1
	TA1	.10.00	Taxable Amount 1
	TX1	.0.40	Tax 1
	TA2	.2.00	Taxable Amount 2
	TX2	.0.20	Tax 2
	TL	- 12.60	
	CASH	.20.00	
	CG	.7.40	

* Before this registration, tax table programming is necessary.

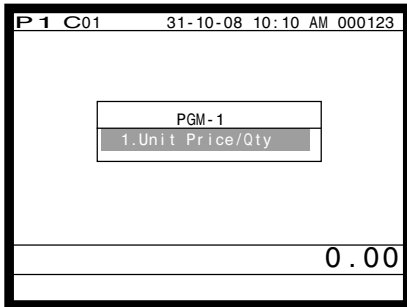
Preparing and using discounts/reductions

This section describes how to prepare and register discounts/reductions.


Programming discount rate and reduction amount

Step 1. Press **MODE** and <PGM1> icon to turn “PGM-1” and press **YES**.

Step 2. Select “8. AMT/Rate to key” and press **YES**.



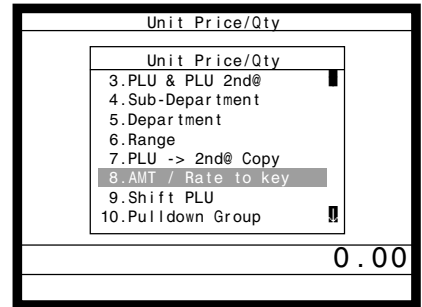
Step 1. screen



Step 2. screen

Step 3. Discount rate: Select the %- record, enter discount rate and press the appropriate key.

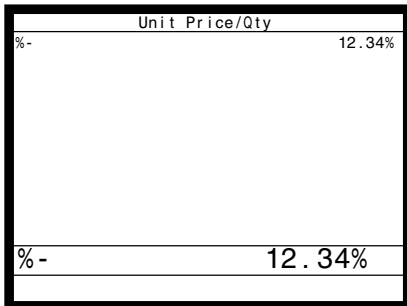Reduction amount: Select the - record, enter reduction amount and press the appropriate key.



Step 3. screen

Step 5. Press **ESC/SKIP** repeatedly to return to the “Step 1. screen”.

Basic Operations and Setups

Registering discounts



The following example shows how you can use the **%-** key in various types of registration.

Discount for items and subtotals

Item 1	Unit price	\$5.00
	Flat-PLU	1
	Taxable	(1) _{preset}
Item 2	Unit price	(\$10.00) _{preset}
	Flat-PLU	2
	Taxable	(2) _{preset}
Discount	Rate	(5%) _{preset}
Subtotal discount	Rate	3.5%
	Taxable	Nontaxable
Payment	Cash	\$15.00

OPERATION

5 00 **PLU 001**

PLU 002

FUNC LIST **%-**

Applies the preset discount rate to the last item registered.

FUNC LIST **3 . 5** **%-**

The input value takes priority of the preset value.

SUB TOTAL

1 5 00 **CA/AMT TEND**

PRINTOUT (by optional remote printer)

		MC #01	
REG	C01	31-10-2008	10:15 AM 000016
1	PLU001	-5.00	T1
1	PLU002	-10.00	T2
	5%		
	%-	-0.50	T2
	ST	-14.50	
	3.5%		
	%-	-0.51	
	TA1	-5.00	
	TX1	-0.20	
	TA2	-9.50	
	TX2	-0.48	
	TL	-14.67	
	CASH	-15.00	
	CG	-0.33	


- You can manually input rates up to 4 digits long (0.01% to 99.99%).

Taxable status of the **%-** key

- Whenever you perform a discount operation on the last item registered, the tax calculation for discount amount is performed in accordance with the tax status programmed for that item.
- Whenever you perform a discount operation on a subtotal amount, the tax calculation for the subtotal amount is performed in accordance with the tax status programmed for the **%-** key.

Registering reductions




The following examples show how you can use the  key in various types of registration.


Reduction for items

OPERATION


PRINTOUT (by optional remote printer)


Item 1	Unit price	\$5.00
	Flat-PLU	1
	Taxable	(1) _{preset}
Reduction	Amount	\$0.25
Item 2	Unit price	(\$6.00) _{preset}
	Flat-PLU	2
	Taxable	(1) _{preset}
Reduction	Amount	(\$0.50) _{preset}
Payment	Cash	\$11.00







 Reduces the last amount registered by the value input.









		MC #01	
REG	C01	31-10-2008	10:20 AM 000017
1	PLU001	-5.00	T1
-		-0.25	T1
1	PLU002	-6.00	T1
-		-0.50	T1
	TA1	-10.25	
	TX1	-0.41	
	TL	-10.66	
	CASH	-11.00	
	CG	-0.34	


- You can manually input reduction values up to 7 digits long.
- If you want to subtract the reduction amount from the department or PLU totalizer, program “Net totaling.”


Reduction for subtotal


OPERATION


PRINTOUT (by optional remote printer)

Item 1	Unit price	\$3.00
	Flat-PLU	1
	Taxable	(1) _{preset}
Item 2	Unit price	\$4.00
	Flat-PLU	2
	Taxable	(2) _{preset}
Subtotal	Amount	\$0.75
Reduction	Taxable	(No) _{preset}
Payment	Cash	\$7.00











 Reduces the subtotal by the value input here.






		MC #01	
REG	C01	31-10-2008	10:25 AM 000018
1	PLU001	-3.00	T1
1	PLU002	4.00	T2
-		-0.75	
	TA1	-3.00	
	TX1	-0.12	
	TA2	-4.00	
	TX2	-0.20	
	TL	-6.57	
	CASH	-7.00	
	CG	-0.43	

NOTE

- First of all, it is necessary to allocate  key on the keyboard or in the function key list.

Registering returned goods in the REG mode

The following example shows how to use the **RF** key in the REG mode to register goods returned by customers.



OPERATION

Item 1	Unit price	\$2.35
	Flat-PLU	1
Item 2	Unit price	\$2.00
	Flat-PLU	2
Item 3	Unit price	(\$1.20) _{preset}
	Flat-PLU	3
Returned Item 1	Unit price	\$2.35
	Flat-PLU	1
Returned Item 3	Unit price	(\$1.20) _{preset}
	Flat-PLU	3
Payment	Cash	\$2.00

2 3 5 **PLU 001**

2 00 **PLU 002**

PLU 003

RF

2 3 5 **PLU 001**

Press **RF** before the item you want to return.

RF

PLU 003

SUB TOTAL

CA / AMT / TEND


PRINTOUT (by optional remote printer)

		MC #01
REG	C01	31-10-2008 11:00 AM 000025
1	PLU001	-2.35
1	PLU002	-2.00
1	PLU003	-1.20
	RF
1	PLU001	-2.35
	RF
1	PLU003	-1.20
	TL	- 2.00
	CASH	2.00

NOTE

- First of all, it is necessary to allocate **RF** key on the keyboard or in the function key list.

Registering returned goods in the REF mode



The following examples show how to use the REF mode to register goods returned by customers.

First of all, press the **MODE** key and press <REF MODE> icon to turn the REF mode.

Normal refund transaction

	OPERATION	PRINTOUT (by optional remote printer)															
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Returned Item 1</td> <td>Unit price</td> <td>\$1.50</td> </tr> <tr> <td></td> <td>Quantity</td> <td>2</td> </tr> <tr> <td>Returned Item 2</td> <td>Unit price</td> <td>(\$1.20)_{preset}</td> </tr> <tr> <td></td> <td>Quantity</td> <td>6</td> </tr> <tr> <td>Payment</td> <td>Cash</td> <td>\$10.20</td> </tr> </table>	Returned Item 1	Unit price	\$1.50		Quantity	2	Returned Item 2	Unit price	(\$1.20) _{preset}		Quantity	6	Payment	Cash	\$10.20	<p>1 5 0 PLU 001</p> <p>6 X</p> <p>PLU 001</p> <p>PLU 003</p> <p>CA/AMT /TEND</p>	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: right;">MC #01</p> <p>RF C01 31-10-2008 11:00 AM 000026 REF mode symbol</p> <p>1 PLU001 .1.50</p> <p>1 PLU001 .1.50</p> <p>6 PLU003 .7.20</p> <p>TL - 10.20</p> <p>CASH .10.20</p> </div>
Returned Item 1	Unit price	\$1.50															
	Quantity	2															
Returned Item 2	Unit price	(\$1.20) _{preset}															
	Quantity	6															
Payment	Cash	\$10.20															

Reduction of amounts paid on refund

	OPERATION	PRINTOUT (by optional remote printer)																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Returned Item 1</td> <td>Unit price</td> <td>\$4.00</td> </tr> <tr> <td></td> <td>Quantity</td> <td>1</td> </tr> <tr> <td>Reduction</td> <td>Amount</td> <td>\$0.15</td> </tr> <tr> <td>Returned Item 2</td> <td>Unit price</td> <td>(\$1.20)_{preset}</td> </tr> <tr> <td></td> <td>Quantity</td> <td>1</td> </tr> <tr> <td>Discount</td> <td>Rate</td> <td>(5%)_{preset}</td> </tr> <tr> <td>Payment</td> <td>Cash</td> <td>\$5.20</td> </tr> </table>	Returned Item 1	Unit price	\$4.00		Quantity	1	Reduction	Amount	\$0.15	Returned Item 2	Unit price	(\$1.20) _{preset}		Quantity	1	Discount	Rate	(5%) _{preset}	Payment	Cash	\$5.20	<p>4 00 PLU 003</p> <p>1 5 -</p> <p>PLU 002</p> <p>%-</p> <p>SUB TOTAL</p> <p>CA/AMT /TEND</p>	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: right;">MC #01</p> <p>RF C01 31-10-2008 11:10 AM 000027</p> <p>1 PLU003 -4.00 T1</p> <p>- -0.15 T1</p> <p>1 PLU002 -1.20 T2</p> <p>5%</p> <p>%- -0.06 T2</p> <p>TA1 -3.85</p> <p>TX1 -0.15</p> <p>TA2 -1.14</p> <p>TX2 -0.06</p> <p>TL - 5.20</p> <p>CASH -5.20</p> </div>
Returned Item 1	Unit price	\$4.00																					
	Quantity	1																					
Reduction	Amount	\$0.15																					
Returned Item 2	Unit price	(\$1.20) _{preset}																					
	Quantity	1																					
Discount	Rate	(5%) _{preset}																					
Payment	Cash	\$5.20																					

Important!

- To avoid miss registrations in the REF mode, return the mode to the former position immediately.

Registering money received on account



The following example shows how to register money received on account. This registration must be performed out of a sale.

OPERATION

Received amount	\$700.00
-----------------	----------

FUNC LIST
7
00
00
RC


Amount can be up to 8 digits.

PRINTOUT

(by optional remote printer)

		MC #01	
REG	C01	31-10-2008 11:15 AM	000028
	RC		.700.00

Registering money paid out



The following example shows how to register money paid out from the terminal. This registration must be performed out of a sale.

OPERATION

Paid out amount	\$1.50
-----------------	--------

FUNC LIST
1
5
0
PD

Amount can be up to 8 digits.

PRINTOUT

(by optional remote printer)

		MC #01	
REG	C01	31-10-2008 11:20 AM	000029
	PD		.1.50

Making corrections in a registration

REG

Mode

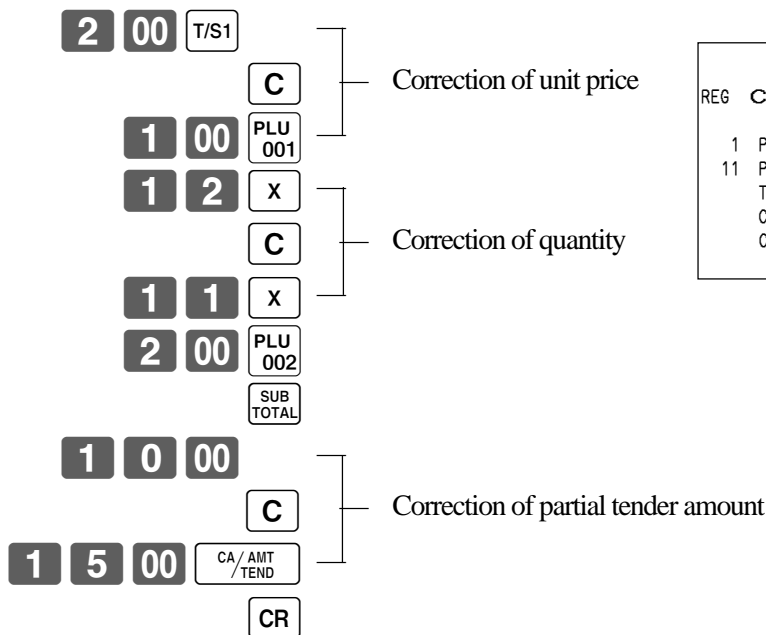
There are four techniques you can use to make corrections in a registration.

- To correct an item that you input but not yet registered.
- To correct the last item you input and registered.
- To correct the item you registered previously in the transaction.
- To cancel all items in a transaction.

To correct an item you input but not yet registered

OPERATION

PRINTOUT
(by optional remote printer)




		MC #01	
REG	C01	31-10-2008	11:40 AM 000033
1	PLU001		· 1.00
11	PLU002		· 22.00
	TL		- 23.00
	CASH		· 15.00
	CREDIT		· 8.00

Basic Operations and Setups

To correct an item you input and registered

OPERATION

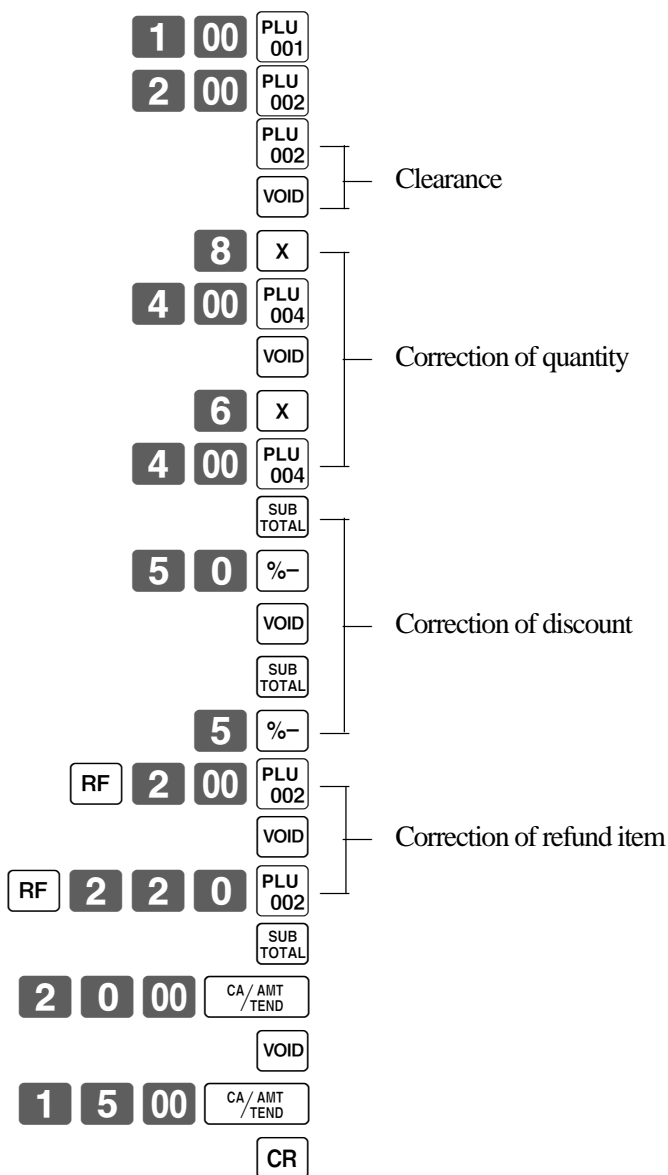PRINTOUT (by optional remote printer)



		MC #01	
REG	C01	31-10-2008 11:45 AM 000034	
1	PLU001		.1.00
1	PLU002		.2.00
1	PLU002		.2.00
	VOID		.2.00
8	PLU003		.32.00
	VOID		.32.00
6	PLU003		.24.00
	ST		.27.00
	50%		
	%-		.19.25
	VOID		.19.25
	ST		.27.00
	5%		
	%-		.1.35
	RF	
-1	PLU002		.2.00
	VOID		.2.00
	RF	
-1	PLU002		.2.20
	TL		.23.45
	CASH		.20.00
	VOID		.20.00
	CASH		.15.00
	CREDIT		.8.45

* These items are printed on journal only.

To correct the item you registered previously in this receipt

OPERATION **PRINTOUT**
(by optional remote printer)

Step three lines up to designate the item.

		MC #01	
REG	C01	31-10-2008	11:50 AM 000035
1	PLU002		-2.00
1	PLU003		-3.00
6	PLU001		-6.00
	TL		- 11.00
	CASH		-11.00

To cancel all items in a transaction

OPERATION **PRINTOUT**
(by optional remote printer)

		MC #01	
REG	C01	31-10-2008	11:55 AM 000036
1	PLU001		-1.00
1	PLU002		-2.00
1	PLU003		-3.00
1	PLU004		-4.00
	CANCEL	

Pressing key is necessary to cancel the transaction.

No sale registration

REG
 Mode

You can use the following procedure to open the drawer without registering a sale. This operation must be performed out of a sale.

OPERATION **PRINTOUT**
(by optional remote printer)

No receipt is issued.

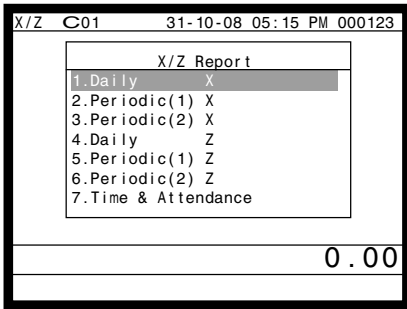
Printing the daily sales reset report

This report shows daily sales totals.


Procedure

Step 1. Press **MODE** and **<X/Z>** icon to turn “X/Z Report”.

Step 2. Select “4.Daily Z” and press **YES**.



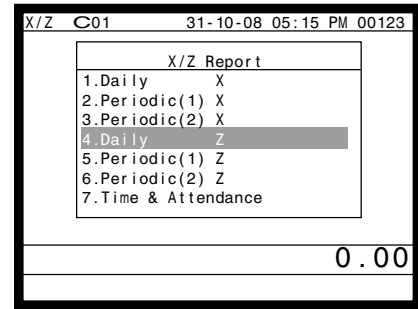
Step 1. screen




Step 2. screen

Step 3. Select “1.Batch” and press **YES**.

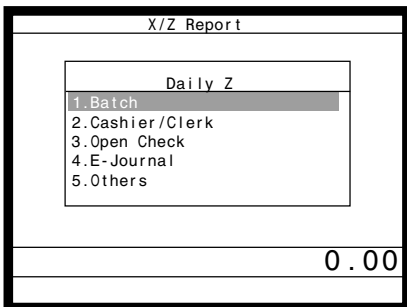Step 4. Select “1.BATCH REPORT 1” and press **YES**.



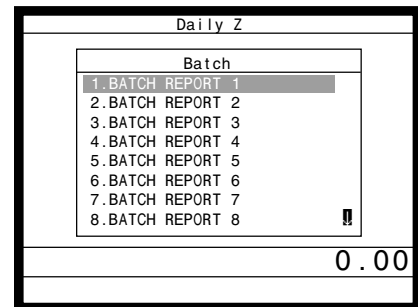Step 3. screen



Step 4. screen

Step 5. Press **ESC/SKIP** repeatedly to return to the “Step 1. screen”.

Printout (by optional remote printer)

			MC #01	Machine No.
Z	C01	31-10-2008 05:15 PM	000237	Clerk/ date/ time/ consecutive No.
Z	0001011	FIXED TTL		Report code/ title / reset counter
GROSS		981.250	·6,574.40	Gross total *2
NET	No	111	·7,057.14	Net total *2
CAID			·1,919.04	Cash in drawer *2
CKID			·859.85	Check in drawer *2
CRID			·709.85	Credit in drawer *2
RF	No	3	·10.22	Refund mode *2
DC			·1.22	Discount total *2
REF			·2.42	Refund key *2
CLEAR	No	85		Clear key count *2
TA1			·2,369.69	Taxable 1 amount *2
TX1			·128.86	Tax 1 amount *2
EX1	No	0	·0.00	Taxable 2 amount *2
TA2			·2,172.96	Tax 2 amount *2
TX2			·217.33	
EX2	No	0	·0.00	
TA10			·0.00	
TX10			·0.00	
EX10	No	0	·0.00	
GT1			·125478.96	Grand total 1 *2
GT2			·346284.23	Grand total 2 *2
GT3			·123212.75	Grand total 3 *2
Z	0001012	FREE FUNCTION		Report code/ title / reset counter
CASH	No	362	·1,638.04	Function key count/ amount *1
CHECK	No	56	·1,174.85	
RC	No	4	·810.00	
PD	No	5	·520.00	
-		3	·410.00	
%-	No	5	·5.00	
VOID	No	14	·39.55	
RCT	No	3		
NS	No	5		
CANCEL	No	1	·100.28	
Z	0001015	DEPT		Report code/ title / reset counter
DEPT01		203.25	·1,108.54	Department count/ amount *1
DISCOUNT			·10.00	Discount total
DEPT02		183	·1,362.26	
DISCOUNT			·0.00	
DEPT04		5	·17.22	
DISCOUNT			·0.00	
TL		421.25	·2,872.28	Department total
DISCOUNT			·112.08	
Z	0001017	CASHIER/CLERK		Report code/ title / reset counter
C01			·1	Clerk name/ drawer No. *1
GROSS		421.254	·2,872.28	Gross total *1
NET	No	111	·1,845.35	Net total *1
CAID			·1,057.14	Cash in drawer *1
CRID			·0.19	Credit in drawer *1
CKID			·9.02	Check in drawer *1
C02			·1	Clerk name/ drawer No. *1

*1 Zero totalled departments/functions/clerks are not printed by programming.

*2 These items can be skipped by programming.

Advanced Operations

This chapter describes more sophisticated operations that you can use to suit the needs of your retail environment.

Post-finalization receipt

The post-finalization receipt lets you issue a receipt after finalization of the transaction.

Note that all of the following conditions must be satisfied.

- The receipt issuance status must be OFF.
- The transaction must be finalized in the REG, REF or REG- mode using <CASH>, <CHARGE>, <CREDIT> or <CHECK>.

Receipt example

OPERATION		
Item 1	Flat 1	\$10.00
	Quantity	1
Item 2	Flat 2	\$20.00
	Quantity	1
Payment	Cash	\$30.00

1 0 00 PLU 001

2 0 00 PLU 002

SUB TOTAL

3 0 00

CA / AMT / TEND

Receipt is not issued.
Sign on a clerk. (if necessary)

RECEIPT

Post-finalization receipt is issued.

PRINTOUT (by optional remote printer)

		MC #01
REG	C01	31-10-2008 01:00 PM 001050
1	PLU001	.10.00
1	PLU002	.20.00
	TL	-30.00
	CASH	.30.00
	CG	.00.00

Important!

- After initialization, the terminal can issue only one post-finalization receipt per transaction.

NOTE

- This key is used for "GUEST RECEIPT" key in check tracking operation.

Inputting the number of customers

Example 1

Customer	Number	2
Item 1	Flat 1	\$15.00
	Quantity	1
Item 2	Flat 2	\$5.00
	Quantity	1
Payment	Cash	\$20.00

OPERATION

2 COVERS

1 5 00 PLU 001

5 00 PLU 002

SUB TOTAL

2 0 00 CA/AMT TEND

PRINTOUT
(by optional remote printer)

```

MC #01
REG C01 31-10-2008 01:10 PM 001051
2CT
1 PLU001 .15.00
1 PLU002 .5.00
TL -20.00
CASH .20.00
CG .0.00
    
```

Example 2

You can only use the following operation to re-input the number of customers when (customer number key) is preset to allow re-input. When programming prohibits re-input of the number of customers, this operation causes an error.

OPERATION

3 COVERS

1 5 00 PLU 001

5 00 PLU 002

2 COVERS

SUB TOTAL

2 0 00 CA/AMT TEND

PRINTOUT
(by optional remote printer)

```

MC #01
REG C01 31-10-2008 01:15 PM 001052
2CT
1 PLU001 .15.00
1 PLU002 .5.00
TL -20.00
CASH .20.00
CG .0.00
    
```

You can re-input the number of customers either immediately after the initial input or during later registration.

Example 3

You can use the following operation to add customers to an original number of customers input (when addition to the number of the customer is allowed).

OPERATION

3 COVERS

1 5 00 PLU 001

5 00 PLU 002

2 COVERS

SUB TOTAL

2 0 00 CA/AMT TEND

PRINTOUT
(by optional remote printer)

```

MC #01
REG C01 31-10-2008 01:20 PM 001055
5CT
1 PLU001 .15.00
1 PLU002 .5.00
TL -20.00
CASH .20.00
CG .0.00
    
```

NOTE

- After initialization, the terminal does not print the number of customer on receipts.

Clerk interrupt function

There are two types of clerk interrupt function, illustrated by Procedure 1 and Procedure 2 below.

- In Procedure 1, each clerk possesses a unique clerk interrupt buffer, and so the clerk interrupt function gives each individual clerk the ability to perform an independent registration operation. In this case, each clerk is individually linked to a unique clerk interrupt buffer.
- In Procedure 2, multiple clerks use the same clerk interrupt buffer, and so a single clerk interrupt operation (clerk change during registration) can perform any registration that is in progress. In this case, multiple clerks are linked to a single clerk interrupt buffer.


In this procedure, “Allow clerk to open check No. belonging to another clerk” program is necessary.

Note the following important points concerning the clerk interrupt function.


- The terminal must be programmed to allow use of the clerk interrupt function.
- In the REG, REF, and REG– modes, clerks can be change while a transaction is in progress, making it possible for multiple clerks to simultaneously perform registrations using a single terminal.

For example, if clerk 1 is interrupted while registering a transaction, clerk 2 can use the same machine to register a different transaction. Then clerk 1 can continue the original registration from the point where it was interrupted. (In Procedure 1)

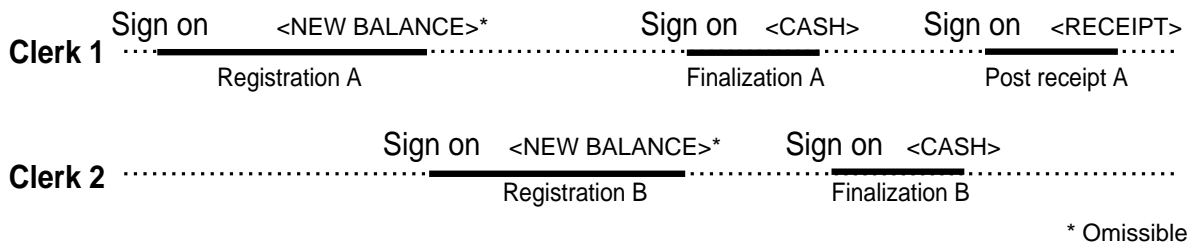Procedure 1



Procedure 2

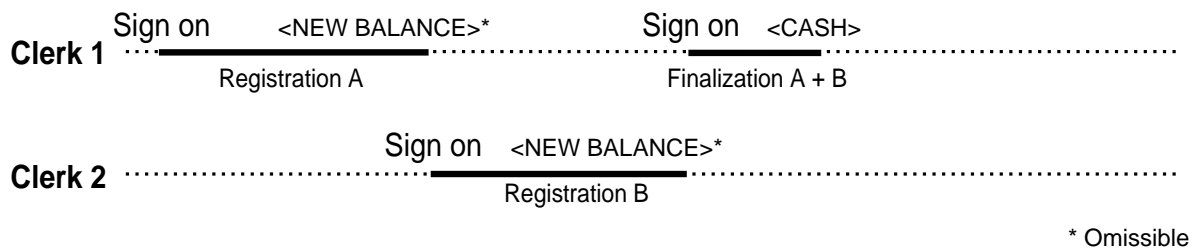

NOTES

- A cancel operation can be performed during registration by either of the clerks. When clerk 1 signs back on (after being interrupt by clerk 2), the cancel operation cancels only the items registered after signing back on (only this receipt) or from the top of the transaction. This is selectable by the key program.
- A <NB> key must be programmed in order to use clerk interrupt.

Printing slip

To perform batch printing on the slip printer, you must first connect the slip printer (SP-1300: option).

There are two ways to print slips:

1. Print all items that are registered until the last slip printing.
2. Print only additional items that are registered until the last receipt issuance (ex. charge posting system).
If you select “option 2”, program “Auto Line Find” also.

Printing slips

The terminal can be connected to the optional SP-1300 slip printer, which features an automatic feed function and automatic back feed function.

• Automatic feed function

This function makes it possible to program the number of line feeds that should be inserted from the normal print start position before starting slip printing. Even if line feeds are programmed for this function, they are not inserted for validation printing, check endorsement printing, and check printing performed using the slip printer.

• Automatic back feed function

This function performs automatic back feed following slip printing, validation printing, and endorsement printing on the slip printer. The slip paper is released once the back feed operation is complete.

• Manual feed function

<SLIP FEED/RELEASE> (slip feed/release key: assigned to the terminal’s keyboard using the program 4 mode) can be used for manual feed of the slip paper. You perform manual feed by inputting a value for the number of lines (up to two digits in the range of 1 to 99) and then press <SLIP FEED/RELEASE>.

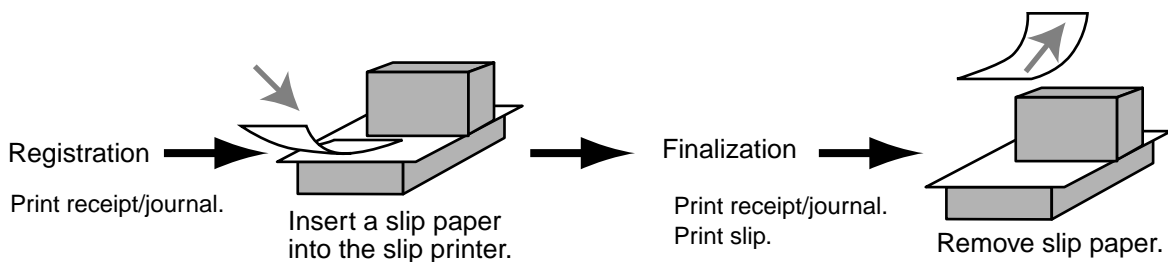
• Manual back feed function

<SLIP BACK FEED/RELEASE> (slip back feed/release key: assigned to the terminal’s keyboard using the program 4 mode) can be used for manual back feed of the slip paper. Manual back feed can be performed by inputting a value for the number of lines (up to two digits in the range of 1 to 99) and then press <SLIP BACK FEED/RELEASE>.


You can print slips using automatic or manual batch printing. The slip print operation can be performed in REG, REF, and REG– modes only.

Finalizing a registration without inserting a slip paper into the slip printer when the terminal is programmed as “Slip Automatic Batch Print Compulsory” produces an error.

To perform auto batch printing 1



To perform auto batch printing 2

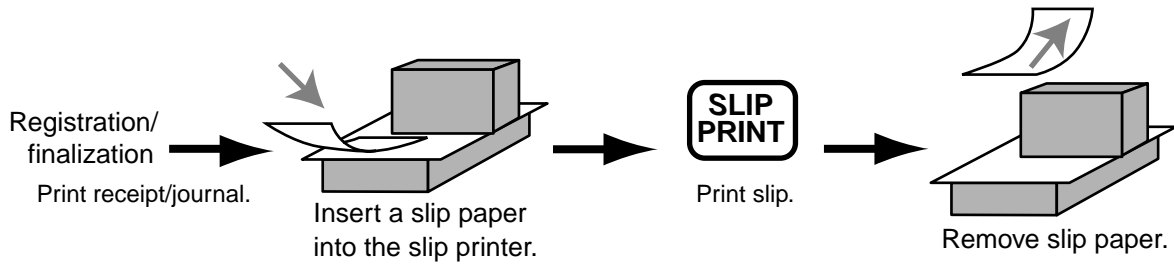

About the maximum number of slip lines

You can program the maximum number of lines that can be printed on a slip. Once you do, any attempt to exceed the preset maximum results in an error. When such an error occurs, change slip paper and press <SLIP PRINT> to restart printing.

Check tracking systems

Check tracking system

With the check tracking system, the amount, check number, number of slip print lines, machine number, date/ time and registration detail data are stored in two files (check tracking index file and check tracking detail file).

- Check tracking detail file and index file are cleared by the following timing:
 1. Check number method: The same check number is not used during daily operation.
The check is cleared after printing finalized data on slip or guest check receipt, or the check is also cleared when the new or old check operation is made on the terminal finalized the transaction.
 2. Table number method: The same check number is used during daily operation.
The check is cleared after printing finalized data on slip or guest check receipt, or check is also cleared when the same finalized check number is assigned in new check operation.You can select one of these options by programming.
- Auto new balance function
The terminal can be programmed so that whenever a clerk (by i-Button key) signs off while a check is open, a <NEW BALANCE> operation is automatically performed to temporarily finalize the open check.
- You can specify a range of checks that can be opened by each clerk. Once you do, any attempt by a clerk to open a check using a number that is not within his specified range results in an error.
- Either of the following two operations can be used to correct input of a wrong check number.
<NEW CHECK>, <NEW/OLD>
Re-input the correct check number, or cancel the original check number, issue a receipt, and then re-input the correct check number.
<OLD CHECK>, <NEW/OLD>
Temporary finalize the original check number, issue a receipt, and then re-input the correct check number.
Printing examples are described under “Print Additional item only” programming.

Opening a check

Example

Check#		1234
Table#		33
Item 1	Flat 1	\$10.00
	Quantity	2
Item 2	Flat 2	\$20.00
	Quantity	2
Item 3	Flat 3	\$30.00
	Quantity	1

OPERATION

1 2 3 4 NEW CHECK
3 3 TABLE #
1 0 00 PLU 001
2 0 00 PLU 002
3 0 00 PLU 003
Insert slip
NB
Remove slip

PRINTOUT
(by optional remote printer)

REG C01		31-10-2008 01:30 PM 001056	MC #01
CHECK No. 1234			#000033
1	PLU001		-10.00
1	PLU001		-10.00
1	PLU002		-20.00
1	PLU002		-20.00
1	PLU003		-30.00
	+		-0.50
	SRVC TL		-90.50

Check No./Table No.

New balance fee

Press <NEW BALANCE> to temporarily finalize the transaction. If you want to finalize a check immediately, use <CASH>, <CHARGE>, <CREDIT> or <CHECK>.

Adding to a check

Example

Check#		1234
Table#		33
Item 1	Flat 1	\$30.00
	Quantity	1
Item 2	Flat 2	\$10.00
	Quantity	1

OPERATION

1 2 3 4 OLD CHECK
3 0 00 PLU 001
1 0 00 PLU 002
Insert slip
NB
Remove slip

PRINTOUT
(by optional remote printer)

REG C01		31-10-2008 01:35 PM 001057	MC #01
CHECK No. 1234			#000033
	ST		-90.50
1	PLU001		-30.00
1	PLU002		-10.00
	+		-0.50
	SRVC TL		-131.00

- * Instead of designating the old check number directly, you can register the appropriate old check number (icon) in the check number pop-up window. (Refer to the page 18 of this manual.)
- The table number is stored in the check tracking index memory so its input is not required in this operation even if table number input is preset as compulsory. Table number input after inputting the check number may be performed, however, without generating an error.
- Once a check is opened under a number in REG mode, the same mode must be used to make additions to the check.

Advanced Operations

Issuing a guest receipt

The following operation can be used to print out the balance of a temporarily finalized check.

Example

OPERATION	PRINTOUT (by optional remote printer)																														
<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">1</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">2</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">3</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">4</div> </div> <div style="border: 1px solid black; padding: 2px 5px; font-size: 8px;">RECEIPT</div> </div> <p style="text-align: center; margin-top: 5px;">Input the number of check you want.</p>	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: right; margin: 0;">MC #01</p> <p>REG C01 31-10-2008 01:30 PM 001056</p> <p>CHECK No 1234 #000033</p> <table style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr><td style="width: 5%;">1</td><td style="width: 85%;">PLU001</td><td style="width: 10%; text-align: right;">-10.00</td></tr> <tr><td>1</td><td>PLU001</td><td style="text-align: right;">-10.00</td></tr> <tr><td>1</td><td>PLU002</td><td style="text-align: right;">-20.00</td></tr> <tr><td>1</td><td>PLU002</td><td style="text-align: right;">-20.00</td></tr> <tr><td>1</td><td>PLU003</td><td style="text-align: right;">-30.00</td></tr> <tr><td></td><td>+</td><td style="text-align: right;">-0.50</td></tr> <tr><td>1</td><td>PLU001</td><td style="text-align: right;">-30.00</td></tr> <tr><td>1</td><td>PLU002</td><td style="text-align: right;">-10.00</td></tr> <tr><td></td><td>+</td><td style="text-align: right;">-0.50</td></tr> <tr><td></td><td>SRVC TL</td><td style="text-align: right;">- 131.00</td></tr> </table> <p style="margin-top: 10px;">**** GUEST BOTTOM MESSAGE 1 ****</p> <p>**** GUEST BOTTOM MESSAGE 2 ****</p> <p>**** GUEST BOTTOM MESSAGE 3 ****</p> <p style="text-align: center;">:</p> <p>**** GUEST BOTTOM MESSAGE10 ****</p> </div>	1	PLU001	-10.00	1	PLU001	-10.00	1	PLU002	-20.00	1	PLU002	-20.00	1	PLU003	-30.00		+	-0.50	1	PLU001	-30.00	1	PLU002	-10.00		+	-0.50		SRVC TL	- 131.00
1	PLU001	-10.00																													
1	PLU001	-10.00																													
1	PLU002	-20.00																													
1	PLU002	-20.00																													
1	PLU003	-30.00																													
	+	-0.50																													
1	PLU001	-30.00																													
1	PLU002	-10.00																													
	+	-0.50																													
	SRVC TL	- 131.00																													

Guest receipt message

Closing a check memory

Example

OPERATION	PRINTOUT (by optional remote printer)												
<div style="display: flex; justify-content: space-around; align-items: center; margin-bottom: 10px;"> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">1</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">2</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">3</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">4</div> </div> <div style="border: 1px solid black; padding: 2px 5px; font-size: 8px;">OLD CHECK</div> </div> <p style="text-align: center; margin-bottom: 10px;">Insert slip</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">1</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">5</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">0</div> <div style="border: 1px solid black; padding: 2px 5px; background-color: #ccc;">00</div> </div> <div style="border: 1px solid black; padding: 2px 5px; font-size: 8px;">CA/AMT TEND</div> </div>	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: right; margin: 0;">MC #01</p> <p>REG C01 31-10-2008 01:40 PM 001058</p> <p>CHECK No. 1234 #000033</p> <table style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr><td style="width: 5%;">ST</td><td style="width: 85%;"></td><td style="width: 10%; text-align: right;">-131.00</td></tr> <tr><td>TL</td><td></td><td style="text-align: right;">- 131.00</td></tr> <tr><td>CASH</td><td></td><td style="text-align: right;">-150.00</td></tr> <tr><td>CG</td><td></td><td style="text-align: right;">-19.00</td></tr> </table> </div>	ST		-131.00	TL		- 131.00	CASH		-150.00	CG		-19.00
ST		-131.00											
TL		- 131.00											
CASH		-150.00											
CG		-19.00											

PRINTOUT
(by optional slip printer)

		MC #01	
REG	C01	31-10-2008 01:40 PM	001058
CHECK No.	1234		#000033
1	PLU001		-10.00
1	PLU001		-10.00
1	PLU002		-20.00
1	PLU002		-20.00
1	PLU003		-30.00
	+		-0.50
#11	SRVC TL		-90.50
1	PLU001		-30.00
1	PLU002		-10.00
	+		-0.50
#15	SRVC TL		-131.00
	TL		-131.00
	CASH		-150.00
	CG		-19.00

New/old check key operation


When the <NEW/OLD> is pressed, check number pop-up window is opened. If the check number you want to use exists in the window, just press the icon and continue the registration.

Example: The check number exists in the window

Just press the icon instead of entering the check number, and continue the registration.

OPERATION **PRINTOUT**
(by optional remote printer)

Press the check 3456 icon.




		MC #01	
REG	C01	31-10-2008 01:50 PM	001060
CHECK No.	3456		
	ST		-10.00
1	PLU001		-10.00
1	PLU002		-20.00
	+		-0.50
	SRVC TL		-40.50

Example: The check number does not exist in the window

If there is no appropriate check number in the window, enter the appropriate check number and press the <NEW/OLD> key. In this operation, the <NEW/OLD> key is treated as <NEW> key.

OPERATION **PRINTOUT**
(by optional remote printer)



Input a check number and press <NEW/OLD>.

		MC #01	
REG	C01	31-10-2008 01:56 PM	001061
CHECK No.	3333		
1	PLU001		-10.00
1	PLU002		-20.00
	+		-0.50
	SRVC TL		-30.50

Advanced Operations

Add check

This operation lets you combine the amounts of more than one check into a single check.

Example

Registration for check number 1234

Original check

Check#	1234	
Item 1	Flat 1	\$10.00
	Quantity	1
Item 2	Flat 2	\$20.00
	Quantity	1

OPERATION

1 2 3 4 NEW/OLD

3 3 TABLE #

1 0 00 PLU 001

2 0 00 PLU 002

NB

PRINTOUT (by optional remote printer)

REG	C01	31-10-2008 02:00 PM	001062	MC #01
CHECK No.	1234		#00033	
1	PLU001			.10.00
1	PLU002			.20.00
	+			.0.50
	SRVC TL			- 30.50

Registration for check number 3456

Added check

Check#	3456	
Item	Flat 1	\$30.00
	Quantity	1

OPERATION

3 4 5 6 NEW/OLD


3 0 00 PLU 001

NB

PRINTOUT (by optional remote printer)

REG	C01	31-10-2008 02:05 PM	001063	MC #01
CHECK No.	3456			
1	PLU001			.30.00
	+			.0.50
	SRVC TL			- 30.50

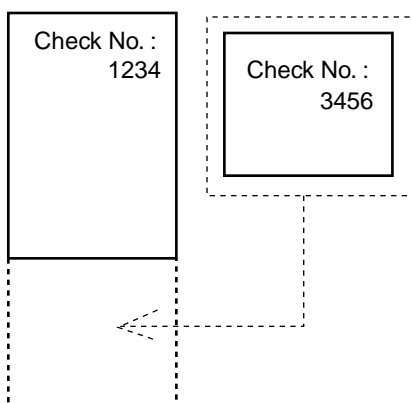Registration for check number 1234



OPERATION

NEW/OLD

Press the check 1234 icon.

3 4 5 6 ADD CHECK

NB

PRINTOUT (by optional remote printer)

REG	C01	31-10-2008 02:10 PM	001064	MC #01
CHECK No.	1234		#0033	
	ST			.30.50
	ADD CHK			3456
	ST			.30.50
	+			.0.50
	SRVC TL			- 61.50

These lines are not printed on receipt.

Separate check

This operation makes it possible to split a single check into separate checks.

Example

Check# 1234		
Item 1	Flat 1	\$10.00
	Quantity	1
Item 2	Flat 2	\$20.00
	Quantity	1
Item 3	Flat 3	\$30.00
	Quantity	2
Item 4	Flat 4	\$40.00
	Quantity	1

Check# 3456		
Item 1	Flat 1	\$10.00
	Quantity	1
Item 2	Flat 3	\$30.00
	Quantity	1
Payment	Cash	\$40.00

OPERATION



Check pop-up window is opened.

Press the check 1234 icon.

Separate check window is opened.

Touch the item1 and item 3 of the original check.

Item 1 and 3 are moved from the original check to separated check.

Press <OK>.



DISPLAY

1	PLU001	*10.00
1	PLU002	*20.00
2	PLU003	*60.00
1	PLU004	*40.00
		*130.00

		*0.00
--	--	-------

1	PLU002	*20.00
1	PLU003	*30.00
1	PLU004	*40.00
		*90.00

1	PLU001	*10.00
1	PLU003	*30.00
		*40.00

PRINTOUT

(by optional remote printer)

		MC #01
REG	C01	31-10-2008 02:15 PM 001065
		CHECK No. 3456
1	PLU001	.10.00
1	PLU003	.30.00
ST		.40.00
CASH		.40.00
CG		.0.00

Advanced Operations

Clerk transfer

This operation lets you change the clerk who is in charge of a specific open check number.

Example

To change the clerk for check number 1234 from clerk 1 to clerk 4.

OPERATION	PRINTOUT (by optional remote printer)									
<p style="text-align: right; margin-bottom: 0;"> CLK# </p> <p>Press this key if you do not want the clerk No. or clerk secret No. to appear on the display.</p> <p style="text-align: right; margin-bottom: 0;"> 1 CLK TRANS </p> <p>Input the clerk No. of the clerk who is currently in charge of check No. 1234 (target check).</p> <p style="text-align: right; margin-bottom: 0;"> 4 OPE # </p> <p>Input the clerk No. of the clerk who will take over check No. 1234 (target check).</p> <p style="text-align: center; margin-bottom: 0;"> 1 2 3 4 NEW CHECK </p> <p>Input the target check No. that is transferred from clerk 1 to 4. You can use either <OLD CHK>, <NEW/OLD>.</p> <p>Note that if you skip this step, all check Nos currently assigned to clerk 1 are transferred to clerk 4.</p> <p style="text-align: right; margin-top: 10px;"> CLK TRANS </p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="text-align: right; margin: 0;">MC #01</p> <p>REG C01 31-10-2008 02:20 PM 001067</p> <p>CLK TRANS</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%; border-bottom: 1px solid black;">C01</td> <td style="width: 40%; border-bottom: 1px solid black;">C04</td> <td style="width: 50%; text-align: right; border-bottom: 1px solid black;">·60.50</td> </tr> <tr> <td style="border-bottom: 1px solid black;">1234</td> <td style="border-bottom: 1px solid black;"></td> <td style="border-bottom: 1px solid black;"></td> </tr> <tr> <td style="border-bottom: 1px solid black;">TL</td> <td style="border-bottom: 1px solid black;"></td> <td style="border-bottom: 1px solid black;">·60.50</td> </tr> </table> </div> <p style="margin-left: 20px;">Check No./NB amount</p>	C01	C04	·60.50	1234			TL		·60.50
C01	C04	·60.50								
1234										
TL		·60.50								

Table transfer

With this operation, you can change the number of a check.

Example 1

To change the check number 1234 to 1111 (which is newly opened).

OPERATION	PRINTOUT (by optional remote printer)															
<div style="border: 1px solid black; padding: 5px; width: fit-content; margin-bottom: 10px;"> Check No: 1234 </div> <p>1111 <TBL TRN></p> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="border: 1px dashed black; padding: 5px; width: 40%;"> Check No: 1234 </div> <div style="border: 1px solid black; padding: 5px; width: 40%;"> Check No: 1111 </div> </div> <p style="text-align: center; margin-top: 10px;"> 1 2 3 4 NEW CHECK 1 0 0 0 PLU 001 1 1 1 1 TABLE TRANS </p> <p style="text-align: center;">Input the new check No.</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="text-align: right; margin: 0;">MC #01</p> <p>REG C01 31-10-2008 02:25 PM 001066</p> <p>CHECK No. 1234</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">1</td> <td style="width: 40%;">PLU001</td> <td style="width: 50%; text-align: right;">·10.00</td> </tr> <tr> <td></td> <td>Check No.</td> <td style="text-align: right;">1234</td> </tr> <tr> <td></td> <td>ST</td> <td style="text-align: right;">·10.00</td> </tr> <tr> <td></td> <td>TBL TRANS</td> <td style="text-align: right;">1111</td> </tr> <tr> <td></td> <td>SRVC TL</td> <td style="text-align: right;">- 10.00</td> </tr> </table> </div>	1	PLU001	·10.00		Check No.	1234		ST	·10.00		TBL TRANS	1111		SRVC TL	- 10.00
1	PLU001	·10.00														
	Check No.	1234														
	ST	·10.00														
	TBL TRANS	1111														
	SRVC TL	- 10.00														

Example 2

To change the check number 3456 to 2222 (which has already been opened).

OPERATION	PRINTOUT (by optional remote printer)															
<div style="display: flex; justify-content: space-around; margin-bottom: 10px;"> <div style="border: 1px solid black; padding: 5px; width: 40%;"> Check No. 3456 </div> <div style="border: 1px solid black; padding: 5px; width: 40%;"> Check No. 2222 </div> </div> <p>2222 <TBL TRN></p> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="border: 1px dashed black; padding: 5px; width: 40%;"> Check No. 3456 </div> <div style="border: 1px solid black; padding: 5px; width: 40%;"> Check No. 2222 Added </div> </div> <p style="text-align: center; margin-top: 10px;"> 3 4 5 6 OLD CHECK 1 0 0 0 PLU 001 2 2 2 2 TABLE TRANS </p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="text-align: right; margin: 0;">MC #01</p> <p>REG C01 31-10-2008 02:30 PM 001069</p> <p>CHECK No. 3456</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">1</td> <td style="width: 40%;">PLU001</td> <td style="width: 50%; text-align: right;">·10.00</td> </tr> <tr> <td></td> <td>Check No.</td> <td style="text-align: right;">3456</td> </tr> <tr> <td></td> <td>ST</td> <td style="text-align: right;">·20.00</td> </tr> <tr> <td></td> <td>TBL TRANS</td> <td style="text-align: right;">2222</td> </tr> <tr> <td></td> <td>SRVC TL</td> <td style="text-align: right;">- 30.00</td> </tr> </table> </div>	1	PLU001	·10.00		Check No.	3456		ST	·20.00		TBL TRANS	2222		SRVC TL	- 30.00
1	PLU001	·10.00														
	Check No.	3456														
	ST	·20.00														
	TBL TRANS	2222														
	SRVC TL	- 30.00														

Condiment/preparation PLUs

You can enter condiment or preparation PLU after the main PLU registration by programming.

Example (condiment PLU)

Main item	Flat 1	\$10.00
Condiment	Flat 3	\$0.10
	PLU 12	\$0.20
	PLU 13	\$0.30
Payment	Cash	\$10.60

OPERATION

Registering main PLU.

PLU 001
1 2 PLU
1 3 PLU
CA/AMT /TEND

PRINTOUT (by optional remote printer)

```

REG C01          MC #01
                31-10-2008 02:50 PM 001080
1  PLU001          -10.00
1  PLU003          -0.10
1  PLU012          -0.20
1  PLU013          -0.30
TL                -10.60
CASH              -10.60
    
```

Example (preparation PLU)

Main item	Flat 2	\$20.00
Preparation	Flat 4	\$0.00
	PLU 22	\$0.00
	PLU 23	\$0.00
Payment	Cash	\$20.00

OPERATION

Registering main PLU.

PLU 002
2 2 PLU
2 3 PLU
CA/AMT /TEND

PRINTOUT (by optional remote printer)

```

REG C01          MC #01
                31-10-2008 02:55 PM 001081
1  PLU002          -20.00
1  PLU004
1  PLU022
1  PLU023
TL                -20.00
CASH              -20.00
    
```

Text recall

This procedure is used to recall text by inputting the address where the text is stored. The recalled text is printed on the receipt and journal. You can also choose recall texts by text recall sub window, which is shown by pressing <TEXT RECALL> directly.

Example

Item 1	Flat 1	\$46.00
	Quantity	1
Item 2	Flat 2	\$10.00
	Quantity	1
Payment	Cash	\$56.00
Text 1	MEDIUM SIZE	
Text 2	SMALL SIZE	

OPERATION

4 6 00 PLU 001
1 TEXT RECALL
1 0 00 PLU 002
2 TEXT RECALL
SUB TOTAL
CA/AMT /TEND

PRINTOUT (by optional remote printer)

```

REG C01          MC #01
                31-10-2008 03:00 PM 001082
1  PLU001          -46.00
MEDIUM SIZE
1  PLU002          -10.00
SMALL SIZE
TL                -56.00
CASH              -56.00
    
```

Advanced Operations

Deposit registrations

Use the following procedures to register deposits.

Deposit from customer

OPERATION

Deposit	Cash	\$50.00
---------	------	---------

5 0 00 DEPOSIT -
CA/AMT /TEND

PRINTOUT (by optional remote printer)

		MC #01
REG C01	31-10-2008 03:05 PM	001083
DEPO-		.50.00
TL		- 50.00
CASH		.50.00

Deposit from customer during sales transaction

OPERATION

Items	Flat 1	\$10.00
	Flat 2	\$20.00
Deposit		\$20.00
Payment	Cash	\$10.00

1 0 00 PLU 001
2 0 00 PLU 002
2 0 00 DEPOSIT +
CA/AMT /TEND

PRINTOUT (by optional remote printer)

		MC #01
REG C01	31-10-2008 03:10 PM	001084
1 PLU001		.10.00
1 PLU002		.20.00
DEPO+		-20.00
TL		- 10.00
CASH		.10.00

- You can select "DEPO+" or "DEPO-" by programming.

List-# registrations

By using <LIST-#>, you can register the item by selecting items in the "LIST" pop-up window.

Example

OPERATION

List-10	
1. PLU0010	\$1.00
2. PLU0012	\$2.00
3. PLU0015	\$5.00
4. PLU0100	\$1.25
5. PLU0111	\$12.98

1 0 LIST#

Touch the appropriate item in the "LIST" pop-up window.

CA/AMT /TEND

DISPLAY

See page 18 of this manual.

Item	PLU0015	\$5.00
	Quantity	1
Payment	Cash	\$5.00

PRINTOUT (by optional remote printer)

		MC #01
REG C01	31-10-2008 03:15 PM	001085
1 PLU015		.5.00
TL		- 5.00
CASH		.5.00

Set menu

When you register a set menu, the unit price of the parent PLU is used. The price of each set menu item is also added to each respective PLU totalizer and counter.

Example

OPERATION			PRINTOUT (by optional remote printer)	
Set menu	Flat 4	\$5.00	<div style="border: 1px solid black; padding: 2px; display: inline-block;">PLU 004</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">CA/AMT TEND</div>	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: right;">MC #01</p> <p>REG C01 31-10-2008 03:25 PM 001087</p> <p>1 PLU004 -5.00 *1</p> <p>PLU031 *1</p> <p>PLU032 *1</p> <p>PLU033 *1</p> <p>PLU034 *1</p> <p>TL -5.00</p> <p>CASH -5.00</p> </div>
Item 1	PLU 31	\$2.00		
Item 2	PLU 32	\$2.00		
Item 3	PLU 33	\$1.00		
Item 4	PLU 34	\$1.00		
Payment	Cash	\$5.00		

*1: These items can be print by programming.

Tips

Example

OPERATION			PRINTOUT (by optional remote printer)	
Item 1	Flat 1	\$3.00	<div style="border: 1px solid black; padding: 2px; display: inline-block;">3 00</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">PLU 001</div>	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: right;">MC #01</p> <p>REG C01 31-10-2008 03:30 PM 001088</p> <p>1 PLU001 -3.00</p> <p>1 PLU002 -5.00</p> <p>TIP -0.80</p> <p>TL -8.80</p> <p>CASH -10.00</p> <p>CG -1.20</p> </div>
	Quantity	1		
Item 2	Flat 2	\$5.00	<div style="border: 1px solid black; padding: 2px; display: inline-block;">SUB TOTAL</div>	
	Quantity	1	<div style="border: 1px solid black; padding: 2px; display: inline-block;">8 0</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">TIP</div>	
Tip	Amount	\$0.80	<div style="border: 1px solid black; padding: 2px; display: inline-block;">1 0 00</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">CA/AMT TEND</div>	
Payment	Cash	\$10.00		

Advanced Operations

Single item cash sales

A department key, subdepartment or PLU programmed with single item sale status finalizes the transaction as soon as it is registered.

The single item sales function cannot work properly if the keyboard does not include <CASH> (the cash key).

The single item sales function can only be used for cash sales.

Example 1

	OPERATION	PRINTOUT (by optional remote printer)																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;"></td> <td style="width: 15%;">Flat 1</td> <td style="width: 15%;">\$1.00</td> </tr> <tr> <td rowspan="2" style="text-align: center;">Item</td> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="text-align: center;">Status</td> <td style="text-align: center;">S.I.S</td> </tr> <tr> <td style="text-align: center;">Payment</td> <td style="text-align: center;">Cash</td> <td style="text-align: center;">\$1.00</td> </tr> </table>		Flat 1	\$1.00	Item	Quantity	1	Status	S.I.S	Payment	Cash	\$1.00	<div style="display: flex; justify-content: center; gap: 10px; align-items: center;"> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 1.2em;">1</div> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 1.2em;">00</div> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 0.8em;">PLU 001</div> </div> <p>The transaction is immediately finalized.</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2"></td> <td style="text-align: right;">MC #01</td> </tr> <tr> <td style="font-weight: bold;">REG</td> <td style="font-weight: bold;">C01</td> <td style="font-weight: bold;">31-10-2008 03:35 PM 001089</td> </tr> <tr> <td style="text-align: right;">1</td> <td>PLU001</td> <td style="text-align: right;">.1.00</td> </tr> <tr> <td></td> <td>TL</td> <td style="text-align: right;">- 1.00</td> </tr> <tr> <td></td> <td>CASH</td> <td style="text-align: right;">.1.00</td> </tr> </table>			MC #01	REG	C01	31-10-2008 03:35 PM 001089	1	PLU001	.1.00		TL	- 1.00		CASH	.1.00
	Flat 1	\$1.00																										
Item	Quantity	1																										
	Status	S.I.S																										
Payment	Cash	\$1.00																										
		MC #01																										
REG	C01	31-10-2008 03:35 PM 001089																										
1	PLU001	.1.00																										
	TL	- 1.00																										
	CASH	.1.00																										

Example 2

	OPERATION	PRINTOUT (by optional remote printer)																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;"></td> <td style="width: 15%;">Flat 1</td> <td style="width: 15%;">(\$1.00)</td> </tr> <tr> <td rowspan="2" style="text-align: center;">Item</td> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">3</td> </tr> <tr> <td style="text-align: center;">Status</td> <td style="text-align: center;">S.I.S</td> </tr> <tr> <td style="text-align: center;">Payment</td> <td style="text-align: center;">Cash</td> <td style="text-align: center;">\$3.00</td> </tr> </table>		Flat 1	(\$1.00)	Item	Quantity	3	Status	S.I.S	Payment	Cash	\$3.00	<div style="display: flex; justify-content: center; gap: 10px; align-items: center;"> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 1.2em;">3</div> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 1.2em;">X</div> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 0.8em;">PLU 001</div> </div> <p>The transaction is immediately finalized.</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2"></td> <td style="text-align: right;">MC #01</td> </tr> <tr> <td style="font-weight: bold;">REG</td> <td style="font-weight: bold;">C01</td> <td style="font-weight: bold;">31-10-2008 03:40 PM 001090</td> </tr> <tr> <td style="text-align: right;">3</td> <td>PLU001</td> <td style="text-align: right;">.3.00</td> </tr> <tr> <td></td> <td>TL</td> <td style="text-align: right;">- 3.00</td> </tr> <tr> <td></td> <td>CASH</td> <td style="text-align: right;">.3.00</td> </tr> </table>			MC #01	REG	C01	31-10-2008 03:40 PM 001090	3	PLU001	.3.00		TL	- 3.00		CASH	.3.00
	Flat 1	(\$1.00)																										
Item	Quantity	3																										
	Status	S.I.S																										
Payment	Cash	\$3.00																										
		MC #01																										
REG	C01	31-10-2008 03:40 PM 001090																										
3	PLU001	.3.00																										
	TL	- 3.00																										
	CASH	.3.00																										

Example 3

	OPERATION	PRINTOUT (by optional remote printer)																																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="3" style="text-align: center;">Item 1</td> <td style="text-align: center;">Flat 4</td> <td style="text-align: center;">\$2.00</td> </tr> <tr> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="text-align: center;">Status</td> <td style="text-align: center;">Normal</td> </tr> <tr> <td rowspan="3" style="text-align: center;">Item 2</td> <td style="text-align: center;">Flat 1</td> <td style="text-align: center;">\$1.00</td> </tr> <tr> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="text-align: center;">Status</td> <td style="text-align: center;">S.I.S</td> </tr> <tr> <td style="text-align: center;">Payment</td> <td style="text-align: center;">Cash</td> <td style="text-align: center;">\$3.00</td> </tr> </table>	Item 1	Flat 4	\$2.00	Quantity	1	Status	Normal	Item 2	Flat 1	\$1.00	Quantity	1	Status	S.I.S	Payment	Cash	\$3.00	<div style="display: flex; justify-content: center; gap: 10px; align-items: center;"> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 1.2em;">2</div> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 1.2em;">00</div> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 0.8em;">PLU 004</div> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 0.8em;">PLU 001</div> </div> <p>The transaction is not finalized. Because another item is registered before the single item sales.</p> <div style="border: 1px solid black; padding: 2px 5px; font-weight: bold; font-size: 0.8em; margin-top: 10px;">CA/AMT /TEND</div>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2"></td> <td style="text-align: right;">MC #01</td> </tr> <tr> <td style="font-weight: bold;">REG</td> <td style="font-weight: bold;">C01</td> <td style="font-weight: bold;">31-10-2008 03:40 PM 001090</td> </tr> <tr> <td style="text-align: right;">1</td> <td>PLU004</td> <td style="text-align: right;">.2.00</td> </tr> <tr> <td style="text-align: right;">1</td> <td>PLU001</td> <td style="text-align: right;">.1.00</td> </tr> <tr> <td></td> <td>TL</td> <td style="text-align: right;">- 3.00</td> </tr> <tr> <td></td> <td>CASH</td> <td style="text-align: right;">.3.00</td> </tr> </table>			MC #01	REG	C01	31-10-2008 03:40 PM 001090	1	PLU004	.2.00	1	PLU001	.1.00		TL	- 3.00		CASH	.3.00
Item 1		Flat 4	\$2.00																																		
		Quantity	1																																		
	Status	Normal																																			
Item 2	Flat 1	\$1.00																																			
	Quantity	1																																			
	Status	S.I.S																																			
Payment	Cash	\$3.00																																			
		MC #01																																			
REG	C01	31-10-2008 03:40 PM 001090																																			
1	PLU004	.2.00																																			
1	PLU001	.1.00																																			
	TL	- 3.00																																			
	CASH	.3.00																																			

Addition

Addition (plus)

Example

Item 1	Flat 1	\$1.00
	Quantity	1
	Addition	\$0.10
Item 2	Flat 1	\$2.00
	Quantity	3
	Addition	3 × (\$0.20)
Payment	Cash	\$7.70

OPERATION

1 **00** **PLU**
001
1 **0** **+**
3 **X**
2 **00** **PLU**
001
3 **X**
+
CA/AMT
TEND

PRINTOUT (by optional remote printer)

```

MC #01
REG C01 31-10-2008 03:50 PM 001100
1 PLU001 .1.00
+ .0.10
3 PLU001 .6.00
+ .0.60
TL -7.70
CASH -7.70
    
```

Premium (%+)

Example

Item 1	Flat 1	\$1.00
	Quantity	1
	Premium	10%
Item 2	Flat 1	\$2.00
	Quantity	3
Subtotal	Premium	(15%)
Payment	Cash	\$8.17

OPERATION

1 **00** **PLU**
001
1 **0** **%+**
3 **X**
2 **00** **PLU**
001
SUB
TOTAL
%+
CA/AMT
TEND

PRINTOUT (by optional remote printer)

```

MC #01
REG C01 31-10-2008 03:50 PM 001101
1 PLU001 .1.00
10%
%+ .0.10
3 PLU001 .6.00
ST .7.10
15%
%+ .1.07
TL -8.17
CASH -8.17
    
```

Coupon transactions

Note that error occurs when the result of the coupon (not coupon 2) registration is negative, if the terminal is programmed to prohibit credit balances.

Coupon registration using <COUPON> (coupon key)

Example

Item 1	Flat 1	\$3.00
	Quantity	2
	Coupon	\$0.50 × 2
Item 2	Flat 3	\$4.00
	Quantity	1
	Coupon	(\$1.00)
Payment	Cash	\$8.00

OPERATION

2 X
 3 00 PLU 001
 2 X
 5 0 CPN
 4 00 PLU 003
 CPN
 CA/AMT
 TEND

PRINTOUT (by optional remote printer)

```

MC #01
REG C01 31-10-2008 04:00 PM 001110
2 PLU001          -6.00
  COUPON          -1.00
1 PLU003          -4.00
  COUPON          -1.00
  TL              - 8.00
  CASH            -8.00
  
```

Coupon registration using <CPN2> (coupon 2 key)

Example

Item 1	Flat 1	\$15.00
	Quantity	1
	Coupon 2 Flat 1	\$1.50
Item 2	Flat 2	\$5.00
	Quantity	1
	Coupon 2 Flat 2	(\$0.50)
Payment	Cash	\$18.00

OPERATION

CPN2 1 5 00 PLU 001
 1 5 0 PLU 001
 5 00 PLU 002
 CPN2 5 0 PLU 002
 CA/AMT
 TEND

PRINTOUT (by optional remote printer)

```

MC #01
REG C01 31-10-2008 04:05 PM 001111
1 PLU001          -15.00
  CPN2            .....
1 PLU001          -1.50
1 PLU002          -5.00
  CPN2            .....
1 PLU002          -0.50
  TL              -18.00
  CASH            -18.00
  
```


Registering the second unit price

Second unit prices along with quantity modifiers can be programmed to PLUs. Pressing <1st@> (1st unit price key)/<2nd@> (2nd unit price key) calls up the first/second unit price, quantity modifier, and descriptor. Totalizers and inventory are adjusted by multiplying the number of items being registered by the quantity modifier programmed to the PLU being registered.

- <1st@> or <2nd@> must be pressed before each registration of a PLU.
- Second unit price registration is not available with open PLUs when unit price is not preset.
- Second unit prices and quantity modifiers are assigned to PLUs using programming procedures described in the programming manual.

Example 1

	OPERATION	PRINTOUT (by optional remote printer)																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="3" style="text-align: center;">Item 1</td> <td style="text-align: center;">Flat 1_{2nd@}</td> <td style="text-align: center;">(\$10.00)</td> </tr> <tr> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="text-align: center;">2nd Q'ty</td> <td style="text-align: center;">1</td> </tr> <tr> <td rowspan="3" style="text-align: center;">Item 2</td> <td style="text-align: center;">PLU 10_{2nd@}</td> <td style="text-align: center;">(\$5.00)</td> </tr> <tr> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="text-align: center;">2nd Q'ty</td> <td style="text-align: center;">1</td> </tr> <tr> <td style="text-align: center;">Payment</td> <td style="text-align: center;">Cash</td> <td style="text-align: center;">\$15.00</td> </tr> </table>	Item 1	Flat 1 _{2nd@}	(\$10.00)	Quantity	1	2nd Q'ty	1	Item 2	PLU 10 _{2nd@}	(\$5.00)	Quantity	1	2nd Q'ty	1	Payment	Cash	\$15.00	<div style="text-align: center;"> 2nd@ PLU 001 </div> <p>The operation declares that the next input is a second unit price.</p> <div style="text-align: center;"> 2nd@ 1 0 PLU </div> <div style="text-align: center; margin-top: 10px;"> SUB TOTAL </div> <div style="text-align: center; margin-top: 10px;"> CA / AMT / TEND </div>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2"></td> <td style="text-align: right;">MC #01</td> <td></td> </tr> <tr> <td style="text-align: left;">REG</td> <td style="text-align: left;">C01</td> <td style="text-align: left;">31-10-2008 04:10 PM</td> <td style="text-align: left;">001112</td> </tr> <tr> <td style="text-align: left;">1</td> <td style="text-align: left;">PLU001</td> <td style="text-align: right;">·10.00</td> <td></td> </tr> <tr> <td style="text-align: left;">1</td> <td style="text-align: left;">PLU010</td> <td style="text-align: right;">·5.00</td> <td></td> </tr> <tr> <td></td> <td style="text-align: left;">TL</td> <td style="text-align: right;">- 15.00</td> <td></td> </tr> <tr> <td></td> <td style="text-align: left;">CASH</td> <td style="text-align: right;">·15.00</td> <td></td> </tr> </table> <p style="text-align: right; margin-top: 5px;">2nd@ descriptor/ amount</p>			MC #01		REG	C01	31-10-2008 04:10 PM	001112	1	PLU001	·10.00		1	PLU010	·5.00			TL	- 15.00			CASH	·15.00	
Item 1		Flat 1 _{2nd@}	(\$10.00)																																								
		Quantity	1																																								
	2nd Q'ty	1																																									
Item 2	PLU 10 _{2nd@}	(\$5.00)																																									
	Quantity	1																																									
	2nd Q'ty	1																																									
Payment	Cash	\$15.00																																									
		MC #01																																									
REG	C01	31-10-2008 04:10 PM	001112																																								
1	PLU001	·10.00																																									
1	PLU010	·5.00																																									
	TL	- 15.00																																									
	CASH	·15.00																																									

Example 2

	OPERATION	PRINTOUT (by optional remote printer)																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="3" style="text-align: center;">Item</td> <td style="text-align: center;">Flat 2_{2nd@}</td> <td style="text-align: center;">(\$10.00)</td> </tr> <tr> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">5</td> </tr> <tr> <td style="text-align: center;">2nd Q'ty</td> <td style="text-align: center;">3</td> </tr> <tr> <td style="text-align: center;">Payment</td> <td style="text-align: center;">Cash</td> <td style="text-align: center;">\$50.00</td> </tr> </table>	Item	Flat 2 _{2nd@}	(\$10.00)	Quantity	5	2nd Q'ty	3	Payment	Cash	\$50.00	<div style="text-align: center;"> 5 X </div> <div style="text-align: center; margin-top: 10px;"> 2nd@ PLU 002 </div> <div style="text-align: center; margin-top: 10px;"> 5 0 00 CA / AMT / TEND </div>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2"></td> <td style="text-align: right;">MC #01</td> <td></td> </tr> <tr> <td style="text-align: left;">REG</td> <td style="text-align: left;">C01</td> <td style="text-align: left;">31-10-2008 04:15 PM</td> <td style="text-align: left;">001113</td> </tr> <tr> <td style="text-align: left;">5</td> <td style="text-align: left;">PLU002</td> <td style="text-align: right;">·50.00</td> <td></td> </tr> <tr> <td></td> <td style="text-align: left;">TL</td> <td style="text-align: right;">- 50.00</td> <td></td> </tr> <tr> <td></td> <td style="text-align: left;">CASH</td> <td style="text-align: right;">·50.00</td> <td></td> </tr> <tr> <td></td> <td style="text-align: left;">CG</td> <td style="text-align: right;">·0.00</td> <td></td> </tr> </table>			MC #01		REG	C01	31-10-2008 04:15 PM	001113	5	PLU002	·50.00			TL	- 50.00			CASH	·50.00			CG	·0.00	
Item		Flat 2 _{2nd@}	(\$10.00)																																	
		Quantity	5																																	
	2nd Q'ty	3																																		
Payment	Cash	\$50.00																																		
		MC #01																																		
REG	C01	31-10-2008 04:15 PM	001113																																	
5	PLU002	·50.00																																		
	TL	- 50.00																																		
	CASH	·50.00																																		
	CG	·0.00																																		

Currency exchange function

When <CE> (currency exchange key) and <ST> are pressed, a current subtotal including tax is converted into foreign currency and the result is displayed.



Before using the currency exchange function, it is necessary to program the conversion rate and foreign currency amount symbol.

Registering foreign currency





Full amount tender in a foreign currency





* Pre-programmed exchange rate: ¥ 100 = \$0.9524





Important!






Tenders in a foreign currency can be registered using the  and  only. Other finalize keys cannot be used.

OPERATION


    ← Enter the unit price and press the applicable flat-PLU key.

    ← Enter the next unit price and press the applicable flat-PLU key.

  ← Press  and  without entering a numeric value. This operation converts the subtotal (including tax) dollar value into yen by applying a pre-programmed exchange rate. The result is shown on the display and printed on the receipt/journal by programming.

    ← Press  and enter the amount tendered in yen. This operation converts the entered yen amount into dollars by applying a pre-programmed exchange rate.

(¥5,000)

 ← Press to finalize the transaction. Note that you do not need to reenter the dollar amount. The terminal automatically calculates the change amount due in dollars and shows it on the display, receipts and journal.

DISPLAY

REG	C01	31-10-08	05:00 PM	001150
1	PLU001			· 10.00
1	PLU002			· 20.00
	TL			· 30.00
	CE			
	CASH			¥5,000
	CASH			· 47.62
	CG			· 17.62
CG				· 17.62

PRINTOUT (by optional remote printer)

REG	C01	31-10-2008	05:00 PM	001150	MC #01
1	PLU001				· 10.00
2	PLU002				· 20.00
	TL				· 30.00
	CE				
	CASH				¥5,000
	CASH				· 47.62
	CG				· 17.62

Partial tender in a foreign currency

* Pre-programmed exchange rate: ¥ 100 = \$0.9524

Important!

Tender in a foreign currency can be registered using **CA/AMT/TEND** and **CHK/TEND** only. Other finalization keys cannot be used, but the remaining tender in local currency can be finalized using any finalize key.

OPERATION

1 0 00 **PLU 001** ← Enter the unit price and press the applicable flat-PLU key.

2 0 00 **PLU 002** ← Enter the next unit price and press the applicable flat-PLU key.

CE **SUB TOTAL** ← Press **CE** and **SUB TOTAL** without entering a numeric value. This operation converts the subtotal (including tax) dollar value into yen by applying a pre-programmed exchange rate. The result is shown on the display and printed on the receipt/journal by programming.

CE **2 0 00** ← Press **CE** and enter the partial amount tendered in yen. (¥2,000)
This operation converts the entered yen amount into dollars by applying a pre-programmed exchange rate.

CA/AMT/TEND ← Press **CA/AMT/TEND** to specify cash tender for the yen partial tender. Note that you do not need to reenter the dollar amount.
The terminal automatically deducts the dollar equivalent of the yen amount tendered from the total amount due and shows the rest amount on the display.

CHK/TEND ← Press to finalize the transaction.

DISPLAY

REG	C01	31-10-08 05:05 PM 001151
1	PLU001	· 10.00
1	PLU002	· 20.00
	TL	· 30.00
	CE	
	CASH	¥2,000
	CASH	· 19.05
	CHECK	· 10.95
CHK		· 10.95

PRINTOUT (by optional remote printer)

		MC #01
REG	C01	31-10-2008 05:05 PM 001151
1	PLU001	· 10.00
1	PLU002	· 20.00
	TL	· 30.00
	CE	
	CASH	¥2,000
	CASH	· 19.05
	CHECK	· 10.95

Temporarily releasing compulsion

<OPEN> (open key) can release HDL (High Digit Limitation)/LDL (Low Digit Limitation) and can be programmed to release HAL (High Amount Limit).

<OPEN 2> (open 2 key) can be programmed to release specific compulsion.

Example 1

OPERATION			PRINTOUT (by optional remote printer)																
Item	Flat 1	\$10.00	1 0 00 <input type="button" value="PLU 001"/>	<table border="1"> <tr> <td colspan="2"></td> <td>MC #01</td> </tr> <tr> <td>REG</td> <td>C01</td> <td>31-10-2008 05:15 PM 001160</td> </tr> <tr> <td>1</td> <td>PLU001</td> <td>-10.00</td> </tr> <tr> <td></td> <td>TL</td> <td>- 10.00</td> </tr> <tr> <td></td> <td>CASH</td> <td>-10.00</td> </tr> </table>			MC #01	REG	C01	31-10-2008 05:15 PM 001160	1	PLU001	-10.00		TL	- 10.00		CASH	-10.00
		MC #01																	
REG	C01	31-10-2008 05:15 PM 001160																	
1	PLU001	-10.00																	
	TL	- 10.00																	
	CASH	-10.00																	
	HAL	\$1.00	ERROR occur																
			* <input type="button" value="OPEN"/>																
Payment	Cash	\$10.00	1 0 00 <input type="button" value="PLU 001"/>																
			<input type="button" value="CA/AMT /TEND"/>																

* In this case, should be programmed to “release high amount limit”.

Example 2

OPERATION			PRINTOUT (by optional remote printer)																			
Input check No. compulsory			Check window opens.	<table border="1"> <tr> <td colspan="2"></td> <td>MC #01</td> </tr> <tr> <td>REG</td> <td>C01</td> <td>31-10-2008 05:20 PM 001161</td> </tr> <tr> <td>1</td> <td>PLU001</td> <td>-10.00</td> </tr> <tr> <td></td> <td>TL</td> <td>- 10.00</td> </tr> <tr> <td></td> <td>CHECK</td> <td>-10.00</td> </tr> <tr> <td></td> <td>CG</td> <td>-0.00</td> </tr> </table>			MC #01	REG	C01	31-10-2008 05:20 PM 001161	1	PLU001	-10.00		TL	- 10.00		CHECK	-10.00		CG	-0.00
		MC #01																				
REG	C01	31-10-2008 05:20 PM 001161																				
1	PLU001	-10.00																				
	TL	- 10.00																				
	CHECK	-10.00																				
	CG	-0.00																				
Item	Flat 1	\$10.00	<input type="button" value="ESC/ SKIP"/>																			
	Quantity	1	1 0 00 <input type="button" value="PLU 001"/>																			
			ERROR occur																			
Payment	Check	\$10.00	Input check No. compulsory																			
			<input type="button" value="OPEN 2"/>																			
			Compulsory is temporarily released.																			
			1 0 00 <input type="button" value="PLU 001"/>																			
			1 0 00 <input type="button" value="CHK/ TEND"/>																			

VAT breakdown printing

You can force printing of the VAT breakdown at the finalize stage, regardless of whether the terminal is programmed to print or skip printing of the VAT breakdown. Every time you want to have VAT breakdown, press <VAT>.

Example

OPERATION			PRINTOUT (by optional remote printer)																						
Item 1	Flat 1	\$1.00	1 00	PLU 001	<table style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: right;">MC #01</td> </tr> <tr> <td>REG C01</td> <td style="text-align: right;">31-10-2008 05:20 PM 001161</td> </tr> <tr> <td>1 PLU001</td> <td style="text-align: right;">.1.00 T1</td> </tr> <tr> <td>1 PLU002</td> <td style="text-align: right;">.2.00 T2</td> </tr> <tr> <td>TA1</td> <td style="text-align: right;">.0.90</td> </tr> <tr> <td>TX1</td> <td style="text-align: right;">.0.10</td> </tr> <tr> <td>TA2</td> <td style="text-align: right;">.1.90</td> </tr> <tr> <td>TX2</td> <td style="text-align: right;">.0.10</td> </tr> <tr> <td>TL</td> <td style="text-align: right;">.3.00</td> </tr> <tr> <td>CASH</td> <td style="text-align: right;">.3.00</td> </tr> </table>	MC #01		REG C01	31-10-2008 05:20 PM 001161	1 PLU001	.1.00 T1	1 PLU002	.2.00 T2	TA1	.0.90	TX1	.0.10	TA2	.1.90	TX2	.0.10	TL	.3.00	CASH	.3.00
	MC #01																								
REG C01	31-10-2008 05:20 PM 001161																								
1 PLU001	.1.00 T1																								
1 PLU002	.2.00 T2																								
TA1	.0.90																								
TX1	.0.10																								
TA2	.1.90																								
TX2	.0.10																								
TL	.3.00																								
CASH	.3.00																								
Taxable	1	2 0 0	PLU 002																						
Item 2	Flat 2			\$2.00	VAT																				
Item 2	Flat 2	\$2.00	2 0 0	PLU 002																					
	Taxable	2			VAT																				
Payment	Cash	\$3.00	CA / AMT TEND																						

Advanced Operations

Registering loan amounts

Use this procedure to register loan or bank received from the office.

	OPERATION	PRINTOUT (by optional remote printer)												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="4" style="text-align: center; vertical-align: middle;">Item</td> <td style="text-align: center;">Note</td> <td style="text-align: right;">\$1.00</td> </tr> <tr> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">10</td> </tr> <tr> <td style="text-align: center;">Note</td> <td style="text-align: right;">\$5.00</td> </tr> <tr> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">5</td> </tr> <tr> <td style="text-align: center;">Media</td> <td style="text-align: center;">Cash</td> <td style="text-align: right;">\$35.00</td> </tr> </table>	Item	Note	\$1.00	Quantity	10	Note	\$5.00	Quantity	5	Media	Cash	\$35.00	<div style="display: flex; flex-direction: column; align-items: center; gap: 10px;"> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">1</div> <div style="border: 1px solid black; padding: 2px 5px;">0</div> <div style="border: 1px solid black; padding: 2px 5px;">X</div> </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">1</div> <div style="border: 1px solid black; padding: 2px 5px;">00</div> <div style="border: 1px solid black; padding: 2px 5px;">LOAN</div> </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">5</div> <div style="border: 1px solid black; padding: 2px 5px;">X</div> </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">5</div> <div style="border: 1px solid black; padding: 2px 5px;">00</div> <div style="border: 1px solid black; padding: 2px 5px;">LOAN</div> </div> <div style="border: 1px solid black; padding: 2px 5px; margin-top: 10px;">CA/AMT TEND</div> </div>	<div style="border: 1px solid black; padding: 5px; font-family: monospace; font-size: small;"> <div style="text-align: right; margin-bottom: 5px;">MC #01</div> REG C01 31-10-2008 05:30 PM 001180 LOAN .10.00 LOAN .25.00 CASH -35.00 </div>
Item		Note	\$1.00											
		Quantity	10											
		Note	\$5.00											
	Quantity	5												
Media	Cash	\$35.00												

Registering pick up amounts

Use this procedure to register pick up money from cash drawer.

	OPERATION	PRINTOUT (by optional remote printer)												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="4" style="text-align: center; vertical-align: middle;">Item</td> <td style="text-align: center;">Coin</td> <td style="text-align: right;">\$0.50</td> </tr> <tr> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">10</td> </tr> <tr> <td style="text-align: center;">Coin</td> <td style="text-align: right;">\$0.10</td> </tr> <tr> <td style="text-align: center;">Quantity</td> <td style="text-align: center;">5</td> </tr> <tr> <td style="text-align: center;">Media</td> <td style="text-align: center;">Cash</td> <td style="text-align: right;">\$5.50</td> </tr> </table>	Item	Coin	\$0.50	Quantity	10	Coin	\$0.10	Quantity	5	Media	Cash	\$5.50	<div style="display: flex; flex-direction: column; align-items: center; gap: 10px;"> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">1</div> <div style="border: 1px solid black; padding: 2px 5px;">0</div> <div style="border: 1px solid black; padding: 2px 5px;">X</div> </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">5</div> <div style="border: 1px solid black; padding: 2px 5px;">0</div> <div style="border: 1px solid black; padding: 2px 5px;">PICK UP</div> </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">5</div> <div style="border: 1px solid black; padding: 2px 5px;">X</div> </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">1</div> <div style="border: 1px solid black; padding: 2px 5px;">0</div> <div style="border: 1px solid black; padding: 2px 5px;">PICK UP</div> </div> <div style="border: 1px solid black; padding: 2px 5px; margin-top: 10px;">CA/AMT TEND</div> </div>	<div style="border: 1px solid black; padding: 5px; font-family: monospace; font-size: small;"> <div style="text-align: right; margin-bottom: 5px;">MC #01</div> REG C01 31-10-2008 05:35 PM 001181 P. UP .5.00 P. UP .0.50 CASH -5.50 </div>
Item		Coin	\$0.50											
		Quantity	10											
		Coin	\$0.10											
	Quantity	5												
Media	Cash	\$5.50												

Changing media in drawer

Use this procedure to change media in drawer.

	OPERATION	PRINTOUT (by optional remote printer)							
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="3" style="text-align: center; vertical-align: middle;">Media</td> <td style="text-align: center;">Check</td> <td style="text-align: right;">-10.00</td> </tr> <tr> <td style="text-align: center;">Cash</td> <td style="text-align: right;">\$8.00</td> </tr> <tr> <td style="text-align: center;">Charge</td> <td style="text-align: right;">\$2.00</td> </tr> </table> <p style="margin-top: 10px; text-align: center;">Enter the amount to be changed.</p>	Media	Check	-10.00	Cash	\$8.00	Charge	\$2.00	<div style="display: flex; flex-direction: column; align-items: center; gap: 10px;"> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">1</div> <div style="border: 1px solid black; padding: 2px 5px;">0</div> <div style="border: 1px solid black; padding: 2px 5px;">00</div> <div style="border: 1px solid black; padding: 2px 5px; font-size: x-small;">MEDIA CHANGE</div> <div style="border: 1px solid black; padding: 2px 5px; font-size: x-small;">CHK/ TEND</div> </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">8</div> <div style="border: 1px solid black; padding: 2px 5px;">00</div> <div style="border: 1px solid black; padding: 2px 5px; font-size: x-small;">CA/AMT TEND</div> </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">2</div> <div style="border: 1px solid black; padding: 2px 5px;">00</div> <div style="border: 1px solid black; padding: 2px 5px; font-size: x-small;">CH</div> </div> </div>	<div style="border: 1px solid black; padding: 5px; font-family: monospace; font-size: small;"> <div style="text-align: right; margin-bottom: 5px;">MC #01</div> REG C01 31-10-2008 05:40 PM 001182 MEDIA CHG CHECK -10.00 CASH .8.00 CHARGE .2.00 </div>
Media		Check	-10.00						
		Cash	\$8.00						
	Charge	\$2.00							

Stock check

Each PLU has an actual stock totalizer that you can program with a minimum stock quantity. The terminal checks actual stock quantities against the programmed minimum stock quantities. Stock operations are performed only for PLUs programmed with minimum stock quantities.

Stock warnings

When the minimum stock value of an item is set, the terminal subtracts its stock quantity from the registered quantity (or registered quantity × unit stock).

The following warning indicates stock problem to the operator.

- **Negative stock:**
This indicates that the actual stock quantity is negative. The terminal to treat this condition as an error.
- **Under minimum stock:**
This indicates that the actual stock quantity is less than the minimum stock quantity. The terminal sounds a buzzer when the actual stock quantity is less than the minimum stock quantity.

Notes

- None of the warning indicators appear unless the terminal is specifically programmed for the stock check operation.
- Stock operations can be performed for registrations in the REF mode or those performed with <REFUND> (the refund key).
- An error correct, void, or cancel operation restores the original value of items back in stock value. (You can change the stock calculation formula of REF mode, <REFUND> or <VOID> by programming.)

Actual stock quantity inquiry

With this operation, you can recall the actual stock quantity for PLUs, departments, scanning PLUs and show it on the display of the terminal.

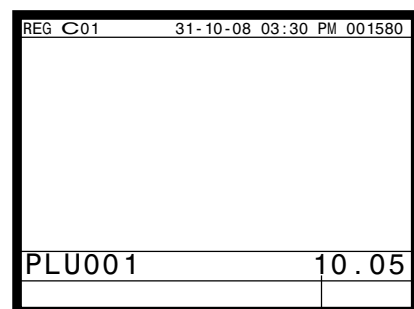
Example

To inquire the actual stock quantity of flat-PLU 001.

OPERATION

STOCK
INQ
PLU
001

DISPLAY



Actual stock quantity

Scanning PLU

Product barcodes are read by scanning with hand-held scanner, and are filed in the scanning PLU file. The unit price, item descriptor, programming status, link department, totalizer and counter, the terminal are filed in the scanning PLU file.

When a barcode is entered by scanning, or from the keyboard by using <OBR> (OBR key), the terminal searches its scanning PLU file and finds the preset unit price to accumulate to the scanning PLU file.

Scanning PLUs include UPC-A/EAN-13/EAN-8, source marking, in-store marking code.

Item registration

By scanner/code input

	OPERATION	PRINTOUT (by optional remote printer)															
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">Item 1 (scan)</td> <td style="width: 25%;">Scan-PLU</td> <td style="width: 50%;">(\$2.35)</td> </tr> <tr> <td></td> <td>PLU code</td> <td>49012347</td> </tr> <tr> <td>Item 2 (code)</td> <td>Scan-PLU</td> <td>(\$2.00)</td> </tr> <tr> <td></td> <td>PLU code</td> <td>123456</td> </tr> <tr> <td>Payment</td> <td>Cash</td> <td>\$5.00</td> </tr> </table>	Item 1 (scan)	Scan-PLU	(\$2.35)		PLU code	49012347	Item 2 (code)	Scan-PLU	(\$2.00)		PLU code	123456	Payment	Cash	\$5.00	<p>“Scanning”</p> <p>1 2 3</p> <p>4 5 6 OBR</p> <p>Scanning-PLU code and OBR key</p> <p>5 00 CA/AMT/TEND</p>	<pre style="font-family: monospace; font-size: 0.8em;"> MC #01 REG C01 31-10-2008 05:45 PM 001182 1 SCAN-PLU100 -2.35 1 SCAN-PLU101 -2.00 TL -4.35 CASH -5.00 CG -0.65 </pre>
Item 1 (scan)	Scan-PLU	(\$2.35)															
	PLU code	49012347															
Item 2 (code)	Scan-PLU	(\$2.00)															
	PLU code	123456															
Payment	Cash	\$5.00															

Mix and match discount registration

Discount 0.50 by every Item 1 registration.

	OPERATION	PRINTOUT (by optional remote printer)																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">Item 1</td> <td style="width: 25%;">Scan-PLU</td> <td style="width: 50%;">(\$2.35)</td> </tr> <tr> <td></td> <td>PLU code</td> <td>49012347</td> </tr> <tr> <td>Item 1</td> <td>Scan-PLU</td> <td>(\$2.35)</td> </tr> <tr> <td></td> <td>PLU code</td> <td>49012347</td> </tr> <tr> <td>Item 1</td> <td>Scan-PLU</td> <td>(\$2.35)</td> </tr> <tr> <td></td> <td>PLU code</td> <td>49012347</td> </tr> <tr> <td>Discount</td> <td>3 item</td> <td>(\$0.50)</td> </tr> <tr> <td>Item 1</td> <td>Scan-PLU</td> <td>(\$2.35)</td> </tr> <tr> <td></td> <td>PLU code</td> <td>49012347</td> </tr> <tr> <td>Payment</td> <td>Cash</td> <td>\$10.00</td> </tr> </table>	Item 1	Scan-PLU	(\$2.35)		PLU code	49012347	Item 1	Scan-PLU	(\$2.35)		PLU code	49012347	Item 1	Scan-PLU	(\$2.35)		PLU code	49012347	Discount	3 item	(\$0.50)	Item 1	Scan-PLU	(\$2.35)		PLU code	49012347	Payment	Cash	\$10.00	<p>“Scanning”</p> <p>“Scanning”</p> <p>“Scanning”</p> <p>“Scanning”</p> <p>1 0 00 CA/AMT/TEND</p>	<pre style="font-family: monospace; font-size: 0.8em;"> MC #01 REG C01 31-10-2008 05:47 PM 001183 1 SCAN-PLU100 -2.35 1 SCAN-PLU100 -2.35 1 SCAN-PLU100 -2.35 Mix-match 1 -0.50 1 SCAN-PLU100 -2.35 TL -8.90 CASH -10.00 CG -1.10 </pre>
Item 1	Scan-PLU	(\$2.35)																														
	PLU code	49012347																														
Item 1	Scan-PLU	(\$2.35)																														
	PLU code	49012347																														
Item 1	Scan-PLU	(\$2.35)																														
	PLU code	49012347																														
Discount	3 item	(\$0.50)																														
Item 1	Scan-PLU	(\$2.35)																														
	PLU code	49012347																														
Payment	Cash	\$10.00																														

Price change registration

You can change scanning PLU item unit price temporarily.

	OPERATION	PRINTOUT (by optional remote printer)												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">Item 1</td> <td style="width: 15%;">Scan-PLU</td> <td style="width: 70%;">(\$2.35)</td> </tr> <tr> <td></td> <td>New price</td> <td>\$2.00</td> </tr> <tr> <td></td> <td>PLU code</td> <td>49012347</td> </tr> <tr> <td>Payment</td> <td>Cash</td> <td>\$10.00</td> </tr> </table>	Item 1	Scan-PLU	(\$2.35)		New price	\$2.00		PLU code	49012347	Payment	Cash	\$10.00	<div style="display: flex; justify-content: center; gap: 10px;"> <div style="border: 1px solid black; padding: 2px 10px; font-weight: bold;">2 00</div> <div>(New price)</div> </div> <div style="display: flex; justify-content: center; gap: 10px; margin-top: 10px;"> <div style="border: 1px solid black; padding: 2px 5px; font-size: small;">PRICE CHANGE</div> <div>(Price change key)</div> </div> <p style="margin-top: 10px;">“Scanning”</p> <div style="display: flex; justify-content: center; gap: 10px; margin-top: 20px;"> <div style="border: 1px solid black; padding: 2px 10px; font-weight: bold;">1 0 00</div> <div style="border: 1px solid black; padding: 2px 5px; font-size: small;">CA/AMT /TEND</div> </div>	<div style="border: 1px solid black; padding: 5px; font-size: small;"> <div style="text-align: right; margin-bottom: 5px;">MC #01</div> REG C01 31-10-2008 05:48 PM 001184 1 SCAN-PLU100 .2.00 TL -2.00 CASH .10.00 CG .8.00 </div>
Item 1	Scan-PLU	(\$2.35)												
	New price	\$2.00												
	PLU code	49012347												
Payment	Cash	\$10.00												

Not found PLU registration

In case of the item which has not existed in the scanning PLU registration, “E028 Error” occurs. You can register and preset this item at the same time.

	OPERATION	PRINTOUT (by optional remote printer)												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">Not found item</td> <td style="width: 15%;">Price</td> <td style="width: 70%;">\$2.50</td> </tr> <tr> <td></td> <td>PLU code</td> <td>49123456</td> </tr> <tr> <td></td> <td>Link dept.</td> <td>1</td> </tr> <tr> <td>Payment</td> <td>Cash</td> <td>\$10.00</td> </tr> </table>	Not found item	Price	\$2.50		PLU code	49123456		Link dept.	1	Payment	Cash	\$10.00	<p style="margin-bottom: 5px;">“Scanning”</p> <p style="margin-bottom: 5px;">(E028 occurs)</p> <div style="display: flex; justify-content: center; gap: 10px; margin-top: 10px;"> <div style="border: 1px solid black; padding: 2px 5px; font-size: small;">NFP</div> <div>(Not found PLU key)</div> </div> <div style="display: flex; justify-content: center; gap: 10px; margin-top: 10px;"> <div style="border: 1px solid black; padding: 2px 10px; font-weight: bold;">2 5 0</div> <div>(Item price)</div> </div> <div style="display: flex; justify-content: center; gap: 10px; margin-top: 10px;"> <div style="border: 1px solid black; padding: 2px 5px; font-size: small;">1</div> <div>(Link department key)</div> </div> <div style="display: flex; justify-content: center; gap: 10px; margin-top: 10px;"> <div style="border: 1px solid black; padding: 2px 10px; font-weight: bold;">1 0 00</div> <div style="border: 1px solid black; padding: 2px 5px; font-size: small;">CA/AMT /TEND</div> </div>	<div style="border: 1px solid black; padding: 5px; font-size: small;"> <div style="text-align: right; margin-bottom: 5px;">MC #01</div> REG C01 31-10-2008 05:48 PM 001184 1 DEPT01 .2.50 TL -2.50 CASH .10.00 CG .7.050 </div>
Not found item	Price	\$2.50												
	PLU code	49123456												
	Link dept.	1												
Payment	Cash	\$10.00												

Unit price inquiry

Use this operation to recall the unit prices of departments, subdepartments, PLUs, second unit price of PLUs, shift PLUs, or scanning PLUs.

The unit prices appear on the display of the terminal when recalled.

Example

To check the unit price of flat-PLU 001.

OPERATION

PRICE
INQ

PLU
001

DISPLAY


REG C01	31-10-08 05:30 PM 001162
1 PLU004	· 10.00
1 PLU002	· 20.00
PLU001	· 10.00

Programming descriptors and messages


Programming item descriptor (flat-PLU) procedure

Step 1. Press **MODE** and <PGM2> icon to turn “PGM-2”, select “1.Item Descriptor” and press **YES**.

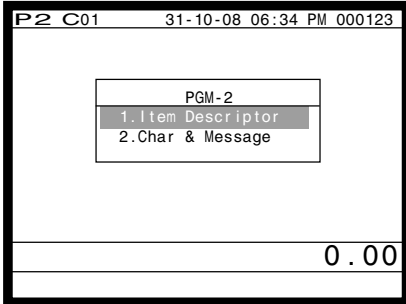Step 2. Select “1.PLU” and press **YES**.



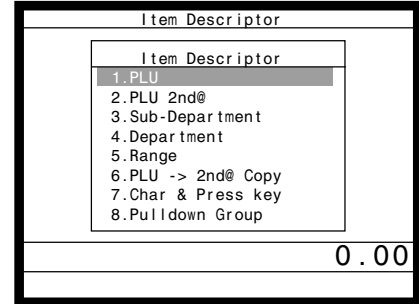
Step 1. screen




Step 2. screen

Step 3. Select the PLU record you want to program by pressing the flat-PLU key directly, by entering PLU record No. and **YES**, or by entering random PLU code and **PLU**, and **YES**.

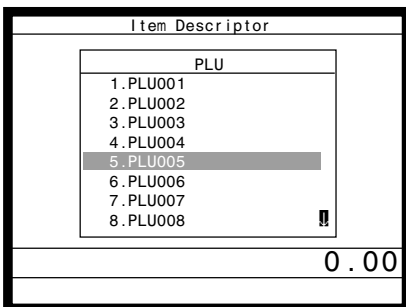Step 4. Enter characters and **ENTER**.



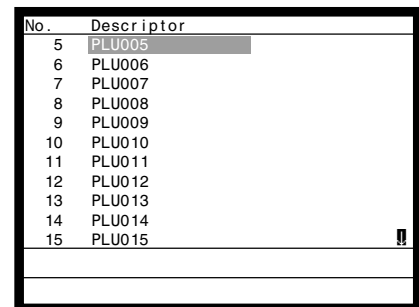Step 3. screen



Step 4. screen

Step 5. Repeat the step 4., if you program the next record.

Press **ESC/SKIP** and repeat the step 3. and 4., if you program to the other record.

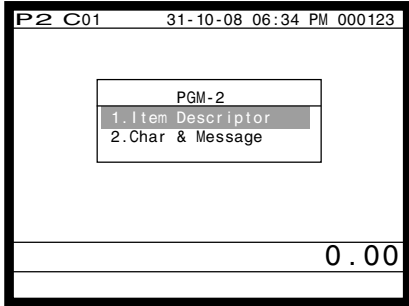
Step 6. Press **ESC/SKIP** repeatedly to return to the “Step 1. screen”.

Advanced Operations


Programming function key character procedure

Step 1. Press **MODE** and <PGM2> icon to turn “PGM-2”, select “1.Item Descriptor” and press **YES**.

Step 2. Select “7.Char & Press key” and press **YES**.




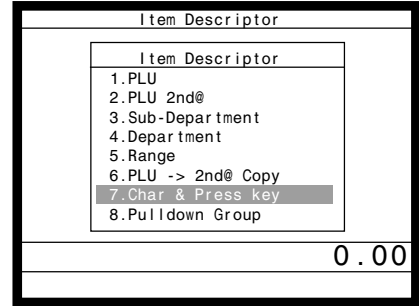Step 1. screen



Step 2. screen

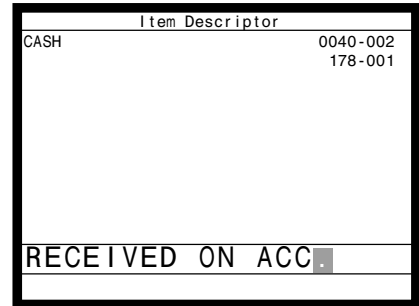Step 3. Enter key characters, press **ENTER**, and press the corresponding key.



Step 3. screen

Step 4. Repeat the step 3., if you have other keys to program.

Step 5. Press **ESC/SKIP** repeatedly to return to the “Step 1. screen”.


The initial characters of function keys

Function	Code	Initial character	Function	Code	Initial character
Cash amount tendered	001	CASH	Non-add/No sale	041	#/NS
Charge	002	CHARGE	Customer number	043	CT
Check tender	003	CHECK	PLU	048	PLU#
Credit	004	CREDIT	Price	049	PRC
New balance	006	NB	Menu shift	064	MENU
Table transfer	014	TBL TRANS	Open	067	OPEN
Received on account	020	RC	Subtotal	075	SUBTOTAL
Paid out	021	PD	Multiplication	082	X
Minus	027	-	New/Old check	093	NEW/OLD
Discount	028	%-	Media change	118	MEDIA CHG
Refund	033	RF	List number	137	LIST#
Error correct/Void	034	VOID	Cancel	236	CANCEL
Receipt	038	RCT			


Programming receipt/slip message procedure

Step 1. Press **MODE** and <PGM2> icon to turn “PGM-2”, select “2.Char & Message” and press **YES**.

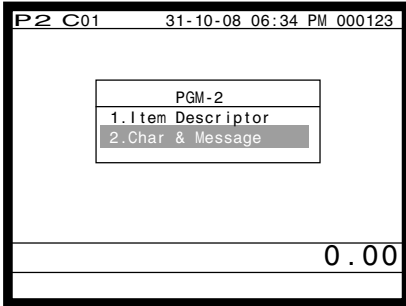Step 2. Select “1.Receipt/SLIP Msg” and press **YES**.




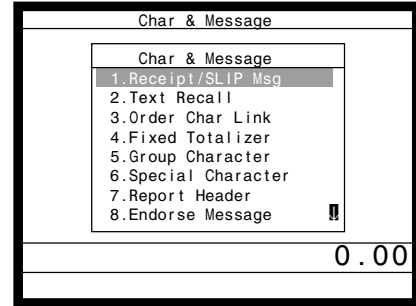Step 1. screen



Step 2. screen

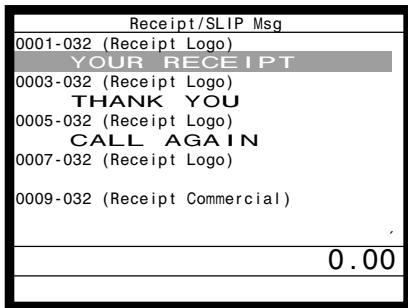Step 3. Select the appropriate record, press **YES** and enter characters and press **ENTER**.



Step 3. screen

Rec No.	Message
1 ~ 8	Receipt logo message
9 ~ 16	Receipt commercial message
17 ~ 24	Receipt bottom message
25 ~ 32	Bill top message
33 ~ 40	Bill copy message
41 ~ 48	Bill bottom message
49 ~ 56	Slip logo message
57 ~ 64	Slip intermediate message
65 ~ 72	Slip bottom message
73 ~ 74	Duplicate receipt
75 ~ 94	Guest bottom message
95 ~ 96	E-journal copy receipt message

Even records are not used.

Step 4. Repeat the step 3., if you have other records to program.


Step 5. Press **ESC/SKIP** repeatedly to return to the “Step 1. screen”.

Entering characters


In this section, the method to enter descriptors or messages (characters) to the terminal during programming is described. Characters are specified by character keyboard.

Entering characters

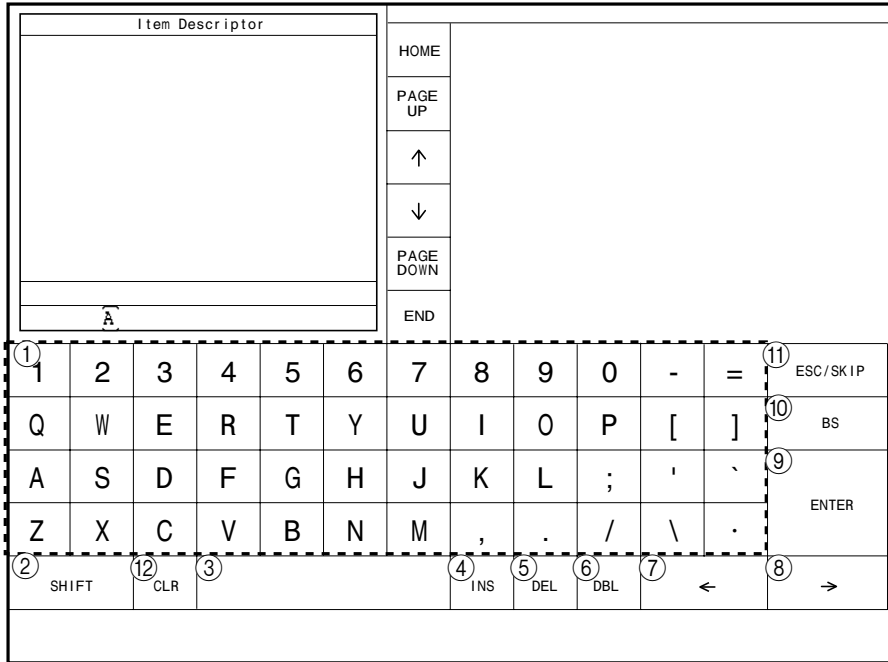SHIFT1-case



SHIFT2-case

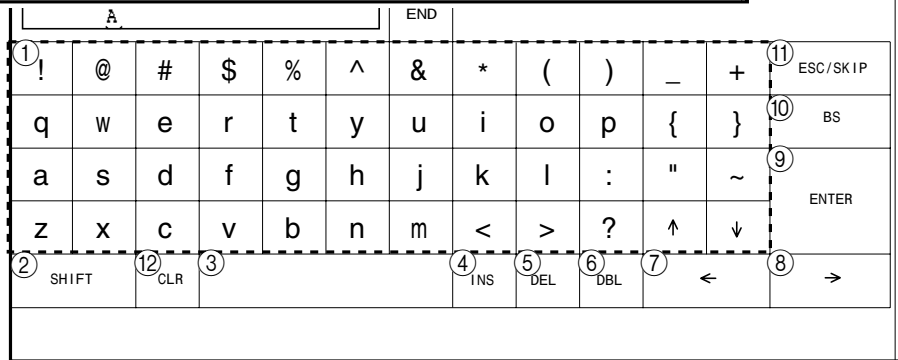

- ① **Alphabet keys**
Press these keys to input characters.
- ② **Shift key**
Press this key to shift the following characters from SHIFT1-case, SHIFT2-case, SHIFT3-case, SHIFT-4-case and returns to the SHIFT1-case letter in sequence.
- ③ **Space key**
Press this key to set a space.
- ④ **Insert key**
Press this key to put one space between the original characters.
- ⑤ **Delete key**
Press this key to clear the designated character.
- ⑥ **Double size letter key**
Press this key to specify that the next characters you input to double size characters.
- ⑦ **Left cursor key**
Press this key to shift the character setting position to the left one by one. This key is used to correct already entered characters.
- ⑧ **Right cursor key**
Press this key to shift the character setting position to the right one by one. This key is used to correct already entered characters.

Example:

Input “ **A** p p l e J u i c e ”,
 enter DBL A SHIFT DBL p p l e SPACE SHIFT SHIFT SHIFT J SHIFT u i c e ENTER

SHIFT3-case

Item Descriptor												HOME					
												PAGE UP					
												↑					
												↓					
												PAGE DOWN					
												END					
A																	
1	Â	Ô	Ù	Î	Ê	Ç	Þ	Ø	£	×	f	ı	11	ESC/SKIP			
	Á	Ó	Ú	Í	É	À	Ã		ª	º	¥	ı	10	BS			
	À	Ò	Ù	Ì	È	Æ	Ý		ð	Ð	ß	±	9	ENTER			
	Ä	Ö	Ü	Ï	Ë	Ñ	Õ	«	»	€	<	>					
2	SHIFT	12	CLR	3				4	INS	5	DEL	6	DBL	7	<	8	>

SHIFT4-case

A												END					
1	â	ô	ù	î	ê	ç	þ	ø					11	ESC/SKIP			
	á	ó	ú	í	é	à	ã	ÿ					10	BS			
	à	ò	ù	ì	è	æ	ý		¬	½	¼		9	ENTER			
	ä	ö	ü	ï	ë	ñ	õ	ç	α	'	-						
2	SHIFT	12	CLR	3				4	INS	5	DEL	6	DBL	7	<	8	>

- 9 **Enter key**
Press this key when the alphabetic entry for a descriptor, name or message has been completed. This key is also used for editing the programmed characters.
- 10 **Backspace key**
Press this key to move the character placed behind.
- 11 **ESC/SKIP key**
Press this key to terminate the character programming.

- 12 **Clear key**
Press this key to clear all input characters.

Advanced Operations

Editing characters

Correcting a character just entered

	OPERATION	DISPLAY
“L” “E” “N” “O” “N”	↵ Enter LENON, instead of LEMON.	LENON
← ← ←	↵ Press left arrow key three times.	LENON
“M”	↵ Enter “M”.	LEMON

Correcting and adding/deleting an item descriptor already set

	OPERATION	DISPLAY
Designate the item.		APPLE
→ →	↵ Press right arrow key two times.	APLE
INS	↵ Press <INS> (insert) key.	AP LE
“p”	↵ Enter “p”.	APPLE

	OPERATION	DISPLAY
Designate the item.		MOULSE
→ → →	↵ Press right arrow key three times.	MOULSE
DEL	↵ Press (delete) key.	MOUSE

	OPERATION	DISPLAY
Designate the item.		MOULE
→ → →	↵ Press right arrow key three times.	MOULE
BS	↵ Press <BS> (backspace) key.	MOLE

Printing read/reset reports

• Read (X) report

You can display or print read reports at any time during the business day without affecting the data stored in the terminal.

• Reset (Z) report

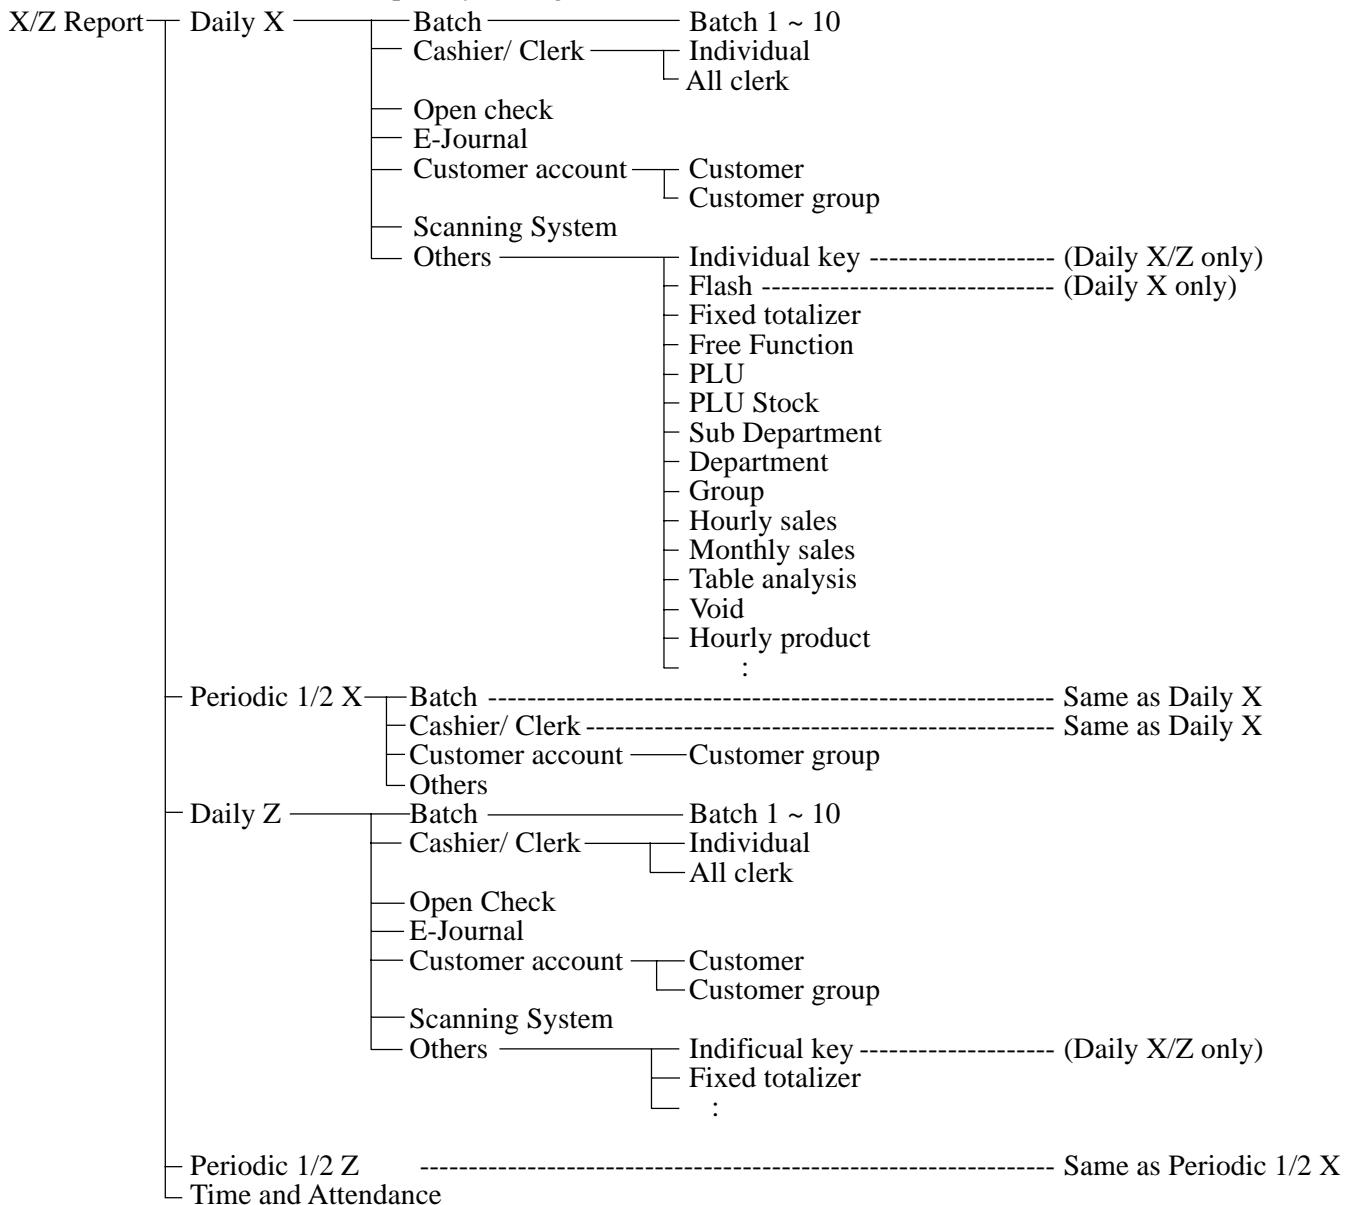
After issuing a reset report, the totals stored in the terminal are reset. So, you should not print reset reports during the business day.

Important!

- The reset operation issues a report and also clears all sales data from the terminal's memory.
- Be sure to perform the reset operations at the end of each business day. Otherwise, you will not be able to distinguish between the sales data for different dates.

The tree of X/Z menu window

You can issue these kinds of report by tracing this tree.



Advanced Operations

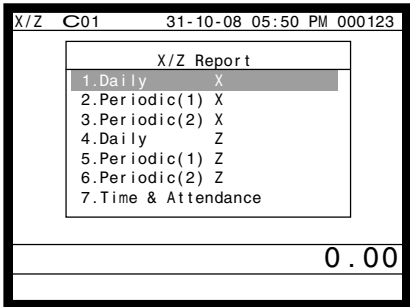
To print the individual key (department, subdepartment, PLU/flat-PLU, function) read report

This report shows sales for specific keys.


Procedure

Step 1. Press **MODE** and **<X/Z>** icon to turn "X/Z Report".

Step 2. Select "1.Daily X" and press **YES**.



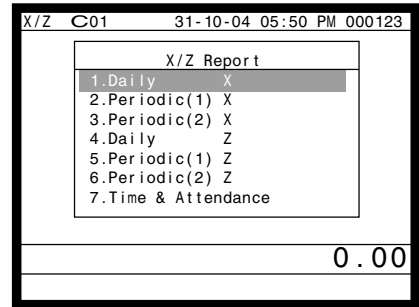
Step 1. screen




Step 2. screen

Step 3. Select "7.Others" and press **YES**.

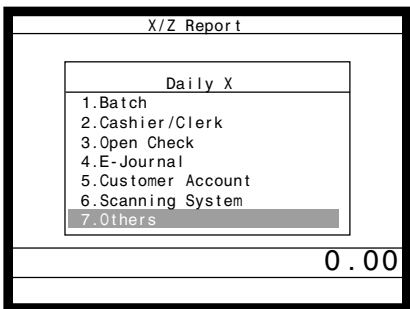Step 4. Select "1.Individual Key" and press **YES**.



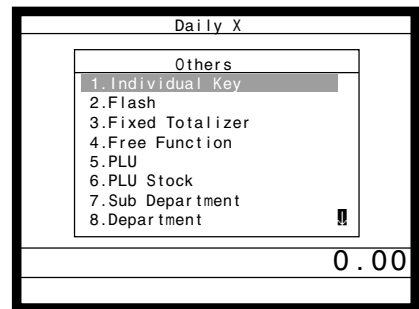Step 3. screen



Step 4. screen

Step 5. Select keys you want to read. (The display shows totalizer/counter of the key.)

Step 6. After you finish to select keys, press **ESC/SKIP** to terminate this procedure – a report is issued.

Report (by optional remote printer)

X	0000095			Read symbol/Report code
PLU0001		17	.17.00	PLU name/No. of items/Amount
DISCOUNT			.2.50	Discount amount
#000001	0.53%			PLU code/Sales ratio
DEPT01		38	.257.53	Department name/No. of items/Amount
DISCOUNT			.5.80	Discount amount
	8.13%			Sales ratio
<hr/>				
CASH	No	11	.128.03	Key descriptor/Key count/Key total
%-	No	2	.10.29	
<hr/>				
TL		88	.516.10	Total No. of items/Total amount
DISCOUNT			.9.50	Discount amount total
	10.83%			Sales ratio

Financial read report (by optional remote printer)

This report shows net sales, cash, charge, check and credit in drawer.

X	0000071	FLASH		Read symbol/Report code/Report title
#			·6,919.04	Declared cash in drawer*1
			·0.00	Difference (= declared - accumulated) *1
NET	No	120	·7,263.20	No. of net sales/Net amount
CAID			·6,919.04	Cash in drawer
CHID			·178.60	Charge in drawer
CKID			·172.85	Check in drawer
CRID			·6.00	Credit in drawer

Individual clerk read/reset report (by optional remote printer)

This report shows individual clerk totals.

X	0020017	CASHIER/CLERK		Read symbol/Report code/Report title
#			·6,919.04	Declared cash in drawer of main currency *1
			·0.00	Difference (= declared - accumulated) *1
C01		1	Clerk name/drawer No.
GROSS		1485	·7,543.48	Gross total
NET	No	120	·7,263.20	Net total
CAID			·6,919.04	Cash in drawer
CHID			·178.60	Charge in drawer
CKID			·172.85	Check in drawer
CRID			·6.00	Credit in drawer

*1 Money declaration:

Count how much cash is in the drawer and input this amount (up to 10 digits).

The terminal will automatically compare the input with the cash in drawer in the memory and print the difference between these two amounts.

Note that if money declaration is required by programming, you cannot skip this procedure.

Daily sales read/reset report (by optional remote printer)

Please refer to "Printing the daily sales reset report" section on page 39 of this manual.

Periodic 1/2 sales read/reset reports (by optional remote printer)

These reports show breakdowns of sales by any two kinds of period you want.

ZZ1	0001111	FIXED TTL		Mode*/Report code/title /Reset counter
GROSS		981.250	·6,574.40	Gross total
NET	No	111	·7,057.14	Net total
CAID			·1,919.04	Cash in drawer
CKID			·859.85	Check in drawer
CRID			·709.85	
RF	No	3	·10.22	
DC			·1.22	
			·2.40	
CLEAR	No	85		
TX10			·0.00	
EX10	No	0	·0.00	
ZZ1	0001112	FREE FUNCTION		Mode*/Report code/title /Reset counter
CASH	No	362	·1,638.04	Function key count/amount
CHECK	No	56	·1,174.85	
RC	No	4	·810.00	
PD	No	5	·520.00	

ZZ1	0001115	DEPT		Mode*/Report code/title /Reset counter
DEPT01		203.25	·1,108.54	Department count/amount
DISCOUNT			·10.00	
DEPT02		183	·1,362.26	
DISCOUNT			·0.00	
		5	·17.22	
DISCOUNT			·0.00	
TL		421.25	·2,872.28	Department total
DISCOUNT			·12.08	
ZZ1	0001117	CASHIER/CLERK		Mode*/Report code/title /Reset counter
C01		1	Clerk name/drawer No.
GROSS		421.254	·2,872.28	
NET	No	111	·1,845.35	
CAID			·1,057.14	
CRID			·0.19	
CKID			·9.02	

* Mode:
 XX1 = Periodic(1) X
 ZZ1 = Periodic(1) Z
 XX2 = Periodic(2) X
 ZZ2 = Periodic(2) Z

Advanced Operations

PLU read/reset report (by optional remote printer)

This report shows sales for PLUs.

X	000014	PLU			Read symbol/Report code/Report title
PLU0001			17	·17.00	PLU name/No. of items/PLU amount
DISCOUNT				·2.50	Discount amount
HOUSE BON QTY			2		House Bon quantity
#000001			0.53%		PLU code/sales ratio/
PLU0100			42	·69.00	
DISCOUNT				·0.50	
HOUSE BON QTY			0		
#000100			4.03%		
TL			188.61	·516.10	Total No. of items/Total amount
DISCOUNT				·9.50	Discount amount total
HOUSE BON QTY			17		House Bon quantity total
			17.92%		Sales ratio

Hourly sales read/reset report (by optional remote printer)

This report shows hourly breakdowns of sales.

X	000019	HOURLY			Read symbol/Report code/Report title
00:00->01:00			1	·1.20	Time range/no. of net sales/Net sales amount
1.90%		CT	1	·1.20	Sales ratio/No. of customers/Sum. of merchandise subtotal
01:00->02:00			12	·12.00	
19.00%					
23:00->00:00				·3.59	
3.90%		CT	1		

Monthly sales read/reset report (by optional remote printer)


This report shows monthly breakdowns of sales.

X	000020	MONTHLY			Read symbol/Report code/Report title
1.....					Date of a month
GROSS			1236.76	·12,202.57	Gross symbol/No. of items/Gross sales amount
NET	No		214	·12,202.57	Net symbol/No. of net sales/Net sales amount
31.....					
GROSS			2132	·14,187.57	
NET	No		205	·13,398.76	
TL					Total symbol
GROSS			9746.63	·161,022.49	Gross symbol/No. of items/Gross sales amount
				·16.52	Average daily gross sales
NET	No		2351	·161,022.49	Net symbol/No. of net sales/Net sales amount
				·68.49	Average daily net sales

Reading the terminal's program

The tree of P6 (program read) menu window

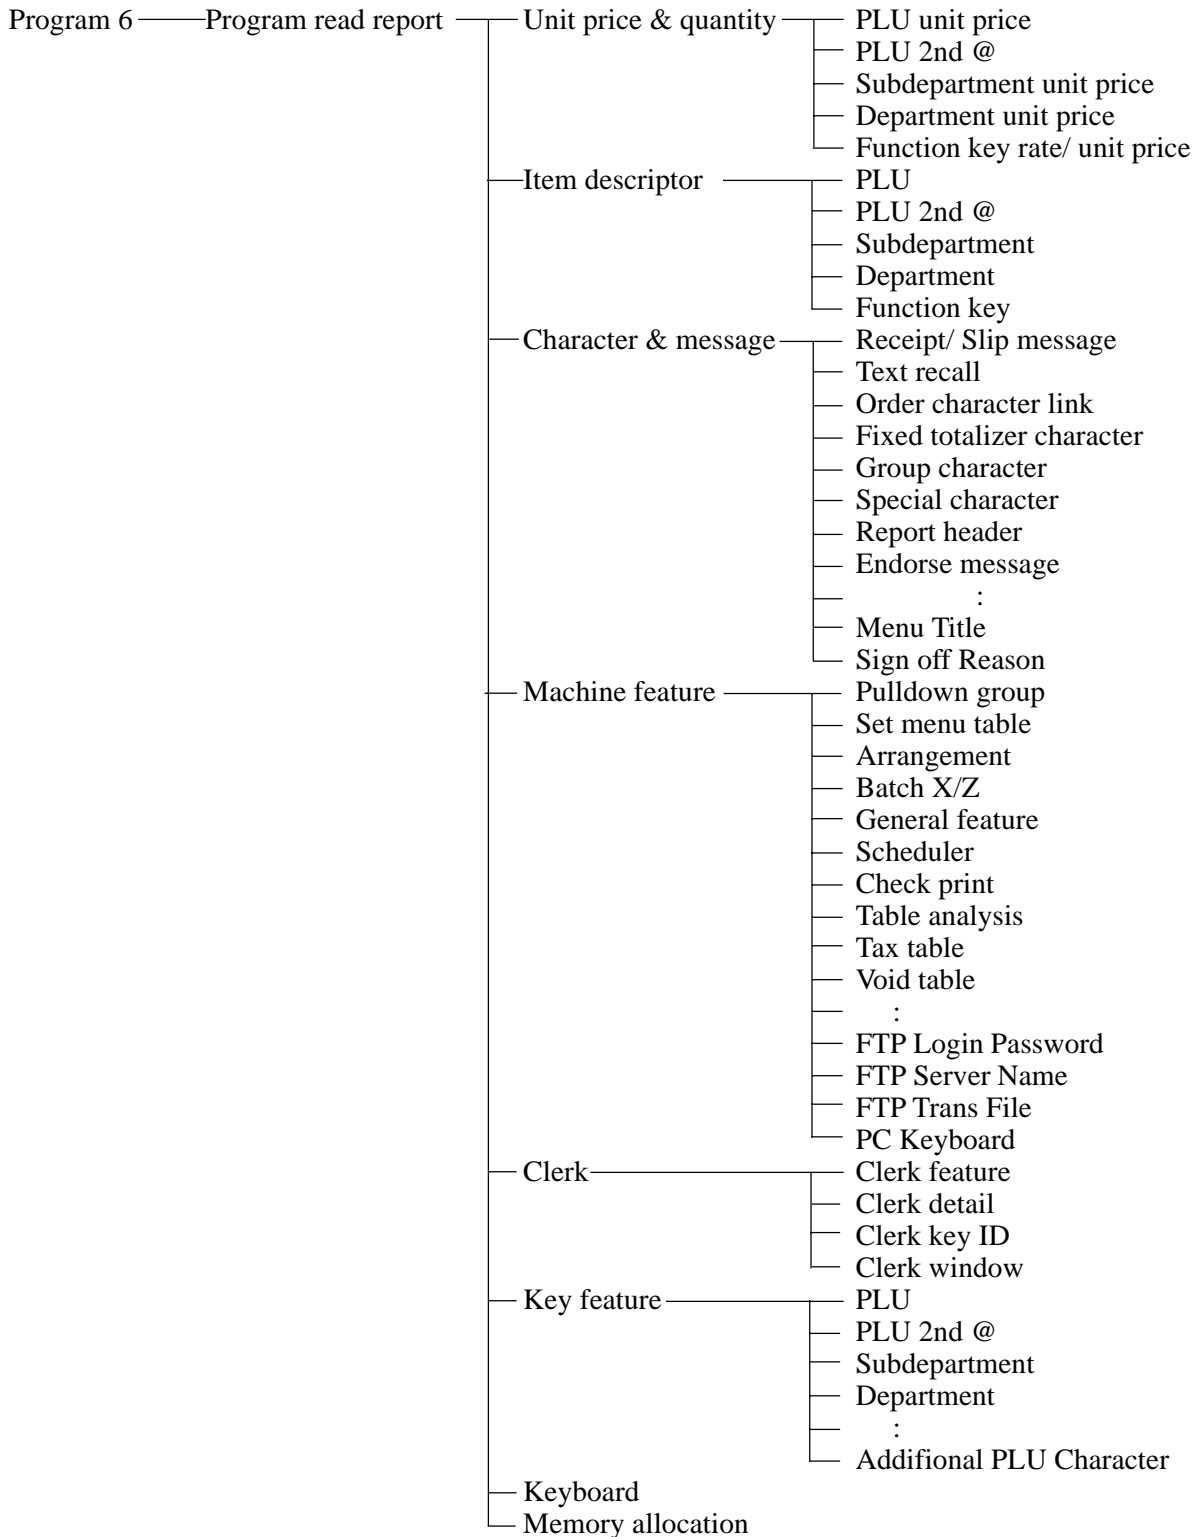You can issue these kinds of report by tracing this tree.




Advanced Operations


Procedure

Step 1. Press **MODE** and <PGM-6> icon to turn Program 6 mode and press **YES**.

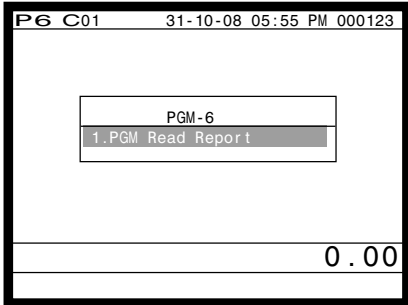Step 2. Select an appropriate job and press **YES**.



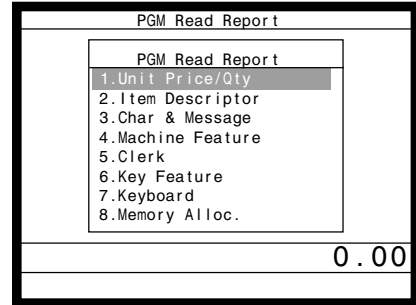
Step 1. screen




Step 2. screen

Step 3. Select an appropriate job and press **YES**. If the job requires range destination, Step 4 screen will appear.

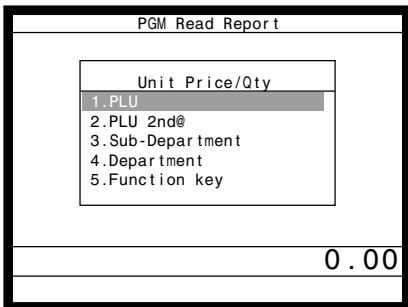Step 4. Enter the start/end range and press **YES**.



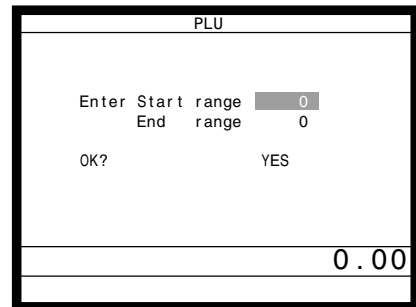Step 3. screen



Step 4. screen

Step 5. Press **ESC/SKIP** repeatedly to return to the “Step 1. screen”.

Report example (It is necessary to connect optional remote printer to print out these reports.)

Unit price and quantity

PLU unit price

PLU001	0001-004	PLU descriptor/Record No./File No.
	@12.34	Unit Price
	0001-055	Record No./File No.(Shift PLU)
	@2.00	Shift 2 PLU unit price
	:	
	@8.00	
PLU002	0002-004	
	@1.00	

PLU 2nd @

PLU001	2	0001-054	PLU 2nd descriptor/Record No./File No.
		@23.45	Unit quantity/2nd unit Price
PLU002		0002-054	
		@10.00	
PLU003		0003-054	
	0	@2.00	

Subdepartment unit price

SUBDEPT01	0001-003	Subdepartment descriptor/Record No./File No.
	@1.00	Unit Price
SUBDEPT02	0002-003	
	@2.00	
SUBDEPT03	0003-003	
	@3.34	

Department unit price

DEPT01	0001-005	Department descriptor/Record No./File No.
	@12.34	Unit Price
DEPT02	0002-005	
	@2.34	
DEPT03	0003-005	
	@1.34	

Function key rate/price

%-	0013-002	Function key descriptor/Record No./File No.
	0%	Unit Price, percent rate or conversion rate
-	0018-002	
	@0.00	
CASH	0035-002	
	@0.00	

Item descriptor

PLU

PLU001	0001-004	PLU descriptor/Record No./File No.
PLU002	0002-004	

PLU 2nd unit price

PLU001	0001-054	PLU 2nd descriptor/Record No./File No.
PLU002	0002-054	

Subdepartment

SUBDEPT01	0001-003	Subdepartment descriptor/Record No./File No.
SUBDEPT02	0002-003	
SUBDEPT03	0003-003	

Department descriptor

DEPT01	0001-005	Department descriptor/Record No./File No.
DEPT02	0002-005	
DEPT03	0003-005	

Function key descriptor

RCT	0001-002	Function key descriptor/Record No./File No.
NEW/OLD	0002-002	
RC	0003-002	
DISP ON/OFF	0004-002	
CLK#1	0005-002	

Advanced Operations

Character and Message

Receipt/Slip message

0001-032	Record No./File No.
YOUR RECEIPT	Receipt message
0002-032	
0003-032	

Clerk

Clerk feature

C01	001-007	Clerk name/Record No./File No.
	0001	Clerk secret code
	00	Drawer No.
	000111	
01-067	0000040000	Other program data
02-067	00000000000000	
03-067	0000000000	
04-067	000000000000	
05-067	000000000000	
06-067	000000000000	
07-067	000000000000	
08-067	000000000000	
09-067	000000000000	
10-067	000000000000	
11-067	000000000000	
068	00000000	
069	000000000000	
C02	002-007	
	0002	

Key feature

PLU feature

PLU001	0001-004	PLU descriptor/Record No./File No.	
	00000000000000000000	Elementary program	
11-066	000000	Other program data	
12-066	000000		
13-066	0000		
14-066	0		
	0		
15-066	@0.00		
16-066	00		
17-066	00		
20-066	00000000		
21-066	000000000000		
22-066	000000		
PLU002			

PLU 2nd unit price feature

PLU001	0001-054	PLU 2nd @ descriptor/Record No./File No.
	00000000000000000000	Elementary program
11-066	000000	Other program data
12-066	000000	Other program data
14-066	0	Other program data
PLU002	0002-054	
	00000000000000000000	
11-066	000000	
12-066	000000	
14-066	0	
PLU003	0003-054	

Subdepartment feature

SUBDEPT01	0001-003	Subdepartment descriptor/Record No./File No.
	00000000000000000000	Elementary program
11-066	000000	Other program
15-066	@0.00	
16-066	00	
17-066	00	
20-066	00000000	
21-066	000000000000	
22-066	00	
SUBDEPT02	0002-003	

Department feature

DEPT01	0001-005	Department descriptor/Record No./File No.
	00000000000000000000	Elementary program
11-066	000000	Other program
15-066	@0.00	
16-066	00	
17-066	00	
20-066	00000000	
21-066	000000000000	
22-066	00	
DEPT02	0002-005	

Function key feature

0001 CASH	00000000000000000000	Record No./Key descriptor/Parameter
0002 CHARGE	00000000000000000000	
0003 CREDIT	00000000000000000000	
0004 %+	00000000000000000000	
0005 CLEAR	00000000000000000000	

Troubleshooting

This section describes what to do when you have problems with operation.

When an error occurs

Errors are indicated by an error codes. When this happens, you can usually find out what the problem is as illustrated below.

Press **C** and check the appropriate section of this manual for the operation you want to perform.

Prompt message	Meaning	Action
Operator mistake.	Operation error	Perform proper operation.
E001 Wrong mode.	Check tracking (Open mode error)	Return the mode to its original setting.
E003 Wrong operator.	Error clerk/Error clerk in check tracking	Input correct check number or assign the proper clerk.
E005 Insufficient memory.	Memory allocation over	Reallocate memory.
E011 Close the drawer.	Drawer compulsory	Close cash drawer.
E012 Journal paper end.	Journal paper end	Replace journal paper.
E014 Receipt paper end.	Receipt paper end	Replace receipt paper.
E015 Check R/J printer.	Internal R/J printer error	Check the internal R/J printer.
E016 Change back to REG mode.	Prohibit plural operation in REF/REG- mode	Switch to another mode and then back to the REF/REG- mode again.
E017 Enter Check/TBL number.	Check number compulsory	Input a check number.
E018 Enter Table number.	Table number compulsory	Input a table number.
E019 Enter Number of covers.	Cover compulsory	Enter the number of customers.
E020 Enter Seat number.	Seat number compulsory	Input a seat number.
E021 No dept link.	Scanning PLU item w/o department link is registered.	Link the item to a department.
E023 Stock running short.	Alarm when any item drops below its programmed minimum stock quantity during registration.	Perform stock maintenance.
E024 No stock is available.	Error when actual stock value for a registration items is a negative value.	Perform stock maintenance.
E025 Scale Read Error	Scale read error	Retry weighing the item.
E028 Not found PLU or C/D is mismatch.	Scanning PLU is not found or OBR code is mismatched.	Re-enter the PLU code.
E029 No registration is possible while you are in the tender operation.	Attempted registration whilst partial tender operation is being done.	Finalize the transaction.
E031 Press ST key before Finalization.	ST compulsory	Press ST key.
E033 Enter tendered amount.	Amount tender compulsory	Enter tendered amount.
E035 Change amount exceeds the limit.	Change amount exceeds the limit.	Enter amount tendered again.
E036 Remove money from the drawer.	Contents of the drawer exceed the programmed limit — Sentinel function.	Perform pickup operation.
E037 Digit or Amount Limitation Over.	H.D.L., H.A.L., L.D.L. error	Enter correct unit price/amount.
E038 Perform Money Declaration	Money declaration compulsory	Perform money declaration.
E040 Issue Guest Receipt.	Guest receipt compulsory	Issue a guest receipt.
E041 Print Validation.	Validation compulsory	Perform validation operation.
E044 Print Cheque.	Check print compulsory	Perform check print operation.
E045 Print Check-Endorsement.	Check endorsement compulsory	Perform check endorsement operation.
E046 REG Buffer Full. Please Finalize or NB.	Registration buffer full	Finalize the transaction. Allocate sufficient buffer.
E047 Print bill.	Slip compulsory	Perform slip printing operation.
E048 Insert Slip Paper and retry.	Alarm when no paper is inserted in the Slip.	Insert new slip paper.
E049 CHECK memory full.	Check tracking index full/near end	Finalize and close the check number currently used.
E050 Detail memory full.	Check tracking memory full/near end	Finalize and close the check number currently used.
E051 CHK/TBL No. is occupied.	Attempt is made to use the <NEW CHECK> key to open a new check using a number that is already used for an existing check tracking memory.	Finalize and close the check that is currently under the number that you want to use or use a different check number.
E052 CHK/TBL No. is Busy.	Attempt to use the same check number whilst the specified number is being used in the other terminal.	Use another check number or close the check at that terminal.
E053 CHK/TBL No. is not opened.	Check number not found	Use the correct check number (if you want to reopen a check that already exists in the check tracking memory) or use <NEW CHECK> to open a new check.
E054 Out of CHK/TBL No. Range.	Check number range over	Enter correct number.
E056 Store range full.	All check number are occupied in range.	Recall the stored data.
E057 No item exists in detail.	Round repeat cannot be found in detail.	
E058 Enter post entry item.	Post entry item has not been registered yet.	Enter Post entry item.
E059 Press Eat-in or Take-out key.	Press eat-in or take-out key.	Press Eat-in or Takeout key.
*****	Printer offline. "*****" means ECR logical ID and printer number.	
E060 Printer offline.	Printer offline. "*****" means ECR logical ID and printer number.	
*****	Printer downed. "*****" means ECR logical ID and printer number.	The contents are printed on the backup printer.
E061 Printer error.	Printer downed. "*****" means ECR logical ID and printer number.	

Troubleshooting

Prompt message	Meaning	Action
***** E061 Printer error. YES:Retry to print. NO :Show on the screen. ESC:Discard data.	Printer downed. "*****" means ECR logical ID and printer number.	Follow the prompt message.
***** E062 Printer paper end. *****	Paper near-end/end "*****" means ECR logical ID and printer number.	Set new paper. The contents are printed on the backup printer.
E062 Printer paper end. YES:Retry to print. NO :Show on the screen. ESC:Discard data.	Paper near-end/end "*****" means ECR logical ID and printer number.	Follow the prompt message.
E064 Printer buffer full. YES:Retry to print. NO :Show on the screen. ESC:Discard data.	Print buffer full at sender side	Follow the prompt message.
***** E070 Terminal out of action. Cannot print.	Down at target ECR which has printer "*****" means ECR logical ID and printer number.	
***** E071 Target terminal printer BF full. YES:Retry to print. NO :Show on the screen. ESC:Discard data.	Printer buffer full at target ECR which has printer "*****" means ECR logical ID and printer number.	Follow the prompt message.
***** E072 Target printer terminal is busy.	Busy at target ECR which has printer "*****" means ECR logical ID and printer number.	
***** E073 Your receipt/order may not be issued. YES:Retry to print. NO :Show on the screen. ESC:Discard data.	Time out at ECR which has printer "*****" means ECR logical ID and printer number.	Follow the prompt message.
E075 Negative Balance, cannot be finalized.	Attempted finalization when balance is less than zero.	Register item(s) until the balance becomes positive amount.
E080 Electronic Journal Full Please clear E-Journal.	Electronic journal full	Reset the electronic journal memory.
E082 ***** Illegal Data *****	Illegal Electronic journal data	
E083 Cannot create E-Journal. Check Flash memory.	Electronic journal file cannot be created.	Check flash memory.
***** E105 Check/TBL tracking Master down. Please call Manager!! YES:Retry for connection. NO :Remove it from system.	CHK master down "*****" means ECR logical ID.	Follow the prompt message.
***** E106 Check/TBL tracking Backup master down. Please call Manager!! YES:Retry for connection. NO :Remove it from system.	CHK BM down "*****" means ECR logical ID.	Follow the prompt message.
***** E107 Both Master&Backup master down. CHK/TBL tracking or Clerk interrupt is not available.	CHK M/BM down "*****" means ECR logical ID.	
***** E108 CHK/TBL Master is removed from system.	Master down then take it off from system "*****" means ECR logical ID.	
***** E109 CHK/TBL Backup master is removed from system.	Backup master down then take it off from system "*****" means ECR logical ID.	
E110 CHK data mismatch between Master and Backup master.	Data mismatch has occurred.	
E130 Middle of Pick up or Loan Press Cancel Key.	During picking up	Follow the prompt message.
E131 Middle of <Bill Copy> Press Cancel Key.	During bill copy	Follow the prompt message.
E133 Middle of <Media Change> Press Cancel Key.	During media change	Follow the prompt message.
E134 Middle of Clerk Transfer Press ESC Key.	During clerk transfer	Follow the prompt message.
E136 Middle of Separate Check Press ESC key.	During separate check	Follow the prompt message.

Troubleshooting


Prompt message	Meaning	Action
E139 Not allowed to be negative by Minus/Coupon key.	Credit balance error	Enter proper minus/coupon amount.
E140 Wrong menu.	This sheet holder is prohibited by program.	Set correct sheet holder.
E141 Press <TRAY TTL> twice before finalization.	<TRAY TOTAL> key is not pressed twice before finalization.	Follow the prompt message.
E145 Arrangement syntax error.	Arrangement syntax error	Program the arrangement again.
E150 Incorrect value entry.	Incorrect entry for PGM	Enter proper value again.
E151 Incorrect Key Pressed.	Linking is incorrect.	Enter proper key again.
E152 PGM File or Memory number does not Exist.	No such file, no such record	Enter file/record number again.
E164 Employee No. is not Found in the Employee File.	Employee No. is not set in the Employee File.	Enter employee number again.
E165 Employee No. is not Clocking-in.	Employee has not done CLOCK-IN operation yet.	Perform CLOCK-IN operation.
E166 Employee No. is Occupied.	Employee who has done CLOCK-IN operation attempts to operate CLOCK-IN again.	Enter the proper employee number again.
E167 Incorrect Job code.	Employee attempts to operate CLOCK-IN with incorrect JOB code.	Enter proper job code.
E168 Your Operation is out of Schedule. Please Call Manager.	Employees operate CLOCK-IN/OUT in not allowance time.	Follow the prompt message.
E169 Work Hours Exceeded. Please Call Manager.	Overtime work.	Follow the prompt message.
E170 No Shift Remains in the Schedule. You cannot Clock-in.	There is no available shift left.	
E171 Please Break-out and Retry.	Employee attempts to operate CLOCK-OUT whilst he/she is in a break time.	Follow the prompt message.
E172 Break Hours Exceeded. Please Call Manager.	Break hours are exceeded.	Follow the prompt message.
E173 This employee is at work now.	Employee is at work without break.	
E174 This employee is taking a break now.	Employee who has not done BREAK-OUT operation attempts to operate BREAK-IN.	
E175 Please Clock-in/Break-out before you sign on. or Please Call Manager.	Sign on after you clock-in or break out.	Follow the prompt message.
E176 You cannot Clock-in. Please reset Employee Report.	Employee Report has not been reset.	Follow the prompt message.
E177 Time&Attendance Data Communication Error. Please Call Manager.	Time & Attendance Data communication error.	Follow the prompt message.
E180 IDC FILE (1) memory full. Please clear IDC data.	IDC FILE (1) memory is full of items.	Follow the prompt message.
E181 IDC FILE (2) memory full. Please clear IDC data.	IDC FILE (2) memory is full of items.	Follow the prompt message.
E182 IDC FILE (3) memory full. Please clear IDC data.	IDC FILE (3) memory is full of items.	Follow the prompt message.
E184 OPEN CHK/TBL data exist.	Open check/ table data exist while resetting fixed total.	Close the open check/ table data first.
E185 Item is not active.	Registrar non active item.	Register active item.
E200 Insert CF Card.	CF card is not inserted to the slot.	Insert CF card.
E201 Format error.	CF card data or formats illegal.	Check the CF card.
E203 Insufficient memory.	Insufficient memory is remained in CF card.	Format or use a new CF card.
E205 The file already exists. Do you replace? YES:Replace the file. NO :Input new name.	File name duplication error	Follow the prompt message.
E210 Mag Card Reader Error.	Magnetic card read error.	Swipe the card again.
E211 Wrong Card Prefix Code.	Card prefix code error	This card cannot be used.
E212 Card Expired.	Card is expired.	This card cannot be used.
E213 Card Validation Failed.	Card validation is failed.	This card cannot be used.
E215 Card Format Error.	Card format error	This card cannot be used.
E240 Customer No. is occupied.	Attempt is made to set a customer that already exists in the customer file.	Enter proper customer No.
E241 Customer memory full.	Customer file becomes full.	Delete unnecessary customer No.
E242 Customer not found.	This customer does not exist.	Enter proper customer No.
E243 Illegal Site ID.	The site No. of the file does not coincide with the No. of the card.	Swipe the proper magnetic card.
E244 Credit limit over.	Attempt to transfer when the balance is over than the credit limit	Release credit limit by OPEN2 Make minus, void, or refund operation to decrease the balance under the credit limit. Perform finalization or cancellation.
E251 Magnetic card error.	This card cannot be read. This card format is illegal.	Swipe the magnetic card again. Swipe the proper magnetic card.

Troubleshooting

Prompt message	Meaning	Action
E252 Enter customer name.		Follow the prompt message.
E253 Enter address.		Follow the prompt message.
E254 Enter phone number.		Follow the prompt message.
MC#nn	Communication error to the machine #nn during auto updating scanning PLU.	Follow the prompt message.
E259 Terminal out of order YES:Retry NO: Skip		

When the terminal does not operate at all

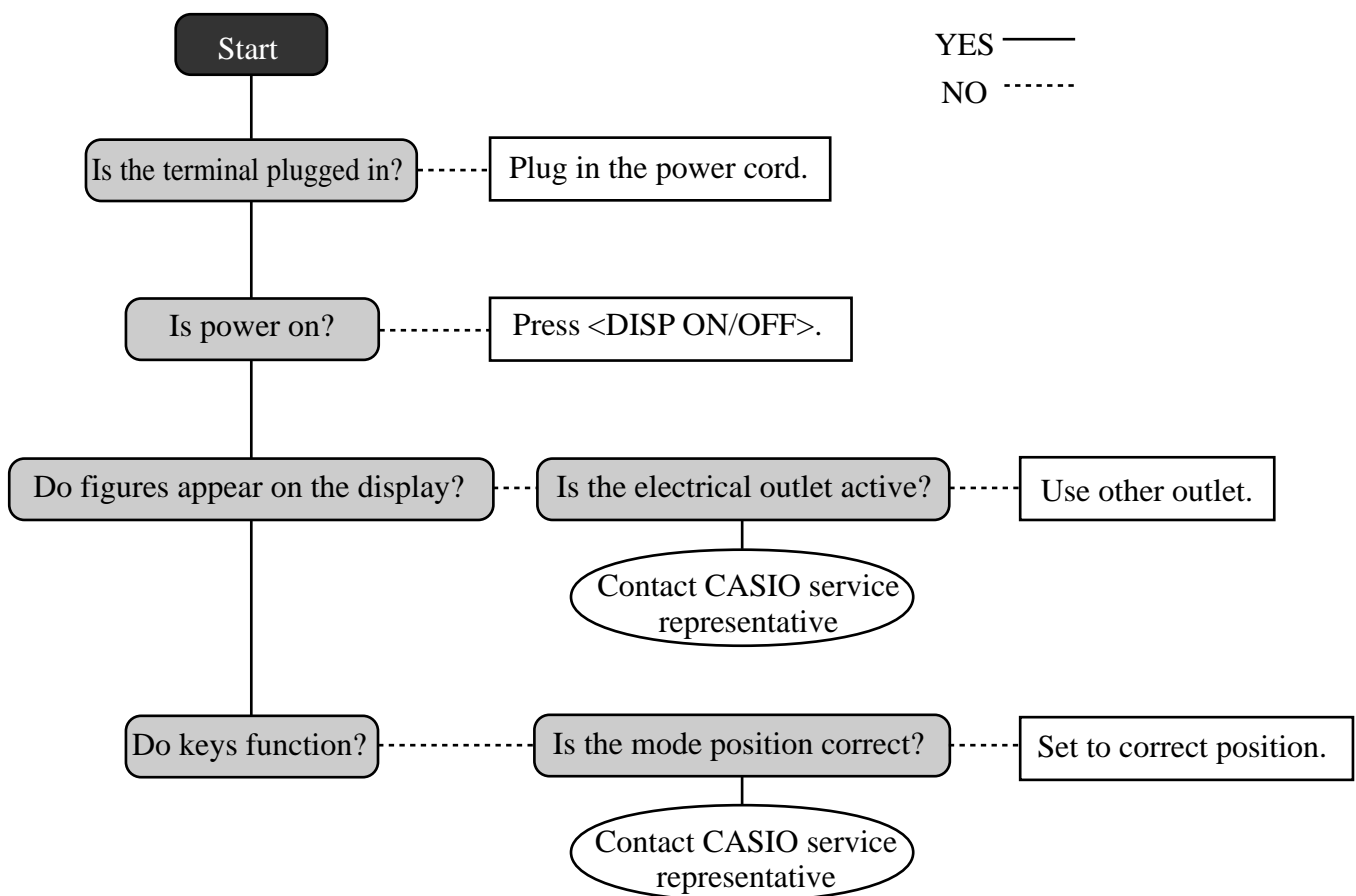Perform the following check whenever the terminal enter an error condition as soon as you switch it on. The results of this check are required by service personnel, so be sure to perform this check before you contact a CASIO representative for servicing.



In case of power failure

If the power supply to the terminal is cut by a power failure or any other reason, simply wait for power to be restored. The details of any on-going transaction as well as all sales data in memory are protected by the memory backup batteries.

- Power failure during a registration
The subtotal for items registered up to the power failure is retained in memory. You will be able to continue with the registration when power is restored.
- Power failure during printing a read/reset report
- Power failure during printing of a receipt and the journal
Printing on remote printer will resume after power is restored. A line that was being printed when the power failure occurred is printed in full.

The memory protection battery is constantly charging and discharging as you switch the terminal on and off during normal operations. This causes the capacity of the battery to decrease after approximately one year of use.

Important !

- Remember a weak battery has the potential of losing valuable transaction data.
- A label on the back of the terminal shows the normal service period of the battery installed in the terminal.
- Have the battery replaced by your dealer within the period noted on this label.

Options

Remote customer display: QT-6060D

Slip printer: SP-1300

Cable: PRT-CB-8C

Remote printer: UP-400, UP-360

Cable: PRL-CB-2 (UP-400),
PRT-CB-8A or
PRT-CB-8B(UP-360)

Cash drawer:

MCR: QT-6046MCR

Interlink cable: PRL-CB-2

Consult with your CASIO dealer for details.

Specifications

Input method

Entry: 10-key system
 Function: Full key system

Display

Main: Color LCD: 15 inch 1024 × 768 dots with touch screen
 Customer: Monochrome LCD: Alphanumeric 20 digits × 2 lines

Listing capacity

Amount: 9999999
 Quantity: 9999.999
 Tendered amount: 9999999999
 Percent: 99.99
 Tax rate: 9999.9999
 Numbers: 999999999999

Chronological data

Date print: Automatic date printout on receipt or journal, automatic calendar
 Time print: Automatic time printout on receipt or journal, 24-hour system/12-hour system

Alarm

Key catch tone, error alarm, sentinel alarm

Memory protection battery

Battery should be replaced every one year.

Power supply/power consumption

See the rating plate.

Operation temperature

0°C ~ 40°C (32°F ~ 104°F)

Humidity

20 ~ 85%

Dimensions and weight

367.5 mm (H) max. × 362 mm (W) × 353.5 mm (D) max. / 5.8 kg ...without drawer nor AC adaptor
 (14 15/16" (H) max. × 14 1/4" (W) × 13 15/16" (D) max. / 12 lbs. 12 oz)

Totalizers	Contents					
Category	No. of totalizers	Amount (10 digits)	No. of items (6 integer/3 decimal)	Count (6 digits)	No. of customers (6 digits)	Periodic totalizers
Department	Up to 9999	✓	✓			✓
PLU	Up to 9999	✓	✓			✓
Clerk	Up to 99	✓	✓	✓	✓	✓
Hourly sales	24 ~ 96	✓		✓	✓	✓
Monthly sales	32	✓	✓	✓	✓	✓
Transaction	Variable with program					✓
Non resettable grand total	3	✓ (16 digits)				
Reset counter				✓ (4 digits)		
Consecutive No.	1			✓		

* Specifications and design are subject to change without notice.

A

- AC adaptor 10
- accessories 10
- add check 19, 48
- add-on new number type 18
- adding to check 45
- alphabet key 70
- arrangement 19
- arrow key 16
- assigning a clerk 23
- auto new balance function 44

B

- backspace key 71
- batch printing 43
- bill copy 19
- break-in/out key 19

C

- cancel 19, 37
- cash in drawer 39
- cash/amount tendered key 17
- change 26
- character editing 72
- character entering 70
- charge 19
- check 19
- check endorsement 19
- check in drawer 39
- check number 15
- check number method 44
- check number pop-up window 18
- check print 19
- check tracking 15, 44
- check/table number window 18
- clear key 16
- clerk 77, 80
- clerk interrupt 42
- clerk number 19
- clerk number key 16
- clerk sign off 23
- clerk sign on 23
- clerk transfer 19, 50
- clock-in/out 19
- closing check memory 46
- condiment PLU 51
- correct not registered item 35
- correct previously registered item 37
- correct registered item 36
- correction 35
- coupon 19, 56
- coupon 2 19, 56
- coupon number 19
- credit 19
- credit in drawer 39
- cube 19
- currency exchange 19, 58
- cursor key 70
- customer display 11, 15

- customer ID number 19

D

- daily sales report 38, 75
- date/time key 16
- declaration 19
- department 19
- department descriptor 79
- department number 19
- deposit 19, 52
- descriptor programming 67
- discount 19, 29, 30
- discount total 39
- display mode 19
- display on/off key 10, 12
- displaying the time and date 25
- drawer 12
- drawer lock 12
- drawer open key 12
- dust cover 10

E

- eat-in 19
- EBT 19
- electronic journal display 19
- end key 16
- error code 82
- error correct key 16
- ESC/SKIP key 16
- escape 21
- Euro 19

F

- finalization list key 17
- financial read report 75
- first unit price 19
- flat-PLU 26, 67
- flat-PLU key 17
- food stamp 19
- function key descriptor 68, 79
- function list key 17

G

- grand total 39
- gross total 39
- guest receipt 40, 46

H

- home position key 17
- hourly sales report 76
- house Bon 19

I

- i-Button key 12, 23
- i-Button key receiver 10
- individual clerk report 75
- insert key 70
- interlink cable 86

item descriptor 15
item quantity 15
item search 16

K

Ketten Bon 20
key descriptor 15
keyboard 16

L

list 19
list number 19, 52
list pop-up window 18
loan 20, 62
location change 20

M

magnetic card reader 86
media change 20, 62
menu level display 14
menu shift 17, 26
merchandise subtotal key 20
message programming 69
minus 20
mix and match 64
mode key 16
money declaration 75
monthly sales report 76
multiplication 27
multiplication key 16

N

net total 39
new balance 45
new balance key 17
new check 20, 45
new/old check 47
new/old check key 17
next 21
no key 17
no sale 17, 20, 37
non-add 20
non-add / no sale key 17
normal receipt 20
not found PLU 65
number of customer 15, 41
number of customer key 17

O

OBR (optical barcode reader) key 20, 64
old check 45
old check key 20
one touch NLU 20
open 20
open 2 20, 60
open check 20, 45
operator number 20, 50
operator X/Z 20
option 86

order character change 20

P

page down key 17
page up key 17
paid out 19
payment 20
pick up 20, 62
PLU 2nd descriptor 79
PLU descriptor 79
PLU key 16
PLU number 20
PLU report 76
plus 20, 55
post entry 17
post receipt 16, 40
power failure 86
premium 20, 55
preparation PLU 51
preset price 28
preset tax status 28
previous 21
price change 20, 65
price inquiry key 20
price key 20
printing slip 43
program reading 77

Q

quantity/for 20

R

read report 73
recall key 20
receipt/slip message programming 69
receipt on/off 20
received on account 20, 34
reduction 29, 31
REF MODE 33
refund 20, 32
release HAL 60
release specific compulsion 60
remote customer display 86
remote printer 86
repeat 26
reports key 16
report title 39
reset counter 39
reset report 39, 73
room number 20
room message 20
round repeat 20

S

scale 20
scanning PLU 64
seat number 17
second unit price 20, 57
selective item subtotal key 21

separate check 20, 49
separate check key 17
set menu 53
shift key 70
shift PLU 21
show table layout type 18
single item 54
single item sale 26
slip 43
slip back feed/release key 21, 43
slip feed/release 21, 43
slip print 21
slip printer 86
space key 70
split payment 21
square key 21
stock (negative) 63
stock (under minimum level) 63
stock check 63
stock inquiry 21, 63
store 21
subdepartment 21
subdepartment descriptor 79
subdepartment number key 21
substitution 21
subtotal key 17
swiipe 21

T

table number 15, 21, 45
table number method 44
table receipt key 16
table sharing 21
table transfer 50
table transfer key 17
takeout 21
tare 21
tax amount 39
tax exempt 21
tax shift 21
tax status 15
taxable amount 39
taxable amount subtotal key 21
ten key pad 16
text print 21
text recall 21, 51
tilt the touch screen panel 11
tip 21
tips 53
touch screen panel 10, 13
tray total 21

U

unit price inquiry 66

V

validation 21
VAT 21
VAT breakdown 61

view 21
void key 16

W

worktime 21

X

X/Z menu window 74

Y

yes key 17

CASIO®

CASIO COMPUTER CO., LTD.
6-2, Hon-machi 1-chome
Shibuya-ku, Tokyo 151-8543, Japan

QT-6600*E
MA0808-A Printed in Indonesia
Printed on recycled paper