

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Three function hand shower

OPERATION

- Lever style handles
- Rotate hot side handle counterclockwise to open and clockwise to close
- Rotate cold side handle clockwise to open and counterclockwise to close

FLOW


Hand shower meets 2.5 gpm max. (9.5 L/min)

STANDARDS

- Third party certified to CSA B125, ASME A112.18.1M, and all applicable requriements referenced therin
- ADA (for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commerical installations

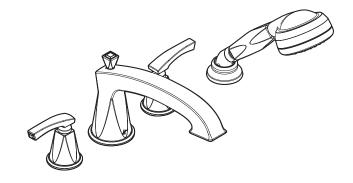

DIVINE™ Two-Handle Roman Tub Faucet Trim with Integral Diverter

Models: TS254 series

Valves: S924, S9204

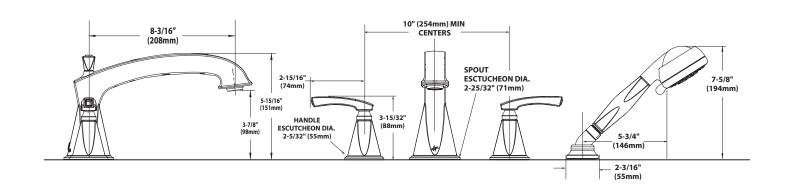



Rev. 6/08

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com