



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes 7" rainshower showerhead, arm and flange
- Includes digital controller for temperature & flow

## OPERATION

- Digital Thermostatic control
- Digital control dial controls temperature with LED indicators
- Digital control dial controls the flow rate with LED indicators
- Digital on/off button
- Digital pause button
- Temperature range adjustment from 60 degrees F to 120 degrees F (16 degrees C to 49 degrees C). Factory maximum setting is 115 degrees (46 degrees C)
- 4 digital presets for temperature and flow rate
- Remote (optional) uses RF technology and has a 30' (9.2m) range depending on intermediary structures

## FLOW

- Showerhead limited to 2.5 gpm (9.5 L/min)

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including ASSE 1016
- Digital controller third party certified to meet UL1951
- Digital controller and Remote control third party certified to meet FCC part 15

## WARRANTY

- Lifetime limited warranty against finish defects to the original consumer purchaser
- 5 year warranty against leaks, drips and operation defects to the original consumer purchaser
- 5 year warranty against finish defects if used in commercial installations
- 1 year warranty against leaks, drips and operation defects if used in commercial installations




## ioDIGITAL™

### Shower Trim Only

**Models:** T3405, T3415 series  
**Optional Remote:** A340 series  
 (Sold separately)


**Valve:** 3381 (Sold separately)

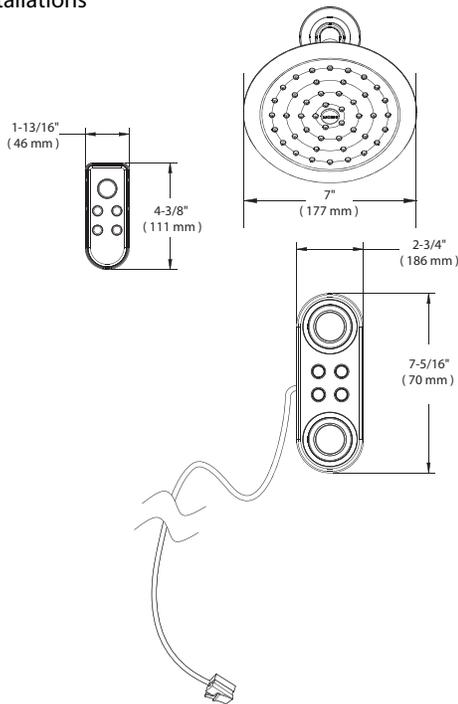

DATA CABLE (30') (9.2 m)

## CRITICAL DIMENSIONS

(DO NOT SCALE)

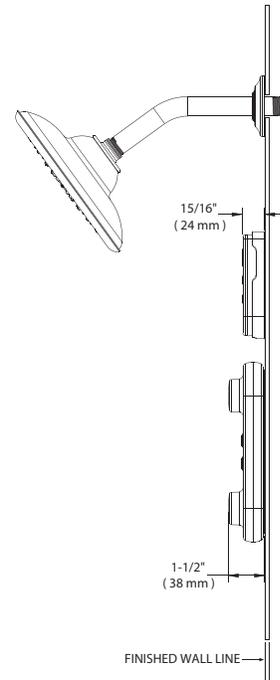

FINISHED WALL LINE