MOEN

Buy it for looks. Buy it for life.[®]

DESCRIPTION

- Chrome plated metal construction with various finishes • identified by suffix
- 1/2" IPS connections •

OPERATION

- Pivot action lever style handle
- Temperature controlled through 180° degree arc of handle travel

FLOW

• Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max (8.3 L/min)

CARTRIDGE

- 1225 cartridge design •
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back •

installations **STANDARDS**

- Third party certified to WaterSense,® CSA B-125.1/ASME A112.18.1, ICC A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9 •
- Complies with California Proposition 65 and with • the Federal Safe Water Drinking Act

ADA 🛃 for lever handle •

WARRANTY

Rev. 7/08

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



Specifications

VILLETA" Single-Handle Lavatory Faucet

With Metal Waste Assembly


Models: L4721 series, L4725 series Bulk Pack (12 per carton) Model: L64721 series, L64725 series

With 50/50 Waste Assembly Model: L84721 series Bulk Pack (12 per carton) Models: L64751 series, L64755 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 4" ON CENTER

eľ

Certified by IAPMO R&T

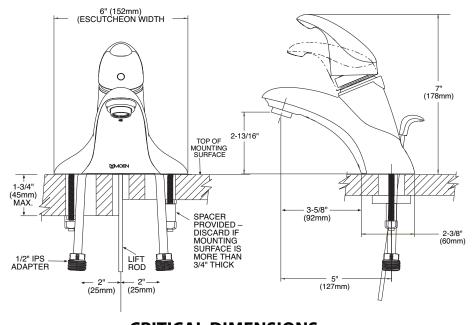

CRITICAL DIMENSIONS

(DO NOT SCALE)

٠