


ELECTRONIC CASH REGISTER

TE-3000S, TE-4000F, TE-4500F

DEALER'S MANUAL

Version 1.0 July 2003

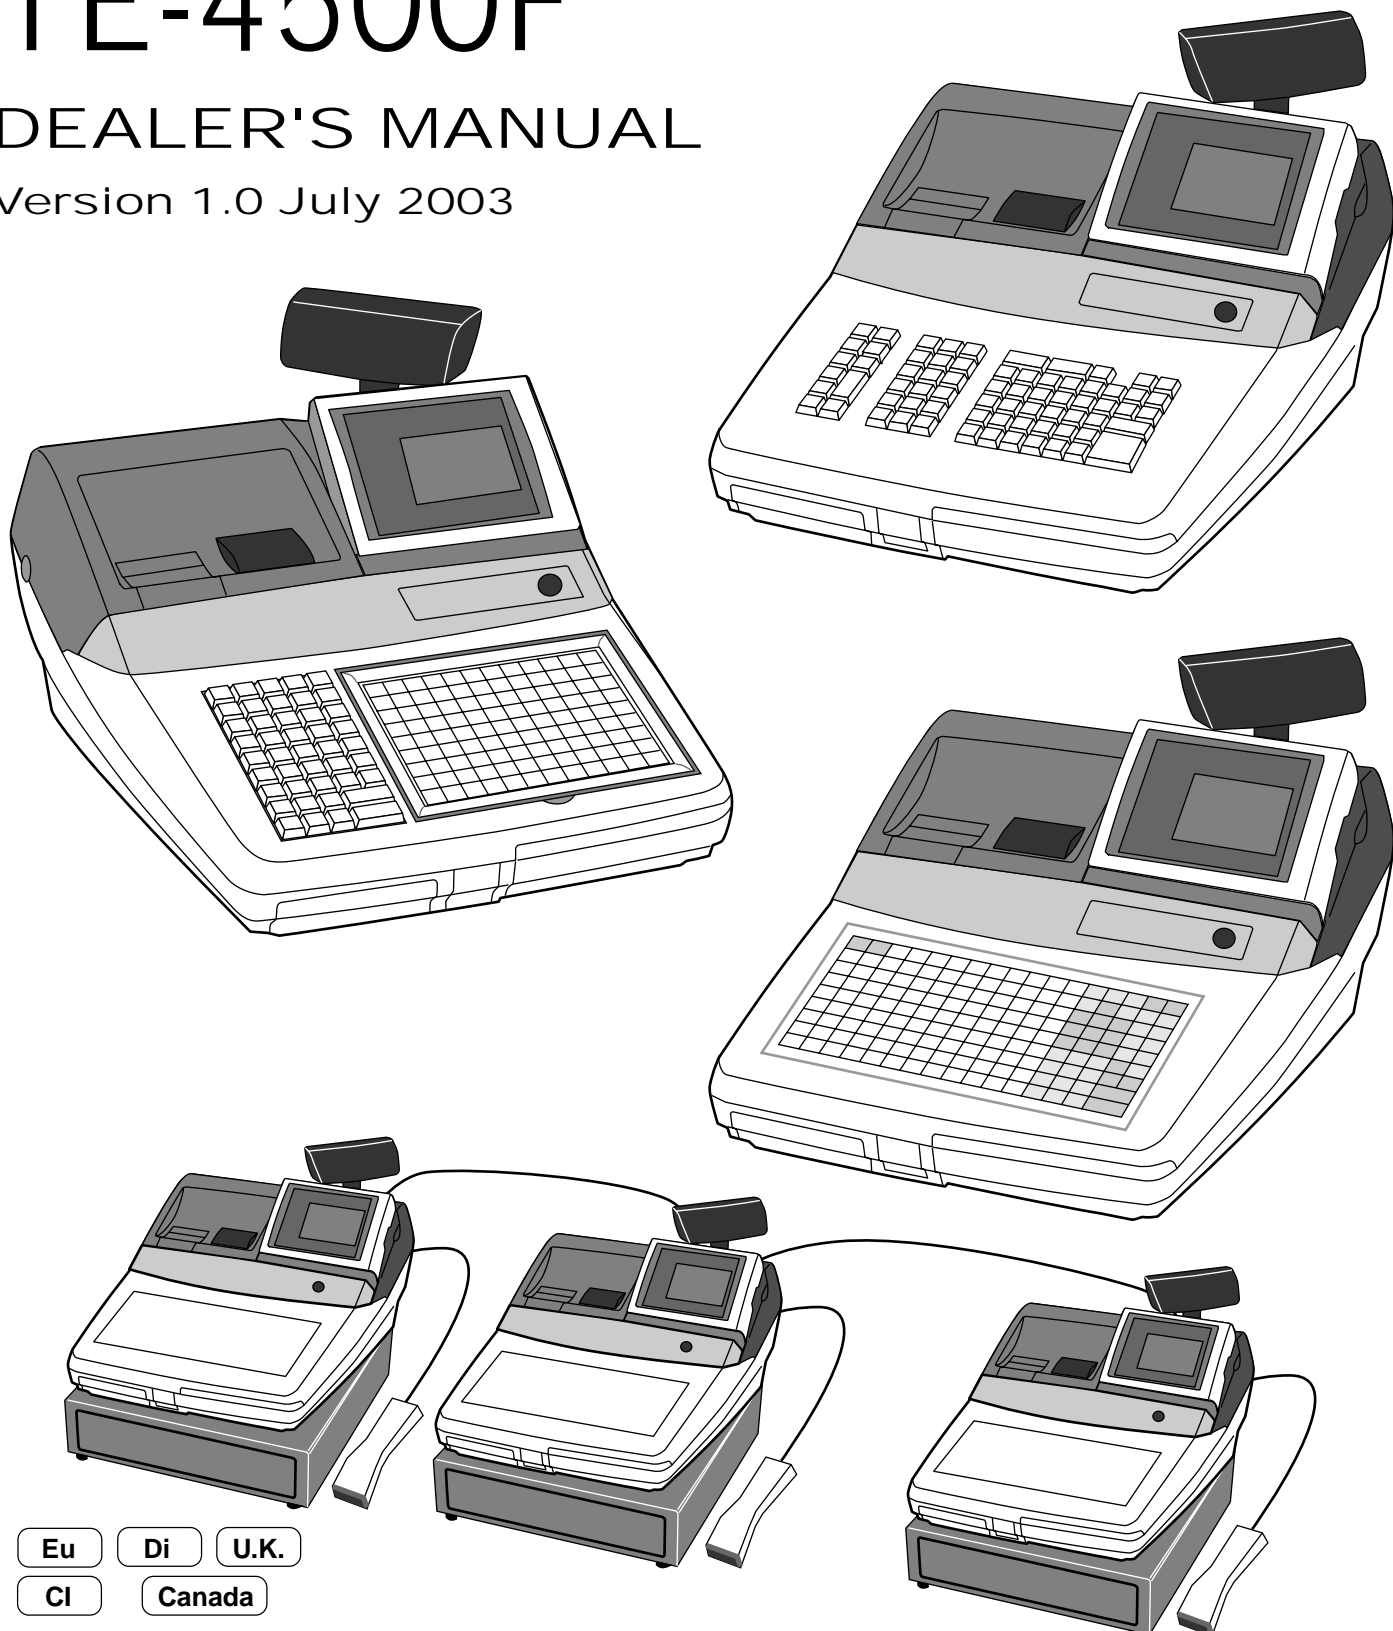

Eu Di U.K.
Cl Canada

CASIO[®]

Introduction & Contents

This manual is intended to be used as a reference to the TE-3000S, TE-4000F and TE-4500F system. It provides details to allow whole understanding of the system capabilities, its operation, and how it can be used to solve many problems within the retail outlet.

This manual consists of the following chapters:

1. Hardware configuration (for installation)

This chapter describes the hardware of these models and their network systems.

2. IPL (initial program loading)

This chapter describes how to download the application program to the terminal.

3. Initialization

This chapter describes how to set up the peripheral devices and the terminals.

4. Programming

This chapter explains actual programming procedure and functions.

5. Manager mode

6. X/Z report

7. Consolidation

8. Application system

9. Tips

10. Appendix:

Printing history

Manual version
Version 1.0.0 : July 2003

Software version
Version 1.0.0

Revised points

System configuration	11
Hardware configuration	11
General configuration	11
Hardware diagram	12
Display	13
Cash drawer.....	13
Input/output connectors	14
In/online configuration	15
Peripheral ports and their connectable devices	15
Inline system	17
IPL (Initial program loading).....	19
Memory map of the terminal.....	19
System configuration and procedure	19
Via COM1 port (to receive IPL data from PC)	19
Via COM1 port (to send IPL data from register)	20
Via inline	20
Via CF card (to send the IPL data to CF card)	21
Via CF card (to send the IPL data to register)	21
Initialization	23
Machine initialization procedure	23
Flag clear operation	25
Init 2 operation	25
Entering diag mode	26
Password	26
Programming (General explanation)	27
Program sub mode (P1 thru P7 mode)	27
Entering the program sub mode	27
File allocation (Program 5)	29
File allocation program	29
Programming procedure	29
Issuing program reading report of program 5 mode.....	33
Issuing procedure	33
Report sample	33
Key allocation (Program 4)	35
Key allocation program	35
Programming procedure	35
Configuration of the physical key layout.....	36
Issuing program reading report of program 4 mode.....	38
Issuing procedure	38
Report sample	38
Key function/machine feature (Program 3)	39
General control program.....	39
Programming procedure	39
Program data (by address code)	39
Department key/flat-PLU key/PLU program (Batch feature programming)	59
Programming procedure	59
Program data	59
Department key/flat-PLU key/PLU/subdepartment program (Individual feature programming)	61
Programming procedure	61
Program data (by address code)	61
Program data	64

Transaction key program	64
Programming procedure	64
Clerk program	88
Secret number, drawer, check number programming	88
Clerk detail link programming	88
Dallas key ID programming	88
Clerk other programming	89
Other programs	91
Time range programming	91
Table range programming	91
Tax table programming	92
Set menu programming	97
Batch X/Z report programming	97
Hourly item (time range) programming	98
Hourly item (link item) programming	98
Arrangement programming	99
Check print control programming	99
Mix & match programming	100
Backlight color control programming	101
Employee number programming	101
Scheduler programming	102
Bottle link table programming	104
Terminal connection table programming	104
I/O parameter table programming	105
Printer connection table programming	106
Non PLU table programming	107
Scanning PLU maintenance programming	108
Batch maintenance PLU programming	108
Activation of batch maintenance PLU	108
Not found PLU maintenance programming	109
Activation of Not found PLU maintenance	109
Scanning PLU direct maintenance programming	110
Scanning PLU individual programming	110
One touch NLU programming	112
Issuing program reading report of program 3 mode	113
Issuing procedure	113
Report sample	113
Character (Program 2)	115
Programming descriptors	115
Programming procedure	115
Programming data	115
Programming item/key descriptors	123
Programming procedure	123
Programming data	123
Programming item/clerk descriptors by range	125
Programming procedure	125
Program data	125
Entering characters	126
By character keyboard	126
By character code	128
Editing characters	129
Correcting a character just entered	129
Correcting and adding a PLU descriptor already set	129
Correcting a key descriptor already set	129
Correcting a message descriptor already set	129

Issuing program reading report of program 2 mode	130
Issuing procedure	130
Report sample	130
Unit price/rate (Program 1)	131
Date/time setting	131
Date setting	131
Time setting	131
Unit price program	131
Programming procedure	131
Rate program	133
<Currency exchange>	133
<Check>, <New balance>, <Premium (%+)>, <Discount (%-)>, <Rate tax>	133
Amount program	133
<Cash>, <Check>, <New balance>, <Plus (+)>, <Minus (-)>, <Coupon>	133
Scanning PLU direct maintenance programming	133
Issuing program reading report of program 1 mode	134
Issuing procedure	134
Report sample	134
Program reading (Program 6)	135
Issuing program reading report	135
Issuing procedure	135
Report code	135
Report sample	136
Fixed totalizer	136
Transaction key	136
Subdepartment	136
PLU	137
Department	138
Group	138
Clerk	139
Hourly sales	139
Scanning PLU	139
Table analysis	140
Grand total	140
General control	140
Special character	140
Report header	141
Tax table	141
Dallas key ID	141
Set menu table	141
Batch X/Z	141
Clerk detail link	142
Hourly item (Item)	142
Receipt message	142
Check endorsement	142
Slip/external printer message	143
Arrangement table	143
Character recall	143
Non-PLU table	143
Check print control	143
Mix & match	144
PLU 2nd @	144
Employee	145
Scheduler	145
Order character	145

LCD backlight color control	145
Bottle link table	145
One touch NLU	146
Hourly item (Time zone)	146
Terminal connection table	146
Printer connection table	146
AT command	147
Online password	147
I/O parameter table	147
Miscellaneous message	147
Printing guidance message	147
Error message	148
Registration guidance message	148
X/Z guidance message	148
Program guidance message	148
Auto-program & system utilities (Program 7)	149
Auto-programming	149
Auto-programming functions	149
Auto-programming operation	153
Other utilities	154
Manager operation	157
Manager control mode (X1 mode)	157
Entering the manager control mode	157
Assign drawers for each clerk	157
Stock quantity maintenance (PLU/flat PLU only)	158
To add to the actual stock quantity of a PLU/flat PLU	158
To subtract from the actual stock quantity of a PLU/flat PLU	158
To input the new stock quantity of a PLU/flat PLU	159
Clerk assignment	159
To link clerk button/key to interrupt buffers	159
To link clerk secret numbers to interrupt buffers	159
To link clerk numbers to clerk number keys	159
Programming for the Euro	160
Programming for the Australian GST	162
Programming of items in the program 1 mode	162
To enter the program 1 mode	162
To exit the program 1 mode	162
Master re-connection	163
Resetting the busy flag of the check	163
Read/reset report issuance	165
Preparation for issuing report	165
Money declaration	165
Password (X2/Z2 mode)	165
Issuing read/reset report	165
Programmability	166
Issuing procedure	166
Report sample	170
Financial report	170
Individual item/key report	170
Fixed total report	171
Transaction key report	172
Subdepartment report	172
PLU report	173
PLU stock report	174

Department report	175
Group report	176
Clerk report	177
Hourly sales report	178
Monthly report	178
Table analysis report	179
Hourly item report	179
Open check report	180
Scanning PLU report	180
Not found PLU report	182
Mix & match report	182
Time & attendance report	183
File reset	184
Consolidation	185
X/Z consolidation	185
X consolidation processing	185
Z consolidation processing (except for scanning PLU)	186
Z consolidation processing (for scanning PLU)	186
Scanning PLU maintenance by consolidating the not found PLU file	187
Standalone Z consolidation processing (except for scanning PLU)	187
X/Z consolidation execution	188
Consolidate terminal by terminal	188
Consolidate by group No./all terminal	188
Execute file reset command to all terminal	189
X/Z consolidation report sample	190
Z consolidation	190
X consolidation	190
Application systems	191
Scanning PLU	191
System configuration of the scanning PLU system	191
Barcode system	191
PLU maintenance	192
Scanning PLU registration	193
Mix & match discount	195
When the master goes down	197
Recovery processing	197
Check tracking system	197
Shared check tracking system	197
Data processing	197
Printing on the external (local/remote) printers	198
System configuration of the external printer system	198
Backup system	199
Printing control options for order	199
Time and attendance	200
Tips	201
Future order	201
Usage	201
Preparation	201
Eat-in/takeout	201
Automatic execution of Euro switchover by arrangement and scheduler	202
Appendix: Calculation method	203
Fixed total file	203

Appendix: Font code tables	205
Standard font set (default)	205
Multilingual + Euro (Windows code page 858)	205
Special font set	206
Slavic (Windows code page 852)	206
Greek	206
Cyrillic (Windows code page 866)	207
Baltic	207
Arabic	208
Appendix: Peripheral device configuration	209
UP-350	209
UP-250	209
SP-1300	210
Quick scan 6000	210
NCI 6710	210
Appendix: File record format	211
Fixed totalizer file	211
Fixed totalizer (daily)	211
Fixed totalizer (periodic/consolidation)	211
Transaction key file	212
Transaction key (daily)	212
Transaction key (periodic/consolidation)	212
Subdepartment file	212
Subdepartment (daily)	212
Subdepartment (periodic/consolidation)	212
PLU file	213
PLU (daily)	213
PLU (periodic/consolidation)	213
PLU 2nd unit price (program)	213
Department file	214
Department (daily)	214
Department (periodic/consolidation)	214
Group file	214
Group (daily)	214
Group (periodic/consolidation)	214
Clerk file	215
Clerk (programming)	215
Clerk detail (daily, periodic/consolidation)	215
Clerk detail link (program)	215
Dallas key ID (program)	215
Hourly sales file	216
Hourly sales (daily)	216
Hourly sales (periodic/consolidation)	216
Monthly sales file	216
Monthly sales (daily, periodic/consolidation)	216
Scanning PLU files	217
Scanning PLU file (daily)	217
Not found PLU file (daily)	217
Non PLU table file (program)	217
Batch maintenance PLU file (program)	217
Direct maintenance PLU file (program)	217
Not found PLU maintenance file (program)	217
One touch NLU table file	218

Mix & match file	218
Mix & match file (daily)	218
Mix & match file (periodic/consolidation)	218
Bottle link table file	218
Bottle link table file (program)	218
Table analysis file	219
Table analysis (daily)	219
Table analysis (periodic/consolidation)	219
Time and attendance file	219
Time and attendance (daily)	219
Employee file	219
Grand total file	220
Grand total (daily)	220
Grand total (consolidation)	220
Hourly item file	220
Hourly item sales file	220
Hourly item link file	220
Hourly item time range file	220
General control file	221
General control	221
Special character file	222
Special character	222
Report header file	223
Report header	223
Tax table file	223
Tax table	223
Set menu table file	223
Set menu table	223
Batch X/Z file	224
Batch X/Z	224
Receipt message file	224
Receipt message	224
Check endorsement message file	224
Check endorsement message	224
Slip/local/remote printer message file	224
Slip/local/remote printer message	224
Arrangement file	225
Arrangement file	225
Character recall file	225
Character recall	225
Check print file	225
Check print	225
Scheduler file	225
Scheduler	225
Order character file	225
Order character	225
System files	226
Character key table file	226
Key table file	227
LCD back light color control file	228
Terminal connection table file	228
Printer connection table	228
Operation start date file	228

Introduction & Contents




Initialize code file	228
AT command file	229
Online password file	229
I/O parameter table file	229
System error log file	229
Graphic image files	229
Graphic logo file	229
Graphic logo file (for local/remote printer)	229
Watermark print file	229
Guidance message files	230
Error message file	230
Guidance message file	234
Appendix: Compulsory	243
Appendix: Error code	245

System configuration

Hardware configuration


General configuration

- ① Operator display
- ② Customer display (Popup display)
- ③ Stroke keyboard
- ④ Touch keyboard
- ⑤ Sheet holder
- ⑥ CF card slot cover
- ⑦ Printer cover
- ⑧ Mode switch
- ⑨ Power switch cover
- ⑩ Dallas key receiver (option)

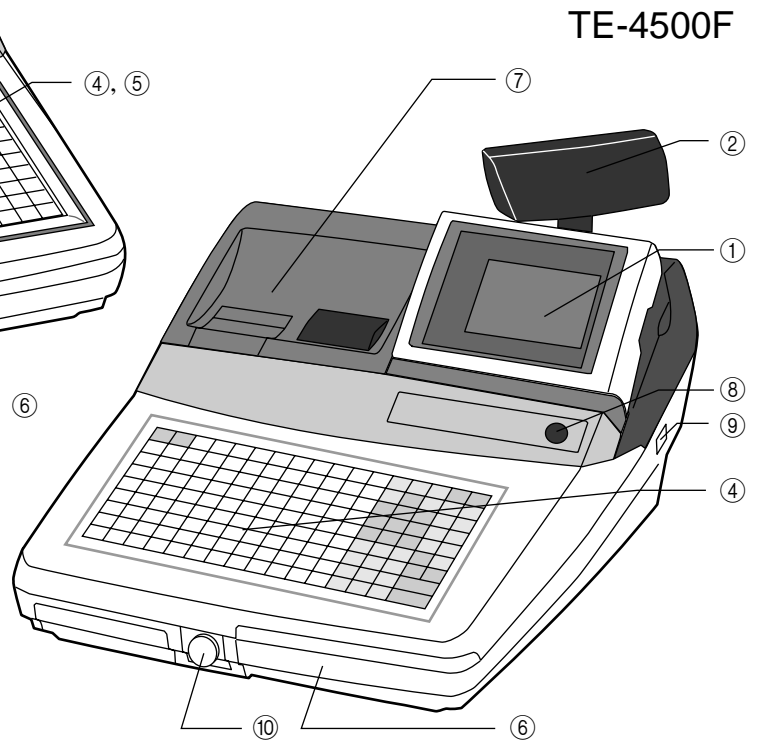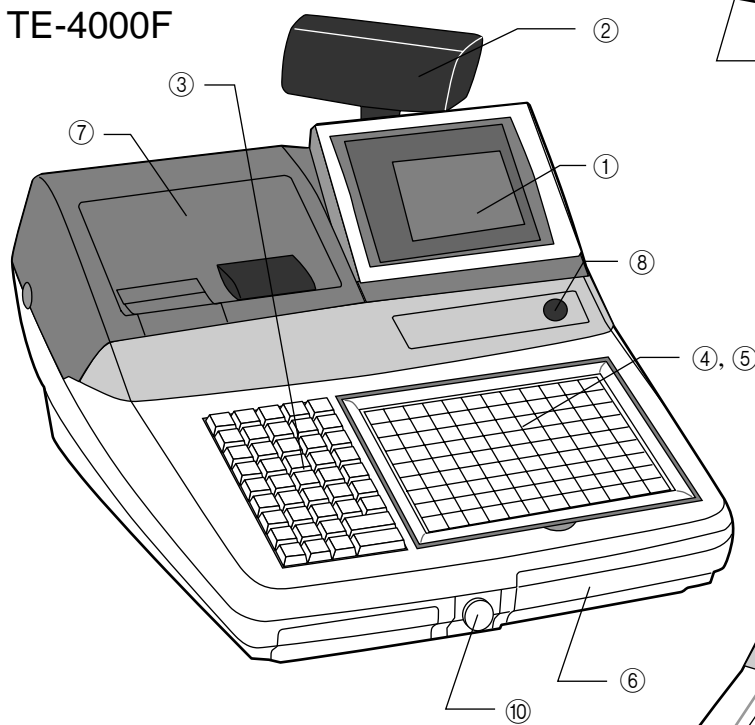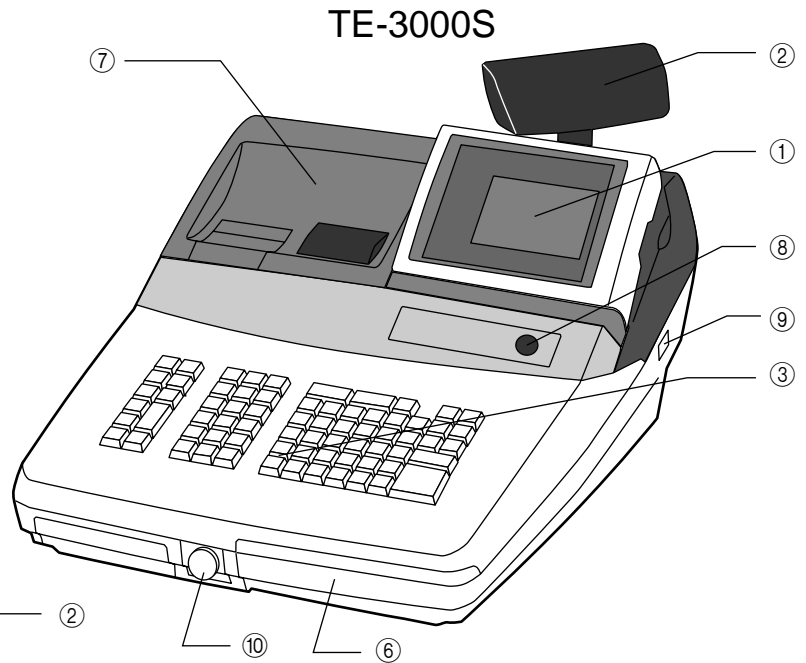

System configuration

Hardware diagram

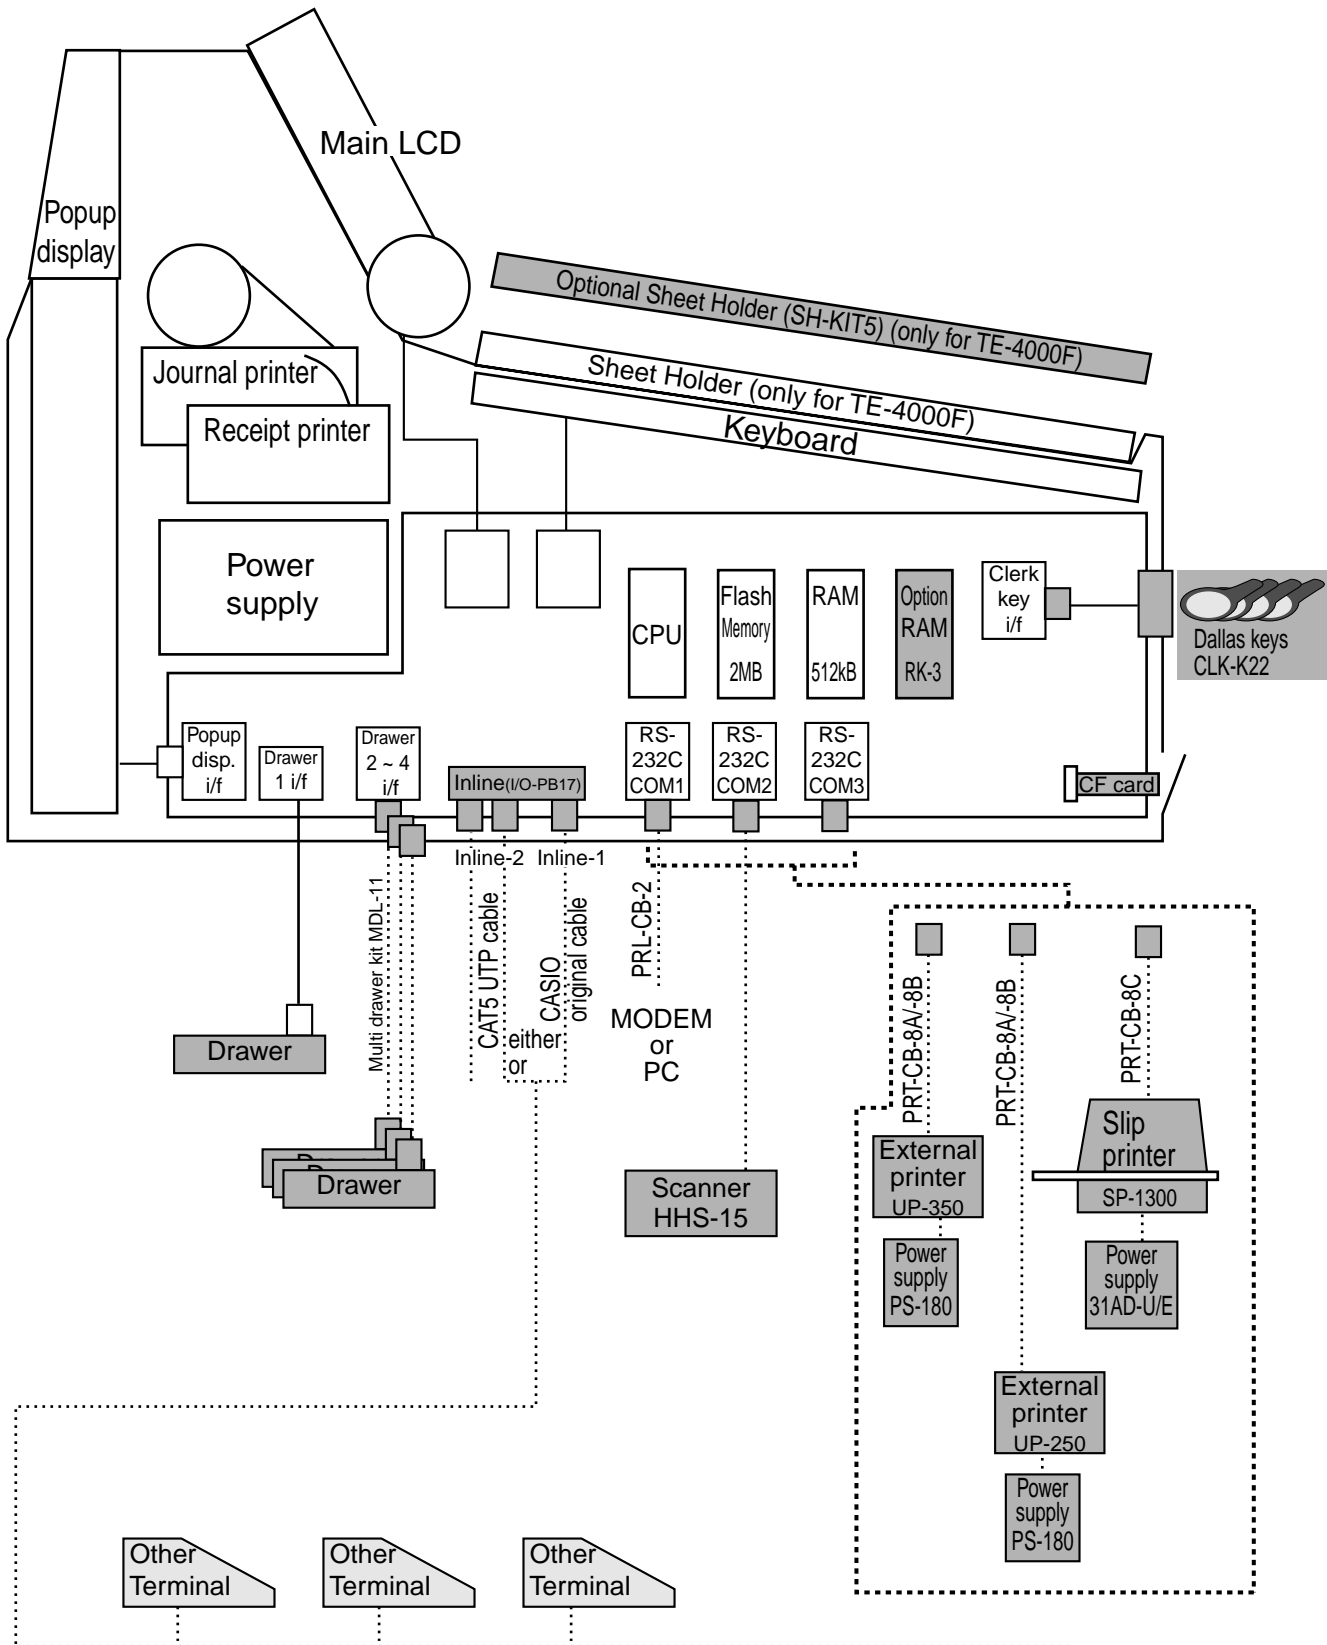


Note: Shaded device and dot line indicate option devices.


For the U.S. and Canada model, I/O-PB17 is included in the standard configuration.

Display


Contrast control knob

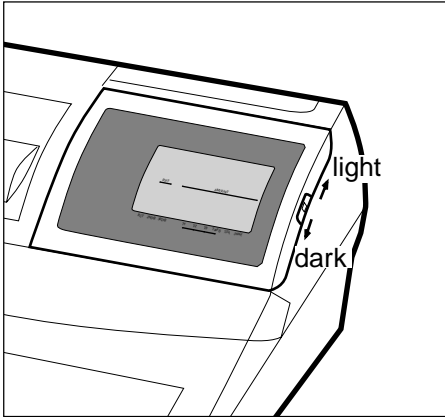

Tilt the LCD

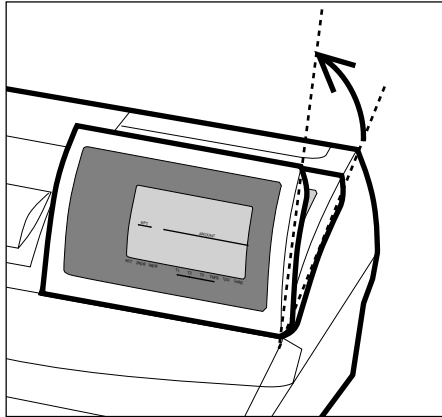

Backlight color control switch

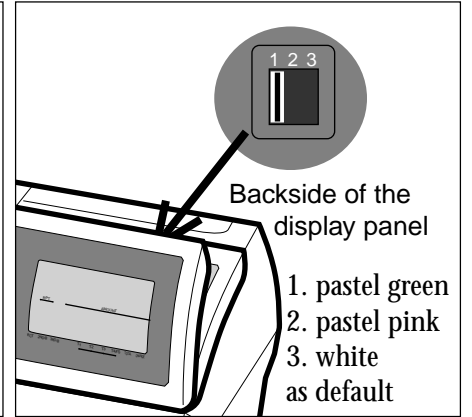


Cash drawer

In case of connecting drawer, follow the procedure below.


Connect the drawer.

1. Connect drawer connector (three color lead on drawer) to the terminal.
2. Connect frame drawer connector (green lead on drawer) to the terminal.

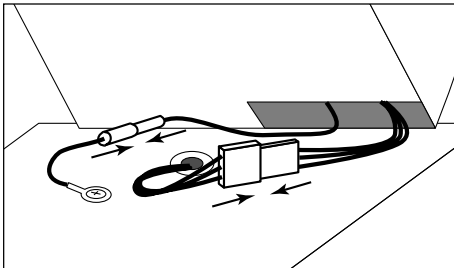

Mount the cash register.

1. Screw in 2 fixing screws bottom side of the terminal.
2. Stick rubber plate on the each corner of the bottom side of the terminal.
3. Mount the terminal on the top of the drawer, ensuring that the feet on the bottom of the terminal go into the holes on the drawer.

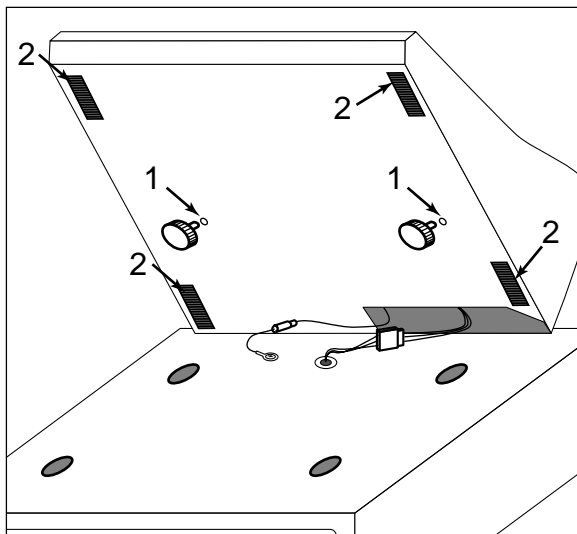


System configuration

Input/output connectors


Power switch

Main power switch is located in the power switch cover.

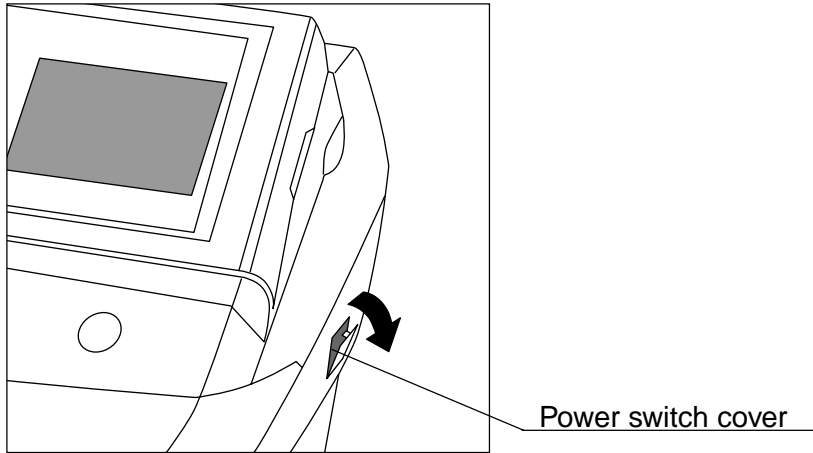

Input /output connectors

Inline connector, COM port, and drawer cable are located in the backside connector cover.

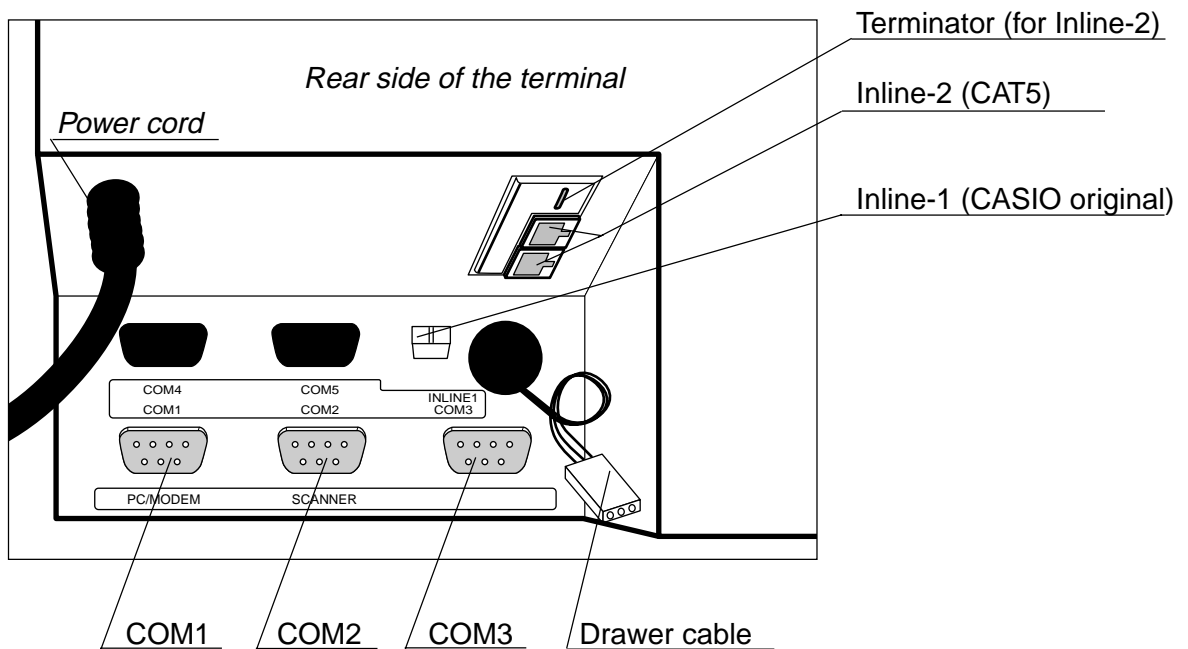

In/online configuration

Peripheral ports and their connectable devices

Model	Device	Inline port	Drawer port	COM port		
				COM1	COM2	COM3
TE-3000S TE-4000F TE-4500F	MODEM/PC			✓		
	External printer (Max. 2 printers, except slip)			✓	✓	✓
	Slip printer				✓	✓
	Scanner				✓	
	Scale					✓
	Inline *	✓				
	Drawer			1 (Max 4)		

✓: can connect

* Standard for U.S. and Canada, option for other area


Available device/cable list

External printer: UP-350, UP-250
 Printer cable: PRT-CB-8A(3m) or PRT-CB-8B(5m)
 Power supply: PS-180 and AC-170 (if necessary)
 Slip printer: SP-1300
 Printer cable: PRT-CB-8C
 Power supply: AD31U or AD31E
 Scale: NCI Model 6710
 Scanner (Hand-held): HHS-15
 Scanner (LASER): PSC Quick Scan 6000
 Scanner (Fixed): PSC HS1250
 MODEM: US Robotics SPORTS STAR 56.4kbps
 PC cable: PRL-CB-2

System configuration


Steps to define COM port/peripheral devices

After connecting peripheral devices, programming of I/O parameter table, printer connection table are necessary.

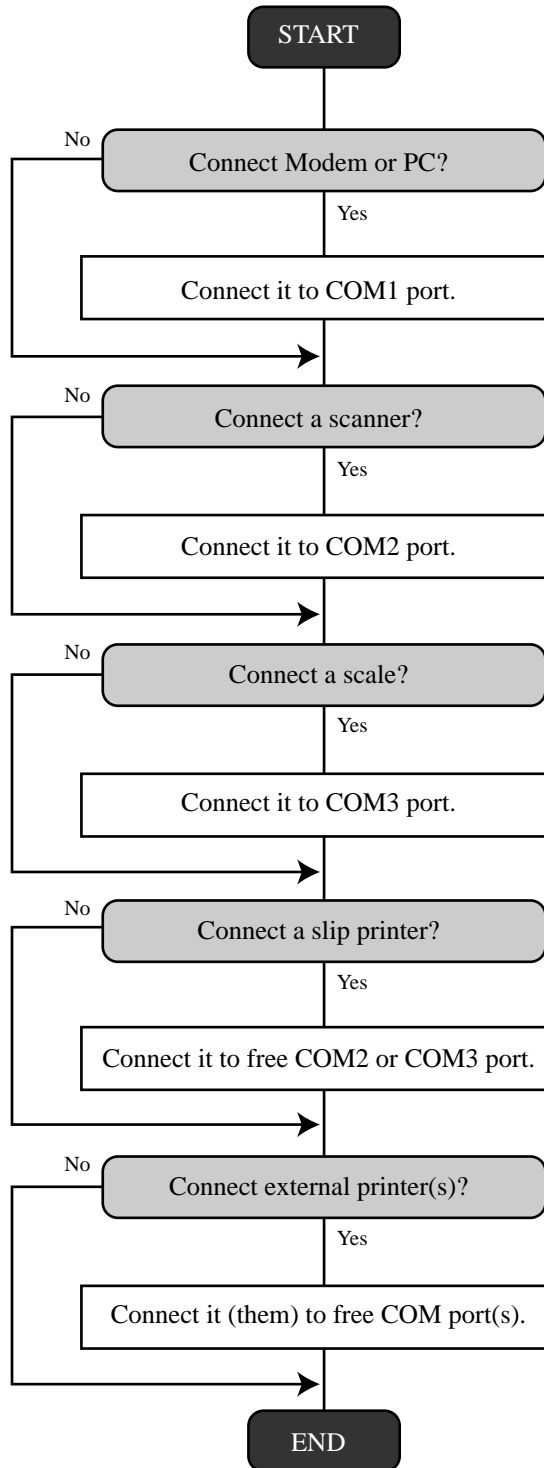


Inline system


Non scanning system

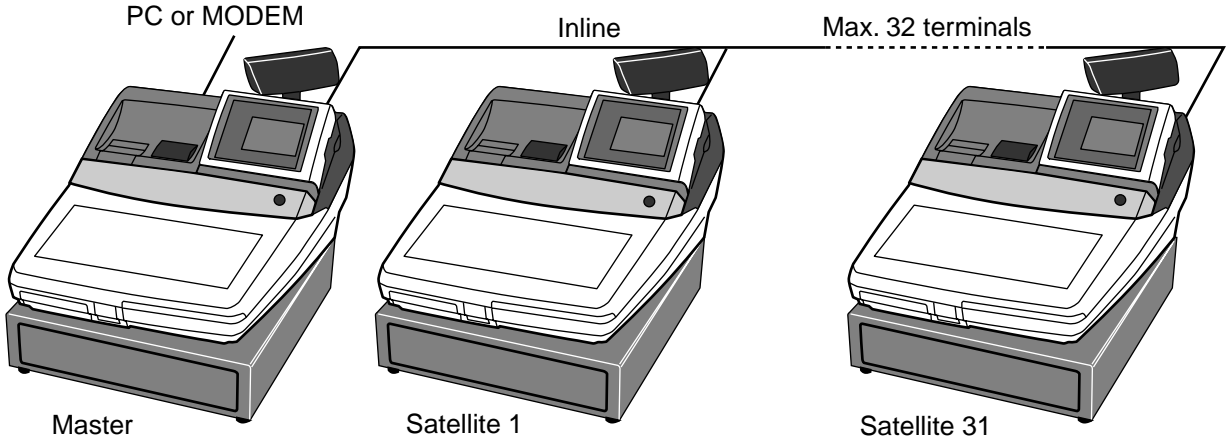

Scanning system

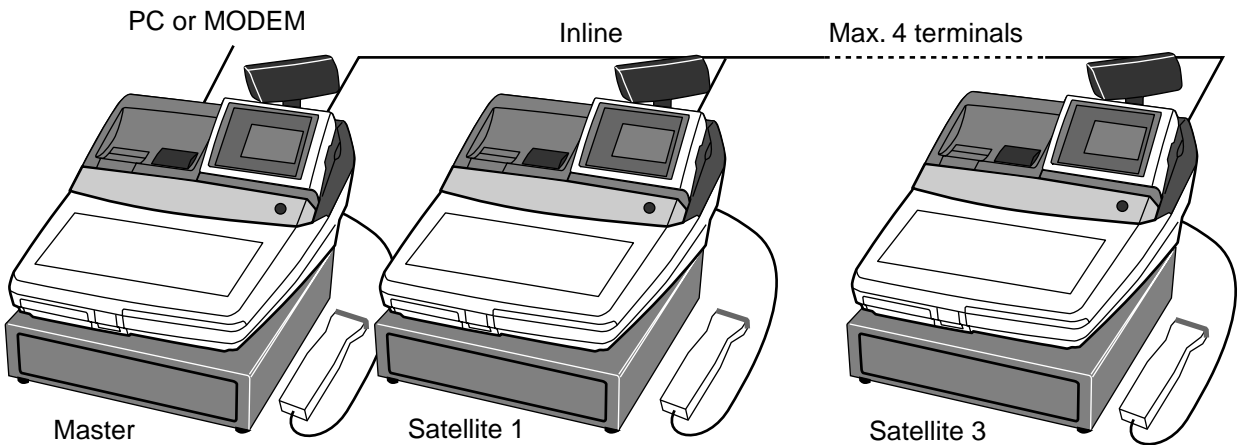

Check tracking/clerk interrupt system

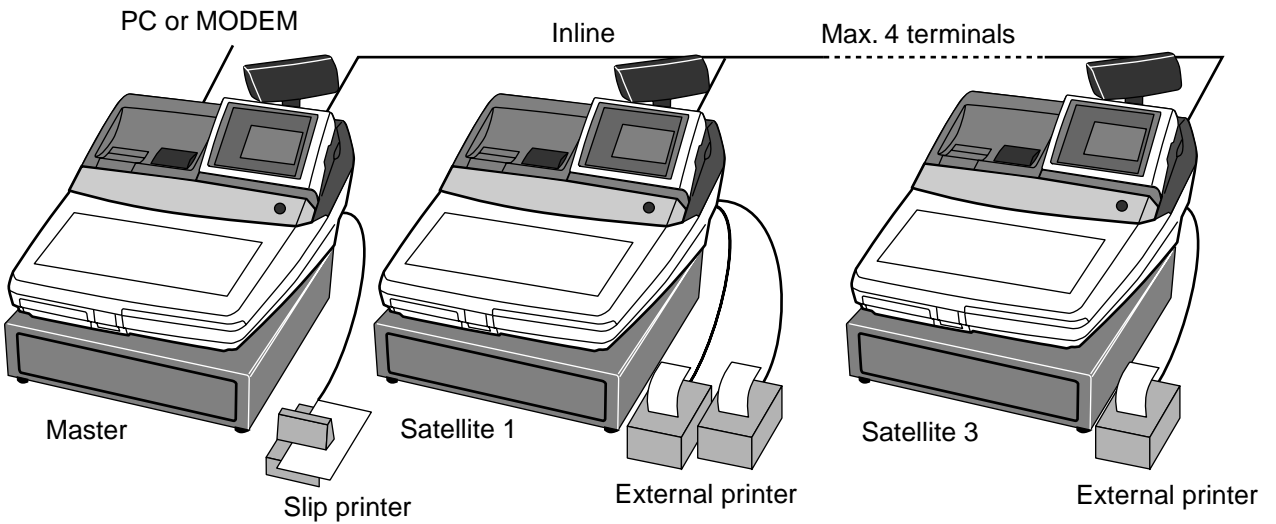

System configuration

Inline cable

1p × 0.5mm² CASIO-IPEV-SLA for INLINE-1
CAT5 cable for INLINE-2

Inline cable length and baud rate

• INLINE-1


baud rate	max. terminals	cable length
312.5 kbps	20 terminals	430m
156.25 kbps	32 terminals	890m

• INLINE-2


baud rate	max. terminals	cable length
312.5 kbps	4 terminals	450m
312.5 kbps	8 terminals	420m
312.5 kbps	32 terminals	230m

Inline connector (for INLINE-1)

for trunk line end

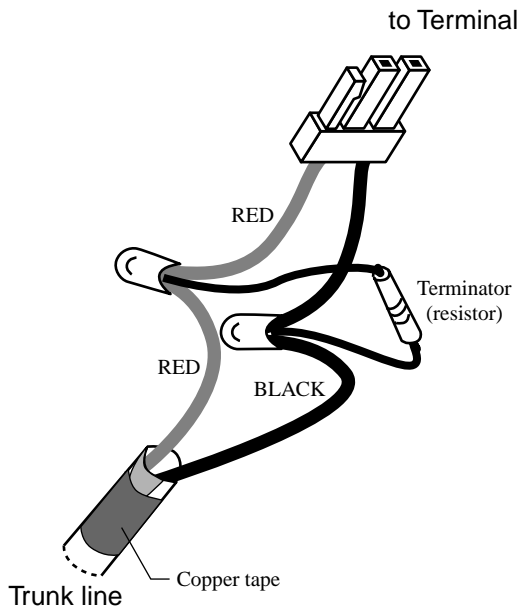

for other part

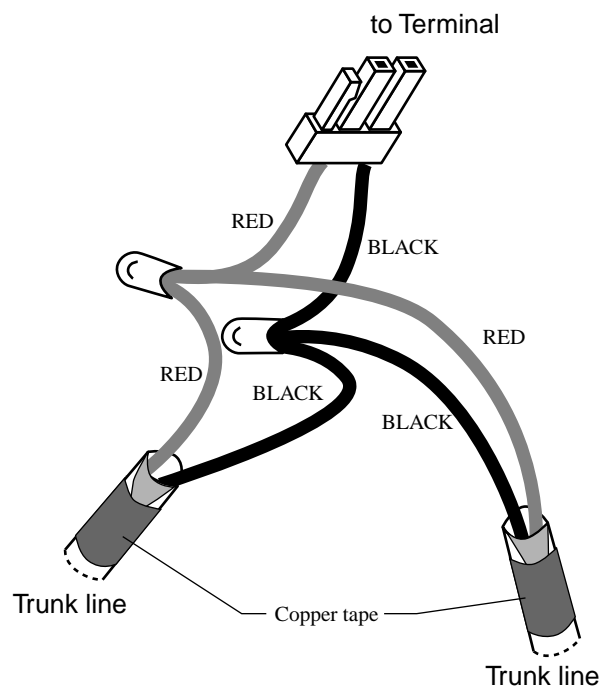


IPL (Initial program loading)

IPL should be made before initializing when the application program has been modified.


Memory map of the terminal

The application programs are downloaded from PC (via COM port)/other terminal (via inline or COM port)/CF card to the internal flash memory.

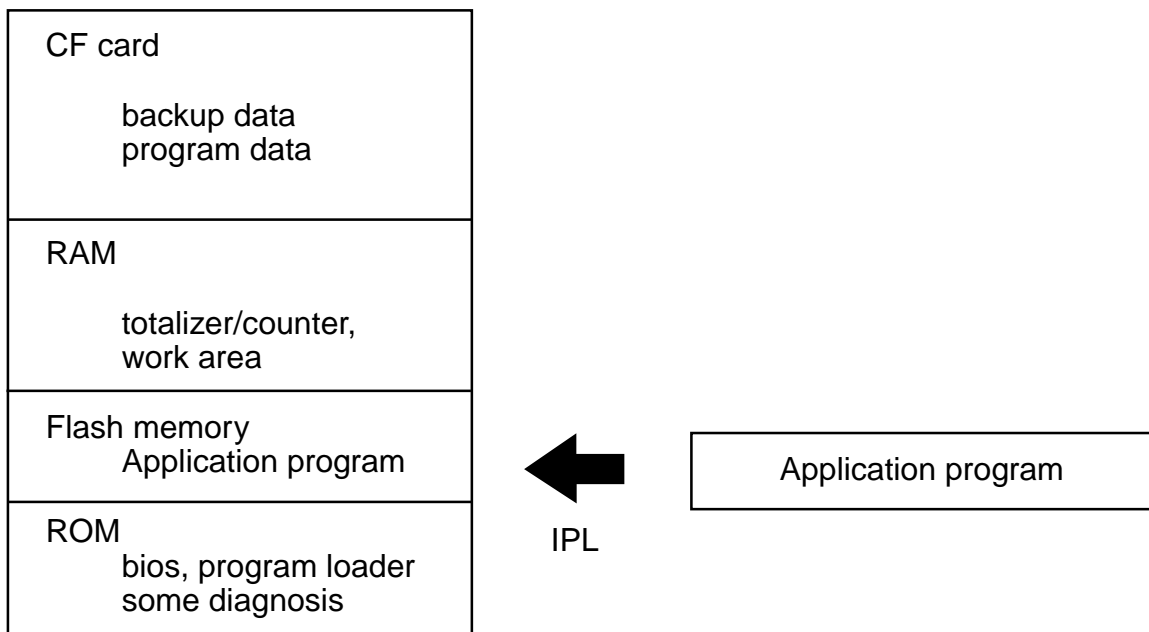

System configuration and procedure

Via COM1 port (to receive IPL data from PC)

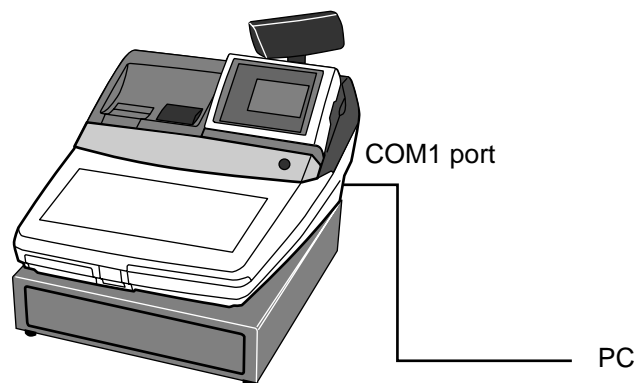

Operation

1. Set the mode switch to PGM position and turn off the power switch.
(Refer page 14 of this manual for the location of the power switch.)
2. While holding down the <JOURNAL FEED>, turn on the register.
3. Release <JOURNAL FEED> after the register shows "INIT".
4. Enter "44449999" and press <SUBTOTAL>.
5. Enter "0" (communication speed: 38400 bps) and press <SUBTOTAL>.
6. Start the IPL program of the PC.


IPL (Initial Program Loading)

Via COM1 port (to send IPL data from register)

Operation

1. Turn to PGM mode.
2. Enter "7" and press <SUBTOTAL>.
3. Enter "180" and press <SUBTOTAL>.
4. Enter "49" and press <CASH>.
(In case of quitting, press <SUBTOTAL> instead of <CASH>.)
(Communication speed is fixed; 38400 bps.)

Via inline

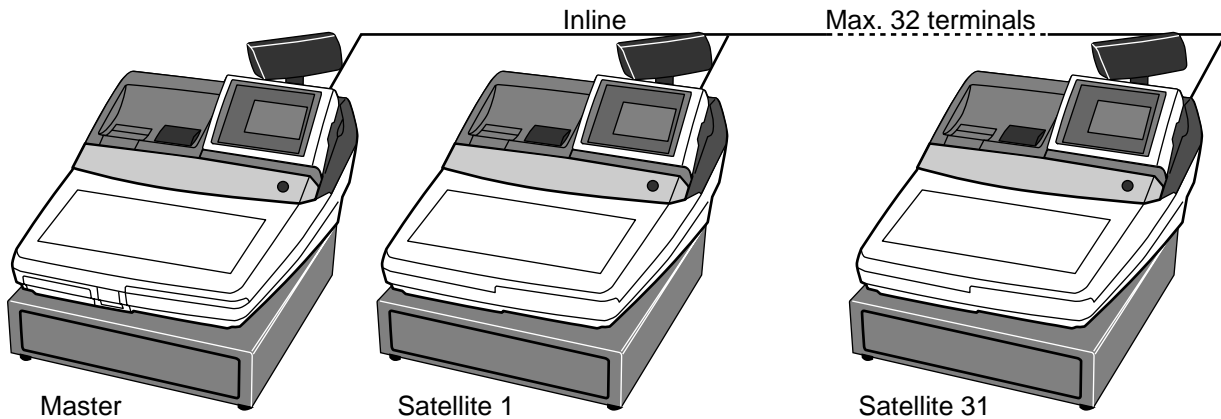


Operation (satellite)

1. Set the mode switch to PGM position and turn off the power switch.
(Refer page 14 of this manual for the location of the power switch.)
2. While holding down the <JOURNAL FEED>, turn on the register.
3. Release <JOURNAL FEED> after the register shows "INIT".
4. Enter "44449999" and press <SUBTOTAL>.
5. Enter "D₄D₃D₂D₁" and press <SUBTOTAL>.
D₄D₃: 2-digit of machine ID for IPL
D₂: Always "1".
D₁: 1-digit of baud rate designation, "0" means 312k bps, "1" means 156k bps.
6. Follow step 2 ~ 5 for all satellites to be IPL.

Operation (master)

1. Turn to PGM mode.
2. Enter "7" and press <SUBTOTAL>.
3. Enter "150" and press <SUBTOTAL>.
4. Enter "49" and press <CASH>.
(In case of quitting, press <SUBTOTAL> instead of <CASH>.)

Via CF card (to send the IPL data to CF card)

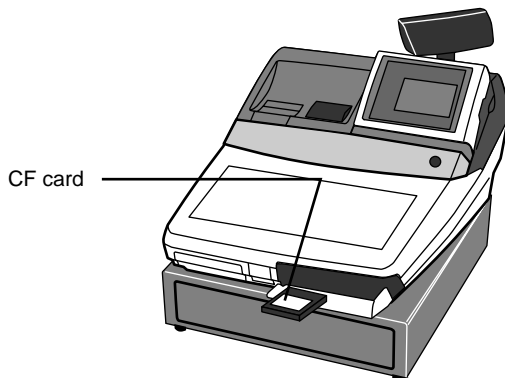


Never plug/unplug the CF card during IPL.

Operation

1. Turn OFF the register.
2. Open the CF card slot cover and insert the CF card securely.
(Please check that the CF card is vacant. Refer to the “System utility section in PGM7”.)
3. Turn to PGM mode.
4. Enter “7” and press <SUBTOTAL>.
5. Enter “170” and press <SUBTOTAL>.
6. Enter “49” and press <CASH>.
(In case of quitting, press <SUBTOTAL> instead of <CASH>.)
7. Turn OFF the register and pull out the CF card.

Via CF card (to send the IPL data to register)

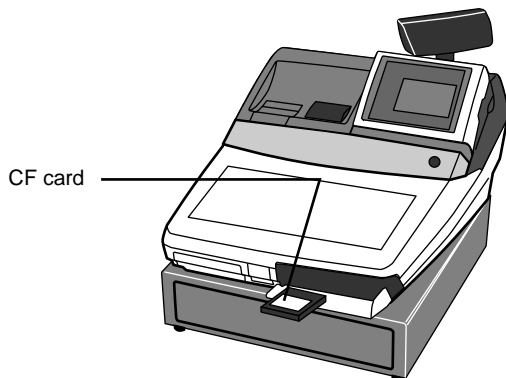

Never plug/unplug the CF card during IPL.

Operation


1. Set the mode switch to PGM position and turn off the power switch.
(Refer page 14 of this manual for the location of the power switch.)
2. Open the CF card slot door and insert the CF card securely.
3. While holding down the <JOURNAL FEED>, turn on the register.
4. Release <JOURNAL FEED> after the register shows “INIT”.
5. Enter “44449999” and press <SUBTOTAL>.
6. Enter “20” and press <SUBTOTAL>.

IPL (Initial Program Loading)


Initialization

Machine initialization procedure

1. Plug the power cord into an AC outlet.



2. Set the mode switch to PGM position and turn off the power switch.
(Refer page 14 of this manual for the location of the power switch.)



3. While holding down <JOURNAL FEED>, turn on the register.



4. Release <JOURNAL FEED>.

You should see "0000000000" on the display.
If 10 zeros are not shown or another character are shown,
immediately set the mode switch to OFF and restart from
the beginning of this procedure.



5. Enter 11-digit program code from the worksheet.

6. Press <SUBTOTAL> to register the program code.
(Wait until beep twice.)

7. In case of installing inline system,
enter 3-digit program code from the worksheet.

8. Press <SUBTOTAL> to register the program code.

$D_{11}D_{10}D_9D_8 \sim D_3D_2D_1$ refer to Worksheet (Initialize 1)

$D_3D_2D_1$ refer to worksheet (Initialize 2)

After completion of initialization and program loading, initialization receipt is issued.

Please turn on and initialize the register in order, if your registers are connected with inline. The ID number of registers are defined automatically. (Do NOT turn off the register(s) until all register has been initialized.)

Initialization

Worksheet (Initialize 1)

Description	Choice	Program code
Print password of PGM mode, when flag clear operation is performed.	Yes = 0 No = 4	<input type="checkbox"/> D ₁₁
Password in PGM3 ~ 7 mode	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₁₀ D ₉ D ₈ D ₇
Messages and descriptors are written in English = 0, French = 1, Spanish = 2, German = 4	Significant number	<input type="checkbox"/> D ₆
Model for U.S. or Canada (Date order: month/day/year) = 2, German (Date order: day/month/year) = 4, Other area (<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> , Date order: day/month/year) = 1, Other area (<input type="checkbox"/> , Date order: day/month/year) = 3	Significant number	<input type="checkbox"/> D ₅
Fixed value: TE-3000S: 15, 20, 30 (dependent upon number of department keys) TE-4000F, TE-4500F: 08	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃
Use ① clerk switch (clerk push switch)/ ② Dallas key or clerk secret number key *	a ① = 0 ② = 1	<input type="checkbox"/> (a+b) D ₂
Initialization pattern: ① For scanning/② For check tracking	b ① = 0 ② = 2	
Use Euro only.	No = 0 Yes = 1	<input type="checkbox"/> D ₁

* When you select this option "Use clerk secret code key", and your register doesn't have this key on the default keyboard, be sure to allocate <CLERK-#> (clerk secret number key) just after the initialization.
(Do NOT turn to OFF before allocating this key.)

Worksheet (Initialize 2)

Description	Choice	Program code
Inline baud rate	156 kbps = 1 312 kbps = 0	<input type="checkbox"/> D ₃
Inline physical I.D. (01 ~ 32)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Note:


Please check the receipt after initialization operation (machine initialization, flag clear operation and init2) that the machine number is printed properly.

If error codes are printed on it, check the hardware and retry the operation.


INIT 03-04-2004(THU) 11:58	Mode symbol/date/time
MC#01 000001	Clerk descriptor/Mc-No./consecutive No.
INIT	INIT symbol
(C) 2003 by CASIO COMPUTER CO.,LTD.	Copyright
All rights reserved.	
TE-3000S/4000F/4500F STD	Model name
VER. :nnnn	ROM version
LABEL :nnnnnn	ROM label
VER. :nnnn 00	ROM version
LABEL :nnnnnn	ROM label
INIT. :nnnnnnnnnnnnnnnn	Initialization code
0004-98 2000	I/O parameter table record No./error code
:	

Flag clear operation

1. Plug the power cord into an AC outlet.



2. Set the mode switch to PGM position and turn off the power switch. (Refer page 14 of this manual for the location of the power switch.)




3. While holding down <RECEIPT FEED>, turn on the register.



4. Release <RECEIPT FEED>.

You should see “FFFFFFFFF” on the display.
If 10 Fs are not shown or another character are shown, immediately set the mode switch to OFF and restart from the beginning of this procedure.




5. Press <SUBTOTAL> to complete.

After completion of flag clear, receipt is issued.


Note: After flag clear, clerk 1 is assigned automatically. So do not program clerk 1 as not assignable or not operable in PGM mode.

Init 2 operation

1. Plug the power cord into an AC outlet.



2. Set the mode switch to PGM position and turn off the power switch. (Refer page 14 of this manual for the location of the power switch.)



3. While holding down <RECEIPT FEED>, turn on the register.



4. Release <RECEIPT FEED>.

You should see “FFFFFFFFF” on the display.
If 10 Fs are not shown or another character are shown, immediately set the mode switch to OFF and restart from the beginning of this procedure.




5. Enter “8888888888” and press <CHECK TEND> to complete.

After completion, receipt is issued.


Initialization

Entering diag mode

1. Plug the power cord into an AC outlet.



2. Set the mode switch to PGM position and turn off the power switch.
(Refer page 14 of this manual for the location of the power switch.)



3. While holding down <JOURNAL FEED>, turn on the register.



4. Release <JOURNAL FEED>.

5. Enter "99990000" and press <SUBTOTAL> to enter the diagnosis.



Password

During initialize operation, you can program the password for PGM 3 ~ 7. If it is set, every time you enter PGM 3 ~ 7 mode, you must input this password by the following procedure.

1. Press <#-1> (normally <CASH/AMT TEND>).
2. Enter password.
3. Press <#-2> (normally <SUBTOTAL>).

Otherwise, you can do nothing in the PGM 3 ~ 7 mode.

Programming (General explanation)


Program sub mode (P1 thru P7 mode)

Program mode contains seven sub modes listed below. When you change the mode switch to PGM mode, the register is always in the PGM 1 mode. In case of using other mode, enter the sub mode number (2 ~ 7) and press <SUBTOTAL>.

- PGM1: unit price, rate, date, time, scanning PLU unit price maintenance
- PGM2: descriptor, name, message
- PGM3: machine feature (general function, clerk, etc.), key feature (department, transaction), scanning PLU maintenance
- PGM4: key allocation
- PGM5: file allocation
- PGM6: program reading
- PGM7: auto-program, system utility


Entering the program sub mode

Procedure (for PGM 1, 2 mode)

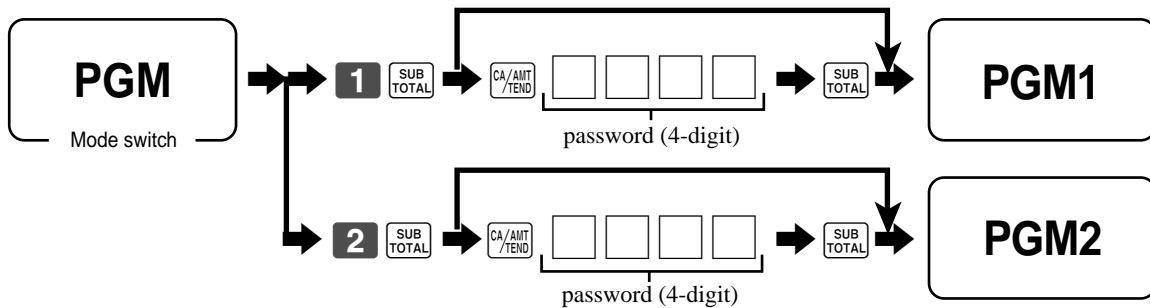

1. Enter password for PGM 1, 2 mode. If the register has no password for the PGM1 and 2 mode, you need not to enter it.
 2. Press <SUBTOTAL>. An error occurs if you try to enter the PGM1 or 2 mode without inputting a password (when one is programmed), or if the password you input does not match the one programmed for the register.
- To avoid repetition, the above operation is abbreviated to the following for all of the other procedure in this manual. This password is defined by the address code 02 of the general function program.

Procedure (for PGM 3 ~ 7 mode)

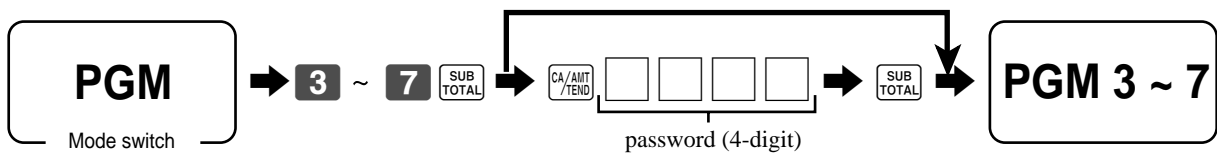


1. Enter password for PGM 3 ~ 7 mode. If the register has no password for the PGM 3 ~ 7 mode, you need not to enter it.
 2. Press <SUBTOTAL>. An error occurs if you try to enter the PGM 3 ~ 7 mode without inputting a password (when one is programmed), or if the password you input does not match the one programmed for the register.
- To avoid repetition, the above operation is abbreviated to the following for all of the other procedure in this manual. This password is defined during initialization operation.

Programming (General explanation)

File allocation (Program 5)

File allocation program

Programming procedure

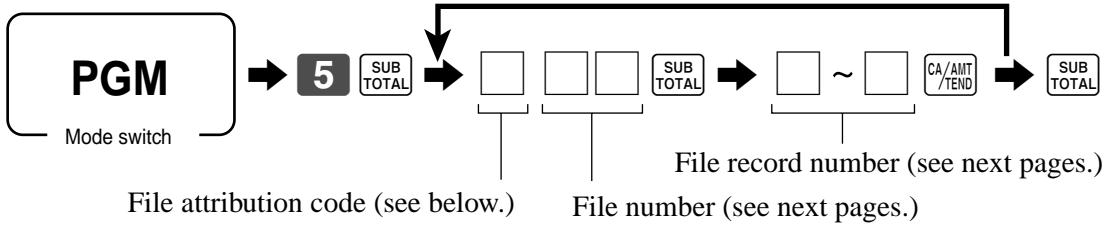

File attribution code	daily sales	Periodic 1	Periodic 2	Consolidation file		
				Daily sales	Periodic 1	Periodic 2
0	✓					
1	✓	✓				
2	✓	✓	✓			
3	✓			✓		
4	✓	✓		✓	✓	
5	✓	✓	✓	✓	✓	✓

File allocation programming (P5)

File number list

File No.	File description	Record length	Max No. of records	Description	Attribution	Allocatable	Default Rec. No.
System files							
089	Consecutive number work	6	1		Work	No	1
091	Terminal connection table	12	32		Program	Yes	32
093	Printer connection table	5	7		Program	Yes	3
094	Start date	4	1		Buffer	No	1
095	Initialize code	7	1		Program	No	1
096	AT command	62	2		Program	Yes	2
097	Online password	8	1		Program	Yes	1
098	I/O parameter table	8	4		Program	No	4
099	System error log	11	99		Buffer	Yes	99
Function and total files							
001	Fixed totalizer	22	99		Pgm/Sale	No	99
---	(periodic total 1)	10	99		Sales	Yes	99
---	(periodic total 2)	10	99		Sales	Yes	0
---	(daily consolidation)	10	99	*A	Sales	Yes	0
---	(periodic 1 consolidation)	10	99	*A	Sales	Yes	0
---	(periodic 2 consolidation)	10	99	*A	Sales	Yes	0
002	Transaction key	35	999		Pgm/Sale	Yes	30
---	(periodic total 1)	10	999		Sales	Yes	30
---	(periodic total 2)	10	999		Sales	Yes	0
---	(daily consolidation)	10	999	*A	Sales	Yes	0
---	(periodic 1 consolidation)	10	999	*A	Sales	Yes	0
---	(periodic 2 consolidation)	10	999	*A	Sales	Yes	0
003	Subdepartment	30	99		Pgm/Sale	Yes	0
---	(periodic total 1)	15	99		Sales	Yes	0
---	(periodic total 2)	15	99		Sales	Yes	0
---	(daily consolidation)	15	99	*A	Sales	Yes	0
---	(periodic 1 consolidation)	15	99	*A	Sales	Yes	0
---	(periodic 2 consolidation)	15	99	*A	Sales	Yes	0
004	PLU	78	9999		Pgm/Sale	Yes	216
---	(periodic total 1)	30	9999		Sales	Yes	0
---	(periodic total 2)	30	9999		Sales	Yes	0
---	(daily consolidation)	30	9999	*A	Sales	Yes	0
---	(periodic 1 consolidation)	30	9999	*A	Sales	Yes	0
---	(periodic 2 consolidation)	30	9999	*A	Sales	Yes	0
005	Department	64	99		Pgm/Sale	Yes	30
---	(periodic total 1)	25	99		Sales	Yes	30
---	(periodic total 2)	25	99		Sales	Yes	0
---	(daily consolidation)	25	99	*A	Sales	Yes	0
---	(periodic 1 consolidation)	25	99	*A	Sales	Yes	0
---	(periodic 2 consolidation)	25	99	*A	Sales	Yes	0
006	Group	22	99		Pgm/Sale	Yes	10
---	(periodic total 1)	10	99		Sales	Yes	0
---	(periodic total 2)	10	99		Sales	Yes	0
---	(daily consolidation)	10	99	*A	Sales	Yes	0
---	(periodic 1 consolidation)	10	99	*A	Sales	Yes	0
---	(periodic 2 consolidation)	10	99	*A	Sales	Yes	0
009	Hourly sales	24	99		Pgm/Sale	Yes	24
---	(periodic total 1)	20	99		Sales	Yes	0
---	(periodic total 2)	20	99		Sales	Yes	0
---	(daily consolidation)	20	99	*A	Sales	Yes	0
---	(periodic 1 consolidation)	20	99	*A	Sales	Yes	0
---	(periodic 2 consolidation)	20	99	*A	Sales	Yes	0

*A: I/O-PB17 is necessary, except for the U.S. and Canada model.

File No.	File description	Record length	Max No. of records	Description	Attribution	Allocatable	Default Rec. No.
010	Monthly sales	20	31		Pgm/Sale	Yes	31
---	(periodic total 1)	20	31		Sales	Yes	0
---	(periodic total 2)	20	31		Sales	Yes	0
---	(daily consolidation)	20	31	*A	Sales	Yes	0
---	(periodic 1 consolidation)	20	31	*A	Sales	Yes	0
---	(periodic 2 consolidation)	20	31	*A	Sales	Yes	0
018	Table analysis	28	99		Pgm/Sale	Yes	0
---	(periodic total 1)	10	99		Sales	Yes	0
---	(periodic total 2)	10	99		Sales	Yes	0
---	(daily consolidation)	10	99	*A	Sales	Yes	0
---	(periodic 1 consolidation)	10	99	*A	Sales	Yes	0
---	(periodic 2 consolidation)	10	99	*A	Sales	Yes	0
020	Grand total	20	3		Pgm/Sale	Yes	3
---	(daily consolidation)	8	3	*A	Sales	Yes	3
Check files							
015	Check index	300	200		Buffer	Yes	(60)*C
056	Separate check buffer	100	1500	*A	Buffer	Yes	(80)*C
060	Check detail	100	9999		Buffer	Yes	(900)*C
Clerk files							
007	Clerk	38	99		Program	Yes	15
030	Clerk detail link	9	200		Program	Yes	10
011	Clerk detail	10	200 × 99		Sales	Yes	150
---	(periodic total 1)	10	200 × 99		Sales	Yes	150
---	(periodic total 2)	10	200 × 99		Sales	Yes	0
---	(daily consolidation)	10	200 × 99	*A	Sales	Yes	0
---	(periodic 1 consolidation)	10	200 × 99	*A	Sales	Yes	0
---	(periodic 2 consolidation)	10	200 × 99	*A	Sales	Yes	0
027	Dallas key ID	14	200		Program	Yes	10
Hourly item files							
021	Hourly item	10	99 × 99		Sales	Yes	0
---	(periodic total 1)	10	99 × 99		Sales	Yes	0
---	(periodic total 2)	10	99 × 99		Sales	Yes	0
---	(daily consolidation)	10	99 × 99	*A	Sales	Yes	0
---	(periodic 1 consolidation)	10	99 × 99	*A	Sales	Yes	0
---	(periodic 2 consolidation)	10	99 × 99	*A	Sales	Yes	0
031	Hourly item link	9	99		Program	Yes	0
084	Hourly range	4	99		Program	Yes	0
Time and attendance files							
019	Time and attendance	16	99		Sales	Yes	0
061	Employee	17	99		Program	Yes	10

*A: I/O-PB17 is necessary, except for the U.S. and Canada model.

*C: Allocate if you select "check tracking pattern" initialization, (refer to page 24 of this manual).

File allocation programming (P5)

File No.	File description	Record length	Max No. of records	Description	Attribution	Allocatable	Default Rec. No.
Scanning PLU files							
016	Scanning PLU	51	25000		Pgm/Sale	Yes	(6000)*B
017	Not found PLU	26	100		Pgm/Sale	Yes	(50)*B
040	Non PLU table	8	100		Program	Yes	(10)*B
051	Mix & match table	30	99		Pgm/Sale	Yes	0
---	(periodic total 1)	10	99		Sales	Yes	0
---	(periodic total 2)	10	99		Sales	Yes	0
---	(daily consolidation)	10	99	*A	Sales	Yes	0
---	(periodic 1 consolidation)	10	99	*A	Sales	Yes	0
---	(periodic 2 consolidation)	10	99	*A	Sales	Yes	0
070	Batch maintenance PLU	40	1000		Program	Yes	(100)*B
071	Direct maintenance PLU	40	1000		Program	Yes	(50)*B
072	Not found PLU batch maintenance	40	400		Program	Yes	(200)*B
075	Not found PLU maintenance work	26	100		Buffer	Yes	(50)*B
076	Scanning PLU index	2	S-PLU + 2		Buffer	Automatic	(6002)*B
077	One touch NLU table	7	999		Program	Yes	(10)*B
Arrangement file							
038	Arrangement table	11	9999		Program	Yes	0
Program / message / buffer files							
022	General control	5	37		Program	No	37
023	Special character	16	42		Program	No	42
024	Report header	12	26		Program	No	26
025	Tax table	74	10		Program	Yes	4
028	Set menu table	60	999		Program	Yes	(10)*C
029	Batch X/Z	23	10		Program	Yes	4
032	Receipt message	24	42		Program	Yes	4
033	Check endorse message	40	4		Program	Yes	0
034	Slip/local/remote printer message	40	42		Program	Yes	0
035	Print buffer (for remote printer)	100	1500		Buffer	Yes	0
036	Registration buffer	100	1200		Buffer	Yes	80
039	Character recall	40	999		Program	Yes	10
041	Check print	3	9		Program	Yes	0
046	Character key table	6	108		Program	No	108
047	Graphic logo	56	168		Program	Yes	168
049	Print buffer (for local printer)	50	1800		Buffer	Yes	0
054	PLU 2nd @	32	9999		Program	Yes	0
062	Scheduler	22	99		Program	Yes	0
065	Order character	12	99		Program	Yes	0
067	Graphic logo (for local/remote printer)	56	168		Program	Yes	0
068	Watermark print	56	168		Program	Yes	0
069	LCD backlight color control	5	9		Program	Yes	9
073	Bottle link table	4	999		Program	Yes	0
074	Key table	24	150		Program	No	150
078	Miscellaneous message	16	58	*D	Program	Yes	0
079	Printing guidance message	24	85	*D	Program	Yes	0
080	Error message	16	238	*D	Program	Yes	0
081	Registration guidance message	16	23	*D	Program	Yes	0
082	X/Z guidance message	16	48	*D	Program	Yes	0
083	Program guidance message	16	93	*D	Program	Yes	0
086	Slip print buffer	40	500		Buffer	Yes	0

*A: I/O-PB17 is necessary, except for the U.S. and Canada model.


*B: Allocate if you select "scanning pattern" initialization, (refer to page 24 of this manual).

*C: Allocate if you select "check tracking pattern" initialization, (refer to page 24 of this manual).

*D: Allocate these files if you want to change the default message.

Issuing program reading report of program 5 mode

Issuing procedure

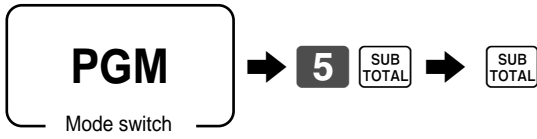

Report sample


P05.....				Program read symbol
FILE0001				File name
22bytes	97	97	97	Sales file record length/No. of records of daily sales/periodic sales 1/periodic sales 2
10bytes	97	97	97	Consolidation file record length/No. of records of daily sales/periodic sales 1/periodic sales 2
FILE0002				
35bytes	100	--	--	Hyphen means no record.
10bytes	100	--	--	

Key allocation (Program 4)


Key allocation program

Programming procedure

By pressing the appropriate key

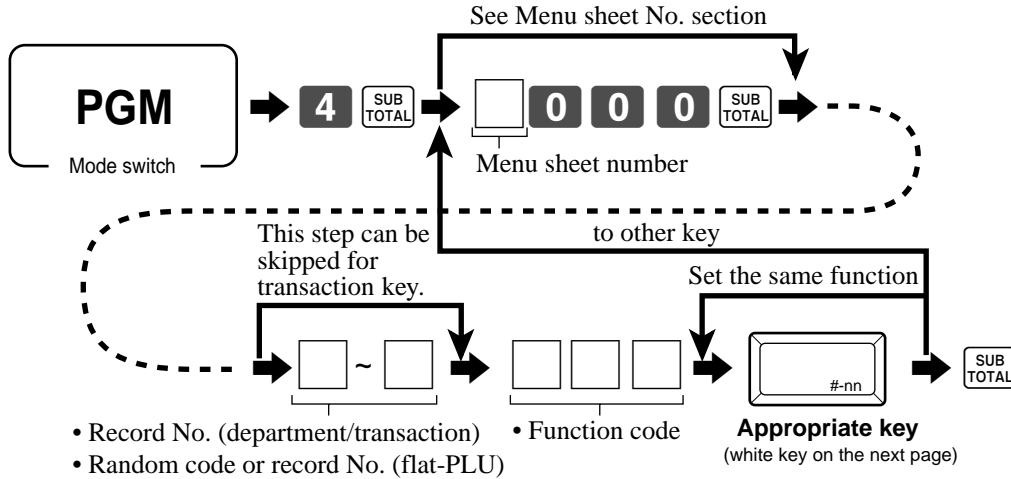

By entering physical key code

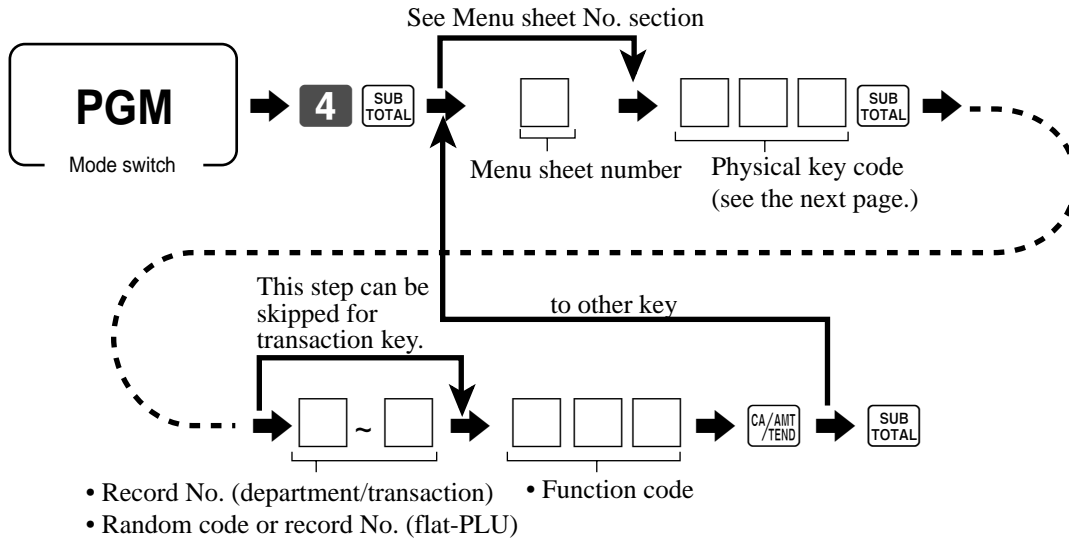

Menu sheet number

Menu sheet number	Description (for transaction key)	Description (for Dept/flat-PLU)
0 or skip entering	Set a function to the 1st ~ 6th menu sheets.	Set a function to the programmed menu sheet.
1	Set a function to the 1st menu sheet.	Set a function to the 1st menu sheet.
2	Set a function to the 2nd menu sheet.	Set a function to the 2nd menu sheet.
3	Set a function to the 3rd menu sheet.	Set a function to the 3rd menu sheet.
4	Set a function to the 4th menu sheet.	Set a function to the 4th menu sheet.
5	Set a function to the 5th menu sheet.	Set a function to the 5th menu sheet.
6	Set a function to the 6th menu sheet.	Set a function to the 6th menu sheet.

Key allocation programming (P4)

Configuration of the physical key layout

TE-3000S

RECEIPT FEED	JOURNAL FEED	077	C	070	068	066	060	054	048	042	036	030	024	018
087	082	076	071	069	067	065	059	053	047	041	035	029	023	017
086	081	075	7	8	9	064	058	052	046	040	034	028	022	015
085	080	074	4	5	6	063	057	051	045	039	033	027	014	016
084	079	073	1	2	3	062	056	050	044	038	032	026	020	021
083	078	072	0	011	012	061	055	049	043	037	031	025	019	013

TE-4000F

RECEIPT FEED	JOURNAL FEED	035	030	021
042	039	034	029	020
041	038	033	028	019
040	037	032	027	018
C	036	031	026	017
7	8	9	025	016
4	5	6	024	015
1	2	3	014	023
0	011	012	013	022

051	060	069	078	087	096	105	114	123	132	141	150
050	059	068	077	086	095	104	113	122	131	140	149
049	058	067	076	085	094	103	112	121	130	139	148
048	057	066	075	084	093	102	111	120	129	138	147
047	056	065	074	083	092	101	110	119	128	137	146
046	055	064	073	082	091	100	109	118	127	136	145
045	054	063	072	081	090	099	108	117	126	135	144
044	053	062	071	080	089	098	107	116	125	134	143
043	052	061	070	079	088	097	106	115	124	133	142

TE-4500F

RECEIPT FEED	JOURNAL FEED	067	076	085	094	103	112	121	130	139	148	042	038	033	028	021
050	058	066	075	084	093	102	111	120	129	138	147	041	037	032	027	020
049	057	065	074	083	092	101	110	119	128	137	146	040	036	031	026	019
048	056	064	073	082	091	100	109	118	127	136	145	039	035	030	025	018
047	055	063	072	081	090	099	108	117	126	135	144	C	034	029	024	017
046	054	062	071	080	089	098	107	116	125	134	143	7	8	9	023	016
045	053	061	070	079	088	097	106	115	124	133	142	4	5	6	022	015
044	052	060	069	078	087	096	105	114	123	132	141	1	2	3	014	
043	051	059	068	077	086	095	104	113	122	131	140	0	011	012	013	

The shadowed key cannot be programmed with any other functions.
 <00>, <000>, and <. > functions are only allocated to <#011> or <#012> keys.


Function code list

Function	Code	Initial character	Function	Code	Initial character
Add check	094	ADD CHK	Open	067	OPEN
Arrangement	044	ARG	Open2	068	OPEN2
Bill copy	047	BILL	Open check	117	OPEN CHK
Bottle return	053	BR	Operator number	078	PE#
Cancel	236	CANCEL	Operator read/reset	073	PE X/Z
Cash amount tendered	001	CASH	Paid out	021	PD
Charge	002	CHARGE	Pick up	022	P. UP
Check endorsement	039	CK. E	Plus	029	+
Check print	012	CHKP	PLU	048	PLU#
Check tender	003	CHECK	Previous balance	026	PB
Clerk number	072	CLK#	Previous balance subtotal	079	PBST
Clerk transfer	013	CLK TRANS	Premium	030	%+
Clock-in/out	108	CLOCK-IN/OUT	Price	049	PRC
Coupon	023	COUPON	Price change	104	PRC CHG
Coupon 2	036	CPN2	Price inquiry	008	PRCINQ
Credit	004	CREDIT	Price shift	069	PRICE SHIFT
Cube	090	XXX	Quantity/for	083	QT
Currency exchange	045	CE	Rate tax	031	TAX
Customer number	043	CT	Recall	131	RECALL
Decimal point	098	.	Receipt	038	RCT
Declaration	061	DECLA	Receipt on/off	076	RCT ON/OFF
Department	nn051	DEPTnn	Received on account	020	RC
Deposit	025	DEPOSIT	Red price	060	RED
Discount	028	%	Refund	033	RF
Eat-in	128	EAT-IN	Review	071	REVIEW
EBT tender	007	EBTTD	Scale	088	SCALE
Enter	105	ENT	Separate check	095	SEP CHK
Error correct	034	CORR	Slip back feed/release	054	SB/R
Flat PLU	nnnn063	PLUnnnn	Slip feed/release	056	SF/R
Food stamp status shift	059	F/S	Slip print	055	SLIP
Food stamp subtotal	081	FSST	Square	084	XX
Food stamp tender	005	FSTD	Stock inquiry	009	STKINQ
Ketten Bon	113	X/KETTEN	Store	130	STORE
Loan	019	LOAN	Subtotal	075	SUBTOTAL
Lock out unused key	000		Table number	058	TBL#
Manual tax	032	TAX	Table transfer	014	TBL TRANS
Media change	118	MEDIA CHG	Takeout	129	TAKE-OUT
Menu shift	064	MENU	Tare	087	TARE
Merchandise subtotal	080	MDST	Tax exempt	062	EXEMPT
Minus	027	-	Tax status shift	057	T/S
Multiplication	082	X	Taxable amount subtotal	077	TAST
New balance	006	NB	Text print	011	PRT
New check	091	NEW CHK	Text recall	010	CHAR
New/old check	093	NEW/OLD	Three zero	097	000
Normal receipt	016	NRMRCT	Tip	015	TIP
No sale	042	NS	Tray total	074	TRAY TL
Non-add	040	#	Two zero	096	00
Non-add/No sale	041	#/NS	Unit weight	089	UNIT WEIGHT
OBR	103	OBR	Validation	037	VLD
Old check	092	OLD CHK	VAT	046	VAT
One touch NLU	138	NLU	Void	035	VOID

Key allocation programming (P4)

Issuing program reading report of program 4 mode

Issuing procedure

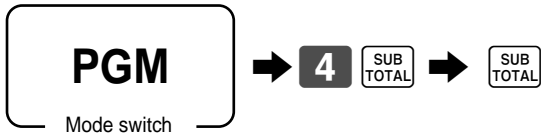


Report sample

P04.....		Program read symbol
1-----		
00	0015-02	Function character/rec-#/file-#
	011-096	Hard key code/function code
.	0009-02	
	012-098	
CASH	0004-02	
	013-001	

Key function/machine feature (Program 3)

General control program

Programming procedure

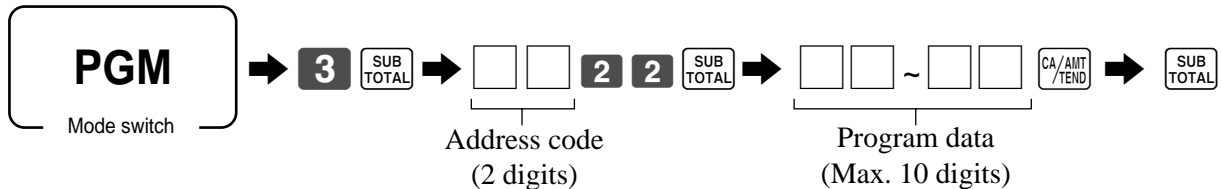

Program data (by address code)

Address code 01 (date order/password)

Description	Choice	Program code	Initial value
Date order Year/Month/Day = 0, 1 Day/Month/Year = 2, Month/Day/Year = 3	Significant number (0 ~ 3)	<input type="text"/> D ₁₀	Dependent upon initialization code
Monetary mode □ = 0, □□ = 1, □□□ = 2, □□□□ = 3	Significant number (0 ~ 3)	<input type="text"/> D ₉	Dependent upon initialization code
Password in Manager mode		<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₈ D ₇ D ₆ D ₅	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₈ D ₇ D ₆ D ₅
Password in X2/Z2 mode		<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₄ D ₃ D ₂ D ₁	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₄ D ₃ D ₂ D ₁

Address code 02 (password)

Description	Choice	Program code	Initial value
Password in PGM1/PGM2 mode	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₁₀ D ₉ D ₈ D ₇	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₁₀ D ₉ D ₈ D ₇
Always "00"		<input type="text"/> <input type="text"/> D ₆ D ₅	<input type="text"/> <input type="text"/> D ₆ D ₅
Always "0000"		<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₄ D ₃ D ₂ D ₁	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₄ D ₃ D ₂ D ₁

Address code 03 (consecutive number)

Description	Choice	Program code	Initial value
Reset consecutive number after daily fixed total reset report is issued.	Yes = 1 No = 0	<input type="text"/> D ₈	<input type="text"/> D ₈
Always "0"		<input type="text"/> D ₇	<input type="text"/> D ₇
Consecutive number set value. It starts "set value + 1."		<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

Key function/machine feature (P3)

Address code 04 (tax system, rounding, etc.)

Description	Choice	Program code	Initial value
Apply rounding for registration. No rounding = 0, IF1 = 1, IF2 = 2, Danish = 3, Norwegian = 4, Singaporean = 5, Finnish = 6, Australian = 7	Significant number (0 ~ 7)	<input type="checkbox"/> D ₁₀	<input type="text" value="0"/> D ₁₀
Tax system Single tax system (1 ~ 10) = 0, U.S. tax system = 1 Canadian tax system = 2, Singaporean tax system = 3	Significant number (0 ~ 3)	<input type="checkbox"/> D ₉	<input type="text" value="0"/> or <input type="text" value="1"/> (EX-U.S.) (U.S.) D ₉
Receipt issuance: Controlled by receipt on/off switch/key = 0 Always on (issue) = 1, Always off (not issue) = 2	Significant number (0 ~ 2)	<input type="checkbox"/> D ₈	<input type="text" value="0"/> D ₈
Allow amount tender in RF/REG- mode operation.	a Yes = 0 No = 2	<input type="checkbox"/> (a+b) D ₇	<input type="text" value="0"/> (a+b) D ₇
Cash drawer opening: ①Immediately when the transaction is finalized. ②After validation compulsory is released.	b ① = 0 ② = 4		
Food stamp system (in case of D ₉ = 1) Payable = 0, Illinois rule = 1, New Jersey rule = 2	Significant number (0 ~ 2)	<input type="checkbox"/> D ₆	<input type="text" value="0"/> D ₆
Tax exempt quantity of donuts tax. (in case of D ₉ = 2) 0 ~ 9 ("0" means "No donuts tax".)	Significant number (0 ~ 9)		
Rounding of results produced by departments, PLUs and scanning PLUs programmed with package prices and package quantities	Round off = 0 Cut off = 1 Round up = 2	<input type="checkbox"/> D ₅	<input type="text" value="0"/> D ₅
High amount limit specification for cash in drawer amount. (Sentinel function)	Maximum value (0 ~ 9)	<input type="text" value=""/> D ₄	<input type="text" value="0"/> D ₄
	Number of zeros (0 ~ 9)	<input type="text" value=""/> D ₃	<input type="text" value="0"/> D ₃
Always "00"		<input type="text" value="0"/> D ₂	<input type="text" value="0"/> D ₁

Rounding

IF 1 rounding		IF 2 rounding	
Last 1 digit of subtotal	Result	Last 1 digit of subtotal	Result
0 ~ 2	0	0 ~ 4	0
3 ~ 7	5	5 ~ 9	10
8 ~ 9	10		
Singaporean rounding		Australian rounding	
Last 1 digit of item, %+, %- registration	Result	Last 1 digit of subtotal/cash change	Result
0 ~ 2	0	0 ~ 2	0
3 ~ 7	5	3 ~ 7	5
8 ~ 9	10	8 ~ 9	10
Danish rounding		Norwegian rounding	
Last 1 digit of subtotal/change	Result	Last 1 digit of subtotal	Result
00 ~ 12	00	00 ~ 24	0
13 ~ 37	25	25 ~ 74	50
38 ~ 62	50	75 ~ 99	100
63 ~ 87	75		
88 ~ 99	100	Finnish rounding	
		Last 1 digit of subtotal/cash change	Result
		0 ~ 2	0
		3 ~ 7	5
		8 ~ 9	10

Address code 05 (print control for receipt)

Description		Choice	Program code	Initial value
Print total line during finalization.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₁₀	<input type="checkbox"/> 0 (a+b+c) D ₁₀
Time system: ① 24 hour system, ② 12 hour system	b	① = 0 ② = 2		
Feed one line after issuing receipt.	c	No = 0 Yes = 4		
Print consecutive number by double sized letter (up to 3 digits).	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₉	<input type="checkbox"/> 0 (a+b) D ₉
Buffered receipt print *1	b	No = 0 Yes = 2		
Skip item lines on journal. (journal skip)	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₈	<input type="checkbox"/> 0 (a+b) D ₈
Breakdown set menu printing on receipt, post receipt, guest receipt.	b	No = 0 Yes = 4		
Always "000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₇ D ₆ D ₆	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₇ D ₆ D ₅
Print number of item sold.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₄	<input type="checkbox"/> or <input type="checkbox"/> (EX-U.S.) (U.S.) (a+b) D ₄
Print tax symbols.	b	Yes = 0 No = 2		
Ignore receipt/journal paper end (not effective for external printer).		Yes = 0 No = 1	<input type="checkbox"/> D ₃	<input type="checkbox"/> 0 D ₃
Print multiplication or item consolidation in one line. *2		Yes = 0 No = 4	<input type="checkbox"/> D ₂	<input type="checkbox"/> 0 D ₂
Print <input type="checkbox"/> operation.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₁	<input type="checkbox"/> 0 (a+b+c) D ₁
Print number of customers on header.	b	Yes = 0 No = 2		
Print PLU number on receipt.	c	No = 0 Yes = 4		

*1: Select "Yes" if you want to print receipts with watermarks.

*4: Select "No" for Australian scale setup.

Key function/machine feature (P3)

Address code 06 (calculation & operation control)

Description	Choice	Choice	Program code	Initial value
Follow the taxable status and commission status of previous item when +/- operation is performed.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₁₀	<input type="checkbox"/> (a+b+c) D ₁₀
Force to register rate tax before finalization.	b	No = 0 Yes = 2		
Force a money declaration by <input type="checkbox"/> , <input type="checkbox"/> , <input type="checkbox"/> before read/reset operation.	c	No = 0 Yes = 4		
Force to press <input type="checkbox"/> before finalization	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉	<input type="checkbox"/> (a+b+c) D ₉
Allow credit balance while finalization.	b	Yes = 0 No = 2		
Allow multiple refund/register minus operation.	c	Yes = 0 No = 4		
Affect the result of +/-, %+/%-, mix & match to the item. (Net totalling)	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₈	<input type="checkbox"/> (a+b) D ₈
Include add-on/add-in tax in net total	b	Yes = 0 No = 2		
Include commission in net total.	a	Yes = 0 No = 2	<input type="checkbox"/> (a+b) D ₇	<input type="checkbox"/> (a+b) D ₇
Treatment of department key numeric inputs: ① Treat as amount override ② Treat as quantity extensions	b	① = 0 ② = 4		
Clear the key buffer when a receipt is issued. (REG1/2 only)	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₆	<input type="checkbox"/> (a+b+c) D ₆
Sounds key catch tone.	b	Yes = 0 No = 2		
Allow to issue post receipt, even if the original one is issued.	c	No = 0 Yes = 4		
Allow program 1 programming in the manager control mode (X1 mode).	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₅	<input type="checkbox"/> (a+b+c) D ₅
Display "seconds" during time display.	b	No = 0 Yes = 2		
Connect slit drawer.	c	No = 0 Yes = 4		
RF mode status	a	RF = 0 REG- = 1	<input type="checkbox"/> (a+b+c) D ₄	<input type="checkbox"/> (a+b+c) D ₄
Prohibit registration when the stock quantity becomes negative.	b	No = 0 Yes = 2		
Alert when the stock quantity becomes under minimum stock quantity.	c	No = 0 Yes = 4		
Affect to stock quantity even if the refund operation.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₃	<input type="checkbox"/> (a+b+c) D ₃
Treatment of flat-PLU/One touch NLU key numeric inputs: ① Treat as amount override (effective for flat-PLU only) ② Treat as quantity extensions	b	① = 0 ② = 2		
Allow one registration of +/-, %+/%- per one transaction.	c	No = 0 Yes = 4		
Rounding on the least significant digit of %+/%- registration: 0 ~ 2 → 0, 3 ~ 7 → 5, 8 ~ 9 → 10	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₂	<input type="checkbox"/> (a+b) D ₂
Display separator.	b	Yes = 0 No = 2		
Allow numeric entry while compulsory drawer opening.	a	Yes = 0 No = 2	<input type="checkbox"/> (a+b) D ₁	<input type="checkbox"/> (a+b) D ₁
PLU numbering: ① By memory No. (sequential), ② By random code	b	① = 0 ② = 4		

Address code 07 (menu & price shift)

Description		Choice	Program code	Initial value
Maintenance of last menu shift: ① Do not maintain ② Until next menu shift specification ③ Within this transaction		① = 0 ② = 1 ③ = 2	<input type="checkbox"/> D ₈	<input type="checkbox"/> 0 D ₈
Maintenance of last price shift: ① Do not maintain ② Until next price shift specification ③ Within this transaction		① = 0 ② = 1 ③ = 2	<input type="checkbox"/> D ₇	<input type="checkbox"/> 0 D ₇
Always "0"			<input type="checkbox"/> 0 D ₆	<input type="checkbox"/> 0 D ₆
Sheet number of the parent menu sheet		Significant number (1 ~ 6)	<input type="checkbox"/> D ₅	<input type="checkbox"/> 0 D ₅
Summed up menu sheet 1 to parent menu sheet.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₄	<input type="checkbox"/> 0 (a+b+c) D ₄
Summed up menu sheet 2 to parent menu sheet.	b	No = 0 Yes = 2		
Summed up menu sheet 3 to parent menu sheet.	c	No = 0 Yes = 4		
Summed up menu sheet 4 to parent menu sheet.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₃	<input type="checkbox"/> 0 (a+b+c) D ₃
Summed up menu sheet 5 to parent menu sheet.	b	No = 0 Yes = 2		
Summed up menu sheet 6 to parent menu sheet.	c	No = 0 Yes = 4		
Always "0"			<input type="checkbox"/> 0 D ₂	<input type="checkbox"/> 0 D ₂
Reset child menu sheets with parent menu sheet together.		Yes = 0 No = 1	<input type="checkbox"/> D ₁	<input type="checkbox"/> 0 D ₁

Key function/machine feature (P3)

Address code 08 (print control for fixed total report)

Description	Choice	Choice	Program code	Initial value
Print gross sales total on fixed total report (GROSS)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₁₀	<input type="checkbox"/> 0 (a+b+c) D ₁₀
Print net sales total on fixed total report (NET)	b	Yes = 0 No = 2		
Print cash in drawer total on fixed total report (CAID)	c	Yes = 0 No = 4		
Print difference between money declaration and cash in drawer total on fixed total report (CATL, CA+, CA-) (Skip these lines, if "CAID" is set to skip.)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₉	<input type="checkbox"/> 5 (a+b+c) D ₉
Print charge in drawer total on fixed total report (CHID)	b	Yes = 0 No = 2		
Print difference between money declaration and charge in drawer total on fixed total report (CHTL, CH+, CH-) (Skip these lines, if "CHID" is set to skip.)	c	Yes = 0 No = 4		
Print check in drawer total on fixed total report (CKID)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₈	<input type="checkbox"/> 2 (a+b+c) D ₈
Print difference between money declaration and check in drawer total on fixed total report (CKTL, CK+, CK-) (Skip these lines, if "CKID" is set to skip.)	b	Yes = 0 No = 2		
Print credit in drawer total on fixed total report (CRID(1) ~ (4))	c	Yes = 0 No = 4		
Print difference between money declaration and credit in drawer total on fixed total report (CRTL, CR+, CR-) (Skip these lines, if "CRID" is set to skip.)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₇	<input type="checkbox"/> 7 (a+b+c) D ₇
Print food stamp in drawer total on fixed total report (FSID)	b	Yes = 0 No = 2		
Print food stamp cash change total on fixed total report (FSCACG)	c	Yes = 0 No = 4		
Print EBT in drawer total on fixed total report (EBTTL)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₆	<input type="checkbox"/> 3 (a+b+c) D ₆
Print EBT cash change total on fixed total report (EBTCACG)	b	Yes = 0 No = 2		
Print RF mode total on fixed total report (RF)	c	Yes = 0 No = 4		
Print the net number of customers on fixed total report (CUST)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b) D ₅	<input type="checkbox"/> 2 (a+b) D ₅
Print the average sales per customer on fixed total report (AVER)	b	Yes = 0 No = 2		
Print check cashing handling fee total on fixed total report (FEE)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₄	<input type="checkbox"/> 7 (a+b+c) D ₄
Print temporary finalize service charge total on fixed total report (+)	b	Yes = 0 No = 2		
Print new balance total on fixed total report (NB)	c	Yes = 0 No = 4		
Print commission 1 total on fixed total report (C-1)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₃	<input type="checkbox"/> 7 (a+b+c) D ₃
Print commission 2 total on fixed total report (C-2)	b	Yes = 0 No = 2		
Print foreign currency cash in drawer and check in drawer totals on fixed total report (CECA1 ~ 4, CECK1 ~ 4)	c	Yes = 0 No = 4		
Print <MINUS>, <COUPON>, <%-> and mix & match operation net total on fixed total report (DC)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₂	<input type="checkbox"/> 7 (a+b+c) D ₂
Print <REFUND> and <VOID> operation net total on fixed total report (REF)	b	Yes = 0 No = 2		
Print total number of <CLEAR> operation net total on fixed total report (CLEAR)	c	Yes = 0 No = 4		
Print nontaxable totals on fixed total report (NON TAX)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₁	<input type="checkbox"/> 1 (Australia) or 3 (other area) D ₁
Print rounding totals on fixed total report (ROUND)	b	Yes = 0 No = 2		
Print cancellation total on fixed total report (CANCEL)	c	Yes = 0 No = 4		

Address code 09 (print control for fixed total report)

Description		Choice	Program code	Initial value
Print taxable amount 1 total on fixed total report (TA1)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₁₀	<input type="checkbox"/> 4 (a+b+c) D ₁₀
Print tax 1 total on fixed total report (TX1)	b	Yes = 0 No = 2		
Print tax exempt 1 total on fixed total report (EX1)	c	Yes = 0 No = 4		
Print taxable amount 2 total on fixed total report (TA2)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₉	<input type="checkbox"/> 7 (Australia) or <input type="checkbox"/> 4 (other area) D ₉
Print tax 2 total on fixed total report (TX2)	b	Yes = 0 No = 2		
Print tax exempt 2 total on fixed total report (EX2)	c	Yes = 0 No = 4		
Print taxable amount 3 total on fixed total report (TA3)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₈	<input type="checkbox"/> 7 (a+b+c) D ₈
Print tax 3 total on fixed total report (TX3)	b	Yes = 0 No = 2		
Print tax exempt 3 total on fixed total report (EX3)	c	Yes = 0 No = 4		
Print taxable amount 4 total on fixed total report (TA4)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₇	<input type="checkbox"/> 7 (a+b+c) D ₇
Print tax 4 total on fixed total report (TX4)	b	Yes = 0 No = 2		
Print tax exempt 4 total on fixed total report (EX4)	c	Yes = 0 No = 4		
Print taxable amount 5 total on fixed total report (TA5)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₆	<input type="checkbox"/> 7 (a+b+c) D ₆
Print tax 5 total on fixed total report (TX5)	b	Yes = 0 No = 2		
Print tax exempt 5 total on fixed total report (EX5)	c	Yes = 0 No = 4		
Print taxable amount 6 total on fixed total report (TA6)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₅	<input type="checkbox"/> 7 (a+b+c) D ₅
Print tax 6 total on fixed total report (TX6)	b	Yes = 0 No = 2		
Print tax exempt 6 total on fixed total report (EX6)	c	Yes = 0 No = 4		
Print taxable amount 7 total on fixed total report (TA7)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₄	<input type="checkbox"/> 7 (a+b+c) D ₄
Print tax 7 total on fixed total report (TX7)	b	Yes = 0 No = 2		
Print tax exempt 7 total on fixed total report (EX7)	c	Yes = 0 No = 4		
Print taxable amount 8 total on fixed total report (TA8)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₃	<input type="checkbox"/> 7 (a+b+c) D ₃
Print tax 8 total on fixed total report (TX8)	b	Yes = 0 No = 2		
Print tax exempt 8 total on fixed total report (EX8)	c	Yes = 0 No = 4		
Print taxable amount 9 total on fixed total report (TA9)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₂	<input type="checkbox"/> 7 (a+b+c) D ₂
Print tax 9 total on fixed total report (TX9)	b	Yes = 0 No = 2		
Print tax exempt 9 total on fixed total report (EX9)	c	Yes = 0 No = 4		
Print taxable amount 10 total on fixed total report (TA10)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₁	<input type="checkbox"/> 7 (a+b+c) D ₁
Print tax 10 total on fixed total report (TX10)	b	Yes = 0 No = 2		
Print tax exempt 10 total on fixed total report (EX10)	c	Yes = 0 No = 4		

Key function/machine feature (P3)

Address code 10 (print control for taxable amount, till timer)

Description	Choice	Program code	Initial value
Print taxable amount 1 on receipt/journal.	a	<input type="checkbox"/> (a+b+c) D ₁₀	<input type="checkbox"/> 0 (a+b+c) D ₁₀
Print taxable amount 2 on receipt/journal.	b		
Print taxable amount 3 on receipt/journal.	c		
Print taxable amount 4 on receipt/journal.	a	<input type="checkbox"/> (a+b+c) D ₉	<input type="checkbox"/> 0 (a+b+c) D ₉
Print taxable amount 5 on receipt/journal.	b		
Print taxable amount 6 on receipt/journal.	c		
Print taxable amount 7 on receipt/journal.	a	<input type="checkbox"/> (a+b+c) D ₈	<input type="checkbox"/> 0 (a+b+c) D ₈
Print taxable amount 8 on receipt/journal.	b		
Print taxable amount 9 on receipt/journal.	c		
Print taxable amount 10 on receipt/journal.		<input type="checkbox"/> D ₇	<input type="checkbox"/> 0 D ₇
Always "0"		<input type="checkbox"/> 0 D ₆	<input type="checkbox"/> 0 D ₆
Prohibit registrations, ① while all drawers are opened. ② while clerk's own drawer is opened.	a	<input type="checkbox"/> (a+b) D ₅	<input type="checkbox"/> 0 (a+b) D ₅
Ignore compulsory drawer sensor.	b		
Till timer (00 ~ 59 minutes)		<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃	<input type="checkbox"/> <input type="checkbox"/> 0 0 D ₄ D ₃
Till timer (00 ~ 59 seconds)		<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> 0 0 D ₂ D ₁

Address code 11 (scale control)

Description	Choice	Program code	Initial value
Scale registration receipt/journal format: Format 1 (standard format): Set to "0." Format 2 (weight and measure format): Set to "1." Format 3 (Australian format): Set to "3."		<input type="checkbox"/> D ₁₀	<input type="checkbox"/> 0 D ₁₀
Number of decimal places for scale registration weights	0.00 = 0 0.000 = 2	<input type="checkbox"/> D ₉	<input type="checkbox"/> 0 D ₉
Feed one line before scale registration printing.	a	<input type="checkbox"/> (a+b+c) D ₈	<input type="checkbox"/> 0 (a+b+c) D ₈
Feed one line after scale registration printing.	b		
Suppress printing of the unit weight when it is "1."	c		
Always "00"		<input type="checkbox"/> <input type="checkbox"/> D ₇ D ₆	<input type="checkbox"/> <input type="checkbox"/> 0 0 D ₇ D ₆
Rounding method for price calculation for scale registration • Round off = 0 • Cut off = 1 • Round up = 2		<input type="checkbox"/> D ₅	<input type="checkbox"/> 0 D ₅
Always "0000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃ D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 0 0 0 0 D ₄ D ₃ D ₂ D ₁

Format 1

12.34LB @1.01/LB DEPT01	\$12.46
12.34LB @1.01/LB DEPT01	MANUAL ENTRY \$12.46

Format 2

12.34LB @ 1.01/LB DEPT01	\$12.46
12.34LB @ 1.01/LB DEPT01	MANUAL ENTRY \$12.46

Format 3

DEPT01 1.234kg @\$1.01 / kg	\$12.46
DEPT01 1.234kg @\$1.01 / kg	MAN \$12.46

Address code 12 (scale control)

Description	Choice	Program code	Initial value
Tare weight • 2-digit integer + 3-digit decimal	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₁₀ D ₉ D ₈ D ₇ D ₆	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₁₀ D ₉ D ₈ D ₇ D ₆
Always "00000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₅ D ₄ D ₃ D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₅ D ₄ D ₃ D ₂ D ₁

Address code 13 (in/online control)

Description	Choice	Program code	Initial value
Print Z consolidation report at master. * (for inline master)	a	<input type="checkbox"/> (a+b+c) D ₈	<input type="checkbox"/> 2 (a+b+c) D ₈
Reset Z consolidation result at master. (for inline master)	b		
Copy consolidation result of stock quantity to daily file. * (for inline master)	c		
Retry to poll the terminal that has not responded to the first polling. * (for inline master)	a	<input type="checkbox"/> (a+b) D ₇	<input type="checkbox"/> 2 (a+b) D ₇
Allow inline master operation. ** (for inline satellite)	b		
Print master's report before Z collection/consolidation. * (for inline master)		<input type="checkbox"/> D ₆	<input type="checkbox"/> 0 D ₆
Source file selection: * ① Terminal file (daily sales and periodic 1/2 totals) ② Consolidation file (daily consolidation and periodic 1/2 consolidation) (for inline master/satellite)	a	<input type="checkbox"/> (a+b+c) D ₅	<input type="checkbox"/> 0 (a+b+c) D ₅
Issue reset report at satellites during Z consolidation. * (for in/online master/satellite)	b		
Add daily total data to consolidation file when reset operation has been performed. (for inline master/satellite)	c		
Limit operation when data exists in the consolidation file. (for inline master/satellite)		<input type="checkbox"/> D ₄	<input type="checkbox"/> 0 D ₄
Always "000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁

* These options are also effective, when consolidation is activated by job command.

** Activation of inline consolidation and activation of inline program transfer (auto-program).

Key function/machine feature (P3)

Address code 14 (currency exchange control)

Description		Choice	Program code	Initial value
Monetary mode of CECA1 and CECK1 in fixed total report:		Significant number (0 ~ 9)	<input type="checkbox"/> D ₈	<input type="checkbox"/> 0 D ₈
Decimal for CECA1 and CECK1 in fixed total report: ① Period = 0, ② Comma = 1	a	① = 0 ② = 1	<input type="checkbox"/> (a+b) D ₇	<input type="checkbox"/> 0 (a+b) D ₇
Separator for CECA1 and CECK1 in fixed total report: ① Comma = 0, ② Period = 1	b	① = 0 ② = 4		
Monetary mode of CECA2 and CECK2 in fixed total report:		Significant number (0 ~ 9)	<input type="checkbox"/> D ₆	<input type="checkbox"/> 0 D ₆
Decimal for CECA2 and CECK2 in fixed total report: ① Period = 0, ② Comma = 1	a	① = 0 ② = 1	<input type="checkbox"/> (a+b) D ₅	<input type="checkbox"/> 0 (a+b) D ₅
Separator for CECA2 and CECK2 in fixed total report: ① Comma = 0, ② Period = 1	b	① = 0 ② = 4		
Monetary mode of CECA3 and CECK3 in fixed total report:		Significant number (0 ~ 9)	<input type="checkbox"/> D ₄	<input type="checkbox"/> 0 D ₄
Decimal for CECA3 and CECK3 in fixed total report: ① Period = 0, ② Comma = 1	a	① = 0 ② = 1	<input type="checkbox"/> (a+b) D ₃	<input type="checkbox"/> 0 (a+b) D ₃
Separator for CECA3 and CECK3 in fixed total report: ① Comma = 0, ② Period = 1	b	① = 0 ② = 4		
Monetary mode of CECA4 and CECK4 in fixed total report:		Significant number (0 ~ 9)	<input type="checkbox"/> D ₂	<input type="checkbox"/> 0 D ₂
Decimal for CECA4 and CECK4 in fixed total report: ① Period = 0, ② Comma = 1	a	① = 0 ② = 1	<input type="checkbox"/> (a+b) D ₁	<input type="checkbox"/> 0 (a+b) D ₁
Separator for CECA4 and CECK4 in fixed total report: ① Comma = 0, ② Period = 1	b	① = 0 ② = 4		

Address code 15 (print control for reports)

Description	Choice	Program code	Initial value
Zero skip department/subdepartment report.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b) D ₁₀
Zero skip clerk report.	b	Yes = 0 No = 2	<input type="checkbox"/> (a+b) D ₁₀
Zero skip transaction report.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₉
Zero skip PLU report.	b	Yes = 0 No = 2	<input type="checkbox"/> (a+b+c) D ₉
Zero skip hourly report.	c	Yes = 0 No = 4	<input type="checkbox"/> (a+b+c) D ₉
Zero skip group report.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₈
Zero skip monthly report.	b	Yes = 0 No = 2	<input type="checkbox"/> (a+b+c) D ₈
Zero skip table analysis report.	c	Yes = 0 No = 4	<input type="checkbox"/> (a+b+c) D ₈
Zero skip hourly item report.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₇
Skip a not clocked out employee on the time & attendance report.	b	Yes = 0 No = 2	<input type="checkbox"/> (a+b+c) D ₇
Zero skip mix & match report.	c	Yes = 0 No = 4	<input type="checkbox"/> (a+b+c) D ₇
Always "0"			<input type="checkbox"/> D ₆
Open cash drawer when the financial or fixed total report is issued.	a	Yes = 0 No = 2	<input type="checkbox"/> (a+b) D ₅
Print PLU number on the PLU report.	b	No = 0 Yes = 4	<input type="checkbox"/> (a+b) D ₅
Print sales ratio.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₄
Issue double Z report.	b	No = 0 Yes = 2	<input type="checkbox"/> (a+b+c) D ₄
Print the recalculate amount of taxable amount and tax amount of single tax.	c	No = 0 Yes = 4	<input type="checkbox"/> (a+b+c) D ₄
Print average sales in the monthly report.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₃
Contents of double Z report: ①: Fixed total report only, ②: Batch report * * Fixed total should be included in this batch.	b	① = 0 ② = 2	<input type="checkbox"/> (a+b+c) D ₃
Reset actual stock quantity after PLU reset report issuance by batch X/Z.	c	No = 0 Yes = 4	<input type="checkbox"/> (a+b+c) D ₃
Print reset counter.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₂
Print item discount totalizer.	b	No = 0 Yes = 2	<input type="checkbox"/> (a+b+c) D ₂
Print order of PLU report: ① Memory No. (sequential), ② = Random code	c	① = 0 ② = 4	<input type="checkbox"/> (a+b+c) D ₂
Always "0"			<input type="checkbox"/> D ₁

Key function/machine feature (P3)

Address code 16 (print control for grand total)

Description		Choice	Program code	Initial value
Contents of the periodic 1 total: • Normal registration only = 0 • Training registration only = 1 • Both normal registration and training registration = 2		Significant number (0 ~ 2)	<input type="checkbox"/> D ₁₀	<input type="checkbox"/> 0 D ₁₀
Contents of the periodic 2 total: • Normal registration only = 0 • Training registration only = 1 • Both normal registration and training registration = 2		Significant number (0 ~ 2)	<input type="checkbox"/> D ₉	<input type="checkbox"/> 0 D ₉
Journal printing of the periodic 1 report	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b) D ₈	<input type="checkbox"/> 0 (a+b) D ₈
Journal printing of the periodic 2 report	b	Yes = 0 No = 2		
Print consecutive number range of the day on daily fixed total report.		No = 0 Yes = 1	<input type="checkbox"/> D ₇	<input type="checkbox"/> 0 D ₇
Always "0000"			<input type="checkbox"/> 0 <input type="checkbox"/> 0 <input type="checkbox"/> 0 <input type="checkbox"/> 0 D ₆ D ₅ D ₄ D ₃	<input type="checkbox"/> 0 <input type="checkbox"/> 0 <input type="checkbox"/> 0 <input type="checkbox"/> 0 D ₆ D ₅ D ₄ D ₃
Print grand total 1 on periodic 1/periodic 2 reset report.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₂	<input type="checkbox"/> 7 (a+b+c) D ₂
Print grand total 2 on periodic 1/periodic 2 reset report.	b	Yes = 0 No = 2		
Print grand total 3 on periodic 1/periodic 2 reset report.	c	Yes = 0 No = 4		
Print grand total 1 on daily sales reset report.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₁	<input type="checkbox"/> 0 (a+b+c) D ₁
Print grand total 2 on daily sales reset report.	b	Yes = 0 No = 2		
Print grand total 3 on daily sales reset report.	c	Yes = 0 No = 4		

Address code 17 (print control)

Description		Choice	Program code	Initial value
Money declaration compulsory (cash) in REG/RF mode	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₁₀	<input type="checkbox"/> (a+b+c) D ₁₀
Money declaration compulsory (charge) in REG/RF mode	b	No = 0 Yes = 2		
Money declaration compulsory (check) in REG/RF mode	c	No = 0 Yes = 4		
Money declaration compulsory (credit) in REG/RF mode		No = 0 Yes = 1	<input type="checkbox"/> D ₉	<input type="checkbox"/> D ₉
Always "0"			<input type="checkbox"/> D ₈	<input type="checkbox"/> D ₈
Commission: ① Taxable amount × commission rate ② (Taxable amount + VAT) × commission rate	a	① = 0 ② = 1	<input type="checkbox"/> (a+b) D ₇	<input type="checkbox"/> (a+b) D ₇
Whenever pressing <PLUS>, <MINUS>, or <COUPON> the amount registered is proportioned among all taxable amounts.	b	No = 0 Yes = 2		
Rounding of commission: Round off = 0, Cut off = 1, Round up = 2		Significant number (0 ~ 2)	<input type="checkbox"/> D ₆	<input type="checkbox"/> D ₆
Append two zeros in unit price programming.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₅	<input type="checkbox"/> (a+b) D ₅
Print normal price and the difference between the normal price and the reduced price on receipt.	b	No = 0 Yes = 2		
Print date on receipt.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₄	<input type="checkbox"/> (a+b+c) D ₄
Print date on journal.	b	Yes = 0 No = 2		
Print consecutive number on receipt/journal.	c	Yes = 0 No = 4		
Print time on receipt.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₃	<input type="checkbox"/> (a+b+c) D ₃
Print time on journal.	b	Yes = 0 No = 2		
Merge the same department/PLU/scanning PLU registration on buffered receipt and post receipt. (Item consolidation)	c	No = 0 Yes = 4		
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Key function/machine feature (P3)

Address code 18 (print control for guest receipt and slip)

Description		Choice	Program code	Initial value
Maximum printing lines of slip (00 ~ 99)		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇	<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Slip printing speed: "Maximum printing lines of slip" is necessary, if you select "High".	a	Low = 0 High = 2	<input type="checkbox"/> (a+b) D ₆	<input type="checkbox"/> (a+b) D ₆
Classify registered item by group on slip & guest receipt.	b	No = 0 Yes = 4		
Always "0"			<input type="checkbox"/> D ₅	<input type="checkbox"/> D ₅
Print date on slip & guest receipt.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₄	<input type="checkbox"/> (a+b+c) D ₄
Print time on slip & guest receipt.	b	Yes = 0 No = 2		
Print: ① Total only, ② Detail when D6 = 4 (item consolidated)	c	① = 0 ② = 4		
Slip print range: ① At the top of the transaction, ② This receipt	a	① = 0 ② = 1	<input type="checkbox"/> (a+b+c) D ₃	<input type="checkbox"/> (a+b+c) D ₃
Enable slip auto line find.	b	No = 0 Yes = 2		
Merge the same department/PLU/scanning PLU registration on slip & guest receipt. (Item consolidation)	c	No = 0 Yes = 4		
Slip auto feed lines (00 ~ 99)		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Address code 19 (order control)

Description		Choice	Program code	Initial value
Print order with order character.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₉	<input type="checkbox"/> (a+b) D ₉
Print order with amount.	b	No = 0 Yes = 2		
Alert when the order printer 1 goes down. (If "No", backup processing is performed.)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₈	<input type="checkbox"/> (a+b+c) D ₈
Alert when the order printer 2 goes down. (If "No", backup processing is performed.)	b	Yes = 0 No = 2		
Breakdown set menu printing on order.	c	No = 0 Yes = 4		
Print double-height characters in UP-350/(internal R/J printer). (not only for order, but also effective for receipt)		No = 0 Yes = 1	<input type="checkbox"/> D ₇	<input type="checkbox"/> D ₇
Show guidance for backup print of order. (when it is backed up from R/J)		No = 0 Yes = 1	<input type="checkbox"/> D ₆	<input type="checkbox"/> D ₆
Always "0"			<input type="checkbox"/> D ₅	<input type="checkbox"/> D ₅
Cut order.	a	No = 0 Yes = 2	<input type="checkbox"/> (a+b) D ₄	<input type="checkbox"/> (a+b) D ₄
Print dashed lines (hyphens).	b	No = 0 Yes = 4		
Print orders even if training clerk is registered items.	a	No = 0 Yes = 2	<input type="checkbox"/> (a+b) D ₃	<input type="checkbox"/> (a+b) D ₃
Merge the same department/PLU/scanning PLU registration on order receipt. (Item consolidation)	b	No = 0 Yes = 4		
Number of feed lines before order printing (0 ~ 9)		Significant number	<input type="checkbox"/> D ₂	<input type="checkbox"/> D ₂
Number of feed lines after order printing (0 ~ 9)		Significant number	<input type="checkbox"/> D ₁	<input type="checkbox"/> 4 D ₁

Address code 21 (message control)

Description		Choice	Program code	Initial value
Print logo message on receipt. (If select "No", logo stamp is used.)	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₁₀	<input type="checkbox"/> (a+b+c) D ₁₀
Print graphic type logo. *1 (If select "No", character type logo is printed.)	b	No = 0 Yes = 2		
Print watermark on receipt.	c	No = 0 Yes = 4		
Print commercial message on slip/guest receipt.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉	<input type="checkbox"/> (a+b+c) D ₉
Print bottom message on slip/guest receipt.	b	No = 0 Yes = 2		
Print intermediate message on slip/guest receipt.	c	No = 0 Yes = 4		
Print bill top message.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₈	<input type="checkbox"/> (a+b+c) D ₈
Print bill copy message.	b	No = 0 Yes = 2		
Print bill bottom message.	c	No = 0 Yes = 4		
Always "0"			<input type="checkbox"/> D ₇	<input type="checkbox"/> D ₇
Print commercial message on receipts in REG/RF mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₆	<input type="checkbox"/> (a+b+c) D ₆
Print bottom message on receipts in REG/RF mode.	b	No = 0 Yes = 2		
Print commercial message on journal in REG/RF mode.	c	No = 0 Yes = 4		
Print bottom message on journal in REG/RF mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₅	<input type="checkbox"/> (a+b+c) D ₅
Print commercial message on receipts in X/Z mode.	b	No = 0 Yes = 2		
Print bottom message on receipts in X/Z mode.	c	No = 0 Yes = 4		
Print commercial message on journal in X/Z mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₄	<input type="checkbox"/> (a+b+c) D ₄
Print bottom message on journal in X/Z mode.	b	No = 0 Yes = 2		
Print commercial message on receipt in PGM mode.	c	No = 0 Yes = 4		
Print bottom message on receipt in PGM mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₃	<input type="checkbox"/> (a+b+c) D ₃
Print commercial message on journal in PGM mode.	b	No = 0 Yes = 2		
Print bottom message on journal in PGM mode.	c	No = 0 Yes = 4		
Print commercial message on FC or AUTO-PGM receipts.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₂	<input type="checkbox"/> (a+b+c) D ₂
Print bottom message on FC or AUTO-PGM receipts.	b	No = 0 Yes = 2		
Print commercial message on FC or AUTO-PGM journal.	c	No = 0 Yes = 4		
Print bottom message on FC or AUTO-PGM journal.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₁	<input type="checkbox"/> (a+b) D ₁
Print Australian GST MOF message.	b	No = 0 Yes = 4		

*1 This option is not effective for optional remote printer UP-250.

Key function/machine feature (P3)

Address code 25 (condiment etc.)

Description		Choice	Program code	Initial value
Enable to register a non-department link PLU.		Yes = 0 No = 1	<input type="checkbox"/> D ₄	<input type="checkbox"/> D ₄
Subtotal display: ① Both "rounded" and "not rounded" subtotal ② Only "not rounded" subtotal		① = 1 ② = 0	<input type="checkbox"/> D ₃	<input type="checkbox"/> 1 (Australia) or <input type="checkbox"/> 0 (other area) D ₃
Previous item void: ① By using <VOID>; ordinary procedure ② By using <REVIEW>		① = 0 ② = 1	<input type="checkbox"/> D ₂	<input type="checkbox"/> 1 D ₂
Restrict (to 0 or 5) on the last one digit for amount tender.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₁	<input type="checkbox"/> 4 (Australia) or <input type="checkbox"/> 0 (other area) D ₁
Obeys registration quantities of child PLU to its parent PLU.	b	Yes = 0 No = 2		
Restriction (to 0 or 5) on the last one digit for <CASH>, <RC>, <PD>, money declaration amount (by <CASH> or <NON ADD>).	c	No = 0 Yes = 4		

Address code 26 (check tracking)

Description		Choice	Program code	Initial value
Check tracking method: ① Check No., ② Table No.	a	① = 0 ② = 1	<input type="checkbox"/> (a+b+c) D ₆	<input type="checkbox"/> (a+b+c) D ₆
Enable to use auto new balance. (only effective for magnetic Dallas key)	b	No = 0 Yes = 2		
Maximum digit of check number: ① 6-digit, ② 12-digit (If you use "table analysis" or "table range", select ①.)	c	① = 0 ② = 4		
Tax calculation by new balance (Calculation result is not saved into totalizer.)		No = 0 Yes = 1	<input type="checkbox"/> D ₅	<input type="checkbox"/> D ₅
Enable to perform <NEW/OLD> during check tracking/clerk interrupt.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₄	<input type="checkbox"/> (a+b) D ₄
Print previous balance amount, when registration begins 0 with old check.	b	Yes = 0 No = 2		
Always "000"			<input type="checkbox"/> 0 <input type="checkbox"/> 0 <input type="checkbox"/> 0 D ₃ D ₂ D ₁	<input type="checkbox"/> 0 <input type="checkbox"/> 0 <input type="checkbox"/> 0 D ₃ D ₂ D ₁

Address code 27 (clerk control)

Description		Choice	Program code	Initial value
Enable clerk/cashier interrupt.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₁₀	<input type="checkbox"/> (a+b) D ₁₀
Print of clerk/cashier's name on receipt following sign back on at D ₁₀ = 1. (enable clerk/cashier interrupt)	b	No = 0 Yes = 4		
Use ① Dallas key, ② Magnet Dallas key		① = 0 ② = 1	<input type="checkbox"/> D ₉	<input type="checkbox"/> D ₉
Always "000000"			<input type="checkbox"/> 0 ~ <input type="checkbox"/> 0 D ₈ ~ D ₃	<input type="checkbox"/> 0 ~ <input type="checkbox"/> 0 D ₈ ~ D ₃
Auto sign-off timer. (in second) ("00" means no auto sign-off.)		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Address code 28 (Euro)

Description	Choice	Program code	Initial value
Define Euro as the main currency.	Yes = 0 No = 1	<input type="checkbox"/> D ₁₀	<input type="checkbox"/> D ₁₀
Select rounding option: Round off = 0, Cut off = 1, Round up = 2	Significant number (0 ~ 2)	<input type="checkbox"/> D ₉	<input type="checkbox"/> D ₉
Exchange rate (within 6-digits)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅ D ₄ D ₃	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅ D ₄ D ₃
Decimal point position of exchange rate: Integer only = 0 1st decimal place = 1, 2nd decimal place = 2, 3rd decimal place = 3, 4th decimal place = 4, 5th decimal place = 5, 6th decimal place = 6 Example: (D8 ~ D2) 1 Euro = 1.977 DM; Set "0019773" 1 Euro = 1957.77319 Lit; Set "1957772"	Significant number (0 ~ 6)	<input type="checkbox"/> D ₂	<input type="checkbox"/> D ₂
Always "0"		<input type="checkbox"/> D ₁	<input type="checkbox"/> D ₁

Address code 29 (Euro)

Description	Choice	Program code	Initial value
Monetary mode of sub currency: 0 = 0, 0.0 = 1, 0.00 = 2, 0.000 = 3	Significant number (0 ~ 3)	<input type="checkbox"/> D ₁₀	<input type="checkbox"/> D ₁₀
Apply rounding for sub currency. * No rounding = 0, IF1 = 1, IF2 = 2, Danish = 3, Norwegian = 4	Significant number (0 ~ 4)	<input type="checkbox"/> D ₉	<input type="checkbox"/> D ₉
Cash drawer number of sub currency: 0 ~ 4 ("0" means main drawer.)	Significant number (0 ~ 4)	<input type="checkbox"/> D ₈	<input type="checkbox"/> D ₈
Print tendered amount in sub currency converted to main currency.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₇	<input type="checkbox"/> (a+b+c) D ₇
Selection of the currency of subtotal printout: ① Main currency only, ② Main and sub currency	b ① = 0 ② = 2		
Print total in sub currency by double sized letter.	c No = 0 Yes = 4		
Selection of the currency of change: ① Main currency, ② Sub currency	a ① = 0 ② = 1	<input type="checkbox"/> (a+b+c) D ₆	<input type="checkbox"/> (a+b+c) D ₆
Print the cash in drawer of sub currency on fixed total reports. (If the cash in drawer of main currency is skipped, this line is also skipped.)	b No = 0 Yes = 2		
Display symbol of sub currency: ① € (Euro), ② L (Local)	c ① = 0 ② = 4		
The currency to restrict (to 00, 25, 50, 75) on last two digits for amount tendered: ① Main currency, ② Sub currency (It is necessary to set this restriction to <CASH> key.)	a ① = 0 ② = 1		
Print rounding total of sub currency on fixed totalier report.	b No = 0 Yes = 2	<input type="checkbox"/> (a+b+c) D ₅	<input type="checkbox"/> (a+b+c) D ₅
Last 1 digit for sub currency monetary amount entries to 0 or 5.	c No = 0 Yes = 4		
Selection of the change amount printout: ① Main and sub currency, ② Dependent upon D ₆ - a of this worksheet	a ① = 0 ② = 1	<input type="checkbox"/> (a+b) D ₄	<input type="checkbox"/> (a+b) D ₄
Calculation method of change amount in sub currency: ① Convert the change amount in main currency into sub currency. ② Subtract the equivalent value of subtotal amount in sub currency from the equivalent value of the tendered amount in sub currency.	b ① = 0 ② = 2		
Always "000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁

* Refer to the Address code 04 programming.

Key function/machine feature (P3)

Address code 30 (Internal thermal printer control)

Description	Choice	Program code	Initial value
Journal compressed print (print by half height characters)	No = 0 Yes = 1	<input type="checkbox"/> D ₄	<input type="checkbox"/> D ₄
Always "000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁

Address code 31 (scanning)

Description	Choice	Program code	Initial value
Print consolidated scanning PLU reset report. (only for master) *	a No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₇	<input type="checkbox"/> (a+b) D ₇
Print report before scanning PLU Z consolidation. *	b No = 0 Yes = 4		
Print scanning PLU code on receipt.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₆	<input type="checkbox"/> (a+b+c) D ₆
Print scanning PLU code on journal.	b No = 0 Yes = 2		
Print scanning PLU code on report.	c No = 0 Yes = 4		
Always "00"		<input type="checkbox"/> <input type="checkbox"/> D ₅ D ₄	<input type="checkbox"/> <input type="checkbox"/> D ₅ D ₄
Inactive days: (If a scanning PLU did not move during these days period, this item will be printed on the Inactive scanning PLU report.)	Significant numbers (000 ~ 999)	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁

* These options are also effective, when consolidation is activated by job command.

Address code 32 (direct maintenance PLU)

Description	Choice	Program code	Initial value
Skip the unit price field programming of direct maintenance PLU file in PGM 1 mode.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₉	<input type="checkbox"/> (a+b) D ₉
Skip the link field programming of direct maintenance PLU file in PGM 1 mode.	b No = 0 Yes = 2		
Always "0000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅
Skip the unit price field programming of direct maintenance PLU file in PGM 3 mode.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₄	<input type="checkbox"/> (a+b+c) D ₄
Skip the link field programming of direct maintenance PLU file in PGM 3 mode.	b No = 0 Yes = 2		
Skip the character field programming of direct maintenance PLU file in PGM 3 mode.	c No = 0 Yes = 4		
Skip the status field programming of direct maintenance PLU file in PGM 3 mode.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₃	<input type="checkbox"/> (a+b+c) D ₃
Skip the bottle link field programming of direct maintenance PLU file in PGM 3 mode.	b No = 0 Yes = 2		
Skip the mix & match field programming of direct maintenance PLU file in PGM 3 mode.	c No = 0 Yes = 4		
Always "00"		<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Address code 33 (batch and not found PLU maintenance)

Description		Choice	Program code	Initial value
Skip the record No. designation of batch maintenance PLU file.		No = 0 Yes = 1	<input type="checkbox"/> D ₁₀	<input type="checkbox"/> D ₁₀
Skip the unit price field programming of batch maintenance PLU file.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉	<input type="checkbox"/> (a+b+c) D ₉
Skip the link field programming of batch maintenance PLU file.	b	No = 0 Yes = 2		
Skip the character field programming of batch maintenance PLU file.	c	No = 0 Yes = 4		
Skip the status field programming of batch maintenance PLU file.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₈	<input type="checkbox"/> (a+b+c) D ₈
Skip the bottle link field programming of batch maintenance PLU file.	b	No = 0 Yes = 2		
Skip the mix & match field programming of batch maintenance PLU file.	c	No = 0 Yes = 4		
Always "000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₇ D ₆ D ₅	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₇ D ₆ D ₅
Skip the unit price field programming of not found PLU.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₄	<input type="checkbox"/> (a+b+c) D ₄
Skip the link field programming of not found PLU.	b	No = 0 Yes = 2		
Skip the character field programming of not found PLU.	c	No = 0 Yes = 4		
Skip the status field programming of not found PLU file.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₃	<input type="checkbox"/> (a+b+c) D ₃
Skip the bottle link field programming of not found PLU file.	b	No = 0 Yes = 2		
Skip the mix & match field programming of not found PLU file.	c	No = 0 Yes = 4		
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Address code 34 (backlight control)

Description	Choice	Program code	Initial value
Backlight	Available = 0 Not available = 1	<input type="checkbox"/> D ₄	<input type="checkbox"/> D ₄
Backlight color control: Follow the backlight color control switch located backside of the main display = 0 * Follow the programming of the backlight color control file = 1 ~ 9 **	Significant number	<input type="checkbox"/> D ₃	<input type="checkbox"/> D ₃
Backlight off timer (01 ~ 59 min. "00" means always on.)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

* Backlight color is controlled by the switch position: position 1 (the contents of the rec-01 of the backlight control file) = pastel green as default, position 2 (rec-02) = pastel pink as default, position 3 (rec-03) = white as default.

** Backlight color is controlled by the programming of the designated record of the backlight color control file.

Key function/machine feature (P3)

Address code 36 (store/recall/auto new check number)

Description	Choice	Program code	Initial value
Reset the store/recall/auto new check starting number after open check reset report	No = 0 Yes = 1	<input type="checkbox"/> D ₉	<input type="checkbox" value="0"/> D ₉
Store/recall/auto new check starting number (0000 = 0001) *	Significant numbers (0000 ~ 9999)	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅	<input type="checkbox" value="0"/> <input type="checkbox" value="0"/> <input type="checkbox" value="0"/> <input type="checkbox" value="0"/> D ₈ D ₇ D ₆ D ₅
Store/recall/auto new check ending number (0000 = 9999) *	Significant numbers (0000 ~ 9999)	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃ D ₂ D ₁	<input type="checkbox" value="0"/> <input type="checkbox" value="0"/> <input type="checkbox" value="0"/> <input type="checkbox" value="0"/> D ₄ D ₃ D ₂ D ₁

* The starting number should be smaller than the ending number.

* If the starting number is bigger than the ending number, the E056 is occurred.

Address code 37 (check number)


Description	Choice	Program code	Initial value
Auto check starting number (0000 = 0001) *	Significant numbers (0000 ~ 9999)	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅	<input type="checkbox" value="0"/> <input type="checkbox" value="0"/> <input type="checkbox" value="0"/> <input type="checkbox" value="0"/> D ₈ D ₇ D ₆ D ₅
Auto check ending number (0000 = 9999) *	Significant numbers (0000 ~ 9999)	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃ D ₂ D ₁	<input type="checkbox" value="0"/> <input type="checkbox" value="0"/> <input type="checkbox" value="0"/> <input type="checkbox" value="0"/> D ₄ D ₃ D ₂ D ₁

* The starting number should be smaller than the ending number.

* If the starting number is bigger than the ending number, the E056 is occurred.

Department key/flat-PLU key/PLU program (Batch feature programming)

Programming procedure

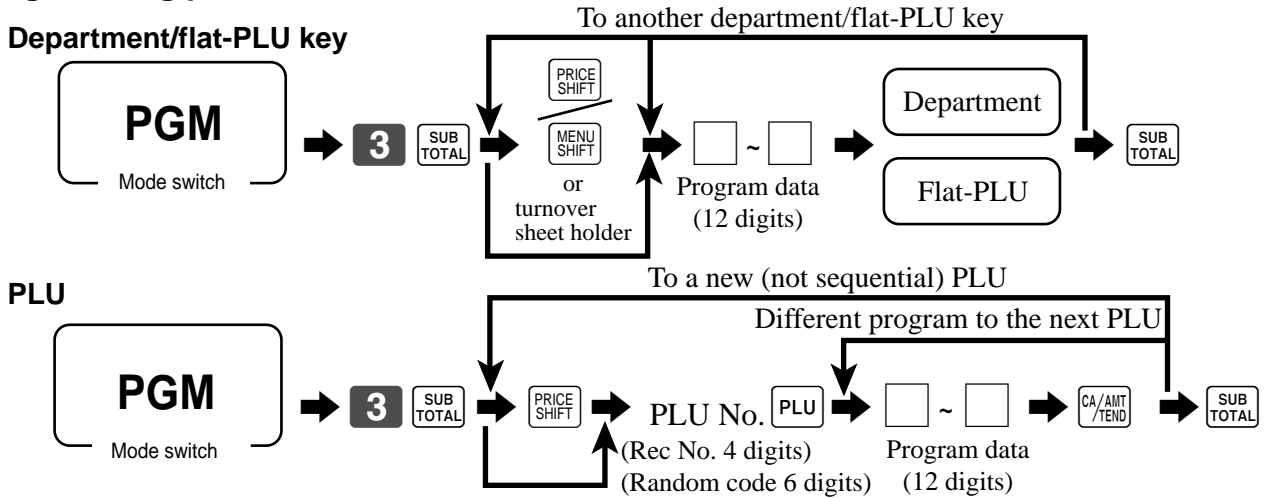

Program data

Description	Choice	Program code	Initial value
Single item control: (Not for PLU 2nd@) Normal receipt = 0, Single item receipt = 3	Significant number	<input type="checkbox"/> D ₁₂	<input type="checkbox"/> 0 D ₁₂
Price change registration is enable. (Only effective for scanning PLU linked to this department)	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₁₁	<input type="checkbox"/> (a+b+c) D ₁₁
Multiplication registration is enable. (Only effective for scanning PLU linked to this department)	b No = 0 Yes = 2		
Compulsory input unit price manually. (Only effective for scanning PLU linked to this department)	c No = 0 Yes = 4		
Normal/condiment/preparation (Not for PLU 2nd@ nor department) Normal item = 0, Condiment = 1, Preparation = 2	Significant number	<input type="checkbox"/> D ₁₀	<input type="checkbox"/> 0 D ₁₀
Disable operation in RF/REG- mode. (Not for PLU 2nd@)	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG 2 mode. (Not for PLU 2nd@)	b No = 0 Yes = 2		
Disable operation in REG 1 mode. (Not for PLU 2nd@)	c No = 0 Yes = 4		
Taxable status: See the next page.		<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇	<input type="checkbox"/> <input type="checkbox"/> 0 0 D ₈ D ₇
Enable 0 unit price.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₆	<input type="checkbox"/> (a+b+c) D ₆
Enable negative price. (Not for PLU 2nd@)	b No = 0 Yes = 2		
Hash (Not for PLU 2nd@)	c No = 0 Yes = 4		
Registration status: (Not for PLU 2nd@) • Prohibit scale registration = 0 • Allow electronic scale registration only = 1 • Allow manual and electronic scale registration = 2 • Allow manual and non scale registration = 3	Significant number (0 ~ 3)	<input type="checkbox"/> D ₅	<input type="checkbox"/> 0 D ₅
Low digit limitation (LDL) for manually entered unit price. (Not for PLU 2nd@)	Significant number	<input type="checkbox"/> D ₄	<input type="checkbox"/> 0 D ₄
Multiple validation: (Not for PLU 2nd@) (If "No", validation is allowed only one time.)	a Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₃	<input type="checkbox"/> (a+b+c) D ₃
Print difference between the normal price and reduced price. (Not for PLU 2nd@)	b No = 0 Yes = 2		
Open PLU (Only for PLU)	c No = 0 Yes = 4		
Commission 1 (Not for PLU 2nd@)	a No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₂	<input type="checkbox"/> (a+b) D ₂
Commission 2 (Not for PLU 2nd@)	b No = 0 Yes = 2		
Compulsory number of condiment/preparation PLU input. (Not for PLU 2nd@)	Significant number (0 ~ 8)	<input type="checkbox"/> D ₁	<input type="checkbox"/> 0 D ₁

Key function/machine feature (P3)

Taxable status

for the U.S./Singapore

Food stamp (for Singapore, always "0")		No = 0 Yes = 1	<input type="checkbox"/> D ₈
Taxable 1 status	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₇
Taxable 2 status	b	No = 0 Yes = 2	
Taxable 3 status	c	No = 0 Yes = 4	

for Canada

Donuts status		No = 0 Yes = 1	<input type="checkbox"/> D ₈
Non tax = 0 Taxable 1 = 1 Taxable 2 = 2	Taxable 3 = 3 Taxable 4 = 4 Taxable 1 & 2 = 5	Taxable 1 & 3 = 6 Taxable 1 & 4 = 7	Significant number <input type="checkbox"/> D ₇


for Other area

Non tax = 0 Taxable 1 = 1 Taxable 2 = 2 Taxable 3 = 3	Taxable 4 = 4 Taxable 5 = 5 Taxable 6 = 6 Taxable 7 = 7	Taxable 8 = 8 Taxable 9 = 9 Taxable 10 = 10	Significant numbers <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
--	--	---	--


Department key/flat-PLU key/PLU/subdepartment program (Individual feature programming)

Programming procedure


Department/flat-PLU key

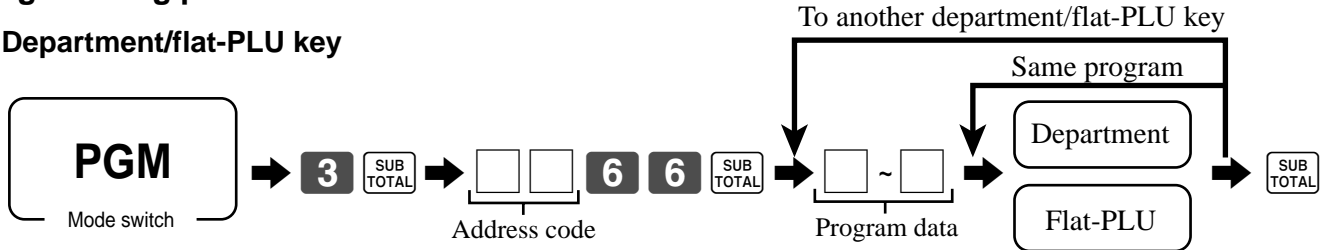


PLU

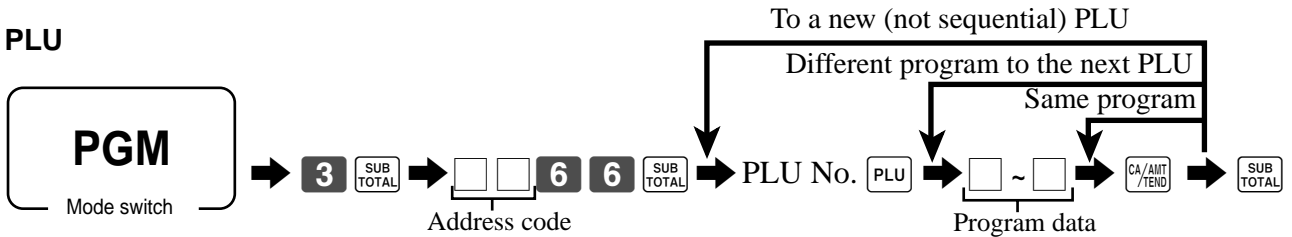

Subdepartment

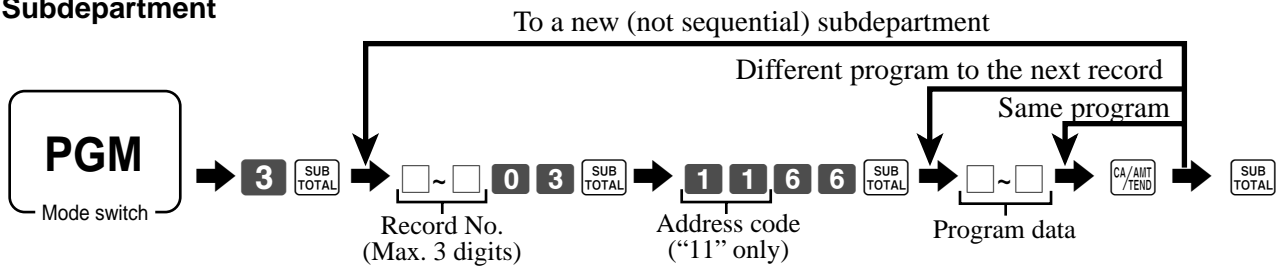

Range (Department/PLU/flat-PLU/subdepartment)

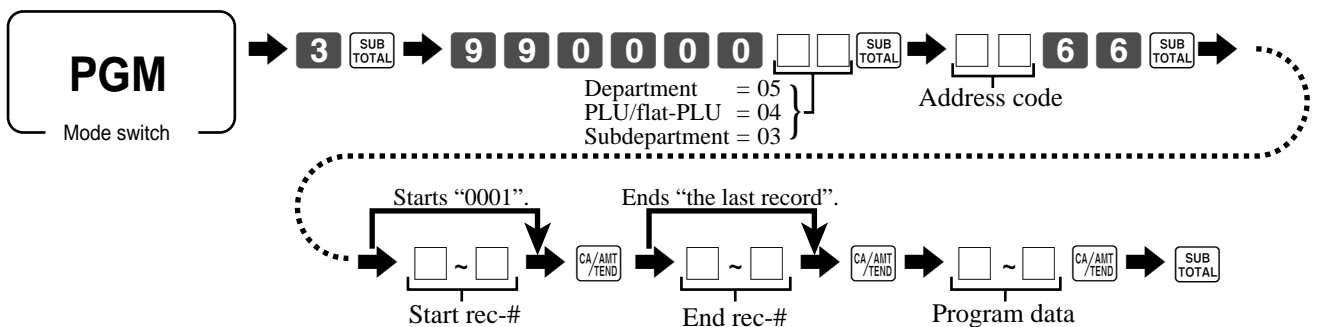

Program data (by address code)

Address code 11 (link)

Description	Choice	Program code
Link group record number: (00 ~ 99)	Significant numbers	D ₆ D ₅
Link department record number: (00 ~ 99) (for PLU, PLU 2nd@, and subdepartment)	Significant numbers	D ₄ D ₃
Link subdepartment record number: (00 ~ 99) (for PLU and PLU 2nd@)	Significant numbers	D ₂ D ₁

Key function/machine feature (P3)

Address code 12 (random code)

Description	Choice	Program code												
PLU random code (only for PLU)	Significant numbers	<table style="display: inline-table; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> </tr> <tr> <td style="text-align: center;">D₆</td> <td style="text-align: center;">D₅</td> <td style="text-align: center;">D₄</td> <td style="text-align: center;">D₃</td> <td style="text-align: center;">D₂</td> <td style="text-align: center;">D₁</td> </tr> </table>							D ₆	D ₅	D ₄	D ₃	D ₂	D ₁
D ₆	D ₅	D ₄	D ₃	D ₂	D ₁									

Address code 13 (set menu)

Description	Choice	Program code								
Set menu table/bottle link table record number (only for PLU)	Significant numbers	<table style="display: inline-table; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> </tr> <tr> <td style="text-align: center;">D₆</td> <td style="text-align: center;">D₅</td> <td style="text-align: center;">D₄</td> <td style="text-align: center;">D₃</td> </tr> </table>					D ₆	D ₅	D ₄	D ₃
D ₆	D ₅	D ₄	D ₃							
Set menu table/bottle link table file number (only for PLU) File number: set menu table = 28, bottle link table = 73	Significant numbers	<table style="display: inline-table; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> </tr> <tr> <td style="text-align: center;">D₂</td> <td style="text-align: center;">D₁</td> </tr> </table>			D ₂	D ₁				
D ₂	D ₁									

Address code 14 (stock)

Description	Choice	Program code										
Optimum stock quantity (0.001 ~ 99.999) Enter without decimal point. (for PLU)	Significant numbers	<table style="display: inline-table; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> </tr> <tr> <td style="text-align: center;">D₅</td> <td style="text-align: center;">D₄</td> <td style="text-align: center;">D₃</td> <td style="text-align: center;">D₂</td> <td style="text-align: center;">D₁</td> </tr> </table>						D ₅	D ₄	D ₃	D ₂	D ₁
D ₅	D ₄	D ₃	D ₂	D ₁								

Address code 15 (high amount limit)

Description	Choice	Program code												
High amount limit for entering unit price manually. (not for PLU 2nd@)	Significant numbers	<table style="display: inline-table; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> </tr> <tr> <td style="text-align: center;">D₆</td> <td style="text-align: center;">D₅</td> <td style="text-align: center;">D₄</td> <td style="text-align: center;">D₃</td> <td style="text-align: center;">D₂</td> <td style="text-align: center;">D₁</td> </tr> </table>							D ₆	D ₅	D ₄	D ₃	D ₂	D ₁
D ₆	D ₅	D ₄	D ₃	D ₂	D ₁									

Address code 16 (order control)

Description	Choice	Program code				
Order character record number (00 ~ 99) (not for PLU 2nd@)	Significant numbers	<table style="display: inline-table; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> </tr> <tr> <td style="text-align: center;">D₆</td> <td style="text-align: center;">D₅</td> </tr> </table>			D ₆	D ₅
D ₆	D ₅					
Printing color of order: ① Black (UP-250)/Normal (UP-350) = 0 ② Red (UP-250)/Reverse (UP-350) = 1	① = 0 ② = 1	<table style="display: inline-table; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> </tr> <tr> <td style="text-align: center;">D₄</td> </tr> </table>		D ₄		
D ₄						
Print order to "Order 1 (printer connection table)" printer.	a	<table style="display: inline-table; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> </tr> <tr> <td style="text-align: center;">(a+b+c) D₃</td> </tr> </table>		(a+b+c) D ₃		
(a+b+c) D ₃						
Print order to "Order 2 (printer connection table)" printer.	b					
Print order to "Order 3 (printer connection table)" printer.	c					
Always "00"		<table style="display: inline-table; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px; height: 20px; text-align: center;">0</td> <td style="border: 1px solid black; width: 20px; height: 20px; text-align: center;">0</td> </tr> <tr> <td style="text-align: center;">D₂</td> <td style="text-align: center;">D₁</td> </tr> </table>	0	0	D ₂	D ₁
0	0					
D ₂	D ₁					

Address code 17 (Bon receipt control)

Description	Choice	Program code
Number of Bon receipts (1 ~ 9) (If "0", no Bon is issued.) (not for PLU 2nd@)	Significant number	<input type="checkbox"/> D ₁


Other address code

Address code	Description	Choice	Program code
18	Single item control: (Not for PLU 2nd@) Normal receipt = 0, Single item receipt = 3	Significant number	<input type="checkbox"/>
19	Price change registration is enable. (Only effective for scanning PLU linked to this department)	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c)
	Multiplication registration is enable. (Only effective for scanning PLU linked to this department)	b No = 0 Yes = 2	
	Compulsory input unit price manually. (Only effective for scanning PLU linked to this department)	c No = 0 Yes = 4	
01	Normal/condiment/preparation (Not for PLU 2nd@) Normal item = 0, Condiment = 1, Preparation = 2	Significant number	<input type="checkbox"/>
02	Disable operation in RF/REG- mode. (Not for PLU 2nd@)	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c)
	Disable operation in REG 2 mode. (Not for PLU 2nd@)	b No = 0 Yes = 2	
	Disable operation in REG 1 mode. (Not for PLU 2nd@)	c No = 0 Yes = 4	
03	Taxable status: See the status table of the batch feature programming section.	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁
05	Enable 0 unit price.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c)
	Enable negative price. (Not for PLU 2nd@)	b No = 0 Yes = 2	
	Hash (Not for PLU 2nd@)	c No = 0 Yes = 4	
06	Registration status: (Not for PLU 2nd@) • Prohibit scale registration = 0 • Allow electronic scale registration only = 1 • Allow manual and electronic scale registration = 2 • Allow manual and non scale registration = 3	Significant number (0 ~ 3)	<input type="checkbox"/>
07	Low digit limitation (LDL) for manually entered unit price. (Not for PLU 2nd@)	Significant number	<input type="checkbox"/>
04	Multiple validation: (Not for PLU 2nd@) (If "No", validation is allowed only one time.)	a Yes = 0 No = 1	<input type="checkbox"/> (a+b+c)
	Print difference between the normal price and reduced price. (Not for PLU 2nd@)	b No = 0 Yes = 2	
	Open PLU (Only for PLU)	c No = 0 Yes = 4	
09	Commission 1 (Not for PLU 2nd@)	a No = 0 Yes = 1	<input type="checkbox"/> (a+b)
	Commission 2 (Not for PLU 2nd@)	b No = 0 Yes = 2	
10	Compulsory number of condiment/preparation PLU input. (Not for PLU 2nd@)	Significant number (0 ~ 8)	<input type="checkbox"/>

Key function/machine feature (P3)

Transaction key program

Programming procedure

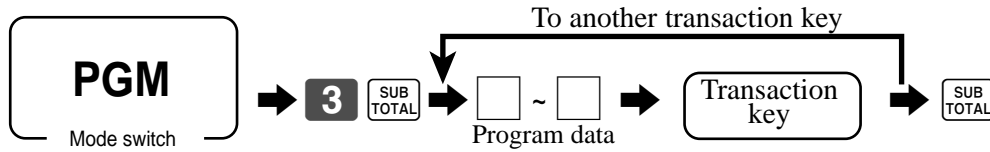

Program data

<CASH>, <CHARGE>, <CHECK>

Description	Choice	Program code
Restriction (to 0, 5) on last digit for amount tendered. (Only effective for <CHARGE> or <CHECK>)	No = 0 Yes = 1	<input type="checkbox"/> D ₁₂
Allowable number of validation printing ("0" means no limitation) *1 *2 *3 *4 *5	Significant number (0 ~ 9)	<input type="checkbox"/> D ₁₁
Force validation operation. *1 *2 *3 *4 *5	a No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₁₀
Restriction (to 00, 25, 50, 75) on last two digits for amount tendered (Only for <CASH> in Danish rounding) *5	b No = 0 Yes = 4	
Disable operation in RF/REG- mode. *1 *4 *5	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode. *1 *4 *5	b No = 0 Yes = 2	
Disable operation in REG1 mode. *1 *4 *5	c No = 0 Yes = 4	
Force batch slip printing. *1 *2 *4	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₈
Force check endorsement printing (Only for <CHECK>). *3 *4 *5	b No = 0 Yes = 2	
Force check printing (Only for <CHECK>). *3 *4 *5	c No = 0 Yes = 4	
Prohibit entry of a partial payment	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₇
Prohibit the entry of the amount tendered.	b No = 0 Yes = 2	
Force entry of the amount tendered.	c No = 0 Yes = 4	
Print VAT breakdown. *1 *2 *4	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₆
Check cashing commission (Only for <CHECK>) *3 ① Use an amount ② Use a rate	b Amount = 0 Rate = 2	
Validation amount *3 *4 ① Print subtotal amount ② Print amount tendered	c Subtotal = 0 Tender = 4	
Perform Finnish rounding.	No = 0 Yes = 4	<input type="checkbox"/> D ₅
High amount limit specification for subtotal and tendering amounts. *3	Maximum value (0 ~ 9)	<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃
	Number of zeros (0 ~ 9)	
High amount limit specification for change amount due.	Maximum value (0 ~ 9)	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁
	Number of zeros (0 ~ 9)	

*1 Those are valid options for Auto Cash as well.

*2 Those are valid options for Single item as well.

*3 Those are valid options for Cashing a check as well.

*4 Those are valid options for Currency exchange (include partial tender) as well.

*5 Those are valid options for Media change (include partial tender) as well.

<CREDIT>

Description	Choice	Program code
Restriction (to 0, 5) on last digit for amount tendered.	No = 0 Yes = 1	<input type="checkbox"/> D ₁₂
Allowable number of validation printing ("0" means no limitation) *1	Significant number (0 ~ 9)	<input type="checkbox"/> D ₁₁
Force validation operation. *1	No = 0 Yes = 1	<input type="checkbox"/> D ₁₀
Disable operation in RF/REG- mode. *1	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode. *1	b No = 0 Yes = 2	
Disable operation in REG1 mode. *1	c No = 0 Yes = 4	
Force batch slip printing.	No = 0 Yes = 1	<input type="checkbox"/> D ₈
Prohibit entry of a partial payment	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₇
Prohibit the entry of the amount tendered.	b No = 0 Yes = 2	
Force entry of the amount tendered.	c No = 0 Yes = 4	
Print VAT breakdown.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₆
Validation amount ① Print subtotal amount ② Print amount tendered	b Subtotal = 0 Tender = 4	
Perform Finnish rounding.	No = 0 Yes = 4	<input type="checkbox"/> D ₅
High amount limit specification for subtotal and tendering amounts.	Maximum value (0 ~ 9)	<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃
	Number of zeros (0 ~ 9)	
Always "0"		<input type="checkbox"/> D ₂
Specify credit in drawer total in the fixed totalizer. *1	Significant number (0 ~ 4)	<input type="checkbox"/> D ₁

*1 Those are valid options for Media change (include partial tender) as well.

Key function/machine feature (P3)

<FOOD STAMP TENDER>, <EBT>

Description	Choice	Program code
Allowable number of validation printing ("0" means no limitation)	Significant number (0 ~ 9)	<input type="text"/> D ₁₁
Force validation operation.	No = 0 Yes = 1	<input type="text"/> D ₁₀
Disable operation in RF/REG- mode.	a No = 0 Yes = 1	<input type="text"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b No = 0 Yes = 2	
Disable operation in REG1 mode.	c No = 0 Yes = 4	
Force batch slip printing.	a No = 0 Yes = 1	<input type="text"/> (a+b) D ₈
Prohibit over tendering. (only for <EBT>)	b No = 0 Yes = 4	
Always "0"		<input type="text" value="0"/> D ₇
Print VAT breakdown.	a No = 0 Yes = 1	<input type="text"/> (a+b) D ₆
Validation amount ① Print subtotal amount ② Print amount tendered	b Subtotal = 0 Tender = 4	
Always "0"		<input type="text" value="0"/> D ₅
High amount limit specification for subtotal and tendering amounts.	Maximum value (0 ~ 9)	<input type="text"/> <input type="text"/> D ₄ D ₃
	Number of zeros (0 ~ 9)	
Always "00"		<input type="text" value="0"/> <input type="text" value="0"/> D ₂ D ₁

<NEW BALANCE>

Description	Choice	Program code
Allowable number of validation printing ("0" means no limitation)	Significant number (0 ~ 9)	<input type="text"/> D ₁₁
Force validation operation.	a No = 0 Yes = 1	<input type="text"/> (a+b) D ₁₀
Cancel the transaction if no item is registered.	b No = 0 Yes = 4	
Disable operation in RF/REG- mode.	a No = 0 Yes = 1	<input type="text"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b No = 0 Yes = 2	
Disable operation in REG1 mode.	c No = 0 Yes = 4	
Force batch slip printing.	a No = 0 Yes = 1	<input type="text"/> (a+b) D ₈
Open drawer when the key is pressed.	b No = 0 Yes = 2	
No receipt is issued.	c No = 0 Yes = 4	
Function after normal (not in check tracking) registration: Operation error = 0, Auto Cash = 1, New balance = 2	Significant number	<input type="text"/> D ₇
Print VAT breakdown.	a No = 0 Yes = 1	<input type="text"/> (a+b) D ₆
Service charge ① Use an amount ② Use a rate	b Amount = 0 Rate = 2	
Always "00000"		<input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/> D ₅ D ₄ D ₃ D ₂ D ₁

<CHARACTER RECALL>, <CHARACTER PRINT>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> 0 D ₈
Disable to change mode switch after registration. (only effective for <character recall>)	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₇
Print characters on receipt, guest receipt, or slip.	b	Yes = 0 No = 2	
Order character record number (01 ~ 99) ("00" means no designation.)		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅
Printing color of order: • Black (UP-250)/Normal (UP-350) = 0 • Red (UP-250)/Reverse (UP-350) = 1		Significant number	<input type="checkbox"/> D ₄
Print order to "Order 1 (printer connection table)" printer.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₃
Print order to "Order 2 (printer connection table)" printer.	b	No = 0 Yes = 2	
Print order to "Order 3 (printer connection table)" printer.	c	No = 0 Yes = 4	
Always "00"			<input type="checkbox"/> <input type="checkbox"/> 0 0 D ₂ D ₁

<CLERK TRANSFER>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> 0 D ₈
Clerk number: ① Memory number ② Clerk secret number		① = 0 ② = 1	<input type="checkbox"/> D ₇
Always "000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 0 0 0 0 0 0 D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

Key function/machine feature (P3)

<TABLE TRANSFER>

Description	Choice	Program code
Disable operation in RF/REG- mode.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b No = 0 Yes = 2	
Disable operation in REG1 mode.	c No = 0 Yes = 4	
Always "0"		<input type="checkbox"/> D ₈
Allow to add checks while table transferring.	No = 0 Yes = 1	<input type="checkbox"/> D ₇
Always "000000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

<TIP>

Description	Choice	Program code
Multiple validation (If "No", only one validation printing is possible.)	Yes = 0 No = 4	<input type="checkbox"/> D ₁₁
Always "0"		<input type="checkbox"/> D ₁₀
Disable operation in RF/REG- mode.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b No = 0 Yes = 2	
Disable operation in REG1 mode.	c No = 0 Yes = 4	
Always "00000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅ D ₄
High digit limitation (HDL) for manually entered unit price ("9" means NOT allow manual entry)	Significant number	<input type="checkbox"/> D ₃
Always "00"		<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

<LOAN>, <PICK UP>

Description		Choice	Program code
Restriction (to 0, 5) on last digit for amount tendered.		No = 0 Yes = 1	<input type="checkbox"/> D ₁₂
Allowable number of validation printing ("0" means no limitation)		Significant number (0 ~ 9)	<input type="checkbox"/> D ₁₁
Force validation operation. (only effective after receipt issuance)		No = 0 Yes = 1	<input type="checkbox"/> D ₁₀
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅
High amount limit specification for entering amounts		Maximum value (0 ~ 9)	<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃
		Number of zeros (0 ~ 9)	
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

<RECEIVED ON ACCOUNT>, <PAID OUT>

Description		Choice	Program code
Allowable number of validation printing ("0" means no limitation)		Significant number (0 ~ 9)	<input type="checkbox"/> D ₁₁
Force validation operation.		No = 0 Yes = 1	<input type="checkbox"/> D ₁₀
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅
High amount limit specification for entering amounts		Maximum value (0 ~ 9)	<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃
		Number of zeros (0 ~ 9)	
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

These programmable options are not effective for the Euro function.

Key function/machine feature (P3)

<+ (PLUS)>, <- (MINUS)>, <COUPON>

Description		Choice	Program code
Multiple validation (If "No", only one validation printing is possible.)		Yes = 0 No = 4	<input type="checkbox"/> D ₁₁
Always "0"			<input type="checkbox"/> D ₁₀
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Taxable status: See below.			<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Allow credit balance. (-, CPN only)		No = 0 Yes = 1	<input type="checkbox"/> D ₆
Always "0"			<input type="checkbox"/> D ₅
Allow key operation after <SUBTOTAL>.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b) D ₄
Allow key operation after item registration.	b	Yes = 0 No = 4	
High digit limitation (HDL) for manually entered unit price ("9" means NOT allow manual entry.)		Significant number	<input type="checkbox"/> D ₃
Commission 1	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₂
Commission 2	b	No = 0 Yes = 2	
Always "0"			<input type="checkbox"/> D ₁

Taxable status

for the U.S./Singapore

Food stamp (for Singapore, always "0")		No = 0 Yes = 1	<input type="checkbox"/> D ₈
Taxable 1 status	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₇
Taxable 2 status	b	No = 0 Yes = 2	
Taxable 3 status	c	No = 0 Yes = 4	

for Canada

Donuts status (D ₈ D ₇ ="99" means donuts and all taxable.)		No = 0 Yes = 1	<input type="checkbox"/> D ₈
Non tax = 0 Taxable 1 = 1 Taxable 2 = 2	Taxable 3 = 3 Taxable 4 = 4 Taxable 1 & 2 = 5	Taxable 1 & 3 = 6 Taxable 1 & 4 = 7	Significant number <input type="checkbox"/> D ₇

for Other area

Non tax = 0 Taxable 1 = 1 Taxable 2 = 2 Taxable 3 = 3	Taxable 4 = 4 Taxable 5 = 5 Taxable 6 = 6 Taxable 7 = 7	Taxable 8 = 8 Taxable 9 = 9 Taxable 10 = 10 All taxable = 99	Significant numbers <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
--	--	---	---

<DEPOSIT>

Description		Choice	Program code
Restriction (to 0, 5) on last digit for amount tendered.		No = 0 Yes = 1	<input type="checkbox"/> D ₁₂
Always "0"			<input type="checkbox"/> 0 D ₁₁
Force validation operation. (only effective after receipt issuance)	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₁₀
Multiple validation (If "No," only one validation is possible.)	b	No = 0 Yes = 4	
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> 0 D ₈
Key attribution		DEPO+ = 0 DEPO- = 1	<input type="checkbox"/> D ₇
Open cash drawer.		No = 0 Yes = 2	<input type="checkbox"/> D ₆
Media definition: Cash = 0, Charge = 1, Check = 2, Credit 1 = 3, Credit 2 = 4, Credit 3 = 5, Credit 4 = 6		Significant number	<input type="checkbox"/> D ₅
High amount limit specification for entering amounts		Maximum value (0 ~ 9)	<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃
		Number of zeros (0 ~ 9)	
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Key function/machine feature (P3)

<PREVIOUS BALANCE>

Description		Choice	Program code
Multiple validation (If "No", only one validation printing is possible.)		Yes = 0 No = 4	<input type="checkbox"/> D ₁₁
Always "0"			<input type="checkbox"/> D ₁₀
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Taxable status: See below.			<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Key attribution	a	PB+ = 0 PB- = 1	<input type="checkbox"/> (a+b) D ₆
Print when registered.	b	Yes = 0 No = 4	
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₅ D ₄
High digit limitation (HDL) for manually entered unit price ("9" means NOT allow manual entry.)		Significant number	<input type="checkbox"/> D ₃
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Taxable status

for the U.S./Singapore

Food stamp (for Singapore, always "0")		No = 0 Yes = 1	<input type="checkbox"/> D ₈
Taxable 1 status	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₇
Taxable 2 status	b	No = 0 Yes = 2	
Taxable 3 status	c	No = 0 Yes = 4	

for Canada

Donuts status (D ₈ D ₇ ="99" means donuts and all taxable.)		No = 0 Yes = 1	<input type="checkbox"/> D ₈
Non tax = 0 Taxable 1 = 1 Taxable 2 = 2	Taxable 3 = 3 Taxable 4 = 4 Taxable 1 & 2 = 5	Taxable 1 & 3 = 6 Taxable 1 & 4 = 7	Significant number <input type="checkbox"/> D ₇

for Other area

Non tax = 0 Taxable 1 = 1 Taxable 2 = 2 Taxable 3 = 3	Taxable 4 = 4 Taxable 5 = 5 Taxable 6 = 6 Taxable 7 = 7	Taxable 8 = 8 Taxable 9 = 9 Taxable 10 = 10 All taxable = 99	Significant numbers <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
--	--	---	---

<PREMIUM (%+)>, <DISCOUNT (%-)>

Description		Choice	Program code
Multiple validation (If "No", only one validation printing is possible.)		Yes = 0 No = 4	<input type="checkbox"/> D ₁₁
Always "0"			<input type="checkbox"/> D ₁₀
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Taxable status: See below.			<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Prohibit manual rate override.		No = 0 Yes = 2	<input type="checkbox"/> D ₆
Rounding: Round off = 0, cut off = 1, round up = 2		Significant number	<input type="checkbox"/> D ₅
Allow key operation after <SUBTOTAL>.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b) D ₄
Allow key operation after item registration.	b	Yes = 0 No = 4	
Always "0"			<input type="checkbox"/> D ₃
Commission 1	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₂
Commission 2	b	No = 0 Yes = 2	
Always "0"			<input type="checkbox"/> D ₁

Taxable status

for the U.S./Singapore

Food stamp (for Singapore, always "0")		No = 0 Yes = 1	<input type="checkbox"/> D ₈
Taxable 1 status	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₇
Taxable 2 status	b	No = 0 Yes = 2	
Taxable 3 status	c	No = 0 Yes = 4	

for Canada

Donuts status (D ₈ D ₇ ="99" means donuts and all taxable.)		No = 0 Yes = 1	<input type="checkbox"/> D ₈
Non tax = 0 Taxable 1 = 1 Taxable 2 = 2	Taxable 3 = 3 Taxable 4 = 4 Taxable 1 & 2 = 5	Taxable 1 & 3 = 6 Taxable 1 & 4 = 7	Significant number <input type="checkbox"/> D ₇

for Other area

Non tax = 0 Taxable 1 = 1 Taxable 2 = 2 Taxable 3 = 3	Taxable 4 = 4 Taxable 5 = 5 Taxable 6 = 6 Taxable 7 = 7	Taxable 8 = 8 Taxable 9 = 9 Taxable 10 = 10 All taxable = 99	Significant numbers <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
--	--	---	---

Key function/machine feature (P3)

<RATE TAX>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Prohibit manual entry.		No = 0 Yes = 2	<input type="checkbox"/> D ₆
Rounding: Round off = 0, cut off = 1, round up = 2		Significant number	<input type="checkbox"/> D ₅
Always "0000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃ D ₂ D ₁

<MANUAL TAX>

Description		Choice	Program code
Multiple validation (If "No", only one validation printing is possible.)		Yes = 0 No = 4	<input type="checkbox"/> D ₁₁
Always "0"			<input type="checkbox"/> D ₁₀
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "00000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅ D ₄
High digit limitation (HDL) for manually entered unit price ("9" means NOT allow manual entry.)		Significant number	<input type="checkbox"/> D ₃
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

<ERROR CORRECTION/CANCEL>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅ D ₄ D ₃ D ₂
A range of cancellation: ① Complete cancellation/② Current receipt only		② = 0 ① = 1	<input type="checkbox"/> D ₁

These programmable options are not effective for error correction function.

<VOID>

Description	Choice	Program code
Disable operation in RF/REG- mode.	a	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	
Disable operation in REG1 mode.	c	
Always "0000000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅ D ₄ D ₃ D ₂
A range of item correction: ① From the beginning of this transaction ② Current receipt only	a	<input type="checkbox"/> (a+b) D ₁
Affect stock quantity	b	

<RECEIPT>

Description	Choice	Program code
Maximum number of post receipts (0 ~ 9) ("0" means 1 post receipt.)	Significant number	<input type="checkbox"/> D ₁₂
Always "00"		<input type="checkbox"/> <input type="checkbox"/> D ₁₁ D ₁₀
Disable operation in RF/REG- mode.	a	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	
Disable operation in REG1 mode.	c	
Always "0"		<input type="checkbox"/> D ₈
Print current time on guest receipt.	No = 0 Yes = 4	<input type="checkbox"/> D ₇
Clear finalized check.	Yes = 0 No = 1	<input type="checkbox"/> D ₆
Always "0"		<input type="checkbox"/> D ₅
Print journal when receipt is issued by <RECEIPT>.	No = 0 Yes = 1	<input type="checkbox"/> D ₄
Receipt is issued by: •"Receipt 1 (printer connection table)" = 0 •"Receipt 2 (printer connection table)" = 1 •"Receipt 3 (printer connection table)" = 2	Significant number	<input type="checkbox"/> D ₃
Line number of guest bottom message (00 ~ 10): ("00" means no bottom message.)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Key function/machine feature (P3)

<CHECK ENDORSEMENT>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> 0 D ₈
Line number of auto-back feed before printing (0 ~ 9)		Significant number	<input type="checkbox"/> D ₇
Always "000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

<NON ADD (#)>, <NON ADD (#)/NO SALE>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> 0 D ₈
Allow mode change or clerk change after non-add registration as first transaction. (only for non-add function)		Yes = 0 No = 1	<input type="checkbox"/> D ₇
Order character record number (00 ~ 99): ("00" means no setting.)		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅
Printing color of order: • Black (UP-250)/Normal (UP-350) = 0 • Red (UP-250)/Reverse (UP-350) = 1		Significant number	<input type="checkbox"/> D ₄
Print order to "Order 1 (printer connection table)" printer.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₃
Print order to "Order 2 (printer connection table)" printer.	b	No = 0 Yes = 2	
Print order to "Order 3 (printer connection table)" printer.	c	No = 0 Yes = 4	
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

<CUSTOMER>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> D ₈
Input method: Allow replacement = 0, Prohibit replacement = 1, Add enter value = 2		Significant number	<input type="checkbox"/> D ₇
Always "000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

<ARRANGEMENT>

Description		Choice	Program code
Secret code (0000 ~ 9999)		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₁₄ D ₁₃ D ₁₂ D ₁₁
Enable operation in X1 mode.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₁₀
Enable operation in Z1 mode.	b	Yes = 0 No = 2	
Enable operation in X2/Z2 mode.	c	Yes = 0 No = 4	
Enable operation in RF/REG- mode.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₉
Enable operation in REG2 mode.	b	Yes = 0 No = 2	
Enable operation in REG1 mode.	c	Yes = 0 No = 4	
Always "0"			<input type="checkbox"/> D ₈
Treat numeric entry as arrange table number		No = 0 Yes = 1	<input type="checkbox"/> D ₇
Arrangement table link number		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

Key function/machine feature (P3)

<CURRENCY EXCHANGE>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> D ₈
Define amount symbol. (0, 1 ~ 4) ("0" means local currency symbol.)		Significant number	<input type="checkbox"/> D ₇
Define foreign currency totalizer. (0, 1 ~ 4) ("0" treats as "1".)		Significant number	<input type="checkbox"/> D ₆
Rounding: Round off = 0, cut off = 1, round up = 2		Significant number	<input type="checkbox"/> D ₅
Always "0"			<input type="checkbox"/> D ₄
Monetary mode (0 ~ 9): 0.00 = 2, 0.0 = 1, 0 = 0, 0.000 = 3		Significant number	<input type="checkbox"/> D ₃
Monetary symbol for decimal	a	Decimal = 0 Comma = 1	<input type="checkbox"/> (a+b) D ₂
Monetary symbol for separator	b	Comma = 0 Decimal = 4	
Assigning drawer number: 0 ~ 4 ("0" means drawer 1.)		Significant number (0 ~ 4)	<input type="checkbox"/> D ₁

<BILL>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "00000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅ D ₄
Receipt is issued by: •"Receipt 1 (printer connection table)" = 0 •"Receipt 2 (printer connection table)" = 1 •"Receipt 3 (printer connection table)" = 2		Significant number	<input type="checkbox"/> D ₃
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

<SLIP>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> 0 D ₈
Force slip batch printing from the beginning of the transaction. If "No", controlled by general function.)	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₇
Print issuing time (only effective when slip is printed from the beginning of the transaction).	b	No = 0 Yes = 4	
Clear finalized check.		Yes = 0 No = 1	<input type="checkbox"/> D ₆
Always "0"			<input type="checkbox"/> 0 D ₅
Print journal when slip is printed.		No = 0 Yes = 1	<input type="checkbox"/> D ₄
Always "000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁

<TAX SHIFT>, <TAXABLE SUBTOTAL>

Description		Choice	Program code
Maintain of tax shift: ① Do not maintain. ② Until next tax shift specification.		① = 0 ② = 1	<input type="checkbox"/> D ₇
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Taxable status (00, 01 ~ 10) ("00" means taxable 1.)		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Always "000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

Key function/machine feature (P3)

<EXEMPT>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
• U.S., Singapore:			
Exempt tax 1	a	Yes = 0 No = 1	<input type="checkbox"/> D ₈ <input type="checkbox"/> (a+b+c) D ₇
Exempt tax 2	b	Yes = 0 No = 2	
Exempt tax 3	c	Yes = 0 No = 4	
• Canada:			
Not exempt donuts tax = 0 Exempt donuts tax 1 = 1		Significant number	<input type="checkbox"/> D ₈
Exempt all (tax 1 ~ 4) = 0 Exempt tax 1 = 1, Exempt tax 2 = 2, Exempt tax 3 = 3, Exempt tax 4 = 4, Exempt tax 1 & 2 = 5, Exempt tax 1 & 3 = 6, Exempt tax 1 & 4 = 7		Significant number	<input type="checkbox"/> D ₇
• Other area			
Exempt all (tax 1 ~ 10) = 00 Exempt tax 1 = 01, Exempt tax 2 = 02, Exempt tax 3 = 03, Exempt tax 4 = 04, Exempt tax 5 = 05, Exempt tax 6 = 06, Exempt tax 7 = 07, Exempt tax 8 = 08, Exempt tax 9 = 09, Exempt tax 10 = 10		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Exempt add-in tax from subtotal amount.		No = 0 Yes = 1	<input type="checkbox"/> D ₆
Always "00000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₅ D ₄ D ₃ D ₂ D ₁

<MENU>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> D ₈
Define assigning menu sheet number. (0, 1 ~ 6) (If you set "0", menu sheets are assigned one by one.)		Significant number	<input type="checkbox"/> D ₇
Always "000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

<OPEN>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> D ₈
Release "High amount limit."		No = 0 Yes = 1	<input type="checkbox"/> D ₇
Always "000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

<OPEN2>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> 0 D ₈
Release customer number compulsory.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₇
Release table number compulsory.	b	Yes = 0 No = 2	
Release check number compulsory.	c	Yes = 0 No = 4	
Release credit balance error. (If "Yes," you can finalize the transaction even if the subtotal is negative.)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₆
Release tax calculation compulsory before finalizing.	b	Yes = 0 No = 2	
Release guest receipt compulsory.	c	Yes = 0 No = 4	
Release validation compulsory.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b+c) D ₅
Release check endorsement compulsory.	b	Yes = 0 No = 2	
Release check print compulsory.	c	Yes = 0 No = 4	
Release slip auto batch print compulsory. (programmed by clerk)	a	Yes = 0 No = 2	<input type="checkbox"/> (a+b) D ₄
Release slip manual batch print compulsory. (programmed by finalize key)	b	Yes = 0 No = 4	
Release condiment compulsory.		Yes = 0 No = 1	<input type="checkbox"/> D ₃
Release eat-in/takeout compulsory.		Yes = 0 No = 2	<input type="checkbox"/> D ₂
Always "0"			<input type="checkbox"/> 0 D ₁

<PRICE SHIFT>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> 0 D ₈
Define assigning price shift number. (0, 1 ~ 3) (If you set "0", price shift numbers are assigned one by one.)		Significant number	<input type="checkbox"/> D ₇
Always "000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

Key function/machine feature (P3)

<REVIEW>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
The reviewed range of item: ① From the beginning of this transaction ② Current receipt only		② = 0 ① = 1	<input type="checkbox"/> (a+b) D ₈
Display "Check number", "Table number", and "Customer number".		No = 0 Yes = 2	
Always "0000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₇ D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

<CLERK NUMBER>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇ D ₆ D ₅
Clerk secret number (0000 ~ 9999) ("0000" means no secret number.)		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃ D ₂ D ₁

<OPERATOR X/Z>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> D ₈
Issue consolidation report./Issue stand-alone report.		Standalone = 0 Consolidation = 1	<input type="checkbox"/> D ₇
Always "000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

<TRAY TOTAL>

Description		Choice	Program code
Allowable number of validation printing (“0” means no limitation)		Significant number (0 ~9)	<input type="checkbox"/> D ₁₁
Force validation operation		No = 0 Yes = 1	<input type="checkbox"/> D ₁₀
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always “00”			<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Include add-on tax.	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b) D ₆
Print tray total when <TRAY TOTAL> is pressed.	b	No = 0 Yes = 4	
Always “00000”			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₅ D ₄ D ₃ D ₂ D ₁

<SUBTOTAL>, <MERCHANDISE SUBTOTAL>

Description		Choice	Program code
Multiple validation (If “No”, only one validation printing is possible.)		Yes = 0 No = 4	<input type="checkbox"/> D ₁₁
Always “0”			<input type="checkbox"/> D ₁₀
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always “00”			<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Include add-on tax. (<SUBTOTAL> only)	a	Yes = 0 No = 1	<input type="checkbox"/> (a+b) D ₆
Print when key is pressed.	b	No = 0 Yes = 4	
Always “00000”			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₅ D ₄ D ₃ D ₂ D ₁

Key function/machine feature (P3)

<MULTIPLICATION>, <QUANTITY/FOR>, <SQUARE>, <CUBE>, <KETTEN BON>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Multiplication procedure: (<KETTEN BON> and <X> only) ① Quantity × Amount, ② Amount × Quantity		① = 0 ② = 1	<input type="checkbox"/> D ₆
Rounding: Round off = 0, cut off = 1, round up = 2		Significant number	<input type="checkbox"/> D ₅
Always "0000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃ D ₂ D ₁

<TARE>, <SCALE>, <UNIT WEIGHT>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> D ₈
Allow manual entry. (only for <SCALE>)		Yes = 0 No = 2	<input type="checkbox"/> D ₇
Always "000000"			<input type="checkbox"/> ~ <input type="checkbox"/> D ₆ ~ D ₁

<NEW CHECK>, <NEW/OLD CHECK>

Description		Choice	Program code
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b	No = 0 Yes = 2	
Disable operation in REG1 mode.	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> D ₈
Enable auto check assignment		No = 0 Yes = 1	<input type="checkbox"/> D ₇
Always "000000"			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

<PRICE CHANGE>

Description		Choice	Program code										
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉										
Disable operation in REG2 mode.	b	No = 0 Yes = 2											
Disable operation in REG1 mode.	c	No = 0 Yes = 4											
Always "00000"			<table border="1" style="display: inline-table; text-align: center;"> <tr> <td>0</td><td>0</td><td>0</td><td>0</td><td>0</td> </tr> <tr> <td>D₈</td><td>D₇</td><td>D₆</td><td>D₅</td><td>D₄</td> </tr> </table>	0	0	0	0	0	D ₈	D ₇	D ₆	D ₅	D ₄
0	0	0	0	0									
D ₈	D ₇	D ₆	D ₅	D ₄									
High digit limitation (HDL) for manually entered unit price ("9" means NOT allow manual entry.)		Significant number	<input type="checkbox"/> D ₃										
Always "0"			<input type="checkbox"/> 0 D ₂										
Prohibit to change price greater than the preset price.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₁										
Prohibit to change price less than the preset price.	b	No = 0 Yes = 2											

<CLOCK-IN/OUT>

Description		Choice	Program code				
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉				
Disable operation in REG2 mode.	b	No = 0 Yes = 2					
Disable operation in REG1 mode.	c	No = 0 Yes = 4					
Always "00"			<table border="1" style="display: inline-table; text-align: center;"> <tr> <td>0</td><td>0</td> </tr> <tr> <td>D₈</td><td>D₇</td> </tr> </table>	0	0	D ₈	D ₇
0	0						
D ₈	D ₇						
High digit limitation (00 ~ 10), "00" means no limitation.		Significant numbers	<table border="1" style="display: inline-table; text-align: center;"> <tr> <td><input type="checkbox"/></td><td><input type="checkbox"/></td> </tr> <tr> <td>D₆</td><td>D₅</td> </tr> </table>	<input type="checkbox"/>	<input type="checkbox"/>	D ₆	D ₅
<input type="checkbox"/>	<input type="checkbox"/>						
D ₆	D ₅						
Always "00"			<table border="1" style="display: inline-table; text-align: center;"> <tr> <td>0</td><td>0</td> </tr> <tr> <td>D₄</td><td>D₃</td> </tr> </table>	0	0	D ₄	D ₃
0	0						
D ₄	D ₃						
Usage: Both CLOCK-IN and CLOCK-OUT = 0, CLOCK-IN only = 1, CLOCK-OUT only = 2		Significant number	<input type="checkbox"/> D ₂				
Issue receipt during CLOCK-IN/OUT.		Yes = 0 No = 1	<input type="checkbox"/> D ₁				

Key function/machine feature (P3)

<EAT-IN>, <TAKEOUT>

Description	Choice	Program code
Disable operation in RF/REG- mode.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b No = 0 Yes = 2	
Disable operation in REG1 mode.	c No = 0 Yes = 4	

• U.S., Singapore:

Exempt tax 1	a Yes = 0 No = 1	<input type="checkbox"/> 0 D ₈ <input type="checkbox"/> (a+b+c) D ₇
Exempt tax 2	b Yes = 0 No = 2	
Exempt tax 3	c Yes = 0 No = 4	

• Canada:

Not exempt donuts tax = 0 Exempt donuts tax 1 = 1	Significant number	<input type="checkbox"/> D ₈
Exempt all (tax 1 ~ 4) = 0 Exempt tax 1 = 1, Exempt tax 2 = 2, Exempt tax 3 = 3, Exempt tax 4 = 4, Exempt tax 1 & 2 = 5, Exempt tax 1 & 3 = 6, Exempt tax 1 & 4 = 7	Significant number	<input type="checkbox"/> D ₇

• Other area

Exempt all (tax 1 ~ 10) = 00 Exempt tax 1 = 01, Exempt tax 2 = 02, Exempt tax 3 = 03, Exempt tax 4 = 04, Exempt tax 5 = 05, Exempt tax 6 = 06, Exempt tax 7 = 07, Exempt tax 8 = 08, Exempt tax 9 = 09, Exempt tax 10 = 10	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
--	---------------------	--

Subtract add-in tax from subtotal amount. (only subtracted when the tax is exempted.)	a No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₆
Print when the key is pressed.	b No = 0 Yes = 4	
Always "0"		<input type="checkbox"/> 0 D ₅
Change tax status to: (only effective for VAT) VAT 1 = 01, VAT 2 = 02, VAT 3 = 03, VAT 4 = 04, VAT 5 = 05, VAT 6 = 06, VAT 7 = 07, VAT 8 = 08, VAT 9 = 09, VAT 10 = 10 ("00": No change is made.)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃
Always "00"		<input type="checkbox"/> <input type="checkbox"/> 0 0 D ₂ D ₁

<ONE TOUCH NLU>

Description	Choice	Program code
Disable operation in RF/REG- mode.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Disable operation in REG2 mode.	b No = 0 Yes = 2	
Disable operation in REG1 mode.	c No = 0 Yes = 4	
Always "00000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 0 0 0 0 0 D ₈ D ₇ D ₆ D ₅ D ₄
Linked one touch NLU record number (000 ~ 999)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁

<CANCEL>

Description		Choice	Program code																
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉																
Disable operation in REG2 mode.	b	No = 0 Yes = 2																	
Disable operation in REG1 mode.	c	No = 0 Yes = 4																	
Always "0000000"			<table border="1"> <tr> <td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td> </tr> <tr> <td>D₈</td><td>D₇</td><td>D₆</td><td>D₅</td><td>D₄</td><td>D₃</td><td>D₂</td><td></td> </tr> </table>	0	0	0	0	0	0	0	0	D ₈	D ₇	D ₆	D ₅	D ₄	D ₃	D ₂	
0	0	0	0	0	0	0	0												
D ₈	D ₇	D ₆	D ₅	D ₄	D ₃	D ₂													
A range of item correction: ① From the beginning of this transaction ② Current receipt only		② = 0 ① = 1	<input type="checkbox"/> D ₁																

<VALIDATION>

Description		Choice	Program code				
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉				
Disable operation in REG2 mode.	b	No = 0 Yes = 2					
Disable operation in REG1 mode.	c	No = 0 Yes = 4					
Always "00"			<table border="1"> <tr> <td>0</td><td>0</td> </tr> <tr> <td>D₈</td><td>D₇</td> </tr> </table>	0	0	D ₈	D ₇
0	0						
D ₈	D ₇						
Print total validation to: Slip (paper is inserted in slip printer) or R/J = 0, Slip only = 1, R/J only = 2		Significant number	<input type="checkbox"/> D ₆				
Number of copies by slip validation (0 ~ 9) ("0" means 1 copy.)		Significant number	<input type="checkbox"/> D ₅				
Number of auto feed lines between slip validation printing (00 ~ 99)		Significant numbers	<table border="1"> <tr> <td><input type="checkbox"/></td><td><input type="checkbox"/></td> </tr> <tr> <td>D₄</td><td>D₃</td> </tr> </table>	<input type="checkbox"/>	<input type="checkbox"/>	D ₄	D ₃
<input type="checkbox"/>	<input type="checkbox"/>						
D ₄	D ₃						
Number of line feeds before slip validation (00 ~ 99)		Significant numbers	<table border="1"> <tr> <td><input type="checkbox"/></td><td><input type="checkbox"/></td> </tr> <tr> <td>D₂</td><td>D₁</td> </tr> </table>	<input type="checkbox"/>	<input type="checkbox"/>	D ₂	D ₁
<input type="checkbox"/>	<input type="checkbox"/>						
D ₂	D ₁						

<PRICE INQUIRY>, **<STOCK INQUIRY>**, **<CHECK PRINT>**, **<NORMAL RECEIPT>**, **<REFUND>**,
<COUPON2>, **<NO SALE>**, **<VAT>**, **<PLU>**, **<PRICE>**, **<BOTTLE RETURN>**,
<SLIP BACKFEED/RELEASE>, **<SLIP FEED/RELEASE>**, **<TABLE NUMBER>**,
<FOOD STAMP SHIFT>, **<RED PRICE>**, **<DECLARATION>**, **<RECEIPT ON/OFF>**,
<OPERATOR NUMBER>, **<PREVIOUS BALANCE SUBTOTAL>**, **<FOOD STAMP SUBTOTAL>**,
<OLD CHECK>, **<ADD CHECK>**, **<SEPARATE CHECK>**, **<OBR>**, **<OPEN CHECK>**,
<MEDIA CHANGE>, **<STORE>**, **<RECALL>**


Description		Choice	Program code																
Disable operation in RF/REG- mode.	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉																
Disable operation in REG2 mode.	b	No = 0 Yes = 2																	
Disable operation in REG1 mode.	c	No = 0 Yes = 4																	
Always "00000000"			<table border="1"> <tr> <td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td> </tr> <tr> <td>D₈</td><td>D₇</td><td>D₆</td><td>D₅</td><td>D₄</td><td>D₃</td><td>D₂</td><td>D₁</td> </tr> </table>	0	0	0	0	0	0	0	0	D ₈	D ₇	D ₆	D ₅	D ₄	D ₃	D ₂	D ₁
0	0	0	0	0	0	0	0												
D ₈	D ₇	D ₆	D ₅	D ₄	D ₃	D ₂	D ₁												

Key function/machine feature (P3)

Clerk program

Secret number, drawer, check number programming

Programming procedure

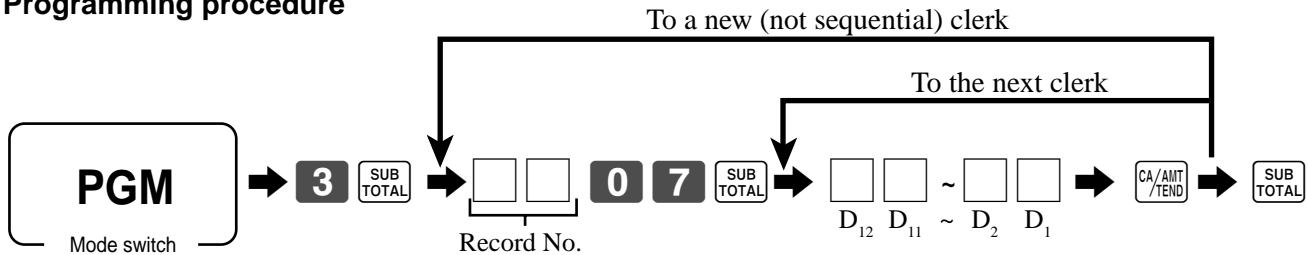


Data

Description	Choice	Program code
Check number for clerk interrupt	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₁₂ D ₁₁ D ₁₀ D ₉ D ₈ D ₇
Assigning drawer number: 00 ~ 04 ("00" means drawer 1.)	Significant numbers	<input type="text"/> <input type="text"/> D ₆ D ₅
Clerk secret number	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₄ D ₃ D ₂ D ₁


Clerk detail link programming

Programming procedure

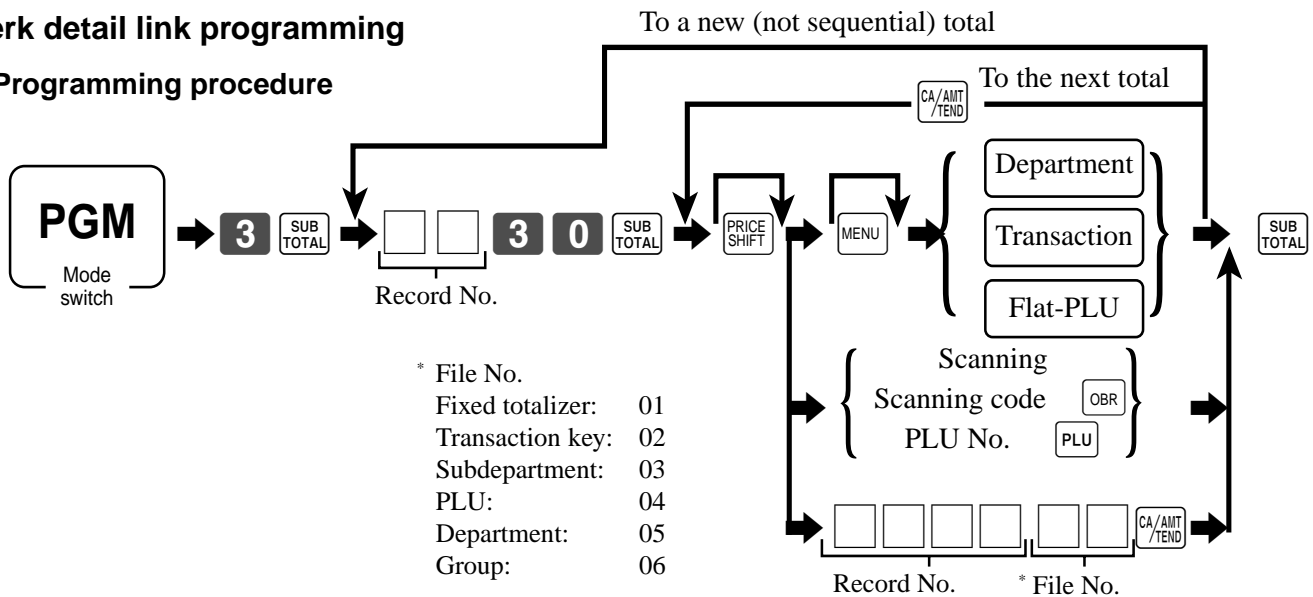

Dallas key ID programming


Programming procedure

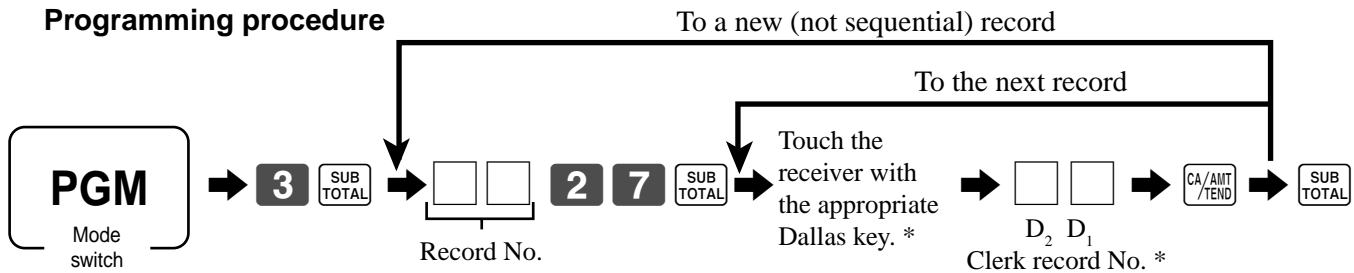


* Enter "0" without touching with a Dallas key clears the programming.

Clerk other programming

Programming procedure (individual)

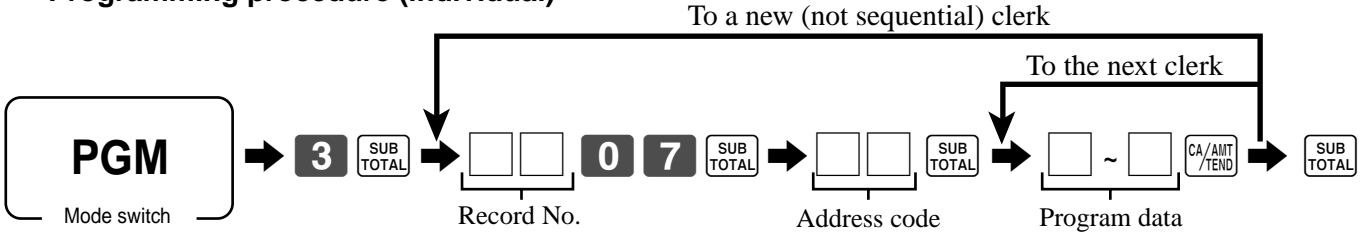

Programming procedure (by range)

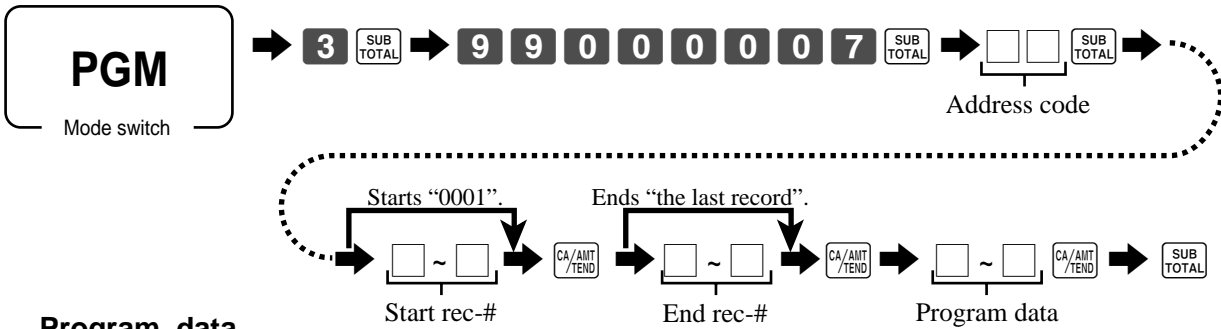

Program data

Address code 67 (Clerk control)

Description		Choice	Program code
Check number compulsory		No = 0 Yes = 4	<input type="checkbox"/> D ₁₀
Table number compulsory	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₉
Number of customer compulsory	b	No = 0 Yes = 2	
Guest receipt compulsory (at finalization)	c	No = 0 Yes = 4	
Guest receipt compulsory (at new balance)	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₈
Slip auto-batch print compulsory (at finalization)	b	No = 0 Yes = 2	
Slip auto-batch print compulsory (at new balance)	c	No = 0 Yes = 4	
Clerk attribution: Cashier = 0, Clerk = 1, Manager = 2		Significant number	<input type="checkbox"/> D ₇
Training clerk	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b) D ₆
Affect stock quantity even if assigning a training clerk	b	No = 0 Yes = 4	
Enable to open clerk created by other clerk	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₅
Disable to sign on	b	No = 0 Yes = 2	
Sign off at finalization (secret number only)	c	No = 0 Yes = 4	
Always "0"			<input type="checkbox"/> D ₄
Compulsory Eat-in/Takeout operation		No = 0 Yes = 2	<input type="checkbox"/> D ₃
Always "00"			<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Key function/machine feature (P3)

Address code 68 (Commission rate)

Description	Choice	Program code
Commission rate 1 (integer: 00 ~ 99)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Commission rate 1 (decimal: 00 ~ 99)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅
Commission rate 2 (integer: 00 ~ 99)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃
Commission rate 2 (decimal: 00 ~ 99)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Address code 69 (Table number range)

Description	Choice	Program code
Minimum range for table range (1 ~ 999999) ("0" means no programming.)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₁₂ D ₁₁ D ₁₀ D ₉ D ₈ D ₇
Maximum range for table range (1 ~ 999999) ("0" means no programming.)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁


Address code 70 (Mode control)

Description	Choice	Program code
Disable to operate in PGM mode.	a	<input type="checkbox"/> (a+b+c) D ₁₀
Disable to operate in RF/REG- mode.	b	
Disable to operate in REG1 mode.	c	
Disable to operate in REG2 mode.	a	<input type="checkbox"/> (a+b+c) D ₉
Disable to operate in X1 mode.	b	
Disable to operate in Z1 mode.	c	
Disable to operate in X2/Z2 mode.		<input type="checkbox"/> D ₈
Always "0"		<input type="checkbox"/> 0 D ₇
Enable to finalize a transaction if the clerk is assigned by clerk key.	a	<input type="checkbox"/> (a+b) D ₆
Enable to finalize a transaction if the clerk is assigned by clerk code/switch.	b	
Skip programming fields of batch/direct/not found PLU maintenance file in accordance with the general function program (address code 32, 33).	a	<input type="checkbox"/> (a+b) D ₅
Enable to issue individual key reset report.	b	
Enable to issue read/reset report by file.	a	<input type="checkbox"/> (a+b+c) D ₄
Enable to issue batch read/reset report.	b	
Enable to issue operator reset report.	c	
Default menu sheet number (0 ~ 6) after signing on.	Significant number	<input type="checkbox"/> D ₃
Enable to use 1st menu sheet.	a	<input type="checkbox"/> (a+b+c) D ₂
Enable to use 2nd menu sheet.	b	
Enable to use 3rd menu sheet.	c	
Enable to use 4th menu sheet.	a	<input type="checkbox"/> (a+b+c) D ₁
Enable to use 5th menu sheet.	b	
Enable to use 6th menu sheet.	c	

Other programs

Time range programming

Programming procedure

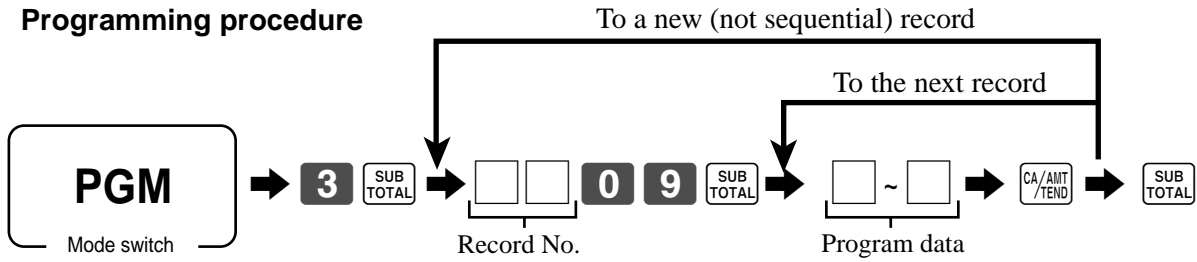


Program data

Description	Choice	Program code
Start time (hour: 00 ~ 23)	Significant numbers	<input type="text"/> <input type="text"/> D ₈ D ₇
Start time (minute: 00 ~ 59)	Significant numbers	<input type="text"/> <input type="text"/> D ₆ D ₅
End time (hour: 00 ~ 23)	Significant numbers	<input type="text"/> <input type="text"/> D ₄ D ₃
End time (minute: 00 ~ 59)	Significant numbers	<input type="text"/> <input type="text"/> D ₂ D ₁

Table range programming

Programming procedure

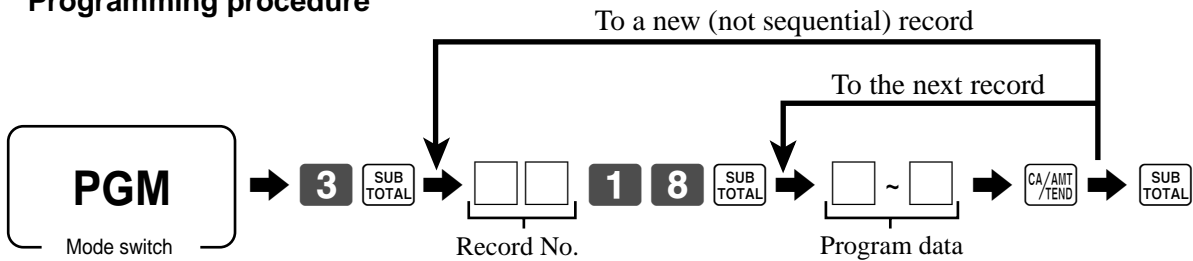


Program data

Description	Choice	Program code
Minimum check number (000000 ~ 999999) ("0" means "000001.")	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₁₂ D ₁₁ D ₁₀ D ₉ D ₈ D ₇
Maximum check number (000000 ~ 999999) ("0" means no programming.)	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

Key function/machine feature (P3)

Tax table programming

Programming procedure

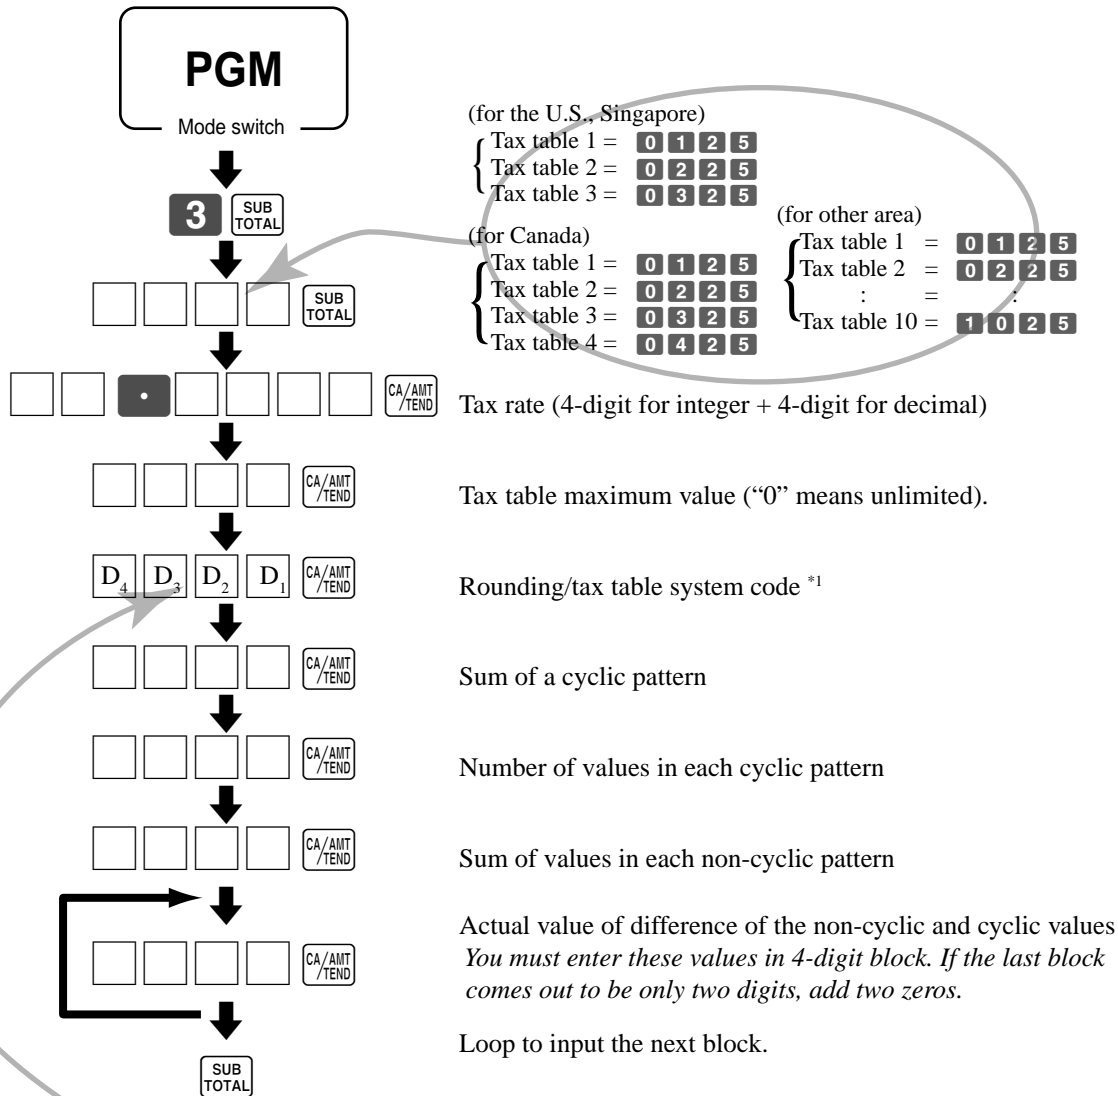

*1 Rounding/Tax system code

Rounding code specification

D ₄	D ₃	Rounding
5	0	Rounding off two decimal places
9	0	Rounding up to two decimal places
0	0	Cut off two decimal places

Tax system code specification

D ₂	D ₁	Rounding
4	--	Singapore rounding
--	1	Tax table only
--	2	U.S. tax table with tax rate or add-on tax only
--	3	Add-in tax rate
--	4	Tax-on-tax (Canada, Singapore)

Canadian tax system

For both add-on and add-in tax systems.



To program Tax-on-tax system, you must use the tax address "0225", "0325" or "0425."

To program Donuts tax system, you must use the tax address "0125" or "0225."

Example 1:

Add-on rate tax

Tax rate (2-digit for integer + 4-digit for decimal)	8.25%	
Tax table maximum value ("0" means unlimited).	0 (no limitation)	
Rounding/tax table system code	5002 (Round off)	
Sum of a cyclic pattern	0	} No need to enter.
Number of values in each cyclic pattern	0	
Number of values in each non-cyclic pattern	0	
Actual value of difference of the non-cyclic and cyclic values	0	

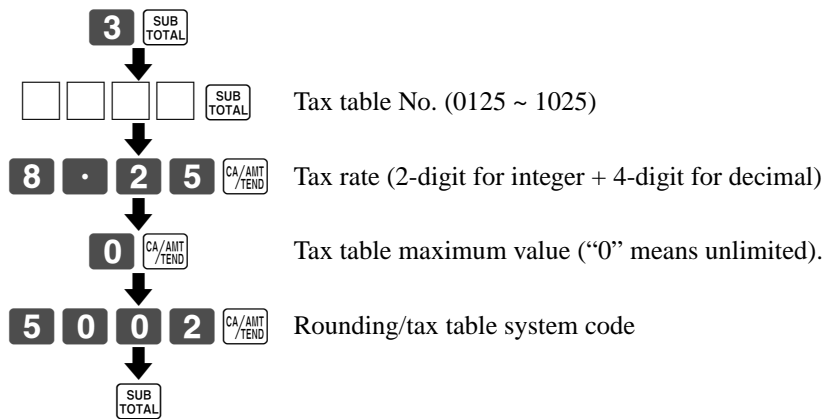



Key function/machine feature (P3)

Example 2:

U.S. tax table without rate setting

TAX (6%)	Price range		Max. break point		Difference	Pattern
	Min. break point	Max. break point	Upper	Lower		
\$.00	\$.01	\$.10	10	0	10	Non cyclic
.01	.11	.24	24	10	14	
.02	.25	.41	41	24	17	Cyclic
.03	.42	.58	58	41	17	
.04	.59	.74	74	58	16	Cyclic
.05	.75	.91	91	74	17	
.06	.92	1.08	108	91	17	Cyclic
.07	1.09	1.24	124	108	16	
		1.41	141	124	17	Cyclic

Tax rate (2-digit for integer + 4-digit for decimal) 0 % (Table only)
 Tax table maximum value ("0" means unlimited). 0 (Table only)
 Rounding/tax table system code 01 (Table only)
 Sum of a cyclic pattern 50 (17+17+16)
 Number of values in each cyclic pattern 3
 Number of values in each non-cyclic pattern 24 (10+14)
 Actual value of difference of the non-cyclic and cyclic values 10, 14, 17, 17, 16

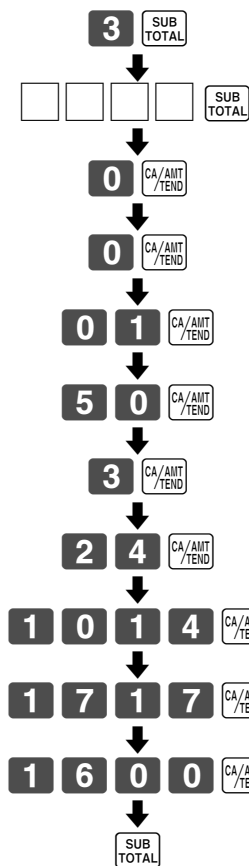

Tax table No. (0125 ~ 0325)

Tax rate (2-digit for integer + 4-digit for decimal)

Tax table maximum value ("0" means unlimited).

Rounding/tax table system code

Sum of a cyclic pattern

Number of values in each cyclic pattern

Sum of values in each non-cyclic pattern

Actual value of difference of the non-cyclic and cyclic values.

You must enter these values in 4-digit block. If the last block comes out to be only two digits, add two zeros.


Example 3:

U.S. tax table with rate setting

TAX (7%)	Price range		Max. break point		Difference	Pattern
	Min. break point	Max. break point	Upper	Lower		
\$.00	\$.01	\$.07	7	0	7	Non-cyclic
.01	.08	.21	21	7	14	Cyclic
.02	.22	.35	35	21	14	
.03	.36	.49	49	35	14	
.04	.50	.64	64	49	15	
.05	.65	.78	78	64	14	
.06	.79	.92	92	78	14	
.07	.93	1.07	107	92	15	Cyclic
.08	1.08	1.21	121	107	14	
.09	1.22	1.35	135	121	14	
.10	1.36	1.49	149	135	14	
.11	1.50	1.64	164	149	15	
.12	1.65	1.78	178	164	14	
.13	1.79	1.92	192	178	14	
.14	1.93	2.07	207	192	15	
1.40	19.93	20.07				

One all sales above \$20.07, compute the tax at the rate of 7%.

- Tax rate (2-digit for integer + 4-digit for decimal) 7 %
- Tax table maximum value ("0" means unlimited). 2007
- Rounding/tax table system code 0002 (Cut off & table + rate)
- Sum of a cyclic pattern 100 (14+14+14+15+14+14+15)
- Number of values in each cyclic pattern 7
- Number of values in each non-cyclic pattern 7
- Actual value of difference of the non-cyclic and cyclic values 14, 14, 14, 15, 14, 14, 15

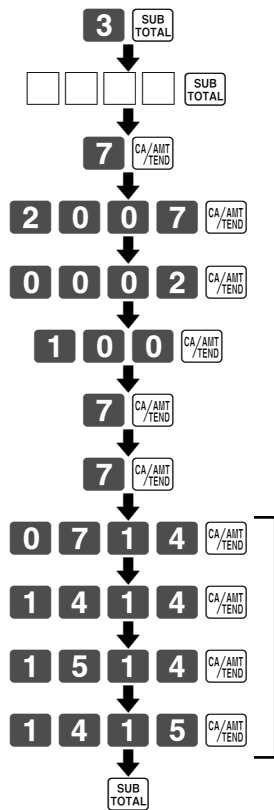


- □ □ □ SUB TOTAL Tax table No. (0125 ~ 0325)
 - 7 CA/AMT/TEND Tax rate (2-digit for integer + 4-digit for decimal)
 - 2 0 0 7 CA/AMT/TEND Tax table maximum value ("0" means unlimited).
 - 0 0 0 2 CA/AMT/TEND Rounding/tax table system code
 - 1 0 0 CA/AMT/TEND Sum of a cyclic pattern
 - 7 CA/AMT/TEND Number of values in each cyclic pattern
 - 7 CA/AMT/TEND Sum of values in each non-cyclic pattern
 - 0 7 1 4 CA/AMT/TEND
 - 1 4 1 4 CA/AMT/TEND
 - 1 5 1 4 CA/AMT/TEND
 - 1 4 1 5 CA/AMT/TEND
 - Actual value of difference of the non-cyclic and cyclic values.
- You must enter these values in 4-digit block. If the last block comes out to be only two digits, add two zeros.*

Key function/machine feature (P3)

Example 4:

Add-in rate tax

Tax rate (2-digit for integer + 4-digit for decimal) 10.00 %
 Rounding/tax table system code 0003 (Cut off)

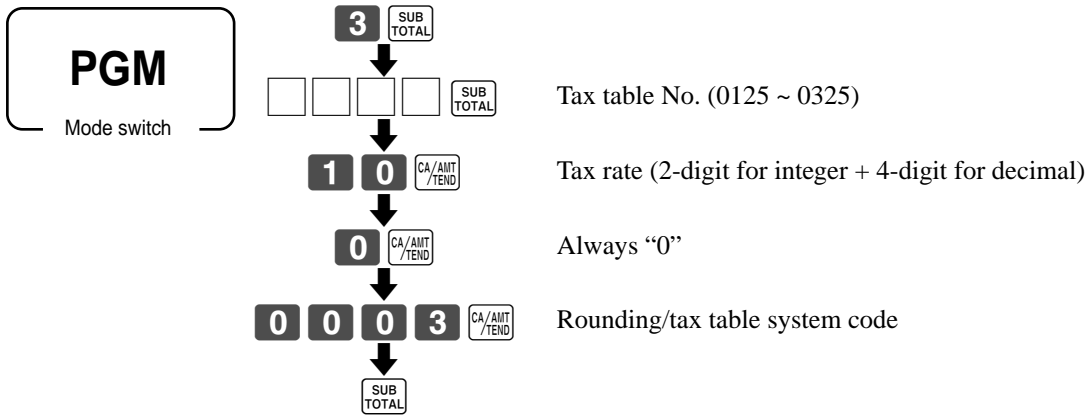

Example 5:

Singapore tax




Tax table 1 Country tax 1%
 Round off/tax on tax 5044


Tax table 2 Service charge 10%
 Round off/tax on tax 5044

Tax table 3 GST 3%
 Round off 5002


Tax table 1

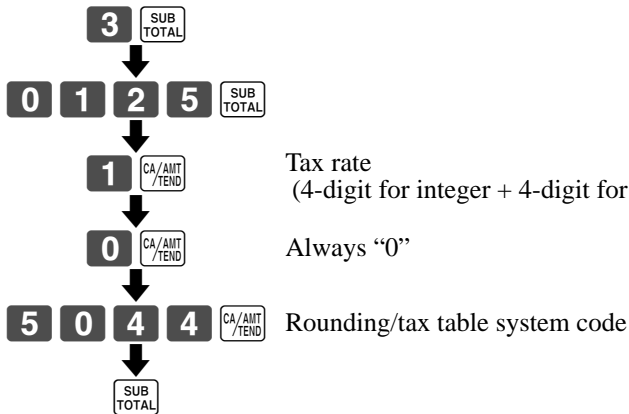

Tax table 2

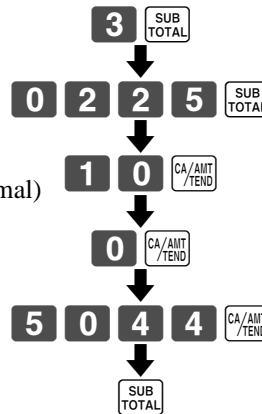


Tax table 3

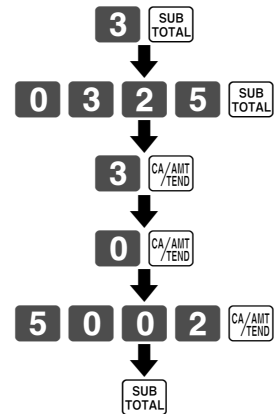


Set menu programming

Programming procedure

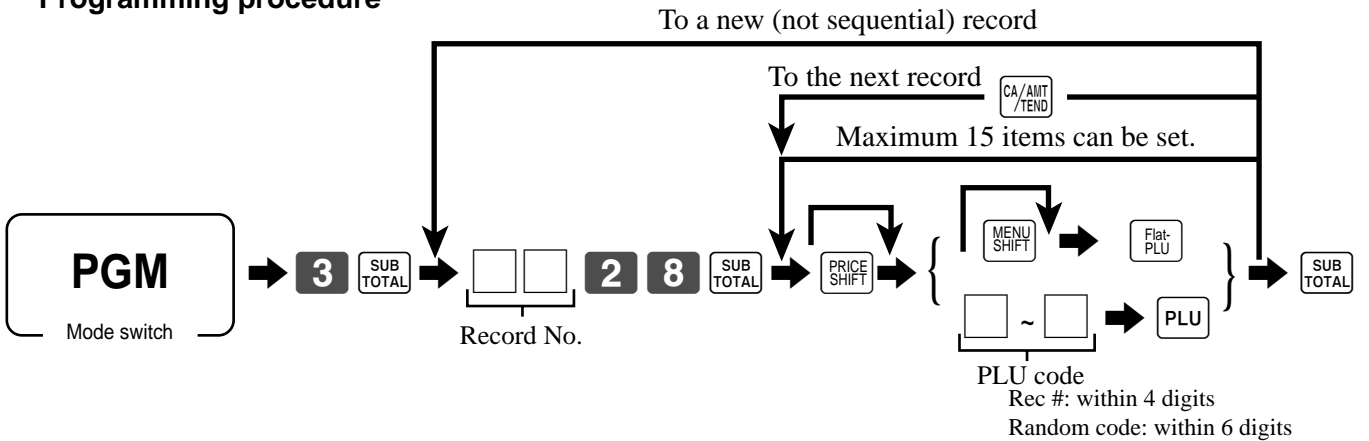

Batch X/Z report programming

Programming procedure

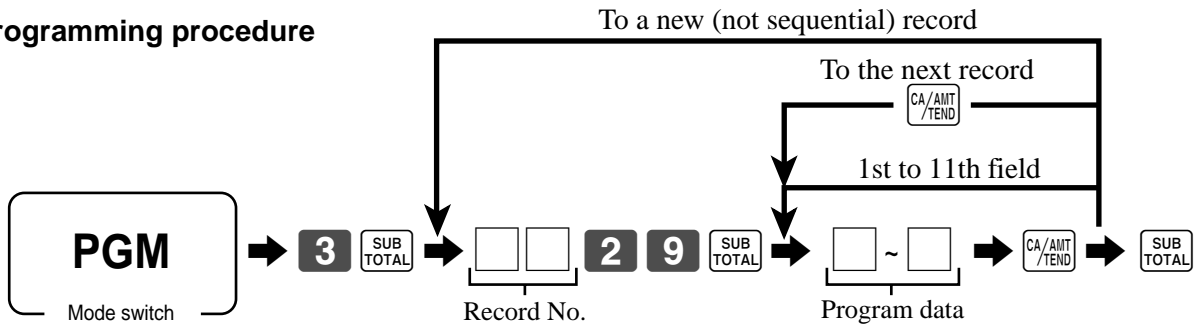

Program data

Control flag (1st field)

Description	Choice	Program code
Disable operation in X1 mode.	a No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₂
Disable operation in Z1 mode.	b No = 0 Yes = 2	
Disable operation in X2/Z2 mode.	c No = 0 Yes = 4	
Report contents in the X2/Z2 mode: • Read report of periodic total 1 = 0 • Reset report of periodic total 1 = 1 • Read report of periodic total 2 = 2 • Reset report of periodic total 2 = 3	Significant number	<input type="checkbox"/> D ₁


Report code (2nd ~ 11th field)

Description	Choice	Program code
Report code: Fixed totalizer = 11, Transaction key = 12, Subdepartment = 13, PLU = 14, PLU by group = 24, Department = 15, Group = 16, Clerk = 17, Time zone = 19, Monthly = 20, Scanning PLU = 26, Table analysis = 28, Employee = 29, Hourly item = 31, Mix & match = 61, PLU stock = 64, PLU stock by group = 34	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Key function/machine feature (P3)

Hourly item (time range) programming

Programming procedure

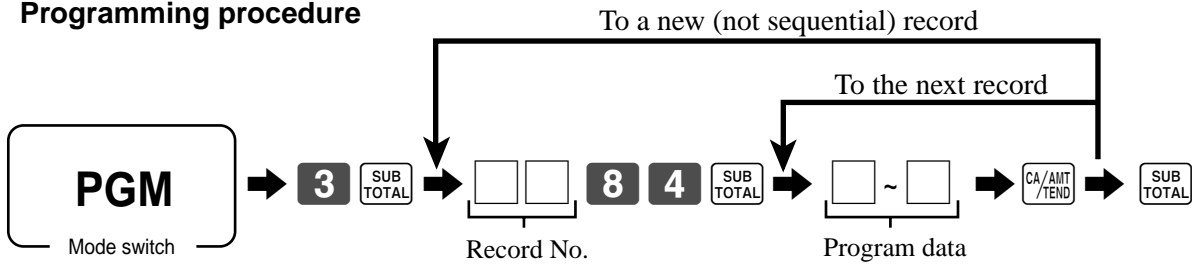


Program data

Description	Choice	Program code
Start time (hour: 00 ~ 23)	Significant numbers	<input type="text"/> <input type="text"/> D ₈ D ₇
Start time (minute: 00 ~ 59)	Significant numbers	<input type="text"/> <input type="text"/> D ₆ D ₅
End time (hour: 00 ~ 23)	Significant numbers	<input type="text"/> <input type="text"/> D ₄ D ₃
End time (minute: 00 ~ 59)	Significant numbers	<input type="text"/> <input type="text"/> D ₂ D ₁


Hourly item (link item) programming

Programming procedure

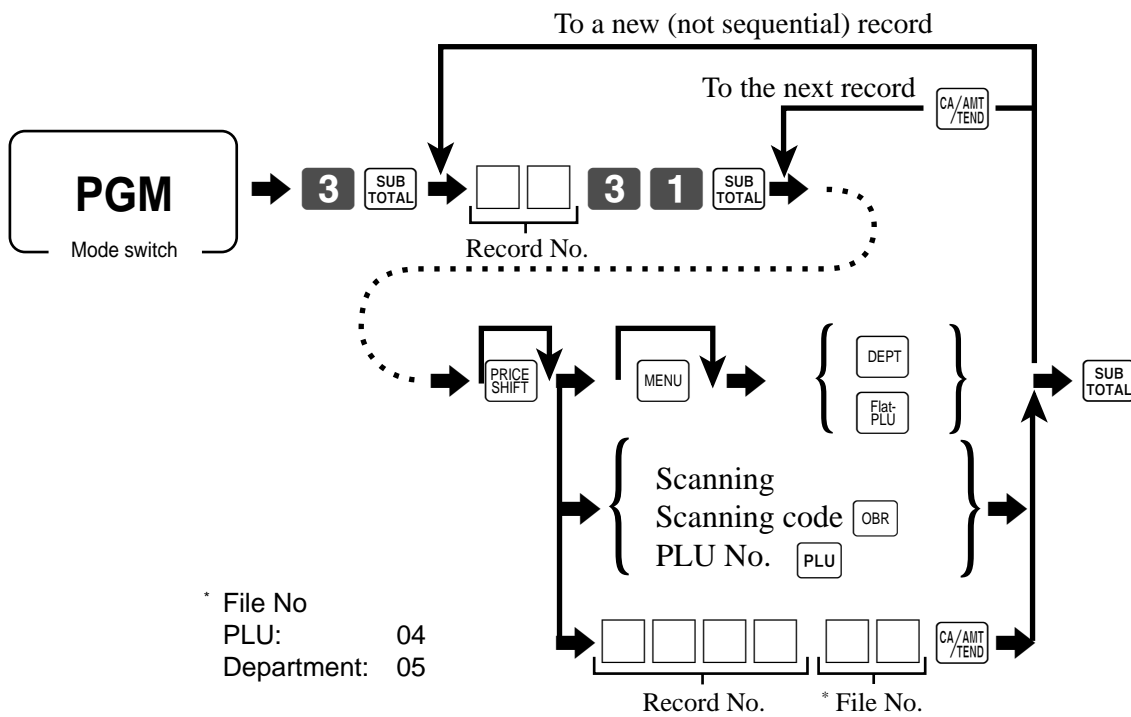

Arrangement programming

Programming procedure

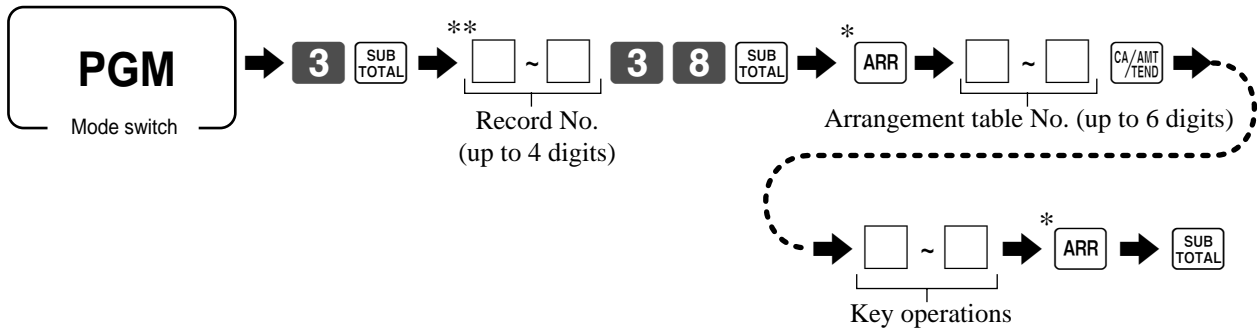


* The same **ARR** should be pressed.

** Vacant record search: If you want to set an arrangement program to a new record, “vacant record search” is possible. (enter **0 0 0 0** instead of entering a record No.)

Check print control programming

Programming procedure

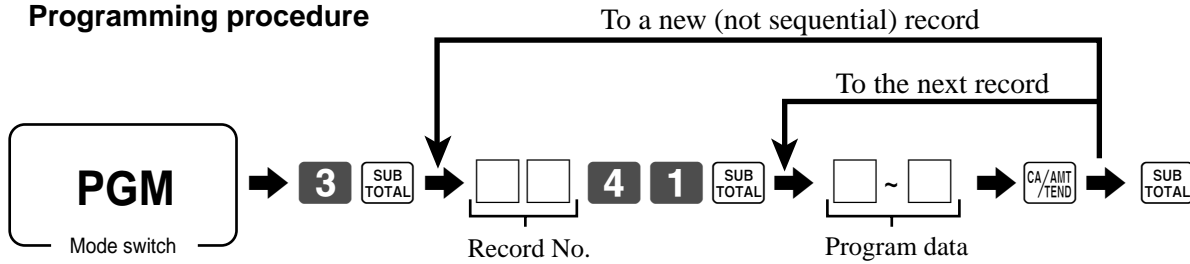

Program data


Description	Choice	Program code
Define printing data: 1: Printing amount, 2: Printing amount (double size), 3: Printing date, 4: Printing date (double size) 5: Check endorsement message 1st line, 6: Check endorsement message 2nd line, 7: Check endorsement message 3rd line, 8: Check endorsement message 4th line	Significant number	<input type="text"/> D ₅
Feed before printing.	a No = 0 Yes = 1	<input type="text"/> (a+b+c) D ₄
Feed direction	b Normal = 0 Reverse = 2	
Feed one line after printing. *	c No = 0 Yes = 4	
No. of feed lines before printing (0 ~ 9)	Significant number	<input type="text"/> D ₃
Printing offset digits (00 ~ 39)	Significant numbers	<input type="text"/> <input type="text"/> D ₂ D ₁

* If you set “0” to this option, one line back feed is made automatically.

Key function/machine feature (P3)

Mix & match programming

Programming procedure

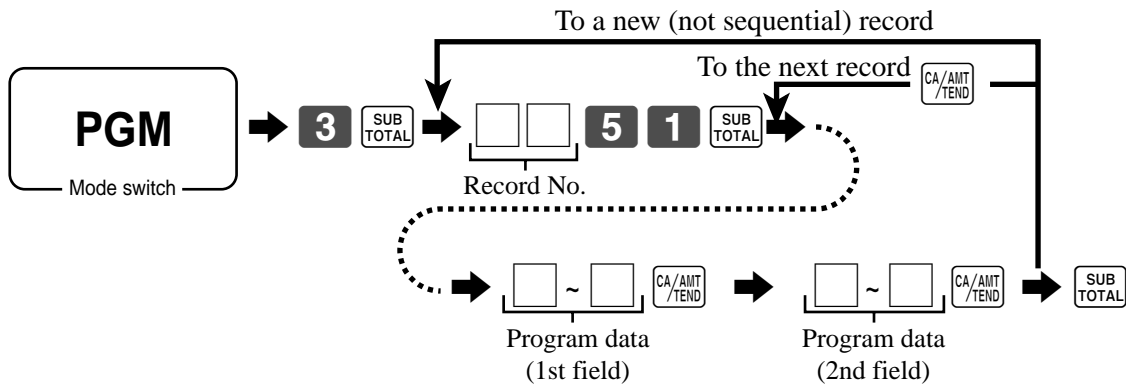

Program data

Description	Choice	Program code
• Amount (1st field)		
Discount amount	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁
• Flag (2nd field)		
Taxable status (see below)		<input type="text"/> <input type="text"/> D ₆ D ₅
Always "0"		<input type="text"/> D ₄
Mix & match type*: Discount 1 = 0: Discount every required quantity Discount 2 = 1: Discount once Discount 3 = 2: Discount continuously	Significant number	<input type="text"/> D ₃
Mix & match required quantity	Significant numbers	<input type="text"/> <input type="text"/> D ₂ D ₁

* Example: (item unit price = \$3.00, required quantity = 3, discount amount = \$0.50)

- Discount 1: \$3.00, \$3.00, \$2.50, \$3.00, \$3.00, \$2.50, \$3.00, \$3.00, \$2.50 ...
- Discount 2: \$3.00, \$3.00, \$2.50, \$3.00, \$3.00, \$3.00, \$3.00, \$3.00, \$3.00 ...
- Discount 3: \$3.00, \$3.00, \$2.50, \$2.50, \$2.50, \$2.50, \$2.50, \$2.50, \$2.50 ...

Taxable status

for the U.S./Singapore

Food stamp (for Singapore, always "0")	No = 0 Yes = 1	<input type="text"/> D ₆
Taxable 1 status	a No = 0 Yes = 1	<input type="text"/> (a+b+c) D ₅
Taxable 2 status	b No = 0 Yes = 2	
Taxable 3 status	c No = 0 Yes = 4	

for Canada


Donuts status (D ₈ D ₇ ="99" means donuts and all taxable.)	No = 0 Yes = 1	<input type="text"/> D ₆
Non tax = 0 Taxable 1 = 1 Taxable 2 = 2 Taxable 3 = 3 Taxable 4 = 4 Taxable 5 = 5 Taxable 6 = 6 Taxable 1 & 2 = 5	Taxable 1 & 3 = 6 Taxable 1 & 4 = 7	Significant number <input type="text"/> D ₅

for Other area

Non tax = 0 Taxable 1 = 1 Taxable 2 = 2 Taxable 3 = 3 Taxable 4 = 4 Taxable 5 = 5 Taxable 6 = 6 Taxable 7 = 7 Taxable 8 = 8 Taxable 9 = 9 Taxable 10 = 10 All taxable = 99	Significant numbers	<input type="text"/> <input type="text"/> D ₆ D ₅
---	---------------------	--

Backlight color control programming

Programming procedure

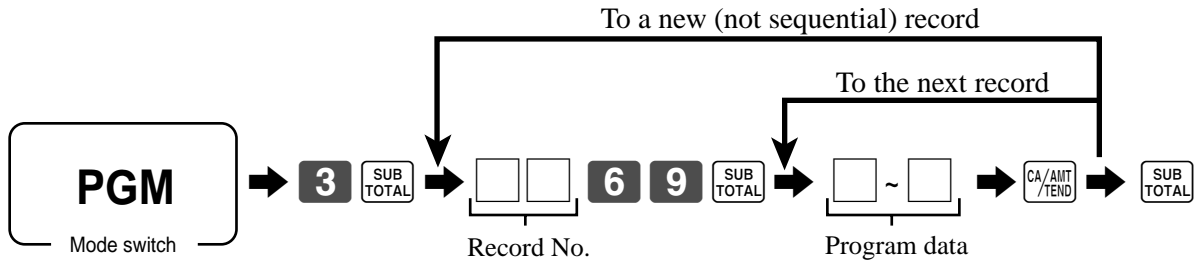

Program data


Description	Choice	Program code
Backlight color during master cut off: 1. Pastel green, 2. Pastel pink, 3. White, 4. Green, 5. Red	Significant number	<input type="text"/> D ₇
Backlight color during busy: 1. Pastel green, 2. Pastel pink, 3. White, 4. Green, 5. Red	Significant number	<input type="text"/> D ₆
Backlight color in error condition: 1. Pastel green, 2. Pastel pink, 3. White, 4. Green, 5. Red	Significant number	<input type="text"/> D ₅
Backlight color in RF, REG- mode: 1. Pastel green, 2. Pastel pink, 3. White, 4. Green, 5. Red	Significant number	<input type="text"/> D ₄
Backlight color in Z mode: 1. Pastel green, 2. Pastel pink, 3. White, 4. Green, 5. Red	Significant number	<input type="text"/> D ₃
Backlight color during review: 1. Pastel green, 2. Pastel pink, 3. White, 4. Green, 5. Red	Significant number	<input type="text"/> D ₂
Backlight color in other scene: 1. Pastel green, 2. Pastel pink, 3. White, 4. Green, 5. Red	Significant number	<input type="text"/> D ₁

Programming "0", "6 ~ 9" means no backlight (turned-off).

Refer to the address 34 of the general control program (backlight control).

Employee number programming

Programming procedure

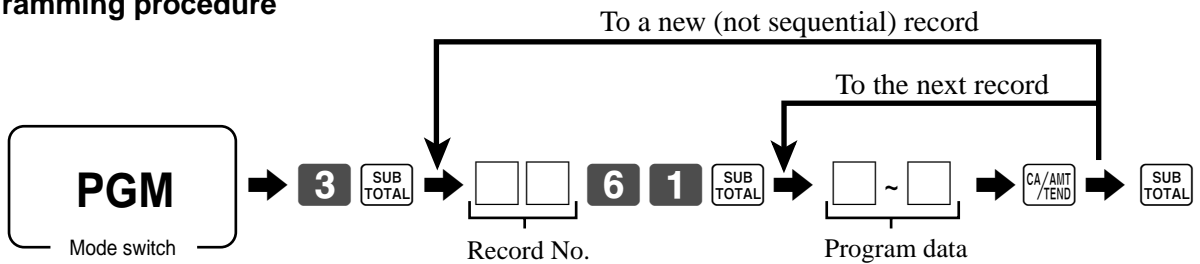


Program data

Description	Choice	Program code
Employee number (000000001 ~ 999999999)	Significant numbers	<input type="text"/> <input type="text"/> ~ <input type="text"/> <input type="text"/> D ₁₀ D ₉ ~ D ₂ D ₁

Key function/machine feature (P3)

Scheduler programming

Programming procedure

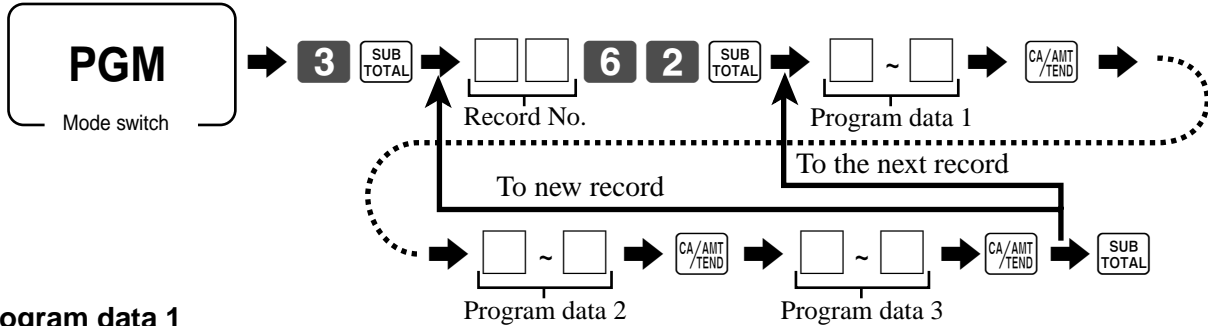

Program data 1

Description	Choice	Program code
Designate clerk by record number ("00" means the first record.)	Significant numbers	<input type="text"/> <input type="text"/> D ₆ D ₅
Scheduler type 1: Execute one time = 0, Execute every day = 1, Execute every week = 2	Significant number	<input type="text"/> D ₄
Scheduler type 2: Execute even if the cash register is in the OFF mode = 0, Not execute if the cash register is in the OFF mode = 1	Significant number	<input type="text"/> D ₃
Execute kind: Switch menu shift/price shift = 0, Arrangement = 1, Job command = 2	Significant number	<input type="text"/> D ₂
Wait until the drawer (compulsory drawer) is closed.	Yes = 0 No = 1	<input type="text"/> D ₁

Program data 2

Description	Choice	Program code
• Execute kind: Switch menu shift/price shift		
Switch to: 1st menu sheet = 1, 2nd menu sheet = 2, 3rd menu sheet = 3, 4th menu sheet = 4, 5th menu sheet = 5, 6th menu sheet = 6, No change = 0	Significant number	<input type="text"/> D ₂
Switch to: 1st price = 1, 2nd price = 2, 3rd price = 3, No change = 0	Significant number	<input type="text"/> D ₁
• Execute kind: Arrangement		
Arrangement table record No.	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁
• Execute kind: Job command * Refer to the "Job command" table.		
Job command No.	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₁₄ D ₁₃ D ₁₂ D ₁₁ D ₁₀ D ₉
Destination terminal No. or group No. (effective the register with I/O-PB-17 only)	Significant numbers	<input type="text"/> <input type="text"/> D ₈ D ₇
Always "0"		<input type="text"/> 0 D ₆
Job command parameter	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₅ D ₄ D ₃ D ₂ D ₁

Program data 3

Description	Choice	Program code
Execute year (00 ~ 88; means 2000 ~ 2088)	Significant numbers	<input type="text"/> <input type="text"/> D ₁₀ D ₉
Execute month (01 ~ 12, "00" means no programming)	Significant numbers	<input type="text"/> <input type="text"/> D ₈ D ₇
Execute day or execute day of a week: Day (01 ~ 31 "00" means no programming) (Day of a week; Sunday = 00, Monday = 01, Tuesday = 02, Wednesday = 03, Thursday = 04, Friday = 05, Saturday = 06)	Significant numbers	<input type="text"/> <input type="text"/> D ₆ D ₅
Execute hour (00 ~ 23)	Significant numbers	<input type="text"/> <input type="text"/> D ₄ D ₃
Execute minute (00 ~ 59)	Significant numbers	<input type="text"/> <input type="text"/> D ₂ D ₁

Job command table


Description	Job No.	Group/terminal ID	Parameter
Default menu sheet number after signing on. (D ₃ of address code 70 of clerk programming)	030770	00	0cddee
Disabled menu sheet number (D ₂ D ₁ of address code 70 of clerk programming)	030771	00	fgddee
Change the backlight color	030069	00	00000h
Switching to dual (Euro/local) currency system to Euro only system	200107	00	002002
Batch maintenance activation	074070	00	000000
Consolidation of Not found PLU file (After completion, file is not reset)	301111	00	000072
Consolidation of Not found PLU file (After completion, file is reset)	311111	00	001072
Not found PLU maintenance activation	074072	00	000000
Inline consolidation for all terminals/terminals by a group (daily sales read)	301111	00 (all) 0A (A:group No.)	0x0xxx x0xxx: report code
Inline consolidation for all terminals/terminals by a group (daily sales reset)	311111	00 (all) 0A (A:group No.)	0x1xxx x1xxx: report code
Inline consolidation for all terminals/terminals by a group (periodic sales read)	321111	00 (all) 0A (A:group No.)	0x0xxx x0xxx: report code
Inline consolidation for all terminals/terminals by a group (periodic sales reset)	321111	00 (all) 0A (A:group No.)	0x1xxx x1xxx: report code
Inline consolidation for terminal by terminal (daily sales read)	302222	Terminal ID. (2-digits)	0x0xxx x0xxx: report code
Inline consolidation for terminal by terminal (daily sales reset)	312222	Terminal ID. (2-digits)	0x1xxx x1xxx: report code
Inline consolidation for terminal by terminal (periodic sales read)	322222	Terminal ID. (2-digits)	0x0xxx x0xxx: report code
Inline consolidation for terminal by terminal (periodic sales reset)	322222	Terminal ID. (2-digits)	0x1xxx x1xxx: report code
Inline auto-program for all terminals	070050	00	000ppp ppp:command code
Inline auto-program for individual terminal	070050	Terminal ID. (2-digits)	000ppp ppp:command code
Inline auto-program for terminals by a group	070051	0A (A:group No.)	000ppp ppp:command code
Format CF card	070270	00	000000
Save programming data to CF card.	070070	00	000ppp ppp:command code
Load programming data from CF card.	070020	00	000ppp ppp:command code
Delete file in CF card.	070030	00	000ppp ppp:command code

- c: Input default menu sheet number (0 ~ 6). (This automatically changes the D₃ value of address 70 of clerk programming by job command.)
 f: Program restrictive status of menu sheet 1 ~ 3. (This automatically changes the D₂ value of address 70 of clerk programming by job command.)
 g: Program restrictive status of menu sheet 4 ~ 6. (This automatically changes the D₁ value of address 70 of clerk programming by job command.)
 dd: Input the start record number of clerk.
 ee: Input the end record number of clerk.
 h: Backlight color control program = D₃ of the address 34 of the general function program

Key function/machine feature (P3)


Bottle link table programming

Programming procedure

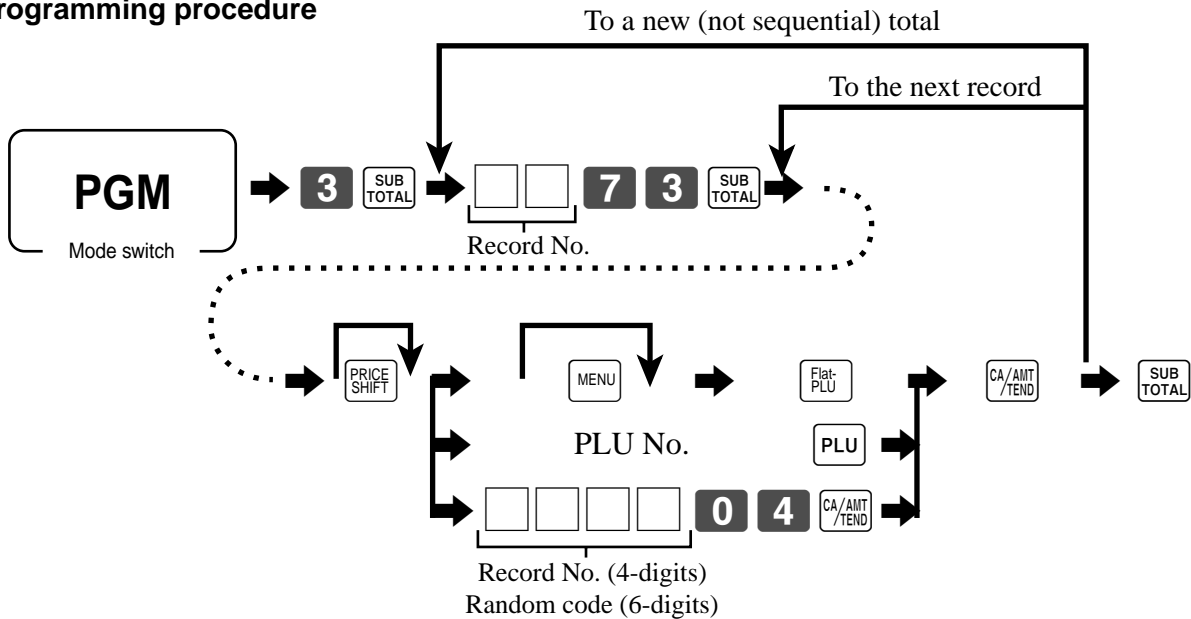

Terminal connection table programming

Programming procedure

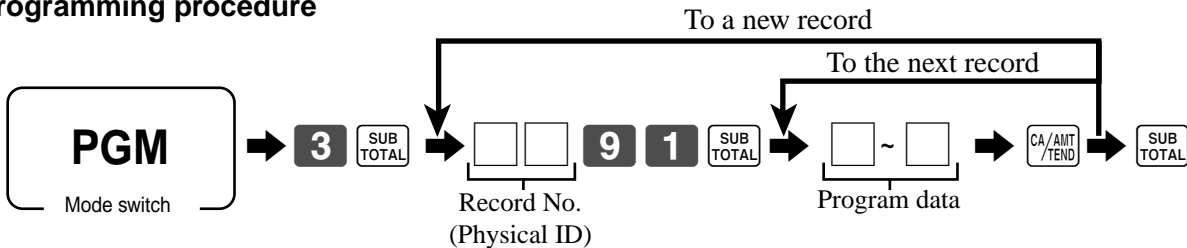

Note: Please follow step 1 and 2, after this program.

1. Send this (terminal connection table) file to all terminals.
2. Perform flag clear operation of all terminals.


Program data

Description	Choice	Program code
Terminal condition: Active = 1, Inactive * = 0	Significant number	<input type="checkbox"/> D ₄
Check tracking master: (program value) Self master = 0, Master = 1, Satellite = 2	Significant number	<input type="checkbox"/> D ₃
Check tracking master: (current status) Behaves as D ₃ program = 0, Behaves as self master (master is cutoff).		<input type="checkbox"/> D ₂
Inline group No. (0 ~ 9) ("0" means no group link.)	Significant number	<input type="checkbox"/> D ₁

* Inactive: No data is sent/received from/to other terminal(s).

I/O parameter table programming

Programming procedure

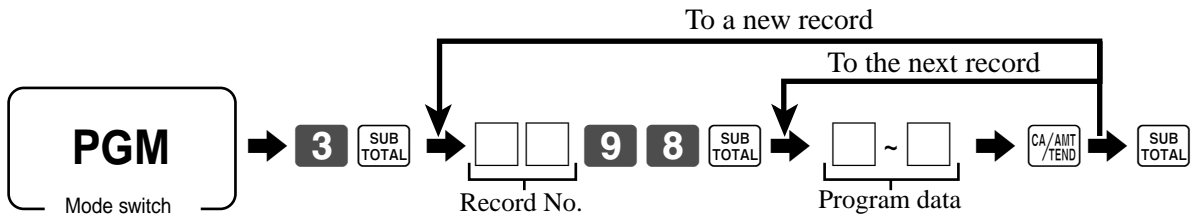

Note: Please perform the following procedure after this program.

1. Power off the register, and connect all peripheral devices to COM ports.
2. Power on all peripheral devices.
3. Flag clear the register.

Program data (Address 01: for COM 1 port)

Description	Choice	Program code
International character set number for external/slip printer: 00: U.S.A., 01: France, 02: German, 03: U.K., 04: Denmark(1), 05: Sweden, 06: Italy, 07: Spain(1), 09: Norway, 10: Denmark(2)	Significant numbers	<input type="text"/> <input type="text"/> D ₁₆ D ₁₅
International character set page number for external/slip printer: For SP-1300: 0000: Multilingual + Euro, 0002: Multilingual, 0003: Portuguese, 0004: Canadian French, 0005: Nordic, 0006: Slavic, 0007: Cyrillic, 0008: Turkish, 0009: Windows code page For other printers: 0000: Multilingual + Euro, 0002: Multilingual, 0003: Portuguese, 0004: Canadian French, 0005: Nordic	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₁₄ D ₁₃ D ₁₂ D ₁₁
Always "0000"		<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₁₀ D ₉ D ₈ D ₇
External printer: UP-350 = 00, UP-250 = 01	Significant numbers	<input type="text"/> <input type="text"/> D ₆ D ₅
Connected device: PC/ECR direct connection = 00, MODEM = 30, External printer (as external printer 1 in printer connection table) = 80, External printer (as external printer 2 in printer connection table) = 81	Significant numbers	<input type="text"/> <input type="text"/> D ₄ D ₃
Baud rate: Refer to the baud rate/device table.	Significant number	<input type="text"/> D ₂
Always "0"		<input type="text"/> D ₁

Program data (Address 02: for COM 2 port)

Description	Choice	Program code
External printer/slip printer/scanner: • External printer (D ₄ D ₃ = 80, 81): UP-350 = 00, UP-250 = 01 • Slip printer (D ₄ D ₃ = 70): SP-1300 = 00 • Scanner (D ₄ D ₃ = 20): HHS-15 = 00, Quick Scan 6000 = 01	Significant numbers	<input type="text"/> <input type="text"/> D ₆ D ₅
Connected device: Scanner = 20, Slip printer = 70, External printer (as external printer 1 in printer connection table) = 80, External printer (as external printer 2 in printer connection table) = 81	Significant numbers	<input type="text"/> <input type="text"/> D ₄ D ₃
Baud rate: Refer to the baud rate/device table.	Significant number	<input type="text"/> D ₂
Always "0"		<input type="text"/> D ₁

D₁₆ ~ D₇: refer to the worksheet of the address 01.

Key function/machine feature (P3)

Program data (Address 03: for COM 3 port)

Description	Choice	Program code
External printer/slip printer/scale: • External printer (D ₄ D ₃ = 80, 81): UP-350 = 00, UP-250 = 01 • Slip printer (D ₄ D ₃ = 70): SP-1300 = 00	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅
Connected device: Scale = 10, Slip printer = 70, External printer (as external printer 1 in printer connection table) = 80, External printer (as external printer 2 in printer connection table) = 81	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃
Baud rate: Refer to the baud rate/device table.	Significant number	<input type="checkbox"/> D ₂
Always "0"		<input type="checkbox"/> D ₁

D₁₆ ~ D₇: refer to the worksheet of the address 01.

Program data (Address 04: for inline port)


Description	Choice	Program code
Baud rate: 312 kbps = 0, 156 kbps = 1	Significant number	<input type="checkbox"/> D ₃
Physical ID No. (01 ~ 32)		<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

Reference (Baud rate/device table)

Device	Default baud rate	Other selection	
Scanner (HHS-15)	2400bps (D ₂ = 0)	9600bps (D ₂ = 2)	4800bps (D ₂ = 3)
Scanner (Quick Scan 6000)	9600bps (D ₂ = 0)	4800bps (D ₂ = 3)	2400bps (D ₂ = 4)
Scale (NCI6710)	4800bps (D ₂ = 0)	9600bps (D ₂ = 2)	
External printer (UP-350)	9600bps (D ₂ = 0)	19200bps (D ₂ = 1)	
External printer (UP-250)	9600bps (D ₂ = 0)	None	
Slip printer (SP-1300)	9600bps (D ₂ = 0)	None	
MODEM	19200bps (D ₂ = 0)	9600bps (D ₂ = 2)	4800bps (D ₂ = 3)
PC/ECR direct connection	19200bps (D ₂ = 0)	None	

Printer connection table programming

Programming procedure

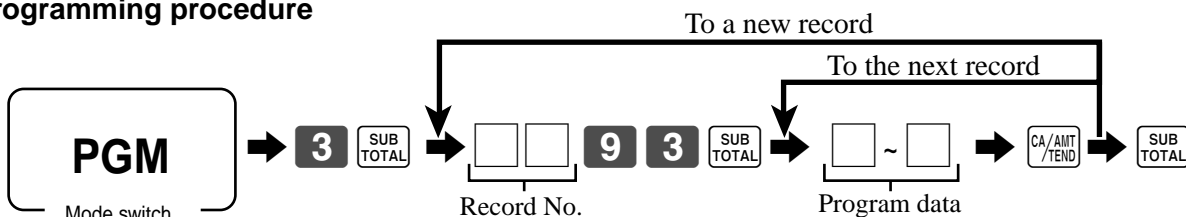


Program data

Description	Choice	Program code
Printout type: Receipt (1) = 00, Receipt (2) = 01, Receipt (3) = 02, Report* = 10, Order (1) = 20, Order (2) = 21, Order (3) = 22	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₁₀ D ₉
Inline ID of main printout destination: (01 ~ 32) ("00" means R/J printer.)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₈ D ₇
Printout destination (Main): R/J printer = 00, External printer 1 = 01, External printer 2 = 02	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅
Inline ID of backup printout destination: (01 ~ 32) ("00" means R/J printer.)	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₄ D ₃
Printout destination (Backup): R/J printer = 00, External printer 1 = 01, External printer 2 = 02	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₂ D ₁

* Reports can be issued only by its own R/J printer or by the external printer connected to the activated terminal (local printer).

Non PLU table programming

Programming procedure

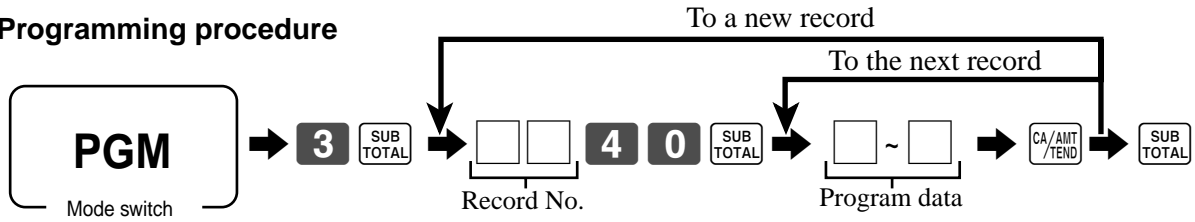


Program data


Description	Choice	Program code
Non PLU type: Short version = 0, Long version = 1, Weight (12-digit) version = 7, Weight (13-digit) version = 8	Significant number	<input type="checkbox"/> D ₁₆
Price check digit is included in the price field.	No = 0 Yes = 1	<input type="checkbox"/> D ₁₅
Price × 10 ⁿ	Significant number	<input type="checkbox"/> D ₁₄
Number of digits for price/weight	Significant number	<input type="checkbox"/> D ₁₃
Always "0000000"		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₁₂ D ₁₁ D ₁₀ D ₉ D ₈ D ₇ D ₆
Number of digits for scanning PLU search code	Significant number	<input type="checkbox"/> D ₅
Flag code: Number of digits for flag (1 ~ 3)	Significant number	<input type="checkbox"/> D ₄
Flag code: Actual value	Significant numbers	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> D ₃ D ₂ D ₁

Program sample


- Long version barcode (with price check digit)




- Long version barcode (without price check digit)




- Short version barcode



- Weight version barcode (12-digit)



- Weight version barcode (13-digit)




Key function/machine feature (P3)

Scanning PLU maintenance programming

Batch maintenance PLU programming


Programming procedure

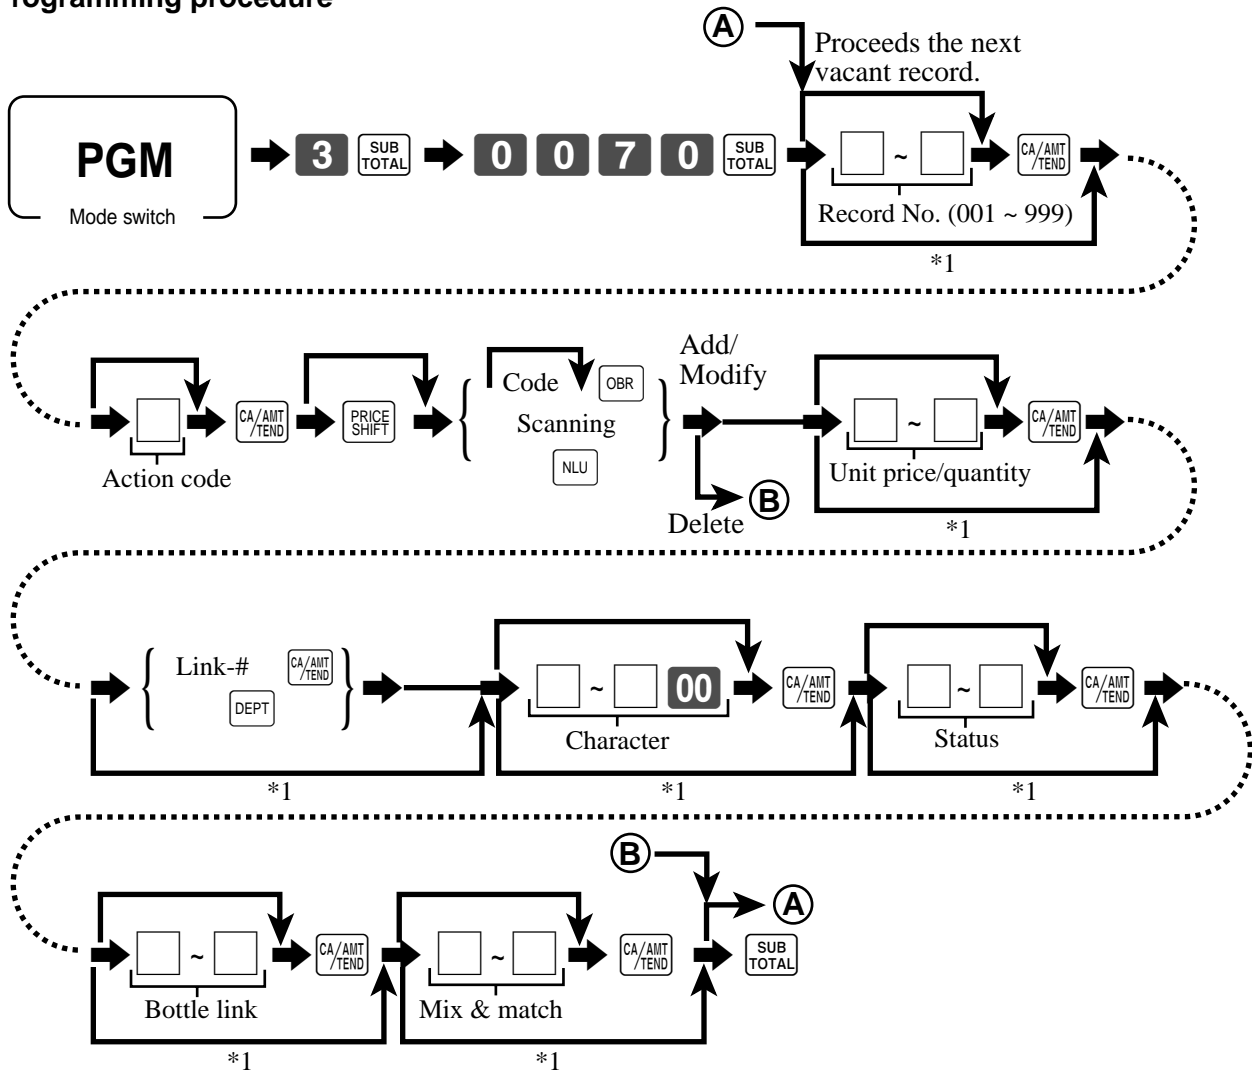

*1 Skip by general function programming address code 33.


Activation of batch maintenance PLU

Activation procedure

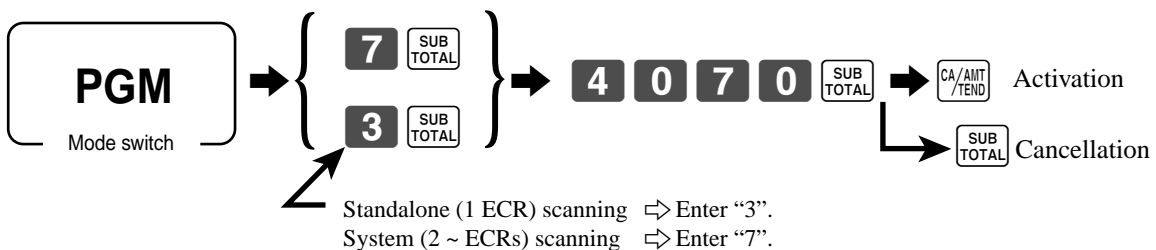

Not found PLU maintenance programming


Programming procedure

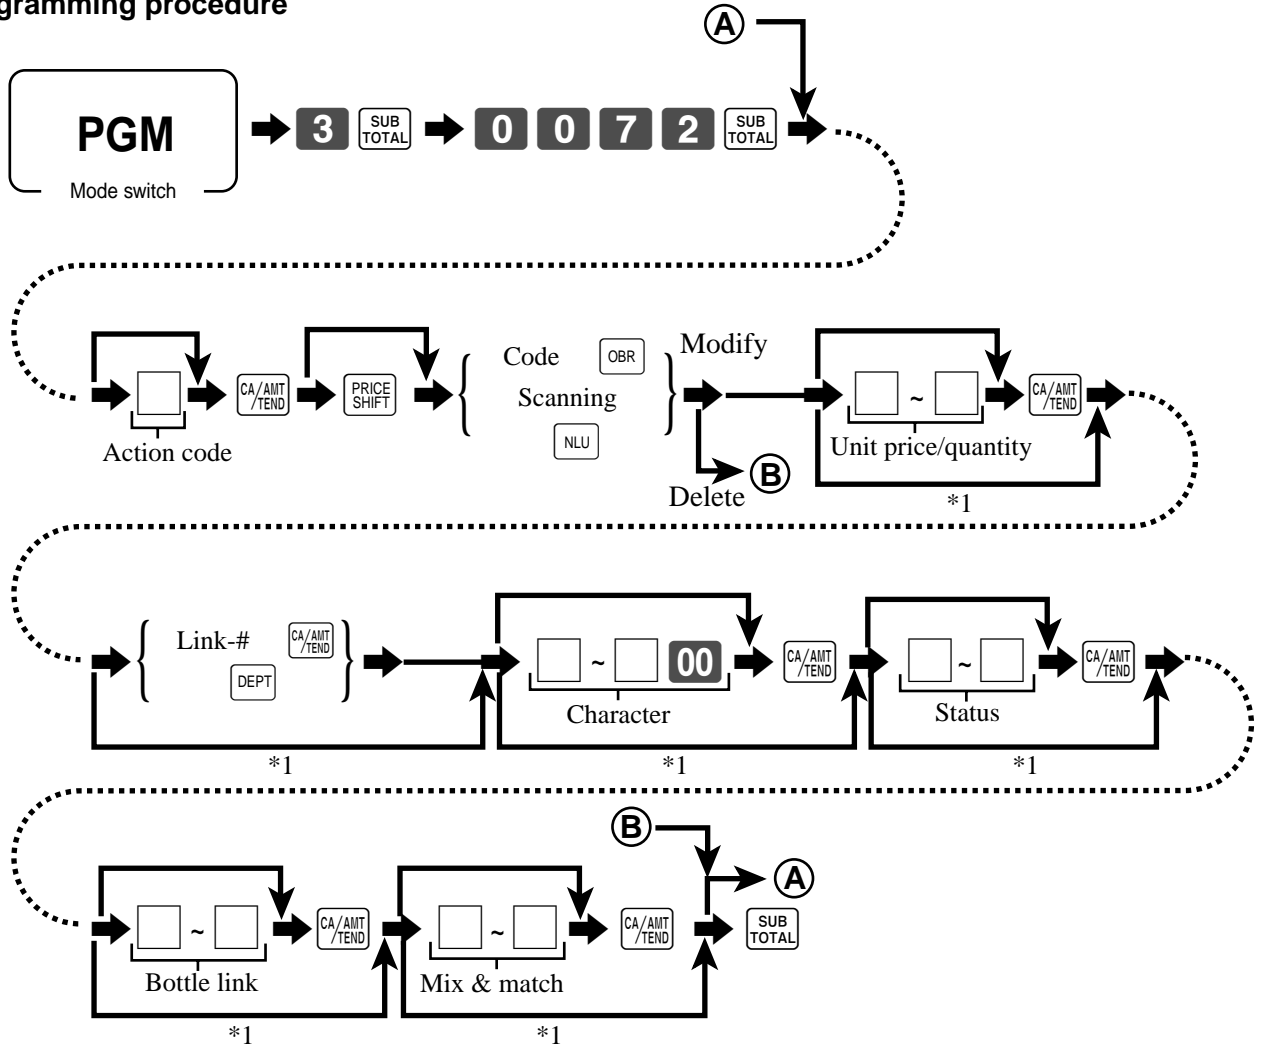

*1 Skip by general function programming address code 33.

Activation of Not found PLU maintenance


Activation procedure

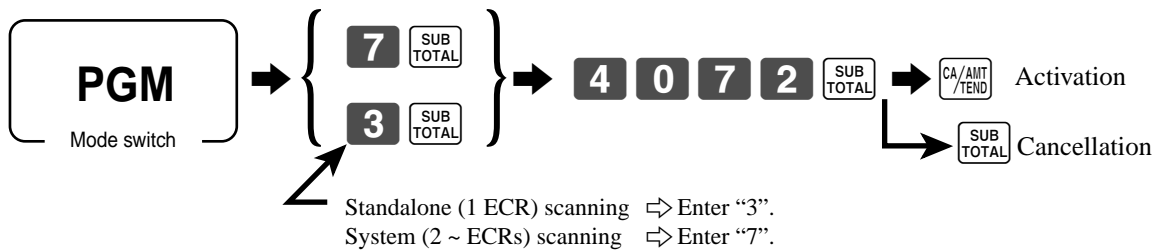

Key function/machine feature (P3)


Scanning PLU direct maintenance programming

Programming procedure

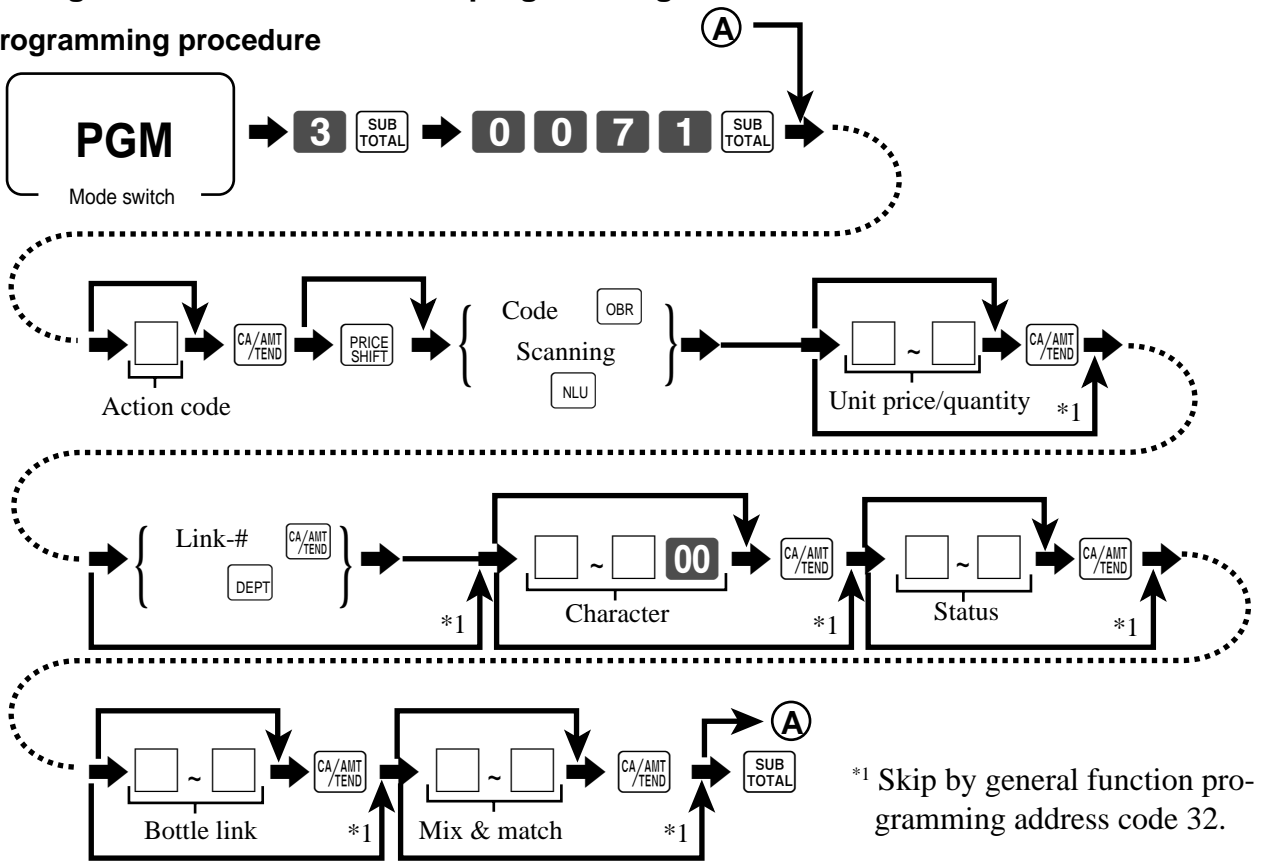

Scanning PLU individual programming

Programming procedure

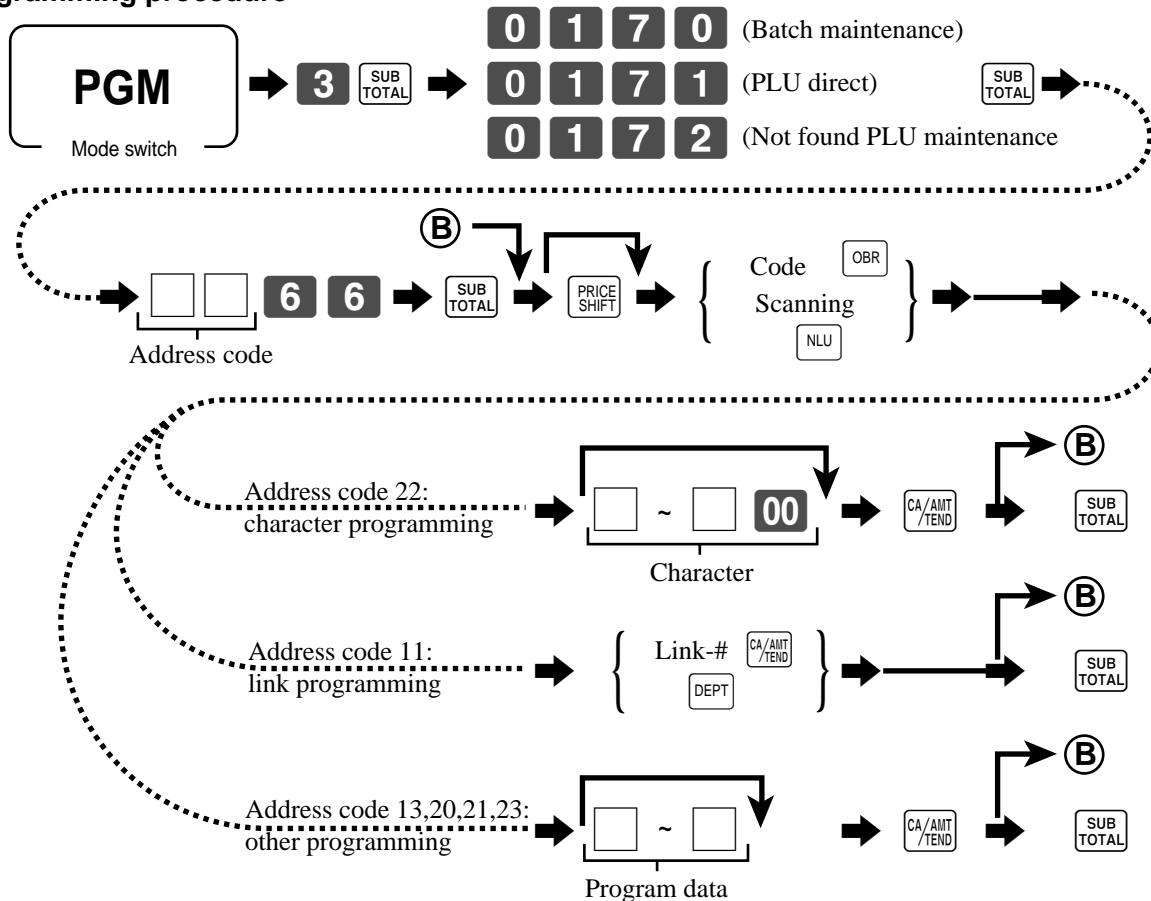

Program data

Action code

Description	Choice	Program code
Action code: Addition = 0 (Not effective for Not found PLU maintenance) Modification = 1 Deletion = 2 (Not effective for direct PLU maintenance)	Significant number	<input type="text"/> D ₁

Unit price/quantity (Address code 21 for individual feature programming)

Description	Choice	Program code
Unit quantity (0.01 ~ 9999.99)	Integer part (0000 ~ 9999)	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₁₂ D ₁₁ D ₁₀ D ₉
	Decimal part (00 ~ 99)	<input type="text"/> <input type="text"/> D ₈ D ₇
Unit price (000000 ~ 999999)	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

Link-# (Address code 11 for individual feature programming)

Description	Choice	Program code
Link group record No. (00 ~ 99)	Significant numbers	<input type="text"/> <input type="text"/> D ₆ D ₅
Link department record No. (00 ~ 99)	Significant numbers	<input type="text"/> <input type="text"/> D ₄ D ₃
Link subdepartment record No. (00 ~ 99)	Significant numbers	<input type="text"/> <input type="text"/> D ₂ D ₁

Bottle link (Address code 13 for individual feature programming)

Description	Choice	Program code
Bottle link record No. (0000 ~ 9999)	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₄ D ₃ D ₂ D ₁

Mix & match (Address code 20 for individual feature programming)

Description	Choice	Program code
Link mix & match record No. (00 ~ 99)	Significant numbers	<input type="text"/> <input type="text"/> D ₂ D ₁

Key function/machine feature (P3)

Status (Address code 23 for individual feature programming)

Description		Choice	Program code
Taxable status: See below. (In case of "00", follow the linked department taxable status.)		Significant numbers	<input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅
Always "0"			<input type="checkbox"/> D ₄
Registration status: (In case of "0", use the linked department status.) • Prohibit scale registration = 0 • Allow electronic scale registration = 1 • Allow manual and electronic scale registration = 2		Significant number (0 ~ 3)	<input type="checkbox"/> D ₃
Enable 0 unit price. (Use this bit to change the status with that of the linked department.)	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₂
Enable negative price. (Use this bit to change the status with that of the linked department.)	b	No = 0 Yes = 2	
Hash (Use this bit to change the status with that of the linked department.)	c	No = 0 Yes = 4	
Permit price change operation (Use this bit to change the status with that of the linked department.)	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₁
Permit multiplication operation (Use this bit to change the status with that of the linked department.)	b	No = 0 Yes = 2	
Price input compulsory (Use this bit to change the status with that of the linked department.)	c	No = 0 Yes = 4	

Taxable status

for the U.S./Singapore

Food stamp (for Singapore, always "0")		No = 0 Yes = 1	<input type="checkbox"/> D ₆
Taxable 1 status	a	No = 0 Yes = 1	<input type="checkbox"/> (a+b+c) D ₅
Taxable 2 status	b	No = 0 Yes = 2	
Taxable 3 status	c	No = 0 Yes = 4	

for Canada


Donuts status		No = 0 Yes = 1	<input type="checkbox"/> D ₆
Non tax = 0 Taxable 1 = 1 Taxable 2 = 2	Taxable 3 = 3 Taxable 4 = 4 Taxable 1 & 2 = 5	Taxable 1 & 3 = 6 Taxable 1 & 4 = 7	Significant number <input type="checkbox"/> D ₅

for Other area

Non tax = 0 Taxable 1 = 1 Taxable 2 = 2 Taxable 3 = 3	Taxable 4 = 4 Taxable 5 = 5 Taxable 6 = 6 Taxable 7 = 7	Taxable 8 = 8 Taxable 9 = 9 Taxable 10 = 10	Significant numbers <input type="checkbox"/> <input type="checkbox"/> D ₆ D ₅
--	--	---	---


One touch NLU programming

Programming procedure

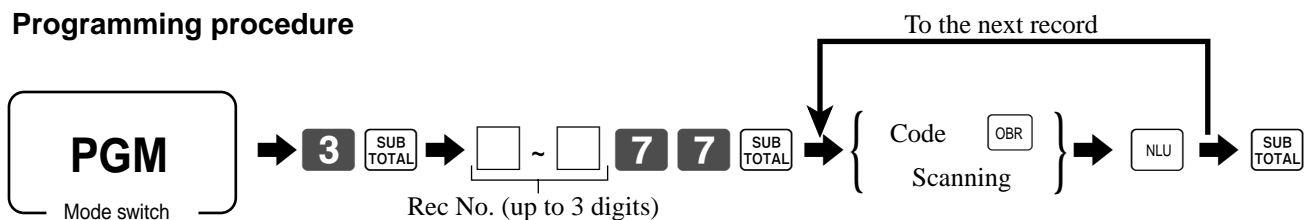

Issuing program reading report of program 3 mode

Issuing procedure

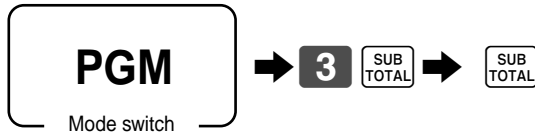

Report sample


P03.....		Program read symbol	BATCH01	0001-29	Batch X/Z program
CHECK	0001-02	Transaction key program	00	11-12-17-15-00	
CREDIT2	00000000000000	Key character/rec-#/file-#	BATCH02	0002-29	
PD	0002-02	Key program	01	11-12-17-15-00	
	00000000000000			00-00-00-00-00	
DEPT01	0001-05	Department program	0001-30		Clerk detail link program
	00000000000000	Key character/rec-#/file-#	GROSS	0001-01	
11-66	000000	Key program	0002-30		
15-66	@1.23	Batch program 1166	NET	0002-01	
16-66	000000	Batch program 1566			Arrangement program
17-66	000000	Batch program 1666	0001-38	000001	Rec-#/file-#/arrange no.
DEPT01	00	Batch program 1766	REG1	204-000	Key descriptor/rec-#/file-#
DEPT01	0002-05	Clerk program	1	001-000	
C01	0001-07	Clerk name/rec-#/file-#	2	002-000	
	000001000001	Clerk #/drw-#/secret-#	DEPT01	026-051	
67	0000000000	Compulsory	CASH	013-001	
68	00000000	Commission rate	0002-00		
69	000000000000	Check # range	CSHR01	0001-061	Employee program
70	0000000000	Operation restriction		0000000000	
C02	0002-07	Clerk program	CSHR02	0002-061	
0001-09	00:00 -> 01:00	Time range program			Scheduler program
0002-09	01:00 -> 02:00		0001-62	000000	
0003-09	02:00 -> 03:00			00000000000000	
				0000000000	
0123456789AB	0001-027	Dallas key ID/rec-#/file-#	0002-62	000000	
C01	0001	Clerk name/program		000000000000	
9876543210AB	0002-027			000000000000	
0001-22	2200000000	General control program			LCD backlight color program
0002-22	0000000000		0001-069	0000000000	
0003-22	0000000000		0002-069	0000000000	
0001-25		Tax table	MC#01	0001-91	Terminal connection table
TX1	10.25%			1001	
TX1	0000		0001-93	000000	Printer connection table
TX1	5003		0002-93	100000	
			0001-98	00000000000000	
			0002-98	00000000000000	I/O parameter table

Key function/machine feature (P3)

Character (Program 2)

Programming descriptors

Programming procedure

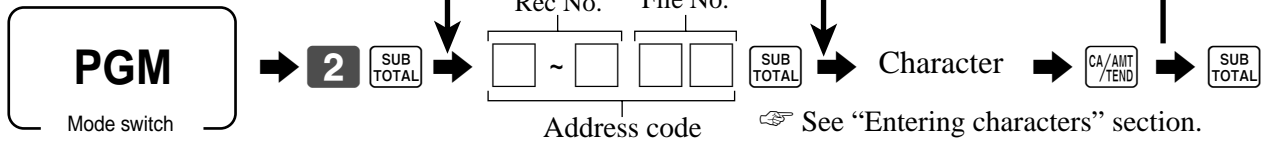

Programming data

Fixed totalizer (up to 12 characters)

Address code	Contents	Initial character
0101	Gross sales total	GROSS
0201	Net sales total	NET
0301	Cash in drawer	CAID
0401	Cash declared amount	CATL
0501	Declared short cash amount	CA-
0601	Declared over cash amount	CA+
0701	Charge in drawer	CHID
0801	Charge declared amount	CHTL
0901	Declared short charge amount	CH-
1001	Declared over charge amount	CH+
1101	Check in drawer	CKID
1201	Check declared amount	CKTL
1301	Declared short check amount	CK-
1401	Declared over check amount	CK+
1501	Credit 1 in drawer	CRID(1)
1601	Credit 2 in drawer	CRID(2)
1701	Credit 3 in drawer	CRID(3)
1801	Credit 4 in drawer	CRID(4)
1901	Credit declared amount	CRTL
2001	Declared short credit amount	CR-
2101	Declared over credit amount	CR+
2201	Cash in drawer *	CAID2
2301	Cash declared amount *	CATL2
2401	Declared short cash amount *	CA- 2
2501	Declared over cash amount *	CA+ 2
2601	Charge in drawer *	CHID2
2701	Charge declared amount *	CHTL2
2801	Declared short charge amount *	CH- 2
2901	Declared over charge amount *	CH+ 2
3001	Check in drawer *	CKID2
3101	Check declared amount *	CKTL2
3201	Declared short check amount *	CK- 2
3301	Declared over check amount *	CK+ 2
3401	Credit 1 in drawer *	CRID2(1)
3501	Credit 2 in drawer *	CRID2(2)
3601	Credit 3 in drawer *	CRID2(3)
3701	Credit 4 in drawer *	CRID2(4)
3801	Credit declared amount *	CRTL2
3901	Declared short credit amount *	CR- 2
4001	Declared over credit amount *	CR+ 2
4101	Food stamp in drawer	FSID
4201	Food stamp cash change	FSCACG
4301	EBT in drawer	EBTTL
4401	EBT cash change	EBTCACG
4501	Refund mode total	RF
4601	Customer count	CUST
4701	Average sales per customer	AVRG
4801	Check cashing service fee	FEE
4901	New balance fee	+
5001	New balance total	NB
5101	Clerk commission 1 total	C-1

Address code	Contents	Initial character
5201	Clerk commission 2 total	C-2
5301	Foreign currency cash in drawer 1	CECA1
5401	Foreign currency check in drawer 1	CECK1
5501	Foreign currency cash in drawer 2	CECA2
5601	Foreign currency check in drawer 2	CECK2
5701	Foreign currency cash in drawer 3	CECA3
5801	Foreign currency check in drawer 3	CECK3
5901	Foreign currency cash in drawer 4	CECA4
6001	Foreign currency check in drawer 4	CECK4
6101	Reduction	DC
6201	Coupon	COUPON
6301	Item return	REF
6401	Clear counter	CLEAR
6501	Rounding 2 *	ROUND
6601	Rounding 1	ROUND
6701	Cancellation	CANCEL
6801	Money declaration	DECLA
6901	Taxable amount	TA1
7001	Tax 1	TX1
7101	Tax exempt 1	EX1
7201	Taxable amount 2	TA2
7301	Tax 2	TX2
7401	Tax exempt 2	EX2
7501	Taxable amount 3	TA3
7601	Tax 3	TX3
7701	Tax exempt 3	EX3
7801	Taxable amount 4	TA4
7901	Tax 4	TX4
8001	Tax exempt 4	EX4
8101	Taxable amount 5	TA5
8201	Tax 5	TX5
8301	Tax exempt 5	EX5
8401	Taxable amount 6	TA6
8501	Tax 6	TX6
8601	Tax exempt 6	EX6
8701	Taxable amount 7	TA7
8801	Tax 7	TX7
8901	Tax exempt 7	EX7
9001	Taxable amount 8	TA8
9101	Tax 8	TX8
9201	Tax exempt 8	EX8
9301	Taxable amount 9	TA9
9401	Tax 9	TX9
9501	Tax exempt 9	EX9
9601	Taxable amount 10	TA10
9701	Tax 10	TX10
9801	Tax exempt 10	EX10
9901	Nontaxable amount	NON TAX

* Totalizers for sub currency

Character programming (P2)

Subdepartment character

Up to 12 characters

Address code	Contents	Initial character
0103	Subdepartment 01	SUBDEPT01
0203	Subdepartment 02	SUBDEPT02
0303	Subdepartment 03	SUBDEPT03
:	:	:
9903	Subdepartment 99	SUBDEPT99

Group character

Up to 12 characters

Address code	Contents	Initial character
0106	Group 01	GROUP01
0206	Group 02	GROUP02
0306	Group 03	GROUP03
:	:	:
9906	Group 99	GROUP99

Clerk character

Up to 12 characters

Address code	Contents	Initial character
0107	Clerk 01	C01
0207	Clerk 02	C02
0307	Clerk 03	C03
:	:	:
9907	Clerk 99	C99

Table analysis character

Up to 12 characters

Address code	Contents	Initial character
0118	Table 01	TBL01
0218	Table 02	TBL02
0318	Table 03	TBL03
:	:	:
9918	Table 99	TBL99

Grand total character

Up to 12 characters

Address code	Contents	Initial character
0120	Grand total 01	GT1
0220	Grand total 02	GT2
0320	Grand total 03	GT3

Special character

Address code	Contents	Initial character
0123	main currency symbol (2), @ (2), No. (2), split pricing (2), not used (1) training filler (1), training symbol (1), not used (1), sub currency symbol (2)	U.S. \$ @ No / **
		Others . @ No / ** €
0223	No. of item sold (2), No. of customer (2), scalable item @ (2), scale weight (2), new price (2), multiplication display (2)	U.S. NoCT @LB *QT
		Others NoCT@ LB *QT
0323	multiplication (6) check in use (6)	U.S. BUSY
		Others X BUSY
0423	taxable symbol 1 (3 each) for tax 1, tax 2, tax 3, tax 4, tax 5	T1 T2 T3 T4 T5
0523	taxable symbol 2 (3 each) for tax 6, tax 7, tax 8, tax 9, tax 10	T6 T7 T8 T9 T10
0623	taxable symbol 3 (3 each) for tax 1/2, tax 1/3, tax 1/4, not used, tax 2/3	T12T13T14 T23
0723	taxable symbol 4 (3 each) for not used, not used, not used, nontax, all, F/S	F
0823	foreign currency (2 each), character edit mode (INS/OVR) (4 each)	* * * * *
0923	mode symbol 1 (4 each) REG1/2, RF, REG-	REG RFR
1023	mode symbol 2 (4 each) PGM, Daily X, Daily Z, Periodic	PnX Z XZ
1123	mode symbol 3 (4 each) training, not used, PGM read	TRG PGMX
1223	decimal: amount/q'ty, separator (main/sub) (1 each), not used (3), square (7) X
1323	A.M., P.M. (3 each), ST displayed on the dot display (2)	AM PM ST
1423	slip continued (12), page (2)	CONTINUED P
1523	(not used)	
1623	display subtotal symbol (ST key) (16)	ST
1723	subtotal symbol (16)	ST
1823	total symbol (16)	TL
1923	change symbol (16)	CG
2023	check cashing fee (16)	┘
2123	check cashing amount (16)	CACG
2223	Bon message (12)	** STUB **
2323	break (16)	**BREAK END**
2423	check No. (10)	CHECK No.
2523	service total (16)	SRVC TL
2623	item discount total (16)	DISCOUNT
2723	scale manual entry (12)	MANUAL ENTRY
2823	(not used)	
2923	report total symbol (12)	Tl
3023	report old price symbol (16)	OLD PRC
3123	red price symbol (16)	RED PRC
3223	food stamp change symbol (16)	FSCG
3323	table No. symbol (10)	TABLE No.
3423	future order message (16)	**Future Order**
3523	declared amount (16)	DECLA
3623	entering child item in separate check or void item in previous item void operation	Sub item ?
3723	current stock (16)	STK(NEW)
3823	last stock (16)	STK(OLD)
3923	added stock (16)	STK(ADD)
4023	reviewing (16)	** REVIEW **
4123	end of transaction (16)	** END **
4223	designating sub currency (16)	EURO money

Character programming (P2)

Message

Up to 24 characters

Address code	Contents	Initial character	Yours
0132	1st line of logo message	YOUR RECEIPT	
0232	2nd line of logo message	THANK YOU	
0332	3rd line of logo message	CALL AGAIN	
0432	4th line of logo message		
0532	1st line of commercial message		
0632	2nd line of commercial message		
0732	3rd line of commercial message		
0832	4th line of commercial message		
0932	1st line of bottom message		
1032	2nd line of bottom message		
1132	3rd line of bottom message		
1232	4th line of bottom message		
1332	1st line of bill top message		
1432	2nd line of bill top message		
1532	3rd line of bill top message		
1632	4th line of bill top message		
1732	1st line of bill copy message		
1832	2nd line of bill copy message		
1932	3rd line of bill copy message		
2032	4th line of bill copy message		
2132	1st line of bill bottom message		
2232	2nd line of bill bottom message		
2332	3rd line of bill bottom message		
2432	4th line of bill bottom message		
2532	Post receipt message	DUPLICATE RECEIPT	
2632	1st line of guest intermediate message		
2732	2nd line of guest intermediate message		
2832	3rd line of guest intermediate message		
2932	4th line of guest intermediate message		
3032	1st line of guest bottom message		
3132	2nd line of guest bottom message		
3232	3rd line of guest bottom message		
3332	4th line of guest bottom message		
3432	5th line of guest bottom message		
3532	6th line of guest bottom message		
3632	7th line of guest bottom message		
3732	8th line of guest bottom message		
3832	9th line of guest bottom message		
3932	10th line of guest bottom message		
4032	1st line of Australian GST MOF message	TAX INVOICE	
4132	2nd line of Australian GST MOF message	* INDICATES	
4232	3rd line of Australian GST MOF message	TAXABLE SUPPLY	

Report header

Up to 12 characters

Address code	Contents	Initial character
0124	Fixed totalizer report	FIX
0224	Transaction key report	TRANS
0324	PLU report	PLU
0424	Department report	DEPT
0524	Group report	GROUP
0624	Cashier/clerk report	CASHIER
0724	Not used	
0824	Hourly sales report	HOURLY
0924	Monthly sales report	MONTHLY
1024	Subdepartment report	SUB DEPT
1124	Table analysis report	ANALYSIS
1224	Open check report	OPEN CHK
1324	Scanning PLU	SCAN PLU
1424	Hourly item	HOURLY ITEM
1524	PLU stock report	PLU STOCK
1624	Financial report	FLASH
1724	Mix & match	MIX&MATCH
1824	PLU by amount	PLU AMT
1924	PLU by quantity	PLU QTY
2024	Department by amount	DEPT AMT
2124	Department by quantity	DEPT QTY
2224	Scanning PLU best	PLU BEST
2324	Inactive scanning PLU	NON ACTIVE
2424	Individual item	INDIVIDUAL
2524	Not found PLU	NFP
2624	Time & attendance	ATTENDANCE

Batch X/Z header

Up to 12 characters

Address code	Contents	Initial character
0129	Batch 01	BATCH 01
0229	Batch 02	BATCH 02
0329	Batch 03	BATCH 03
:	:	:
1029	Batch 10	BATCH 10

Check endorsement message

Up to 40 characters

Address code	Contents	Initial character
0133	Check endorsement message 01	
0233	Check endorsement message 02	
0333	Check endorsement message 03	
0433	Check endorsement message 04	

Character programming (P2)

Slip/external printer message

Up to 40 characters (Contents are the same as file032.)

Address code	Contents	Initial character
0134	Slip/external printer message 01	YOUR RECEIPT
0234	Slip/external printer message 02	THANK YOU
0334	Slip/external printer message 03	CALL AGAIN
:	:	:
4134	Slip/external printer message 41	* INDICATES TAXABLE SUPPLY

Recall character message

Up to 40 characters

Address code	Contents	Initial character
0139	Recall character 01	
0239	Recall character 02	
0339	Recall character 03	
:	:	
99939	Recall character 999	

Mix & match character

Up to 12 characters

Address code	Contents	Initial character
0151	Mix & match 01	DISCOUNT01
0251	Mix & match 02	DISCOUNT02
0351	Mix & match 03	DISCOUNT03
:	:	:
9951	Mix & match 99	DISCOUNT99

Employee character

Up to 12 characters

Address code	Contents	Initial character
0161	Employee 01	CSHR01
0261	Employee 02	CSHR02
0361	Employee 03	CSHR03
:	:	:
9961	Employee 99	CSHR99

Order character

Up to 12 characters

Address code	Contents	Initial character
0165	Order character 01	
0265	Order character 02	
0365	Order character 03	
:	:	
9965	Order character 99	

Terminal connection table

Up to 8 characters

Address code	Contents	Initial character
0191	Physical No. 01	MC#01
0291	Physical No. 02	MC#02
0391	Physical No. 03	MC#03
:	:	:
3291	Physical No. 32	MC#32

AT command

Up to 62 characters

Address code	Contents	Initial character
0196	Command set to MODEM	AT COMMAND**** - - -****
0296	on hook, confirmation	ATA AT I4

Error message

Up to 16 characters

Address code	Contents	Initial character
0180	Error code	E001
0280	Mode switch position changed before...	Wrong mode
0380	Error code	E002
:	:	:
23880	Flash memory format is illegal.	Illegal format

Miscellaneous message

Up to 16 characters

Address code	Contents	Initial character
0178	Register total working time	GT TIME
0278	Register start date message	START DATE
0378	RAM message in PGM5	RAM
:	:	:
5878	Model name	

Printing guidance message

Up to 24 characters

Address code	Contents	Initial character
0179	not used	
0279	not used	
0379	not used	
:	:	:
8579	Euro currency system setup	set.

Character programming (P2)

X/Z guidance message

Up to 16 characters

Address code	Contents	Initial character
0182	PLU range report message 1st line	PLU by range
0282	Input start No. message 1st line	Input start No.
0382	Input start No. message 2nd line	and press <#1>
:	:	:
4882	PLU reset message 1st line	PLU Z clear

Program guidance message

Up to 16 characters

Address code	Contents	Initial character
0183	Range program message 1st line	Range PGM
0283	Input start No. message 1st line	Input start No.
0383	Input start No. message 2nd line	and press <#1>
:	:	:
9783		

Registration guidance message


Up to 16 characters

Address code	Contents	Initial character
0181	Guidance message of NFP 1st line	Not Found PLU
0281	Guidance message of NFP 2nd line	Input Unit Price
0381	Guidance message of NFP 3rd line	,and press DEPT
:	:	:
2281	Guidance message of price comp 4th line	> key


Programming item/key descriptors

Programming procedure


Department key/transaction key

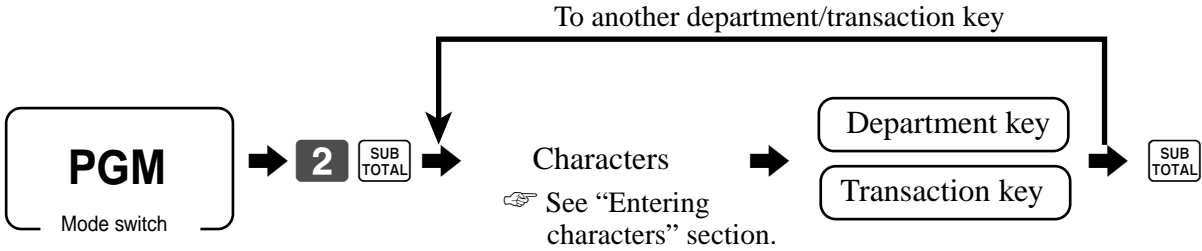

PLU

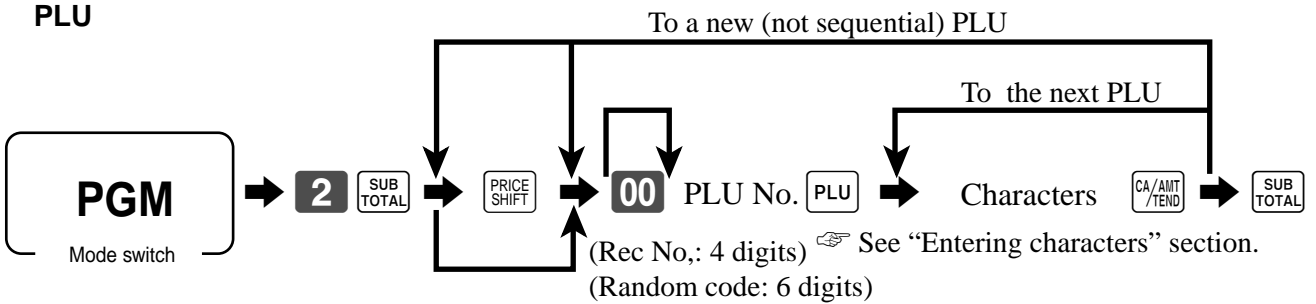

Flat-PLU key

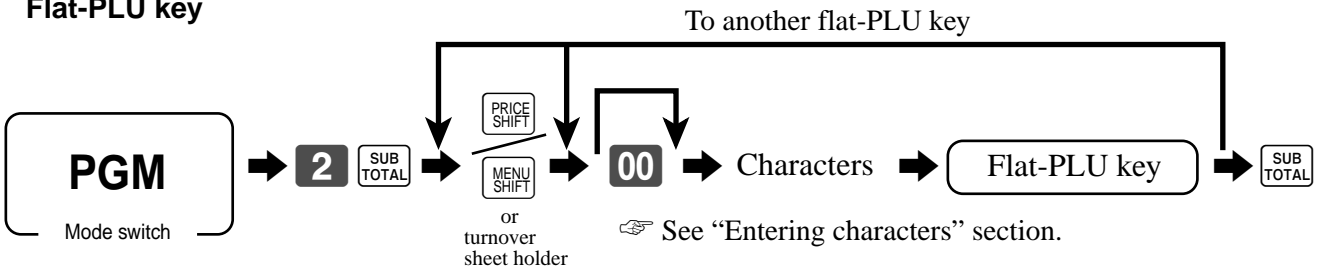

Programming data

Department

up to 16 characters

Contents	Initial character
Department 01	DEPT01
Department 02	DEPT02
Department 03	DEPT03
:	:
Department 99	DEPT99

PLU/flat-PLU

up to 16 characters

PLU No.	Contents	Initial character
0001	PLU 0001	PLU0001
0002	PLU 0002	PLU0002
0003	PLU 0003	PLU0003
:	:	:
9999	PLU 9999	PLU9999

Character programming (P2)

Transaction key


Up to 12 characters

Function	Code	Initial character	Function	Code	Initial character
Add check	094	ADD CHK	Open	067	OPEN
Arrangement	044	ARG	Open2	068	OPEN2
Bill copy	047	BILL	Open check	117	OPEN CHK
Bottle return	053	BR	Operator number	078	OPE#
Cancel	236	CANCEL	Operator read/reset	073	OPE X/Z
Cash amount tendered	001	CASH	Paid out	021	PD
Charge	002	CHARGE	Pick up	022	P. UP
Check endorsement	039	CK. E	Plus	029	+
Check print	012	CHKP	PLU	048	PLU#
Check tender	003	CHECK	Previous balance	026	PB
Clerk number	072	CLK#	Pervious balance subtotal	079	PBST
Clerk transfer	013	CLK TRANS	Premium	030	%+
Clock-in/out	108	CLOCK-IN/OUT	Price	049	PRC
Coupon	023	COUPON	Price change	104	PRC CHG
Coupon 2	036	CPN2	Price inquiry	008	PRCINQ
Credit	004	CREDIT	Price shift	069	PRICE SHIFT
Cube	090	XXX	Quantity/for	083	QT
Currency exchange	045	CE	Rate tax	031	TAX
Customer number	043	CT	Recall	131	RECALL
Decimal point	098	.	Receipt	038	RCT
Declaration	061	DECLA	Receipt on/off	076	RCT ON/OFF
Department	nn051	DEPTnn	Received on account	020	RC
Deposit	025	DEPOSIT	Red price	060	RED
Discount	028	%	Refund	033	RF
Eat-in	128	EAT-IN	Review	071	REVIEW
EBT tender	007	EBTTD	Scale	088	SCALE
Enter	105	ENT	Separate check	095	SEP CHK
Error correct	034	CORR	Slip back feed/release	054	SB/R
Flat PLU	nmm063	PLUmmnn	Slip feed/release	056	SF/R
Food stamp status shift	059	F/S	Slip print	055	SLIP
Food stamp subtotal	081	FSST	Square	084	XX
Food stamp tender	005	FSTD	Stock inquiry	009	STKINQ
Ketten Bon	113	X/KETTEN	Store	130	STORE
Loan	019	LOAN	Subtotal	075	SUBTOTAL
Lock out unused key	000		Table number	058	TBL#
Manual tax	032	TAX	Table transfer	014	TBL TRANS
Media change	118	MEDIA CHG	Takeout	129	TAKE-OUT
Menu shift	064	MENU	Tare	087	TARE
Merchandise subtotal	080	MDST	Tax exempt	062	EXEMPT
Minus	027	-	Tax status shift	057	T/S
Multiplication	082	X	Taxable amount subtotal	077	TAST
New balance	006	NB	Text print *1	011	PRT
New check	091	NEW CHK	Text recall	010	CHAR
New/old check	093	NEW/OLD	Three zero	097	000
Normal receipt	016	NRMRCT	Tip	015	TIP
No sale	042	NS	Tray total	074	TRAY TL
Non-add	040	#	Two zero	096	00
Non-add/No sale	041	#/NS	Unit weight	089	UNIT WEIGHT
OBR	103	OBR	Validation	037	VLD
Old check	092	OLD CHK	VAT	046	VAT
One touch NLU	138	NLU	Void	035	VOID

*1 Except for TE-3000S

Programming item/clerk descriptors by range

Programming procedure

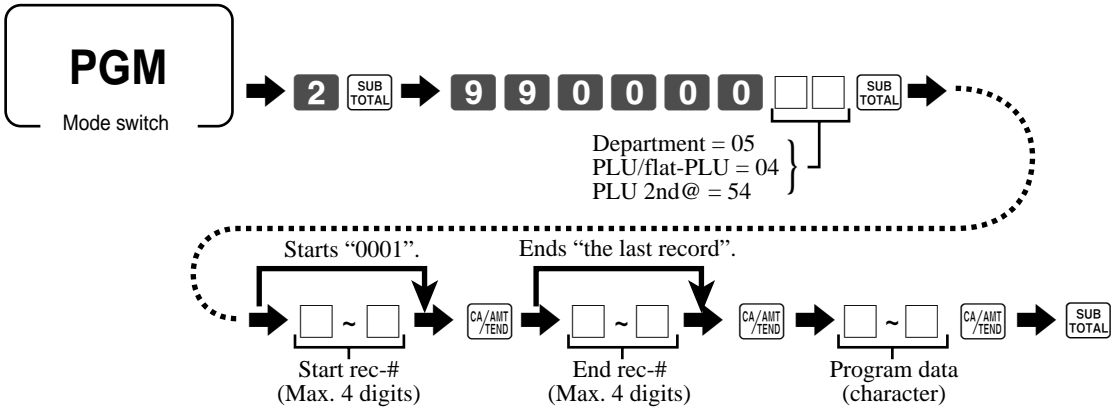

Program data

Department

up to 16 characters

Contents	Initial character
Department 01	DEPT01
Department 02	DEPT02
Department 03	DEPT03
: :	:
Department 99	DEPT99

PLU/flat-PLU

up to 16 characters

PLU No.	Contents	Initial character
0001	PLU 0001	PLU0001
0002	PLU 0002	PLU0002
0003	PLU 0003	PLU0003
:	:	:
9999	PLU 9999	PLU9999

PLU 2nd @

up to 16 characters


PLU No.	Contents	Initial character
0001	PLU 0001	PLU0001
0002	PLU 0002	PLU0002
0003	PLU 0003	PLU0003
:	:	:
9999	PLU 9999	PLU9999

Character programming (P2)


Entering characters

By character keyboard


TE-3000S character keyboard

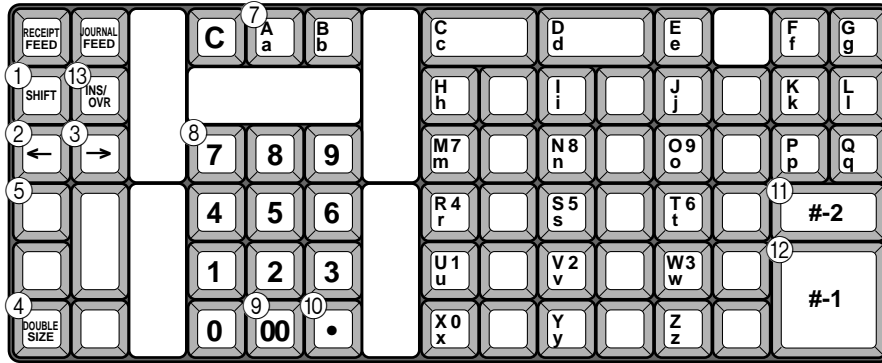

(30 department keyboard)


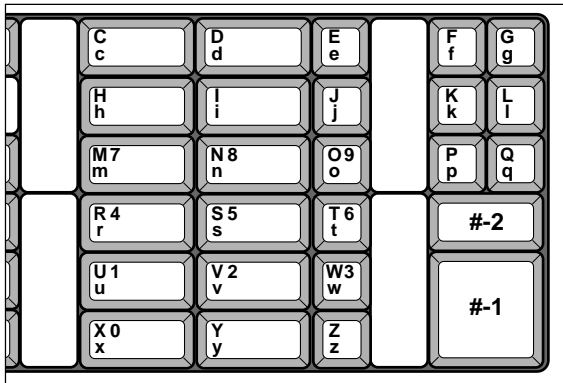


(15 department keyboard)

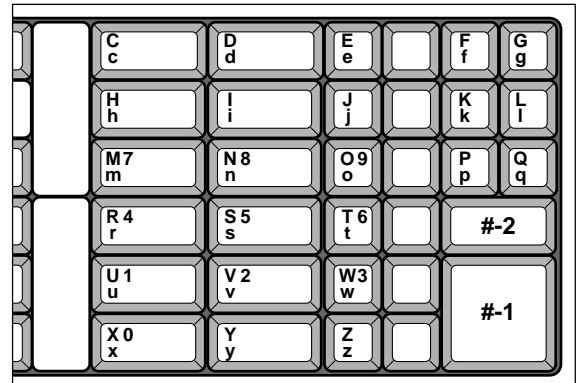


(20 department keyboard)

TE-4000F character keyboard

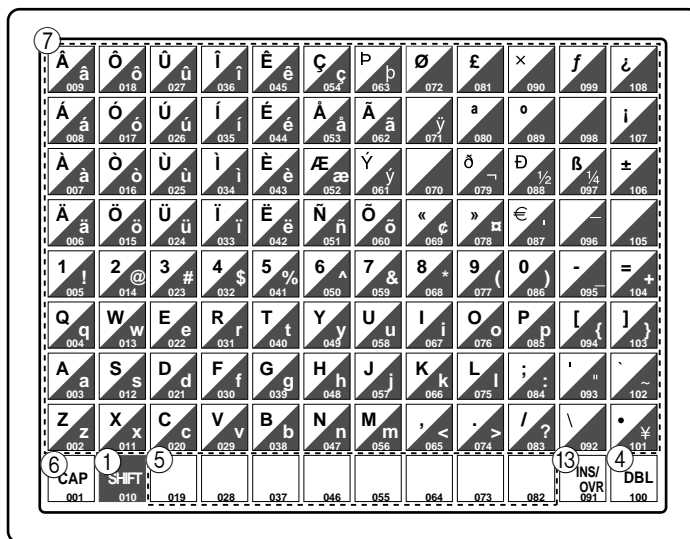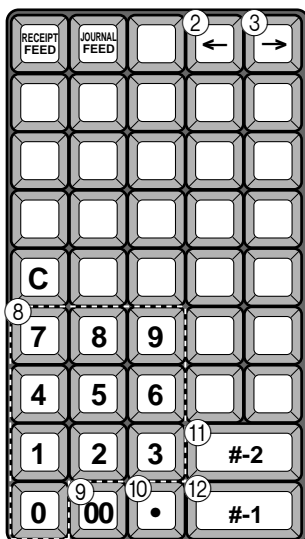

TE4500F character keyboard

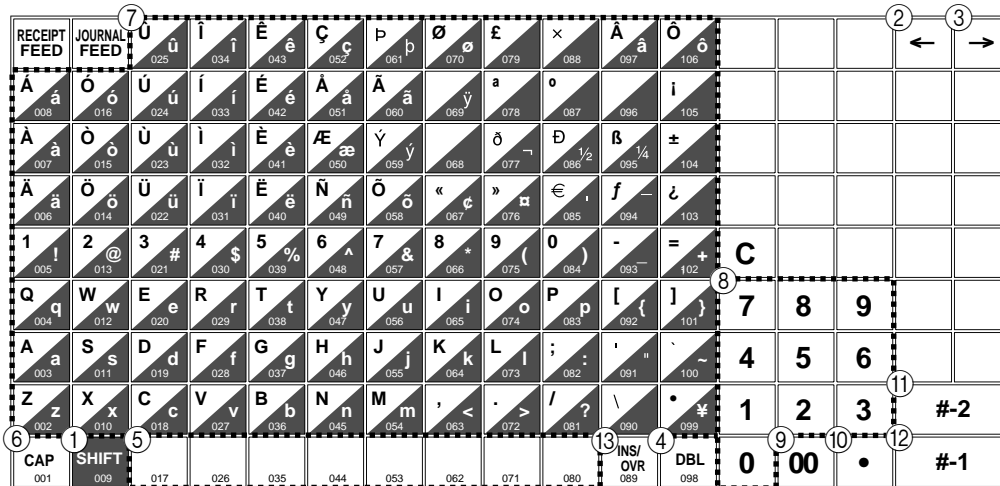

① Shift key

TE-3000S:

Pressing this key shifts the character through the uppercase letter, lower case letter and numerics.

TE-4000F, TE-4500F:

Pressing this key shifts the character from the uppercase letter to lower case letter and vice versa.

② Left cursor key

Move the cursor to the left one by one to modify characters.

③ Right cursor key

Move the cursor to the right one by one to modify characters.

④ Double size letter key

Specifies that the next character you enter a double size character.

You must press this key before each double size character.

⑤ Space key

Set a space by depression.

⑥ CAP key

Pressing this key shifts the character to the uppercase letter.

⑦ Alphabet keys

Use those keys to enter characters.

⑧ Numeric keys

Use those keys to enter program codes, memory number and character codes.

⑨ Character fixed key

Press this key to fix all entered characters before you assign them to function keys, PLUs, department keys and so on.

⑩ Backspace/Character code fixed key

Registers one character with code (2 or 3 digit).

Clears the last entered character, much like a back space key.

⑪ Program end key

Terminates the character programming.

⑫ Character enter key

Registers the programmed characters.

⑬ Insert/Override key

Press this key to change the status "Insert" between the original characters or "Override" the original characters.

Character programming (P2)









By character code

Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code
Space	32	0	48	@	64	P	80	`	96	p	112	Ç	128
!	33	1	49	A	65	Q	81	a	97	q	113	Ü	129
”	34	2	50	B	66	R	82	b	98	r	114	é	130
#	35	3	51	C	67	S	83	c	99	s	115	â	131
\$	36	4	52	D	68	T	84	d	100	t	116	ä	132
%	37	5	53	E	69	U	85	e	101	u	117	à	133
&	38	6	54	F	70	V	86	f	102	v	118	â	134
'	39	7	55	G	71	W	87	g	103	w	119	ç	135
(40	8	56	H	72	X	88	h	104	x	120	ê	136
)	41	9	57	I	73	Y	89	i	105	y	121	ë	137
*	42	:	58	J	74	Z	90	j	106	z	122	è	138
+	43	;	59	K	75	[91	k	107	{	123	ï	139
,	44	<	60	L	76	\	92	l	108		124	î	140
-	45	=	61	M	77]	93	m	109	}	125	ï	141
.	46	>	62	N	78	^	94	n	110	~	126	Ä	142
/	47	?	63	O	79	_	95	o	111		127	Å	143

Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code
É	144	á	160	■	176	ˆ	192	đ	208	ó	224	-	240
æ	145	í	161	■	177	ˆ	193	ð	209	β	225	±	241
Æ	146	ó	162	■	178	τ	194	ê	210	ô	226	_	242
ô	147	ú	163		179		195	ë	211	ò	227	¾	243
ö	148	ñ	164	†	180	-	196	è	212	õ	228	¶	244
ò	149	Ñ	165	Á	181	†	197	€	213	õ	229	§	245
û	150	ä	166	Â	182	ã	198	í	214	μ	230	÷	246
ù	151	ä	167	À	183	Ä	199	î	215	ρ	231	↳	247
ÿ	152	ó	168	©	184	ˆ	200	ï	216	ρ	232	°	248
ö	153	®	169	†	185	ˆ	201	ˆ	217	ú	233	¨	249
Ü	154	¬	170		186	ˆ	202	ˆ	218	û	234	.	250
φ	155	½	171	ˆ	187	ˆ	203	■	219	ü	235	¹	251
£	156	¼	172	ˆ	188	ˆ	204	■	220	ý	236	º	252
∅	157	ı	173	φ	189	-	205		221	ÿ	237	»	253
×	158	«	174	¥	190	†	206	ı	222	-	238	■	254
f	159	»	175	ı	191	ˆ	207	■	223	'	239	Double sized	255











Editing characters

Correcting a character just entered











OPERATION		DISPLAY (dot)
“L” “E” “N” “O” “N”	↵ Enter LENON, instead of LEMON.	
  	↵ Press left arrow key three times.	
	↵ Override mode	
“M”	↵ Enter “M”.	

“*” means “OVR” mode.













Correcting and adding a PLU descriptor already set

OPERATION		DISPLAY (dot)
	↵ Enter “00”.	
  	↵ Enter PLU No.	
“S”, “o”, “d”, “a”, “ ”	↵ Enter “Soda” and “space”.	
	↵ Override mode	
“L”	↵ Enter “L”.	

Correcting a key descriptor already set

OPERATION		DISPLAY (dot)
	↵ Enter “00”.	
	↵ Designate an appropriate key	
 	↵ Press right arrow key two times.	
“M”	↵ Enter “M”.	
	↵ Delete “N”.	


Correcting a message descriptor already set

OPERATION		DISPLAY (dot)
    	↵ Enter record and file number.	
 	↵ Press right arrow key two times.	
“O”	↵ Enter “O”.	
	↵ Delete “A”.	

Character programming (P2)

Issuing program reading report of program 2 mode

Issuing procedure

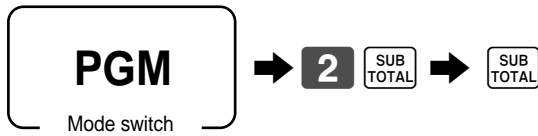



Report sample

P02.....		Program read symbol	BATCH 01	0001-29	
GR0SS	0001-01		BATCH 02	0002-29	Batch X/Z character
NET	0002-01		BATCH 03	0003-29	
CAID	0003-01	Fixed totalizer character		0004-29	
CATL	0004-01		0001-32		
	0005-01		YOUR RECEIPT		Receipt message
CHECK	0001-02		0002-32		
CHARGE2	0002-02	Transaction key character	THANK YOU		
PD	0003-02		0001-33		
	0004-02		***ENDORSE MESSAGE*****		Check endorsement message
SUBDEPT01	0001-03		*****		
SUBDEPT02	0002-03	Subdepartment character	0002-33		
SUBDEPT03	0003-03		*****		
	0004-03		0001-34		
DEPT01	0001-05		***SLIP MESSAGE*****		Slip/external printer message
DEPT02	0002-05	Department character	*****		
DEPT03	0003-05		0002-34		
	0004-05		*****		
GR0UP01	0001-06		0001-39		
GR0UP02	0002-06	Group character	CHARACTER RECALL *****		Recall character
GR0UP03	0003-06		*****		
	0004-06		0002-39		
C01	0001-07		*****		
C02	0002-07	Clerk character	ORDER01	0001-65	
C03	0003-07		ORDER02	0002-65	Order character
	0004-07		ORDER03	0003-65	
TBL01	0001-18			0004-65	
TBL02	0002-18	Table character	MC#01	0001-91	
TBL03	0003-18		MC#02	0002-91	Terminal connection table character
	0004-18		MC#03	0003-91	
GT1	0001-20		0001-96		
GT2	0002-20		AT COMMAND*****		AT command
GT3	0003-20		*****		
. @No/ **	0001-23		****		
NoCT@ LB *QT	0002-23	Special character	0002-96		
X BUSY	0003-23		ATA	ATI4	
FIX	0001-24				
TRANS	0002-24	Report header character			
PLU	0003-24				
	0004-24		PASSWORD	0001-97	Online password

Unit price/rate (Program 1)



Date/time setting

Date setting

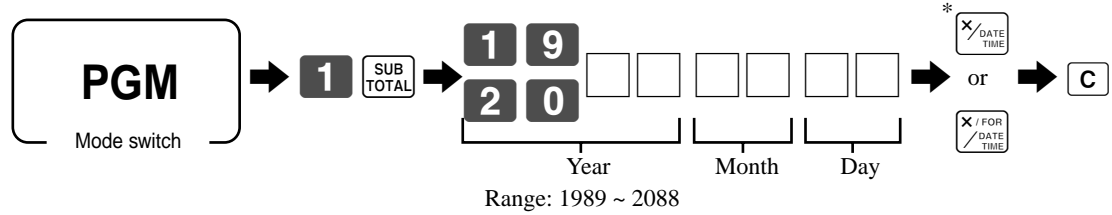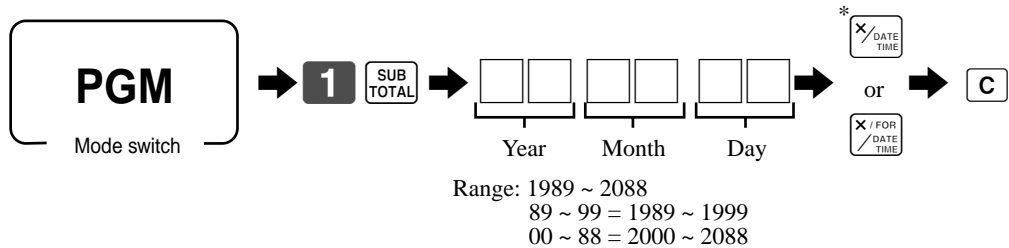

* You can use <X/FOR>, <X/XX> or <X/KETTEN> instead of these keys.

Time setting

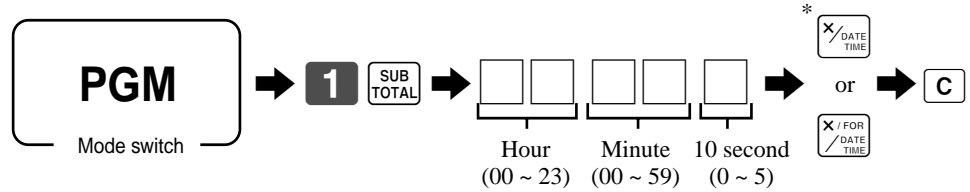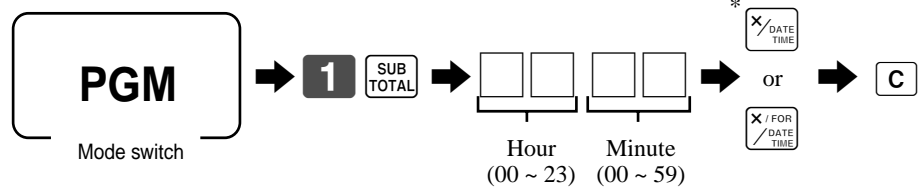


* You can use <X/FOR>, <X/XX> or <X/KETTEN> instead of these keys.

Unit price program


Programming procedure

Programming the 1st unit price and unit quantity (to department/flat-PLU key)

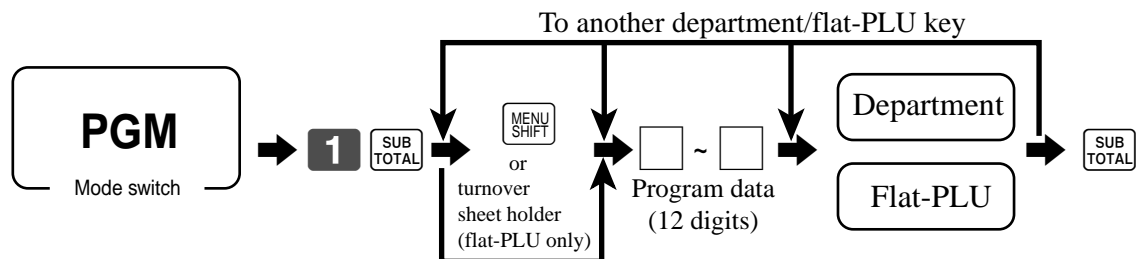


Unit price/rate programming (P1)


Programming the 1st unit price and unit quantity (to PLU)

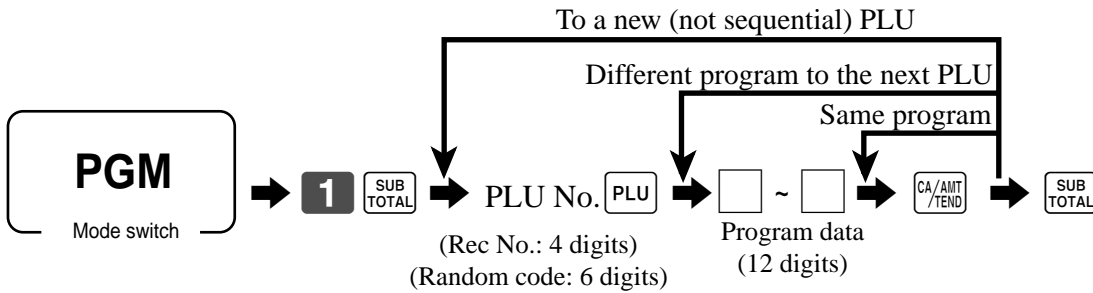

Programming the 2nd unit price and unit quantity (to flat-PLU key)

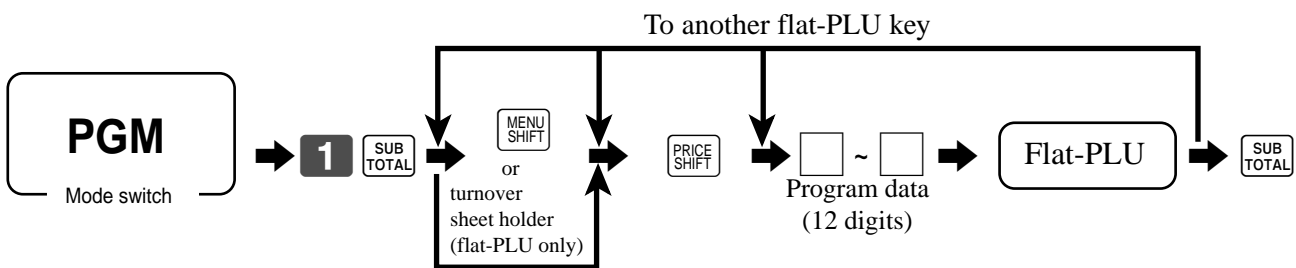

Programming the 2nd unit price and unit quantity (to PLU)

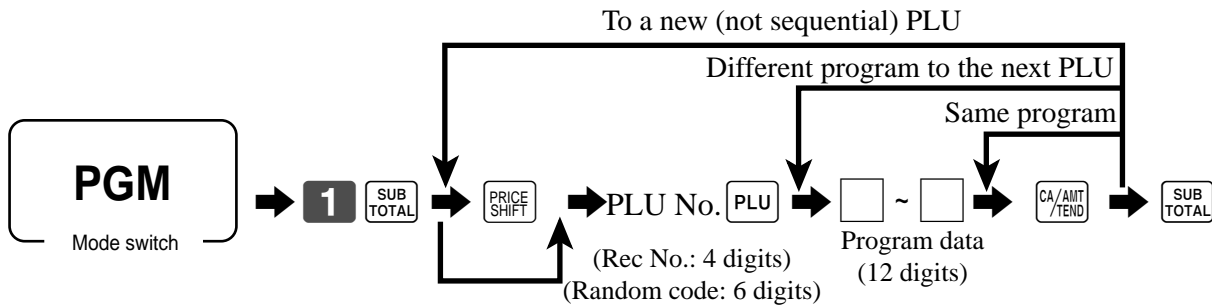


Program data

Description	Choice	Program code
D ₁₂ ~ D ₇ for non scalable item (unit quantity/2nd unit quantity)		
Unit quantity (integer)	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₁₂ D ₁₁ D ₁₀ D ₉
Unit quantity (decimal)	Significant numbers	<input type="text"/> <input type="text"/> D ₈ D ₇
D ₁₂ ~ D ₇ for scalable item (unit quantity/2nd unit quantity)		
Unit quantity (integer)	Significant numbers	<input type="text"/> <input type="text"/> D ₁₂ D ₁₁
Unit quantity (decimal)	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> D ₁₀ D ₉ D ₈
Always "0"		<input type="text"/> <input type="text"/> 0 D ₇
Unit price/2nd unit price	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

Rate program


<CURRENCY EXCHANGE>

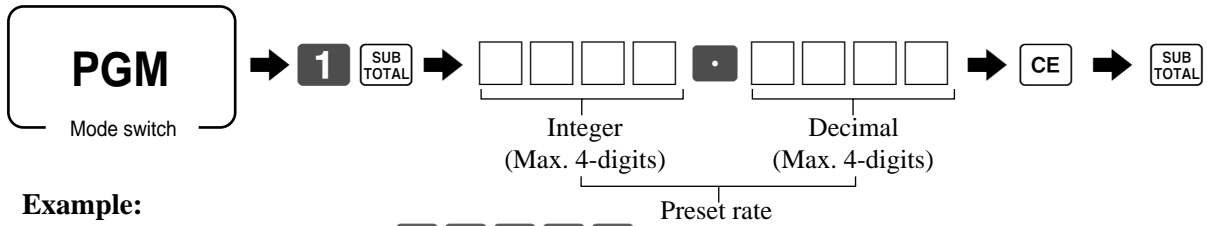

Example:


\$1.00 = ¥110.50 ⇒ **1** · **1** **0** **5**
 ¥100 = \$0.9050 ⇒ **0** · **9** **0** **5**

<CHECK>, <NEW BALANCE>, <PREMIUM (%+)>, <DISCOUNT (%-)>, <RATE TAX>

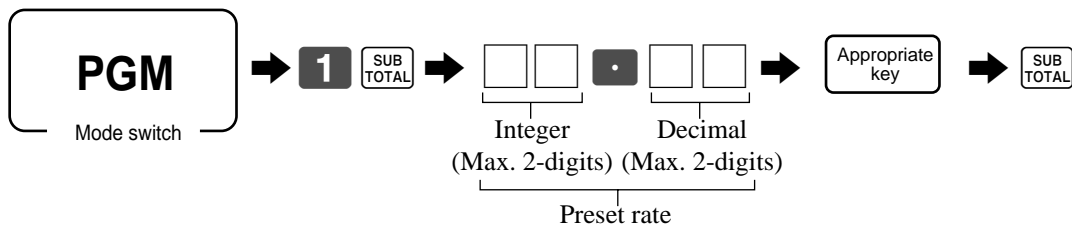


Amount program

<CASH>, <CHECK>, <NEW BALANCE>, <PLUS (+)>, <MINUS (-)>, <COUPON>

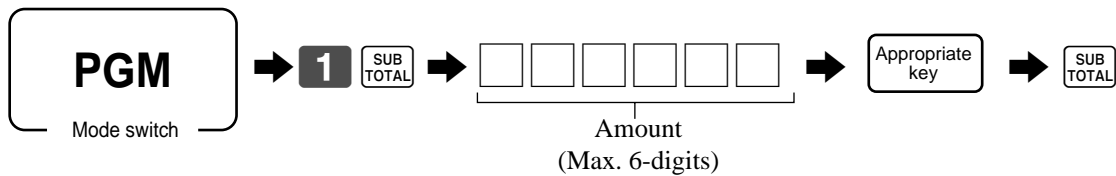

Scanning PLU direct maintenance programming

Programming procedure

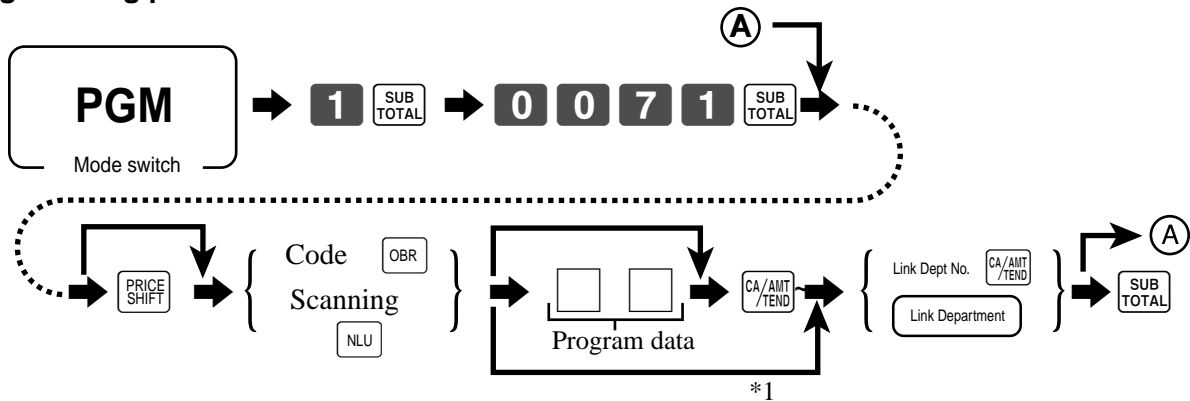

*1 Skip by general function programming address code 32.


Program data

Description	Choice	Program code
Unit quantity (0.01 ~ 9999.99)	integer part (0000 ~ 9999)	□ □ □ □ D ₁₂ D ₁₁ D ₁₀ D ₉
	decimal part (00 ~ 99)	□ □ D ₈ D ₇
Unit price (000000 ~ 999999)	Significant numbers	□ □ □ □ □ □ □ □ D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

Unit price/rate programming (P1)

Issuing program reading report of program 1 mode

Issuing procedure

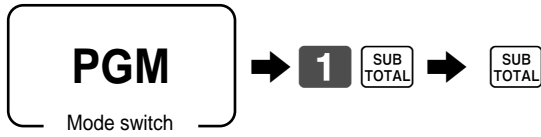

Report sample

P01.....			Program read symbol
CASH		@100.00	Transaction key unit price or rate
CHECK		@1.00	
-		@1.00	
%-		10%	
DEPT01		0001-05	Department descriptor/rec-#/file-#
	1.2	@1.00	Unit quantity/unit price
DEPT02		0002-05	
	1	@2.00	

Program reading (Program 6)


Issuing program reading report

Issuing procedure

Reading by file



Reading by range

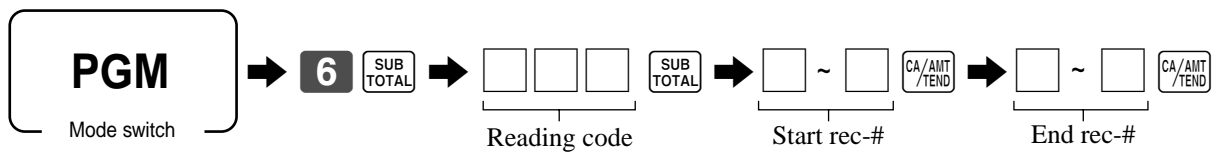

Report code

File name	Report code			Note
	Unit price	Character	Status, etc.	
Fixed totalizer	----	201	----	
Transaction key	102	202	302	
Subdepartment	----	203	303	
PLU	104	204	304	By range reading
Department	105	205	305	By range reading
Group	----	206	----	
Clerk	----	207	307	By range reading
Hourly sales	----	----	309	
Scanning PLU	----	----	316	
Table analysis	----	218	318	
Grand total	----	220	----	
General control	----	----	322	
Special character	----	223	----	
Report header	----	224	----	
Tax table	----	----	325	
Dallas key ID	----	----	327	
Set menu table	----	----	328	
Batch X/Z	----	229	329	
Clerk detail link	----	----	330	
Hourly item (Item)	----	----	331	
Receipt message	----	232	----	
Check endorsement message	----	233	----	
Slip/loc/remote printer message	----	234	----	
Arrangement table	----	----	338	
Character recall	----	239	----	
Non-PLU table	----	----	340	
Check print control	----	----	341	
Mix & match	----	251	351	
PLU 2nd @	154	254	354	By range reading
Employee	----	----	361	
Scheduler	----	----	362	
Order character	----	265	----	
LCD backlight color control	----	----	369	
Bottle link table	----	----	373	
One touch NLU table	----	----	377	
Miscellaneous message	----	278	----	
Printing guidance message	----	279	----	
Error message	----	280	----	
Registration guidance message	----	281	----	
X/Z guidance message	----	282	----	
Program guidance message	----	283	----	
Hourly item (Time zone)	----	----	384	
Terminal connection table	----	291	391	
Printer connection table	----	----	393	
AT command	----	296	----	
Online password	----	297	----	
I/O parameter table	----	----	398	

Program reading (P6)

Report sample

Fixed totalizer

P02.....		Program 2 mode symbol
GROSS	0001-01	Fixed totalizer descriptor/rec-#/file-#
NET	0002-01	
CAID	0003-01	
CATI	0004-01	

Transaction key

Program 1

P01.....		Program 1 mode symbol
CHECK	@10.00	Transaction key descriptor/unit price
CASH	@1.00	
-	@2.20	
%-	10.24%	Transaction key descriptor/rate

Program 2

P02.....		Program 2 mode symbol
CHECK	0001-02	Transaction key descriptor/rec-#/file-#
CREDIT2	0002-02	
PD	0003-02	
CASH	0004-02	

Program 3

P03.....		Program 3 mode symbol
CHECK	0001-02	Transaction key descriptor/rec-#/file-#
	000000000000	
CREDIT2	0002-02	
	000002000002	

Subdepartment

Program 2

P02.....		Program 2 mode symbol
SUBDEPT01	0001-03	Subdepartment descriptor/rec-#/file-#
SUBDEPT02	0002-03	
SUBDEPT03	0003-03	
SUBDEPT04	0004-03	

Program 3

P03.....		Program 3 mode symbol
SUBDEPT01	0001-03	Subdepartment descriptor/rec-#/file-#
11-66	000000	Address code 11 program
SUBDEPT02	0002-02	
11-66	000000	

PLU

Program 1

P01.....		Program 1 mode symbol
#000001 - #000010		PLU range
PLU0001	0001-04	PLU descriptor/rec-#/file-#
	#000001	PLU random code
1.23	@10.00	Unit quantity/unit price
PLU0002	0002-04	
	#000002	
2.34	@30.00	

Program 2

P02.....		Program 2 mode symbol
#000001 - #000010		PLU range
PLU0001	0001-04	PLU descriptor/rec-#/file-#
	#000001	PLU random code
PLU0002	0002-04	
	#000002	
PLU0003	0003-04	

Program 3

P03.....		Program 3 mode symbol
#000001 - #000010		PLU range
PLU0001	0001-04	PLU descriptor/rec-#/file-#
	00000000000000	Address code 01 ~ 10, 18 program
11-66	000000	Address code 11 program
12-66	#000000	Address code 12 program
13-66	<- 0001-28	Address code 13 program
14-66	12.345	Address code 14 program
15-66	@1234.56	Address code 15 program
16-66	000000	Address code 16 program
17-66	00	Address code 17 program
PLU0002	0002-04	

Program reading (P6)

Department

Program 1

P01.....			Program 1 mode symbol
	#0001 - #0010		Department range
DEPT01		0001-05	Department descriptor/rec-#/file-#
	1.23	@10.00	Unit quantity/unit price
DEPT02		0002-05	
	2.34	@30.00	

Program 2

P02.....			Program 2 mode symbol
	#0001 - #0010		Department range
DEPT01		0001-05	Department descriptor/rec-#/file-#
DEPT02		0002-05	
DEPT03		0003-05	

Program 3

P03.....			Program 3 mode symbol
	#0001 - #0010		Department range
DEPT01		0001-05	Department descriptor/rec-#/file-#
		00000000000000	Address code 01 ~ 10, 18 program
11-66		000000	Address code 11 program
15-66		@1234.56	Address code 15 program
16-66		000000	Address code 16 program
17-66		00	Address code 17 program
DEPT02		0002-05	

Group

P02.....			Program 2 mode symbol
GROUP01		0001-06	Group descriptor/rec-#/file-#
GROUP02		0002-06	
GROUP03		0003-06	

Clerk

Program 2

P02.....	Program 2 mode symbol
#0001 - #0010	Clerk range
C01 0001-07	Clerk descriptor/rec-#/file-#
C02 0002-07	
C03 0003-07	

Program 3

P03.....	Program 3 mode symbol
#0001 - #0010	Clerk range
C01 0001-07	Clerk descriptor/rec-#/file-#
000001000001	Check-#/drawer-#/secret-#
67 0000000000	Address code 67 program
68 00000000	Address code 68 program
69 000000000000	Address code 69 program
70 0000000000	Address code 70 program
C02 0002-07	

Hourly sales

P03.....	Program 3 mode symbol
0001-09 00:00 -> 01:00	Rec-#/file-#/time zone
0002-09 01:00 -> 02:00	
0003-09 02:00 -> 03:00	

Scanning PLU

P03.....	Program 3 mode symbol
SCAN-PLU0001	Scanning PLU descriptor
#49401004	Scanning PLU code
0 @10.00	Unit quantity/unit price
0 000000 000100 0000 00	Menu sheet No./status/link dept/ bottle link/mix & match

Program reading (P6)

Table analysis

Program 2

P02.....		Program 2 mode symbol
TBL01	0001-18	Table descriptor/rec-#/file-#
TBL02	0002-18	
TBL03	0003-18	

Program 3

P03.....		Program 3 mode symbol
TBL01	0001-18	Table descriptor/rec-#/file-#
	000000000000	Program data
TBL02	0002-18	
	000000000000	
TBL03	0003-18	

Grand total

P02.....		Program 2 mode symbol
GT1	0001-20	Grand total descriptor/rec-#/file-#
GT2	0002-20	
GT3	0003-20	

General control

P03.....		Program 3 mode symbol
0001-22	2200000000	Rec-#/file-#/program data
0002-22	0000000000	
0003-22	0000000000	

Special character

P02.....		Program 2 mode symbol
· @No/ ** €	0001-23	Special character/rec-#/file-#
NoCT @LB *QT	0002-23	
X BUSY	0003-23	

Report header

P02.....		Program 2 mode symbol
FIX	0001-24	Report header character/rec-#/file-#
TRANS	0002-24	
PLU	0003-24	

Tax table

P03.....		Program 3 mode symbol
0001-25		Rec-#/file-#
TX1	12.3456%	Tax table program data
TX1	0000	
TX1	5003	

Dallas key ID

P03.....		Program 3 mode symbol
019237283A	0001-027	Dallas key ID/rec-#/file-#
C01	0001	Clerk name/program data
27128367B	0002-027	

Set menu table

P03.....		Program 3 mode symbol
0001-28		Rec-#/file-#
PLU0001	0001-04	Linked PLU descriptor/rec-#/file-#
PLU0002	0002-04	

Batch X/Z

Program 2

P02.....		Program 2 mode symbol
BATCH 01	0001-29	Batch report descriptor/rec-#/file-#
BATCH 02	0002-29	
BATCH 03	0003-29	

Program reading (P6)

Program 3

P03.....	Program 3 mode symbol	
BATCH 01	0001-29	Batch report descriptor/rec-#/file-#
00	11-12-17-15-00	Execution mode/report code
	00-00-00-00-00	Report code
BATCH 02	0002-29	

Clerk detail link

P03.....	Program 3 mode symbol	
0001-30	Rec-#/file-#	
GROSS	0001-01	Linked total descriptor/rec-#/file-#
0002-30		
NET	0002-01	

Hourly item (Item)

P03.....	Program 3 mode symbol	
0001-31	Rec-#/file-#	
PLU0001	0001-04	Linked PLU descriptor/rec-#/file-#
0002-31		
Scan-PLU	#49401004	Linked scanning PLU descriptor/ scanning code

Receipt message


P02.....	Program 2 mode symbol
0001-32	Rec-#/file-#
*****	Message
0002-32	
** LOGO MESSAGE **	

Check endorsement


P02.....	Program 2 mode symbol
0001-33	Rec-#/file-#
*****	Message

0002-33	


Slip/external printer message

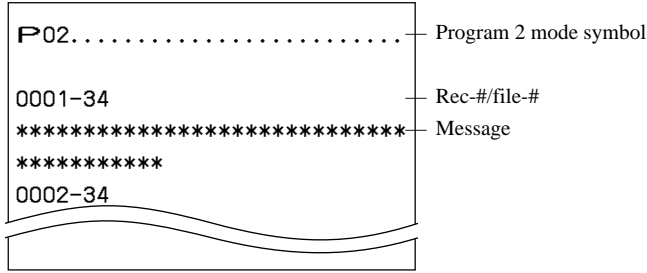


Arrangement table

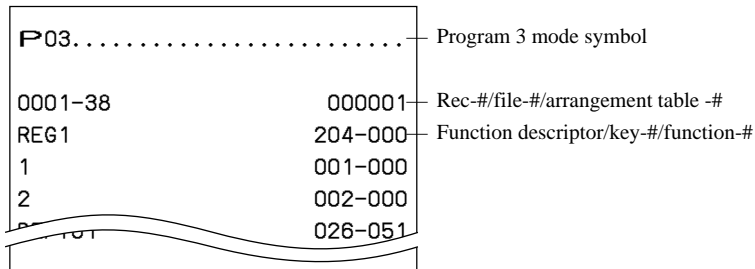


Character recall

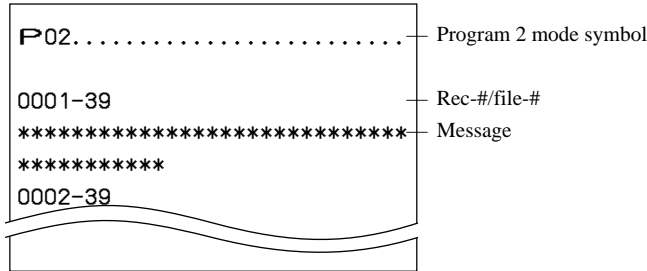

Non-PLU table

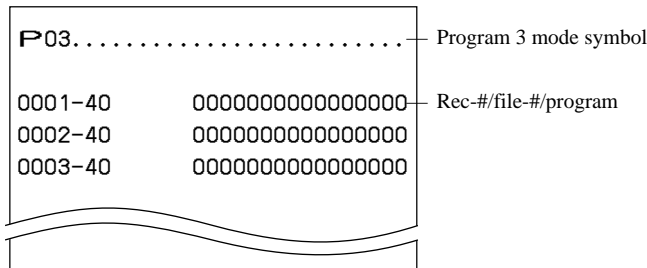

Check print control

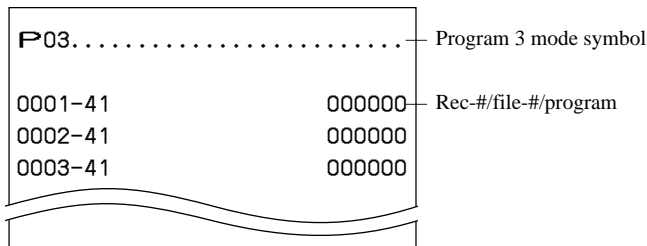

Program reading (P6)

Mix & match

Program 2

P02.....		Program 2 mode symbol
DISCOUNT01	0001-51	Descriptor/rec-#/file-#
DISCOUNT02	0002-51	
DISCOUNT03	0003-51	

Program 3

P03.....		Program 3 mode symbol
DISCOUNT01	0001-51	Descriptor/rec-#/file-#
@1.45	000003	Discount amount/status
DISCOUNT02	0002-51	

PLU 2nd @

Program 1

P01.....		Program 1 mode symbol
#000001 - #000010		PLU range
PLU0001	0001-54	PLU descriptor (2nd)/rec-#/file-#
	#000001	PLU random code
1.23	@10.00	Unit quantity (2nd)/unit price (2nd)
PLU0002	0002-54	
	#000002	
2.34	@30.00	

Program 2

P02.....		Program 2 mode symbol
PLU0001	0001-54	PLU descriptor (2nd)/rec-#/file-#
	#000001	PLU random code
PLU0002	0002-54	
	#000002	
PLU0003	0003-54	

Program 3

P03.....		Program 3 mode symbol
PLU0001	0001-54	PLU descriptor (2nd)/rec-#/file-#
	00000000000000	Address code 03, 05 program
11-66	000000	Address code 11 program
PLU0002	0002-54	

Employee

P03.....		Program 3 mode symbol
CSHR01	0001-061	Employee name/rec-#/file-#
	0000000000	Programming data
CSHR02	0002-061	
	0000000000	

Scheduler

P03.....		Program 3 mode symbol
0001-62	001234	Rec-#/file-#/data 1
	00000000000000	Data 2
	0000000000	Data 3
0002-62	002345	

Order character

P02.....		Program 2 mode symbol
ORDER 01	0001-65	Descriptor/rec-#/file-#
KITCHEN	0002-65	
BAR	0003-65	

LCD backlight color control


P03.....		Program 3 mode symbol
0001-69	0000000000	Rec-#/file-#/programming data
0002-69	0000000000	

Bottle link table


P03.....		Program 3 mode symbol
0001-73		Rec-#/file-#
PLU0001	0001-04	Linked PLU descriptor/rec-#/file-#
0002-73		

Program reading (P6)

One touch NLU

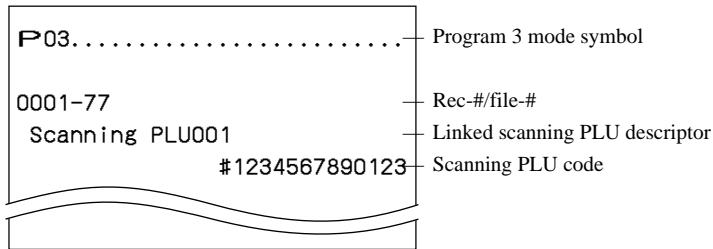


Hourly item (Time zone)

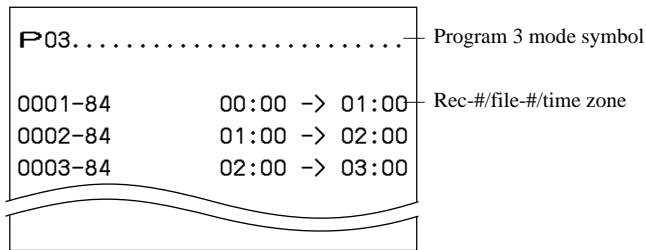


Terminal connection table


Program 2

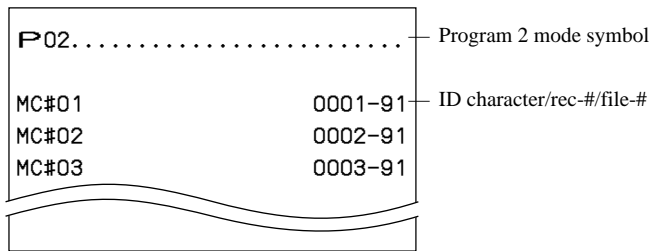


Program 3

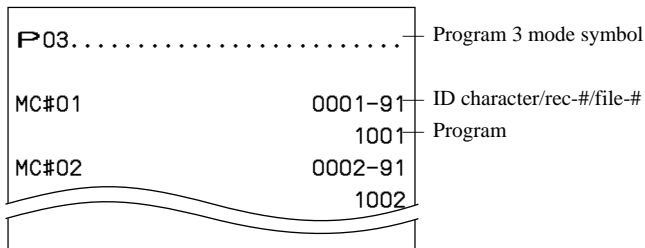


Printer connection table

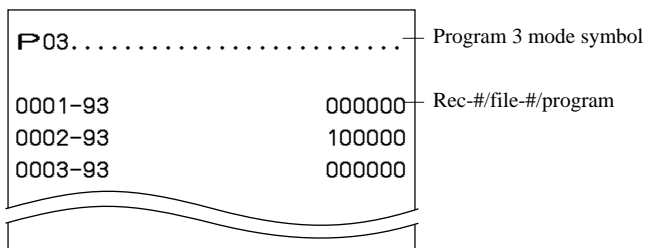


AT command

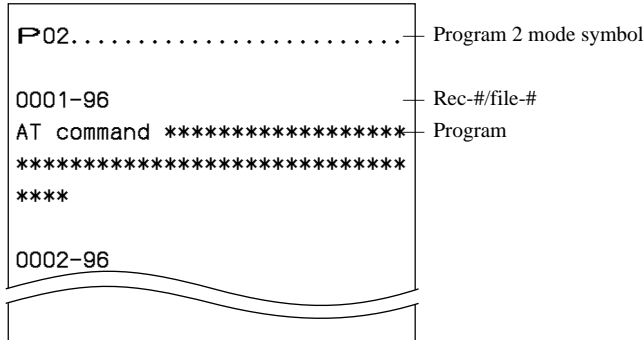


Online password

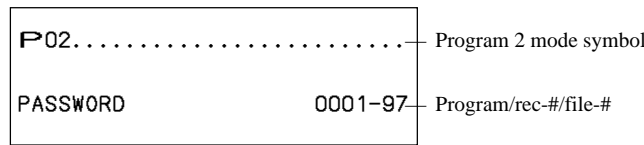


I/O parameter table

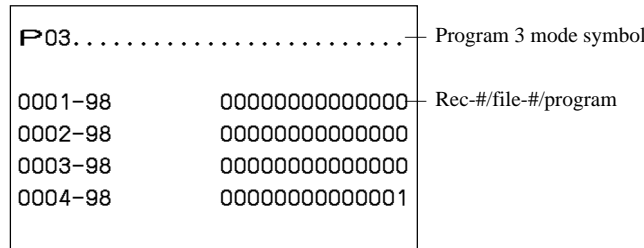

Miscellaneous message

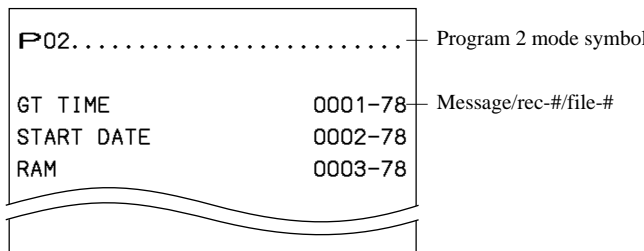

Printing guidance message

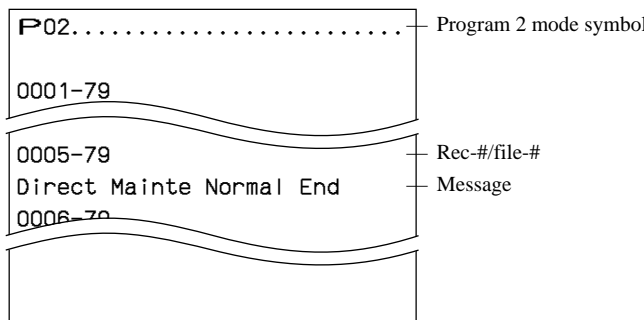

Program reading (P6)

Error message

P02.....	Program 2 mode symbol	
#0001	Guidance-No. (internal use)	
E001	0001-80	Error code/rec-#/file-# (do NOT change)
Wrong mode	0002-80	Error message/rec-#/file-#
#0003		
E003	0003-80	

Registration guidance message

P02.....	Program 2 mode symbol	
#0001	Guidance No. (internal use)	
Not Found PLU	0001-81	Message/rec-#/file-#
Input Unit Price	0002-81	
, and Press DEPT	0003-81	
key	0004-81	
#0002		

X/Z guidance message

P02.....	Program 2 mode symbol	
#0001	Guidance No. (internal use)	
PLU by range	0001-82	Message/rec-#/file-#
Input start No.	0002-82	
and press <#1>	0003-82	
#0002		
PLU by range	0001-82	
Input end No. an	0004-82	

Program guidance message

P02.....	Program 2 mode symbol	
#0001	Guidance No. (internal use)	
Range PGM	0001-83	Message/rec-#/file-#
Input start No.	0002-83	
and press <#1>	0003-83	
#0002		
Range PGM	0001-83	
Input end No. an	0004-83	

Auto-program & system utilities (Program 7)

Auto-programming

Using the auto-program function makes it possible to save and load the terminal program files. Methods available for saving the terminal program are as follows:

- 1) Saving another terminal connected through inline.
- 2) Saving onto a personal computer connected through online.
- 3) Saving onto a CF card.

To ensure quick recovery from a corrupted file resulting from user error or system failure, it is recommended that you maintain backup copies of current terminal programs on a file basis.

Terminal program files can be loaded using procedures opposite to those used for saving.

Note

Data except for program data and totalizer/counters, such as subtotal amount, item counter, and work area, cannot be saved by the auto-programming function.

Never plug/unplug the CF card during auto-programming.

Auto-programming functions

The terminal is capable of saving and loading terminal program files. The terminal has the following transfer functions:

- 1) Copy complete terminal files (send/receive: activation by source terminal) :Command code 900
This function copies complete terminal files (except system work files) with counter and totalizers. When a file is not reserved on the target terminal, the file is created automatically. This function is used for backing up a terminal.
Note: This function does not work through inline.
- 2) Copy all terminal files (send/receive: activation by source terminal): Command code 090 (or 990)
This function copies all terminal files (except system work files and terminal ID No.) with counter and totalizers. When a file is not reserved on the target terminal, the file is created automatically. This function is used for copying a terminal data to other terminal.
- 3) Copy all terminal program files (send/receive: activation by source terminal): Command code 092
This function copies all terminal files (except system work files, terminal ID No., I/O parameter table file, and consecutive No.) without counters and totalizers. When a file is not reserved on the target terminal, the processing file is skipped.
- 4) Copy all terminal program files with file allocation (send/receive: activation by source terminal): Command code 992
This function copies all terminal files (except system work files, terminal ID No., I/O parameter table file, and consecutive No.) without counters and totalizers. When a file is not reserved on the target terminal, the file is created automatically.
- 5) Copy individual terminal program files (send/receive: activation by source terminal) Command code 0xx (xx: file No.)
This function copies the specific terminal program file (except system work files) without counters and totalizers. When the specific file is not reserved on the target terminal, it is skipped.
- 6) Copy individual terminal program files with file creation (send/receive: activation by source terminal)
Command code 9xx (xx: file No.)
This function copies the specific terminal program file (except system work files) without counters and totalizers. When the specific file is not reserved on the target terminal, it is allocated automatically.

Auto-programming/system utilities (P7)

Command code list

File No.	File description	Command 900	Command 090/990	Command 092/992	Command 0xx/9xx
System files					
089	Consecutive number work	✓	---	---	---
091	Terminal connection table	✓	✓	✓	091/991
093	Printer connection	✓	✓	✓	093/993
094	Start date	✓	---	---	---
095	Initialize code	✓	✓	---	---
096	AT command	✓	✓	✓	096/996
097	Online password	✓	✓	✓	097/997
098	I/O parameter table	✓	---	---	098/998
099	System error log	✓	---	---	---
Function and total files					
001	Fixed totalizer	✓	✓	✓	001/901
101	(periodic total 1)	✓	✓	---	---
201	(periodic total 2)	✓	✓	---	---
301	(daily consolidation)	✓	✓	---	---
401	(periodic 1 consolidation)	✓	✓	---	---
501	(periodic 2 consolidation)	✓	✓	---	---
002	Transaction key	✓	✓	✓	002/902
102	(periodic total 1)	✓	✓	---	---
202	(periodic total 2)	✓	✓	---	---
302	(daily consolidation)	✓	✓	---	---
402	(periodic 1 consolidation)	✓	✓	---	---
502	(periodic 2 consolidation)	✓	✓	---	---
003	Subdepartment	✓	✓	✓	003/903
103	(periodic total 1)	✓	✓	---	---
203	(periodic total 2)	✓	✓	---	---
303	(daily consolidation)	✓	✓	---	---
403	(periodic 1 consolidation)	✓	✓	---	---
503	(periodic 2 consolidation)	✓	✓	---	---
004	PLU	✓	✓	✓	004/904
104	(periodic total 1)	✓	✓	---	---
204	(periodic total 2)	✓	✓	---	---
304	(daily consolidation)	✓	✓	---	---
404	(periodic 1 consolidation)	✓	✓	---	---
504	(periodic 2 consolidation)	✓	✓	---	---
005	Department	✓	✓	✓	005/905
105	(periodic total 1)	✓	✓	---	---
205	(periodic total 2)	✓	✓	---	---
305	(daily consolidation)	✓	✓	---	---
405	(periodic 1 consolidation)	✓	✓	---	---
505	(periodic 2 consolidation)	✓	✓	---	---
006	Group	✓	✓	✓	006/906
106	(periodic total 1)	✓	✓	---	---
206	(periodic total 2)	✓	✓	---	---
306	(daily consolidation)	✓	✓	---	---
406	(periodic 1 consolidation)	✓	✓	---	---
506	(periodic 2 consolidation)	✓	✓	---	---


File No.	File description	Command 900	Command 090/990	Command 092/992	Command 0xx/9xx
009	Hourly sales	✓	✓	✓	009/909
109	(periodic total 1)	✓	✓	---	---
209	(periodic total 2)	✓	✓	---	---
309	(daily consolidation)	✓	✓	---	---
409	(periodic 1 consolidation)	✓	✓	---	---
509	(periodic 2 consolidation)	✓	✓	---	---
010	Monthly sales	✓	✓	---	---
110	(periodic total 1)	✓	✓	---	---
210	(periodic total 2)	✓	✓	---	---
310	(daily consolidation)	✓	✓	---	---
410	(periodic 1 consolidation)	✓	✓	---	---
510	(periodic 2 consolidation)	✓	✓	---	---
018	Table analysis	✓	✓	✓	018/918
118	(periodic total 1)	✓	✓	---	---
218	(periodic total 2)	✓	✓	---	---
318	(daily consolidation)	✓	✓	---	---
418	(periodic 1 consolidation)	✓	✓	---	---
518	(periodic 2 consolidation)	✓	✓	---	---
020	Grand total	✓	✓	✓	020/920
320	(daily consolidation)	✓	✓	---	---
Check files					
015	Check Index	✓	✓	---	---
056	Separate check buffer	✓	✓	---	---
060	Check detail	✓	✓	---	---
Clerk files					
007	Clerk	✓	✓	✓	007/907
027	Dallas key ID	✓	✓	✓	027/927
030	Clerk detail link	✓	✓	✓	030/930
011	Clerk detail	✓	✓	---	---
111	(periodic total 1)	✓	✓	---	---
211	(periodic total 2)	✓	✓	---	---
311	(daily consolidation)	✓	✓	---	---
411	(periodic 1 consolidation)	✓	✓	---	---
511	(periodic 2 consolidation)	✓	✓	---	---
Time & attendance files					
019	Time & attendance	✓	✓	---	---
061	Employee	✓	✓	✓	061/961

Auto-programming/system utilities (P7)

File No.	File description	Command 900	Command 090/990	Command 092/992	Command 0xx/9xx
Hourly item files					
021	Hourly item	✓	✓	---	---
121	(periodic total 1)	✓	✓	---	---
221	(periodic total 2)	✓	✓	---	---
321	(daily consolidation)	✓	✓	---	---
421	(periodic 1 consolidation)	✓	✓	---	---
521	(periodic 2 consolidation)	✓	✓	---	---
031	Hourly item link	✓	✓	✓	031/931
084	Hourly range	✓	✓	✓	084/984
Scanning PLU files					
016	Scanning PLU	✓	✓	✓	016/916
017	Not found PLU	✓	✓	✓	017/917
040	Non PLU table	✓	✓	✓	040/940
051	Mix & match table	✓	✓	✓	051/951
151	(periodic total 1)	✓	✓	---	---
251	(periodic total 2)	✓	✓	---	---
351	(daily consolidation)	✓	✓	---	---
451	(periodic 1 consolidation)	✓	✓	---	---
551	(periodic 2 consolidation)	✓	✓	---	---
070	Batch maintenance PLU	✓	✓	✓	070/970
071	Direct maintenance PLU	✓	✓	---	---
072	Not found PLU batch maintenance	✓	✓	✓	072/972
075	Not found PLU maintenance work	✓	✓	---	---
076	Scanning PLU index	✓	✓	✓	016/916
077	One touch NLU table	✓	✓	✓	077/977
Arrangement file					
038	Arrangement table	✓	✓	✓	038/938
Program / message / buffer files					
022	General control	✓	✓	✓	022/922
023	Special character	✓	✓	✓	023/923
024	Report header	✓	✓	✓	024/924
025	Tax table	✓	✓	✓	025/925
028	Set menu table	✓	✓	✓	028/928
029	Batch X/Z	✓	✓	✓	029/929
032	Receipt/slip message	✓	✓	✓	032/932
033	Endorse message	✓	✓	✓	033/933
034	Slip/external printer message	✓	✓	✓	034/934
036	Registration buffer	✓	✓	---	---
039	Character recall	✓	✓	✓	039/939
041	Check print	✓	✓	✓	041/941
046	Character key table	✓	✓	✓	046/946
047	Graphic logo *1	✓	✓	✓	047/947
049	External printer print buffer	✓	✓	---	---
054	PLU 2nd @	✓	✓	✓	054/954
062	Scheduler	✓	✓	✓	062/962
065	Order character	✓	✓	✓	065/965
068	Watermark print	✓	✓	✓	068/968
069	LCD backlight color control	✓	✓	✓	069/969
073	Bottle link table	✓	✓	✓	073/973
074	Key table	✓	✓	✓	074/974
078	Miscellaneous message	✓	✓	✓	078/978
079	Printing guidance message	✓	✓	✓	079/979
080	Error message	✓	✓	✓	080/980
081	Registration guidance message	✓	✓	✓	081/981
082	X/Z guidance message	✓	✓	✓	082/982
083	Program guidance message	✓	✓	✓	083/983
084	Slip print buffer	✓	✓	---	---


Auto-programming operation

To other terminal(s) through inline (Individual or all terminals)

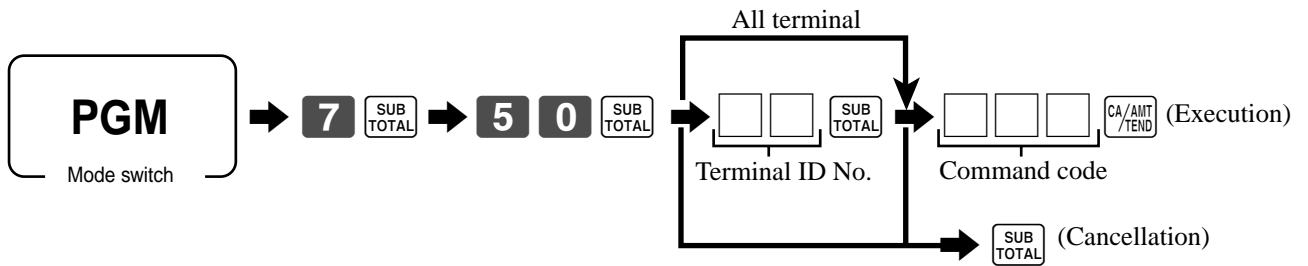


Note: Before executing this command, terminal connection table program is necessary.

To other terminal(s) through inline (group terminals)

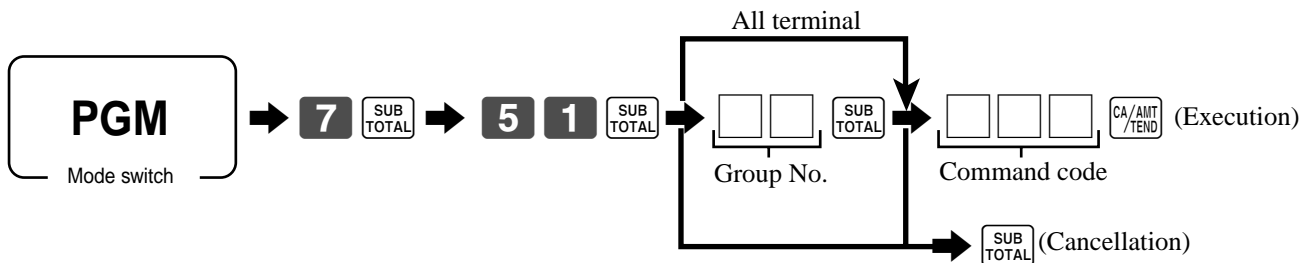


Note: Before executing this command, terminal connection table program is necessary.

To other terminal through COM1 port

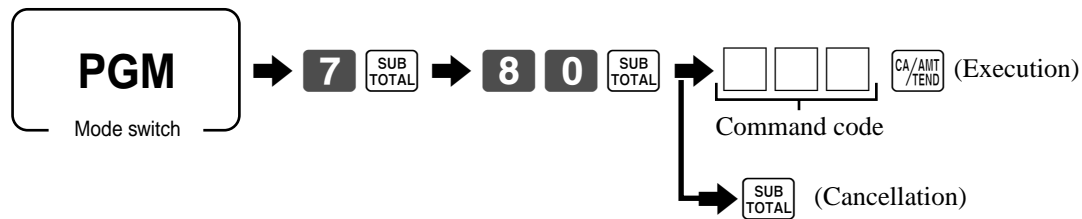


To CF card

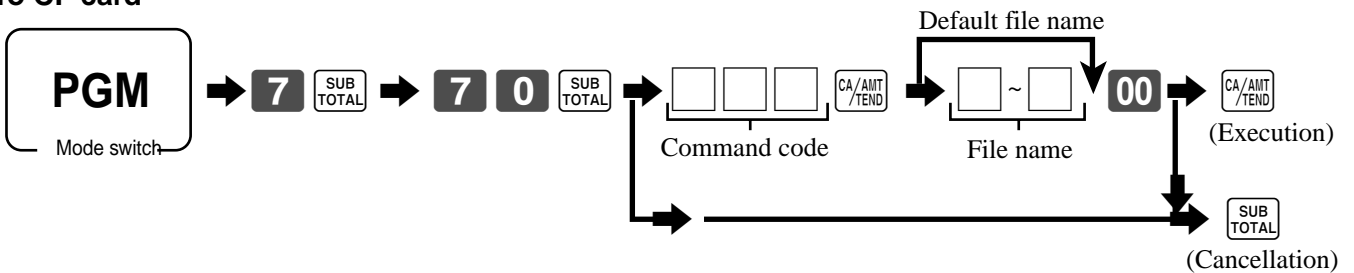


Note: You cannot overwrite the same file name.
 If there is no enough room for auto-program delete other files in the CF card or format it.
 If you use the CF card for the first time, format it.

Auto-programming/system utilities (P7)

From CF card

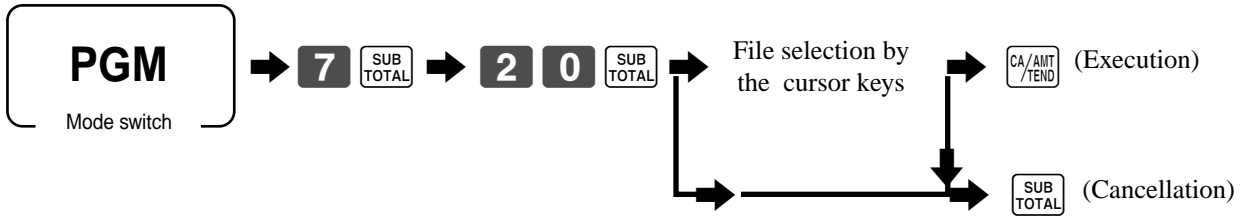

Cursor keys

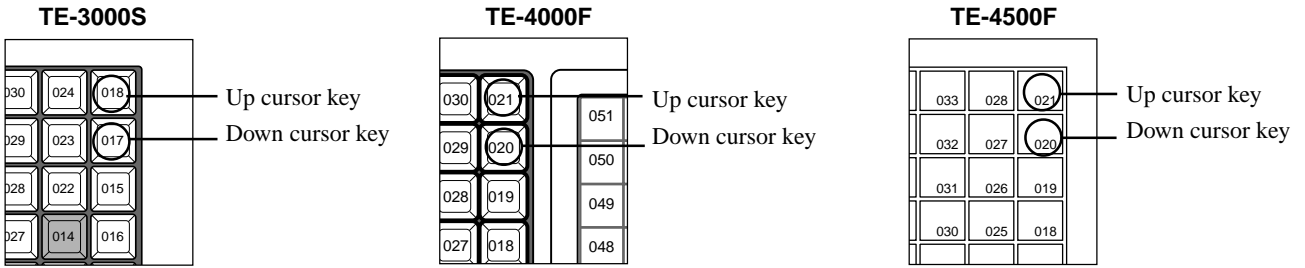


Other utilities

Issuing system error log report




Report sample

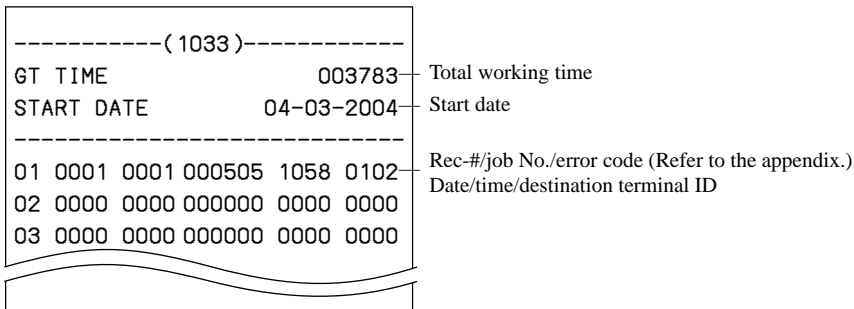

Issuing CF card directory report




Report sample

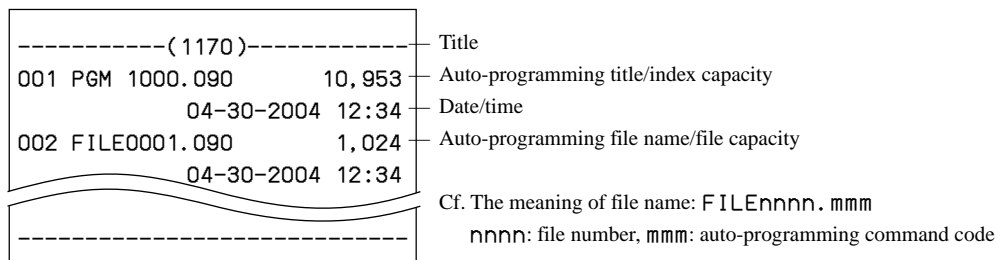


Formatting of CF card



Deleting a file from CF card

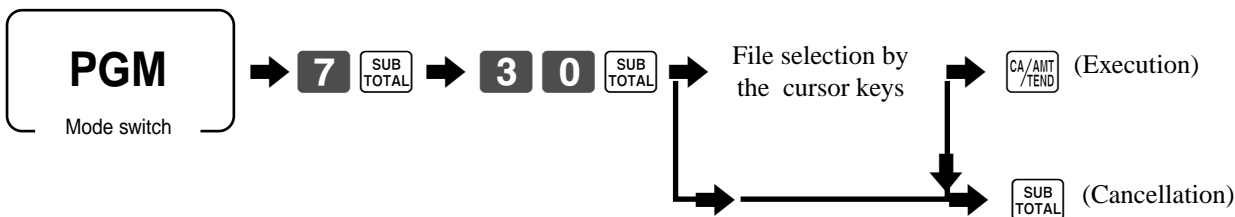

Cursor keys

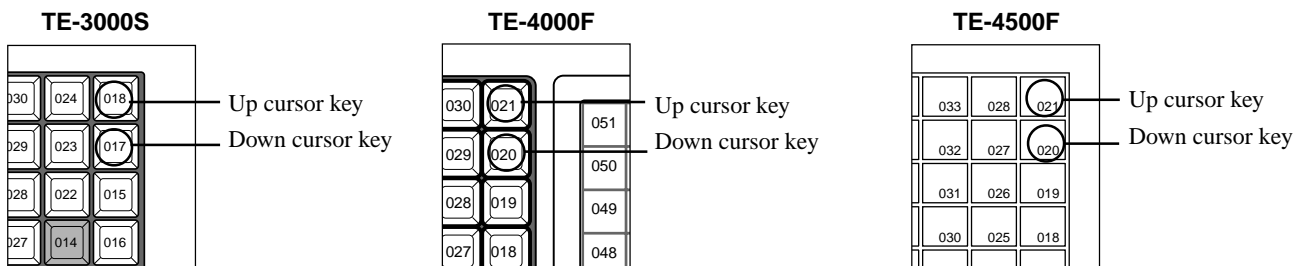

Set the AT command to default value




Set the AT command to MODEM

Before executing this command, you should connect a MODEM.



Report sample

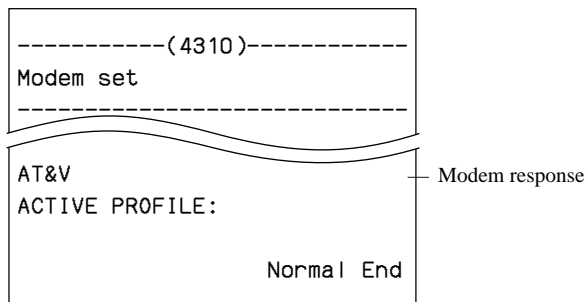

Set the graphic logo to the external printer

Before executing this command, you should connect UP-350.



Manager operation


This section describes modes and operations that are generally used by management only. Besides user programming procedure, it also describes how to perform clerk assignments for clerk interrupt function and set stock quantities.

Manager control mode (X1 mode)

Manager control consists of the six operations listed below. Access to these operations can be restricted by password that makes it impossible to perform operations unless the correct password is input.

- Drawer assignments for each clerk (when optional multi-drawer system is used)
- Stock quantity maintenance
- Clerk assignment for clerk interrupt function
- Clerk number to clerk number key
- Programming for the Euro
- Programming for Australian GST
- Program 1 programming (programming unit prices for department keys, PLUs; programming unit prices, rates, times, dates for function keys)
- Master re-connection
- Resetting the busy flag

Entering the manager control mode

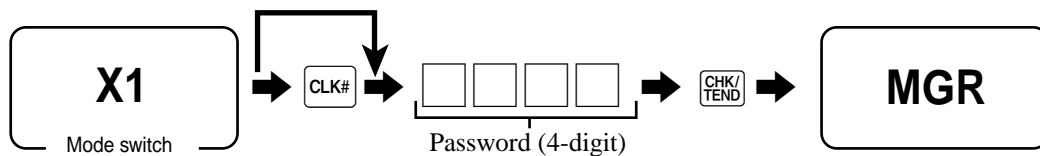


Procedure

1. If the register has no password for the manager mode, you need not to enter it.
2. Press the clerk number key if you want the password you input not to appear on the display.
3. An error occurs if you try to enter the manager control mode without inputting a password (when one is programmed), or if the password you input does not match the one programmed for the register.


To avoid repetition, the above operation is abbreviated to the following for all of the other procedure in this section.

Assign drawers for each clerk

Procedure (by clerk button/key)

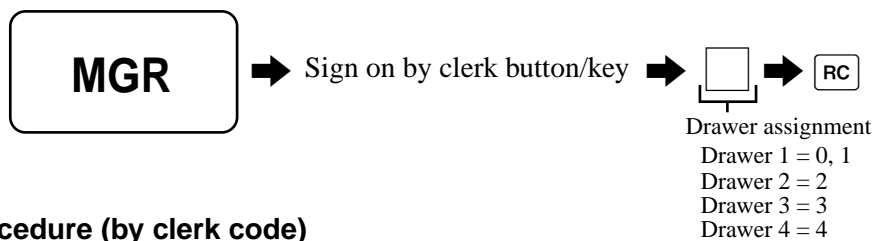

Procedure (by clerk code)

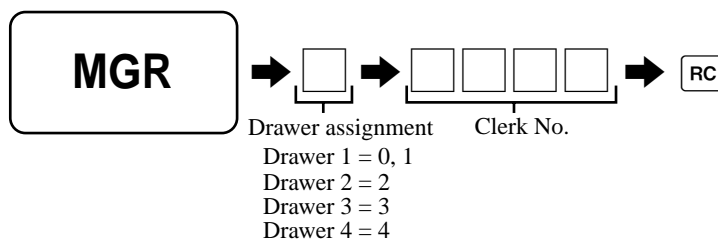

Note:

1. Each clerk can be assigned a drawer when optional multi-drawer system is being used.
2. Input a 4-digit clerk number (0001 ~ 9999) that identifies the clerk you want to assign the drawer to.


Manager operation

Stock quantity maintenance (PLU/flat PLU only)


You can make changes in actual stock quantities for PLU using the procedures described in this section.

To add to the actual stock quantity of a PLU/flat PLU

Procedure for PLU

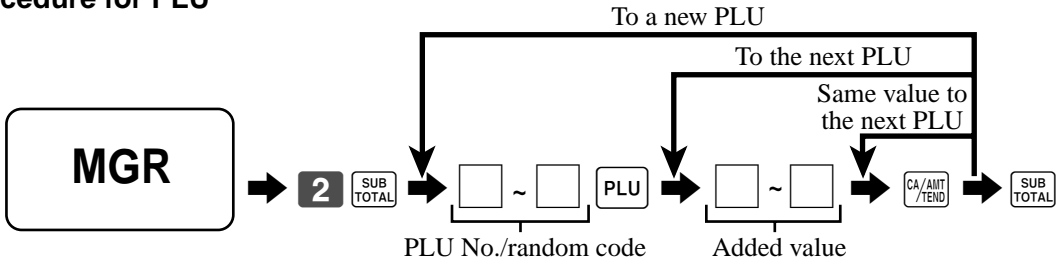


Procedure for flat PLU

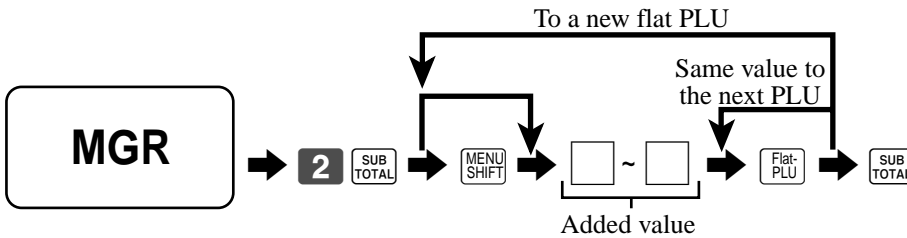


To subtract from the actual stock quantity of a PLU/flat PLU

Procedure for PLU

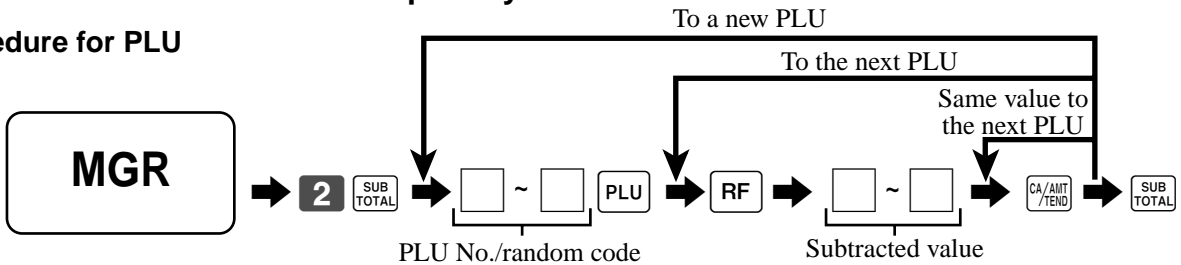


Procedure for flat PLU

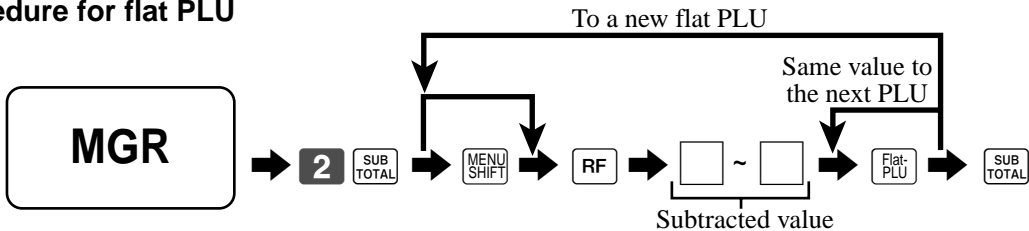


To input the new stock quantity of a PLU/flat PLU

Procedure for PLU

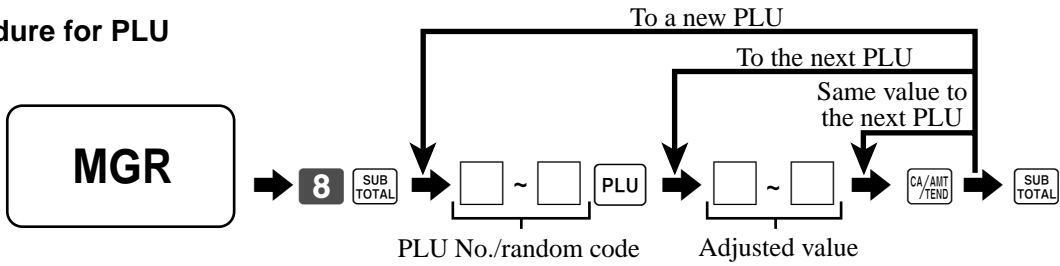

Procedure for flat PLU

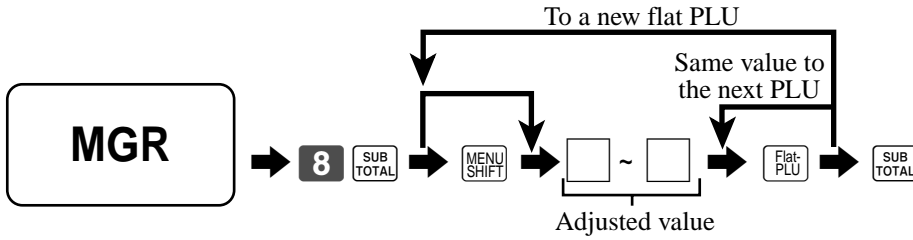


Clerk assignment

Linking a clerk to a clerk interrupt buffer enables clerk interrupt while a transaction is in progress.


To link clerk button/key to interrupt buffers

Procedure

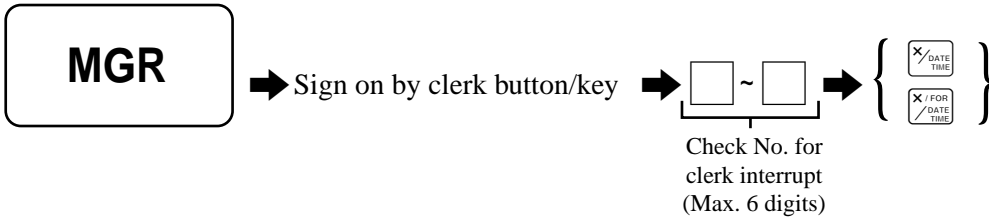


To link clerk secret numbers to interrupt buffers

Procedure

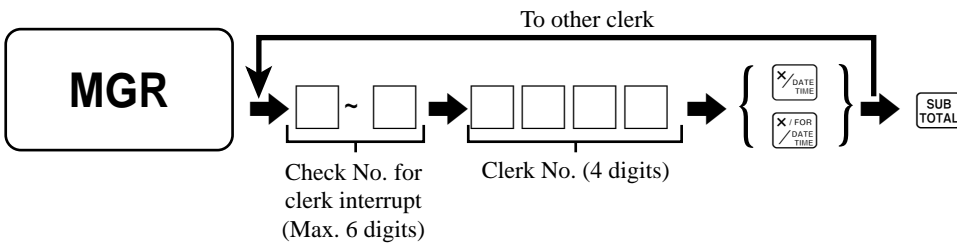

To link clerk numbers to clerk number keys

Procedure

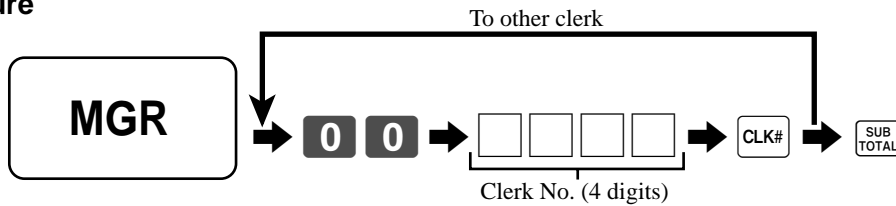

Note:


To clear the programming, enter "000000."

Manager operation

Programming for the Euro

This procedure is used for defining main/sub currency, currency exchange rate for the Euro, and drawer number for sub currency at the same time. Please follow the guidance receipts issued in each time during this procedure.

General procedure

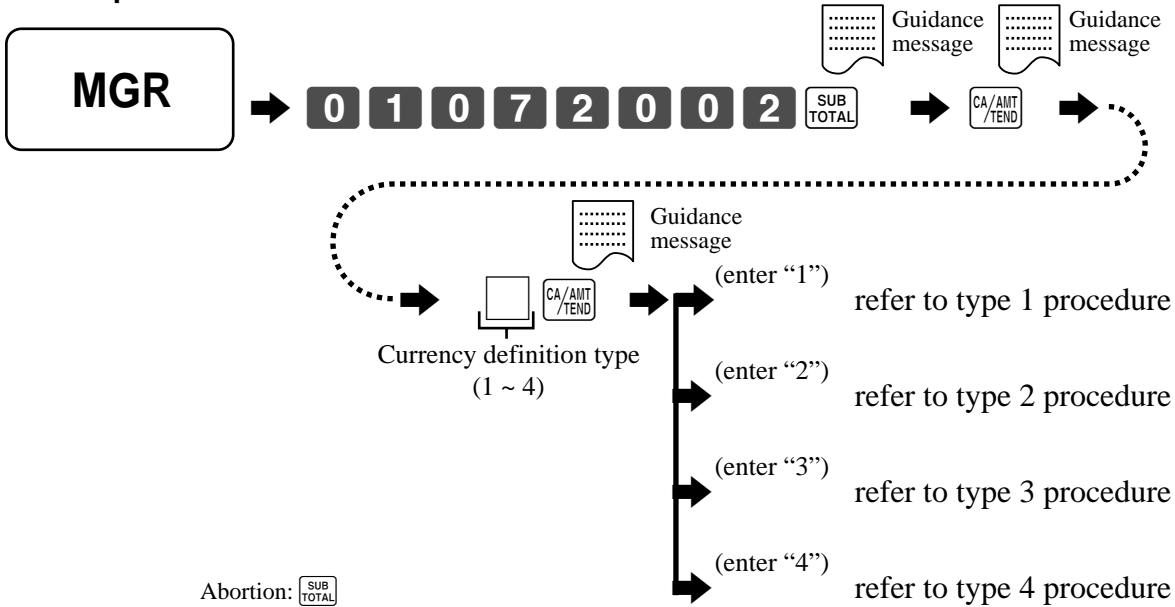


Note: After this operation, the Init 2 (Memory all clear except the program area) is automatically performed.

Data (Currency definition type)

Description	Choice	Program code
Currency definition type * :		
Main = local, sub = Euro, change = local 1	Significant number	□ D ₁
Main = local, sub = Euro, change = Euro 2		
Main = Euro, sub = local, change = Euro 3		
Euro only (No sub currency) 4		


* Once you have chosen one of these numbers, do NOT select the smaller number of the type.

Type 1 procedure

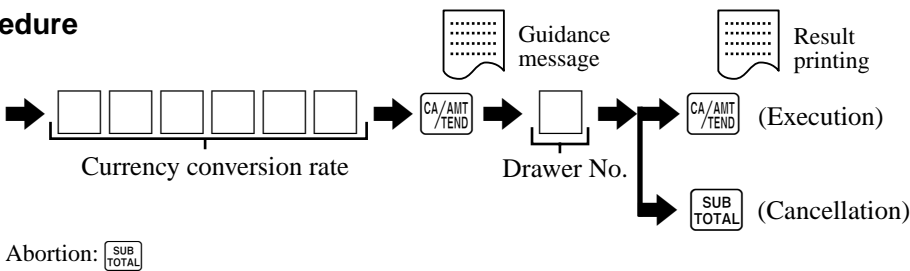


Abortion:

Type 2 procedure

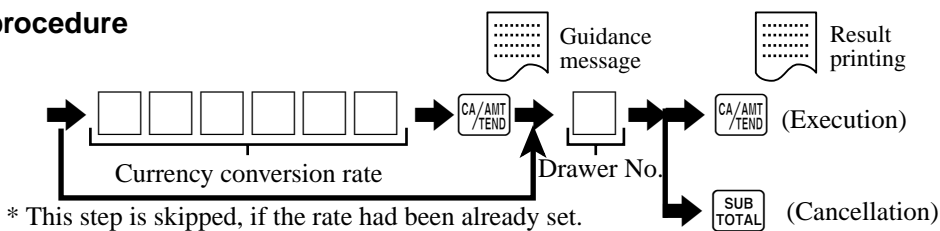


Abortion:

Type 3 procedure

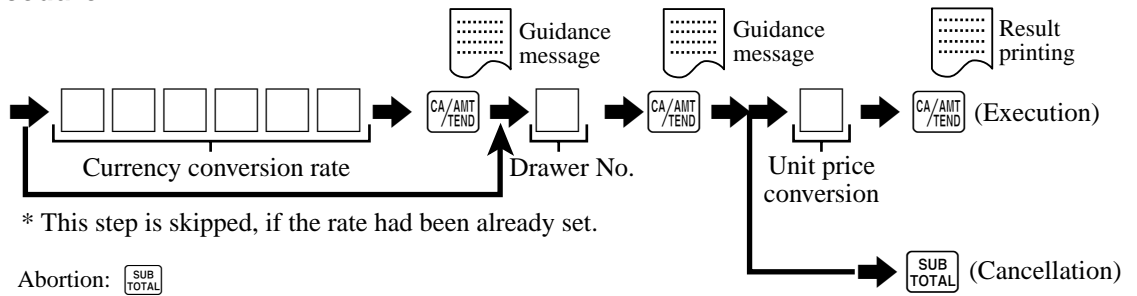

Type 4 procedure

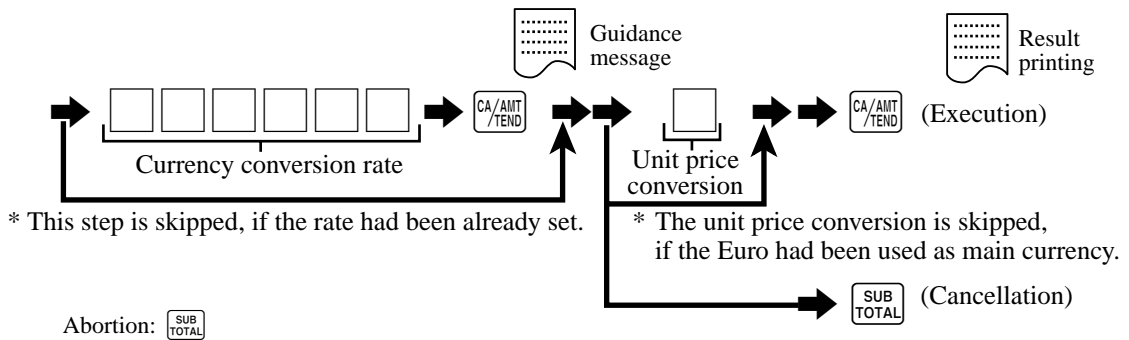

Data (Currency conversion rate)

Description	Choice	Program code
Currency exchange rate: (6 digit with decimal point key) example: 1 Euro = DM 1.95583	Significant numbers	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> D ₆ D ₅ D ₄ D ₃ D ₂ D ₁

Data (Drawer number for sub currency)

Description	Choice	Program code
Cash drawer number of sub currency: 0 ~ 4 ("0" means main drawer)	Significant number	<input type="text"/> D ₁

Data (Unit price conversion to Euro)

Description	Choice	Program code
All unit price (department, PLU, flat-PLU, scanning PLU) are converted in Euro. Note: All unit price/rate of the following function keys (<CASH>, <CHECK>, <NB>, <+>, <->, <COUPON>) are set to zero.	Yes = 0 No = 1	<input type="text"/> D ₁

Automatic execution of this procedure on the preset date/time

You can execute this Euro switchover procedure automatically by using arrangement and scheduler. Please refer to the programming example on page 202.

Manager operation

Programming for the Australian GST

This procedure is used for defining

- Tax symbol (*) is printed.
- Taxable amount (receipt) is skipped.
- “GST INCLUDED” is set to the TX1 descriptor.
- “TAXABLE AMT” is set to the TA1 descriptor.
- Total line is printed even in direct (cash) sales.
- Australian rounding is set.
- “\$” is set to the monetary symbol.
- Print “MOF message” on receipt.
- Tax (10% tax rate, add-in tax, fraction rounding off) is set to the tax table 1. No data is set to other tax tables.
- The taxable amount and tax amount except TA1/TX1 are not printed on fixed totalizer report.
- “RND/ST” is set to the subtotal descriptor for display.
- After subtotal, both “rounded ST” and “not rounded ST” are displayed.

at the same time.

Procedure



Programming of items in the program 1 mode

Use the manager control mode to program the items in the program 1 mode. These items can be preset to prohibit programming by manager control mode. The following is a list of items that you can program using the manager control mode.

- Unit prices for departments, and PLUs
- Unit prices for the plus, minus, coupon keys
- Second unit price for PLU
- Percentage for discount/premium key
- Rate or amount service charge for check cashing using the check tender key
- Rate or amount service charge for temporary finalization using the new balance key
- Date
- Time
- Currency exchange rate for currency exchange key
- Rate tax
- Scanning PLU direct maintenance

To enter the program 1 mode



1. The register enters the program 1 mode at this point. You do not need to change the mode switch to the program position.
2. Perform program 1 programming as explained in the programming manual.

To exit the program 1 mode

Change the position of the mode control key to another setting (REG1/2, RF, OFF, Z1, X2/Z2 or PGM).


This procedure cancels program 1 mode of manager control (X1) mode.

Master re-connection

This operation is used for re-connection the master with the satellite that activates this command.

Procedure

1. Issue open check reset report from this satellite.
2. Follow this step.

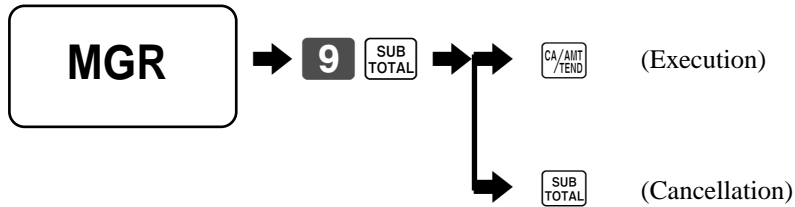


NOTE: If your system has two or more cutoff satellites, perform this procedure to all terminals.

Resetting the busy flag of the check

This operation is used for resetting the busy flag of the check in check tracking or clerk interrupt.

Procedure

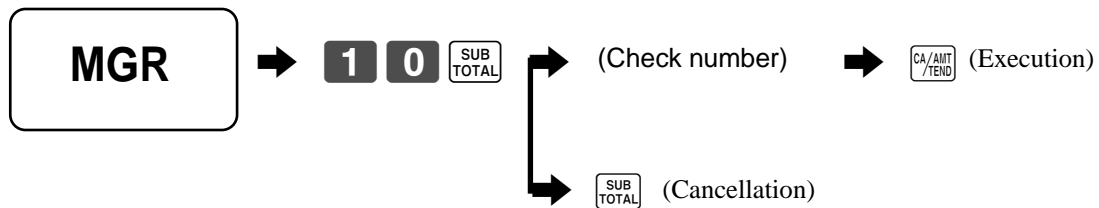

Read/reset report issuance


Preparation for issuing report

Money declaration

There are two ways to declare the money in drawer amount; money declaration in the REG1/REG2/RF mode or money declaration in the X1/Z1 mode. Both declarations release “money declaration compulsory.”


Money declaration in the REG1/REG2/RF modes

The register stores the declaration amount, declaration over and declaration short totalizers for each payment medium, and you can issue reports in the status of each totalizer.

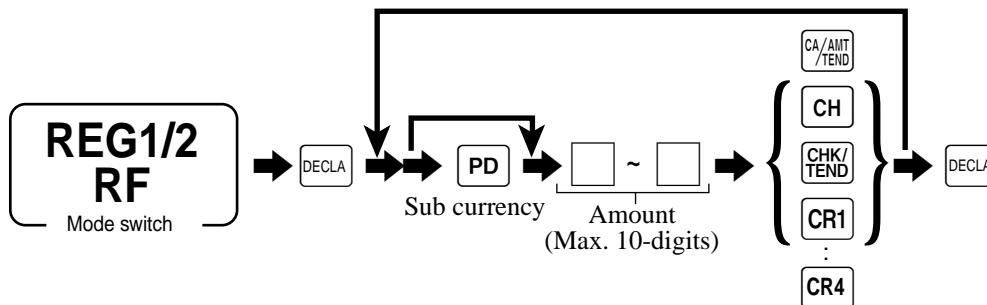


- Declaration amount: Stores declared amount (added in the REG1/2, subtracted in RF).
- Declaration over: Stores difference between declared amount and in drawer amount if declared amount is greater than the in drawer amount.
- Declaration short: Stores difference between declared amount and in drawer amount if declared amount is less than the in drawer amount.

Money declaration in the X1/Z1 modes

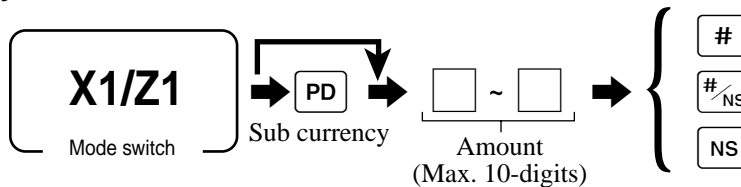

Password (X2/Z2 mode)

Without entering password of X2/Z2 mode, an error will occur if it is programmed.

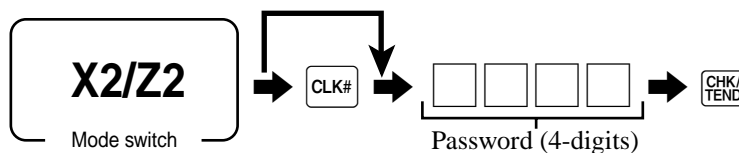

Press the clerk number key if you want the password you input not to appear on the display.

Issuing read/reset report

- The formats of read reports are similar to those of reset reports, except that the reset reports contain the symbol “Z” and the non-resettable number of resets at the top. Also, the non-resettable grand total is printed on the fixed totalizer reset report.
- If money declaration is programmed as compulsory, you must input an amount before you can perform read or reset operations, otherwise an error will occur.
- “*” is printed on the left side of the “X or Z” symbol on the read or reset report if an overflow occurs in any of the counters or totalizers.
- A report header message (report title) that indicates the report code and report contents is printed in the header line of each report. The report header message is programmable up to maximum of 12 characters. Note that the report header is programmable for each totalizer file or for batch X/Z report file record, not for each report code.

Read/reset report

Programmability

Report issuance can be programmed with the following features:

- Suppress printing of zero total lines.
- Money declaration compulsory
- Report header message (report title)
- Print sales ratio
- Suppress printing of grand total
- Print two copies of the fixed total reset report.
- Print PLU number/random PLU codes on the PLU report and individual report.
- Clear (reset) actual stock quantity when the stock reset report programmed in a batch report is issued.
- Printing control for totalizers and counters in the fixed total report
- Start time period for the hourly sales and hourly item report
- Target items for the hourly item report
- Print the monthly sales average amount on the monthly sales report.


Issuing procedure

The following procedures are available for issuing reports:


- Individual read/reset report issuance.
- PLU/scanning PLU range read/reset report issuance
- Report code input for individual files for read/reset report issuance
- Batch read/reset report issuance for string report
- File reset (clear totalizers/counters) with no report

Individual report


• Finance report

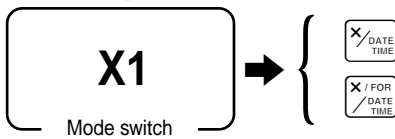

• Individual item/key report

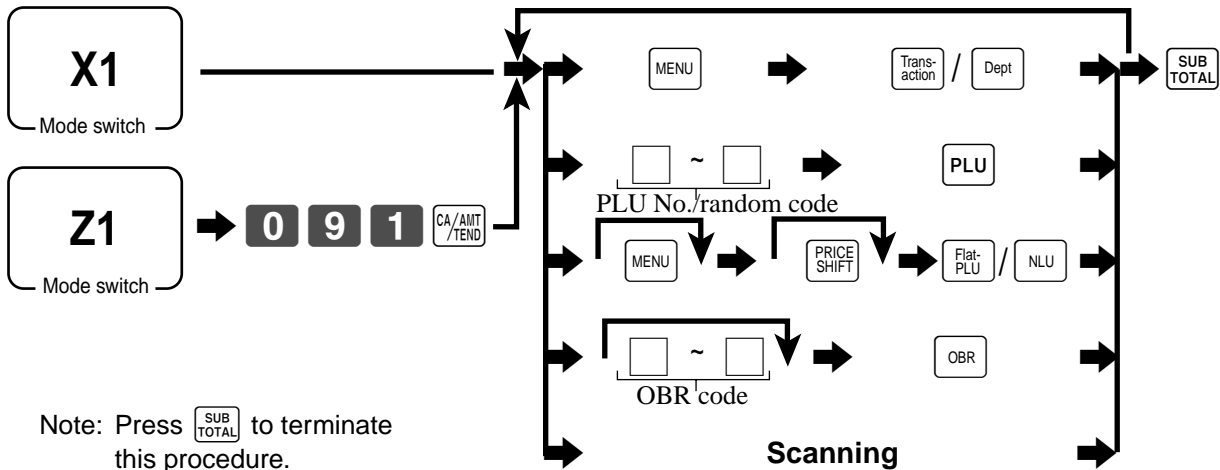


• Individual clerk/PLU by group, dept., subdept./PLU stock by group, dept., subdept report

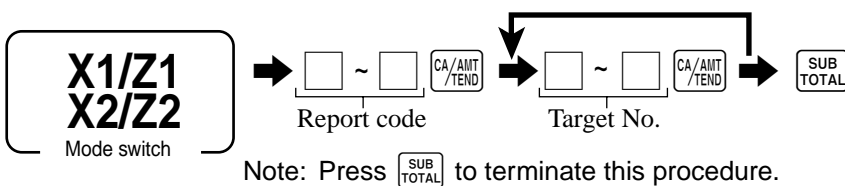

Report name	Report code (Read: #-0 / Reset: #-1)						Target-No.
				Consolidation file			
	Daily	Periodic 1	Periodic 2	Daily	Periodic 1	Periodic 2	
Clerk individual	20017	2#117	2#217	20317	2#417	2#517	Clerk-No.
PLU individual by group	1020014	102#114	102#214	1020314	102#414	102#514	Group-No.
PLU individual by department	2020014	202#114	202#214	2020314	202#414	202#514	Department-No.
PLU individual by subdepartment	3020014	302#114	302#214	3020314	302#414	302#514	Subdept-No.
PLU stock individual by group	1020064	-----	-----	-----	-----	-----	Group-No.
PLU stock individual by department	2020064	-----	-----	-----	-----	-----	Department-No.
PLU stock individual by subdepartment	3020064	-----	-----	-----	-----	-----	Subdept-No.


• Individual open check report

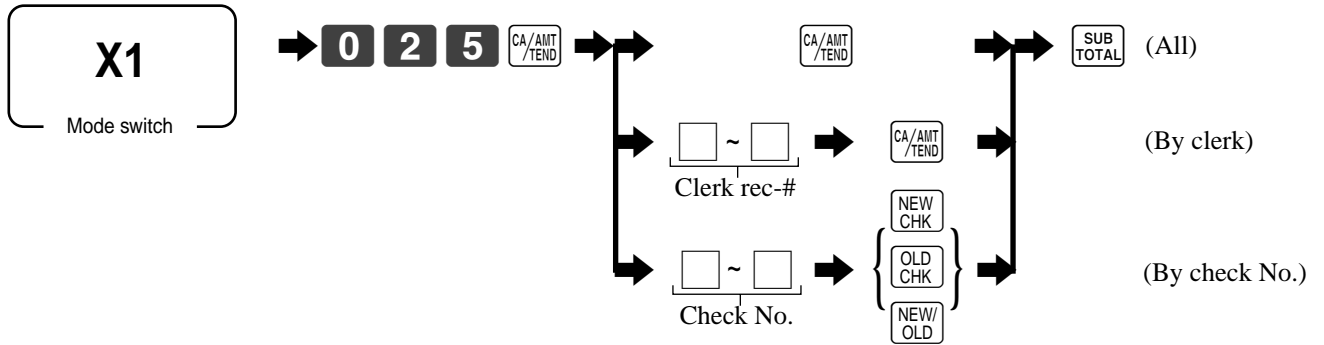

Note: Press **SUB TOTAL** to terminate this procedure.

Range report

- PLU range report
- Scanning PLU range report

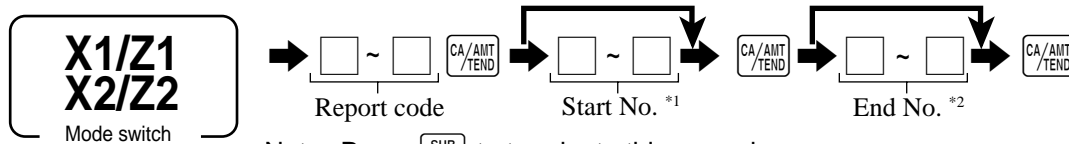

Note: Press **SUB TOTAL** to terminate this procedure.


*1 If you skip to enter the start No., it starts the first record No./random code.

*2 If you skip to enter the end No., it starts the last record No./random code.

Read/reset report


Report name	Report code (Read: #=0 / Reset: # = 1)						Target-No.	
	Consolidation file						Start number	End number
	Daily	Periodic 1	Periodic 2	Daily	Periodic 1	Periodic 2		
PLU range by record number	10014	1#114	1#214	10314	1#414	1#514	Start rec-No.	End rec-No.
PLU range by random code	10014	1#114	1#214	10314	1#414	1#514	Start random code	End random code
PLU stock range by record number	10064	-----	-----	10364	-----	-----	Start rec-No.	End rec-No.
PLU stock range by random code	10064	-----	-----	10364	-----	-----	Start random code	End random code
Scanning PLU by range group	1000026	-----	-----	-----	-----	-----	Start group-No.	End group-No.
Scanning PLU by range department	2000026	-----	-----	-----	-----	-----	Start department-No.	End department-No.
Scanning PLU by range subdepartment	3000026	-----	-----	-----	-----	-----	Start subdept-No.	End subdept-No.
Scanning PLU best 50 by range department	80026	-----	-----	-----	-----	-----	Start department-No.	End department-No.
Scanning PLU inactive item by range department	90026	-----	-----	-----	-----	-----	Start department-No.	End department-No.

Individual file report

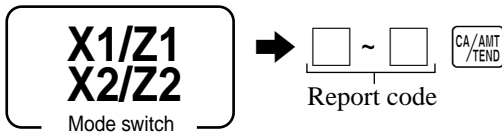


Report name	Report code (Read: #=0 / Reset: # = 1)					
	Consolidation file					
	Daily	Periodic 1	Periodic 2	Daily	Periodic 1	Periodic 2
Fixed totalizer	11	#111	#211	311	#411	#511
Transaction key	12	#112	#212	312	#412	#512
Subdepartment	13	#113	#213	313	#413	#513
PLU by record number/random code (all)	14	#114	#214	314	#414	#514
best 50 (amount order)	60014	60114	60214	60314	60414	60514
best 50 (quantity order)	70014	70114	70214	70314	70414	70514
by group	24	#124	#224	324	#424	#524
menu (1st)	81	#181	#281	381	#481	#581
menu (2nd)	82	#182	#282	382	#482	#582
menu (3rd)	83	#183	#283	383	#483	#583
menu (4th)	84	#184	#284	384	#484	#584
menu (5th)	85	#185	#285	385	#485	#585
menu (6th)	86	#186	#286	386	#486	#586
PLU stock all PLU by record number	64	-----	-----	-----	-----	-----
by group	34	-----	-----	-----	-----	-----
Department	15	#115	#215	315	#415	#515
best 50 (amount order)	60015	60115	60215	60315	60415	60515
best 50 (quantity order)	70015	70115	70215	70315	70415	70515
Group	16	#116	#216	316	#416	#516
Clerk	17	#117	#217	317	#417	#517
Hourly sales	19	#119	#219	319	#419	#519
Monthly sales	20	#120	#220	320	#420	#520
Open check	25	-----	-----	-----	-----	-----
total only	40025	-----	-----	-----	-----	-----
Scanning PLU by range department (all)	26	-----	-----	-----	-----	-----
Not found PLU	27	-----	-----	-----	-----	-----
Table analysis	28	#128	#228	328	#428	#528
Hourly item	31	#131	#231	331	#431	#531
Mix & match	61	#161	#261	361	#461	#561
Time & attendance	29	-----	-----	-----	-----	-----

Batch report

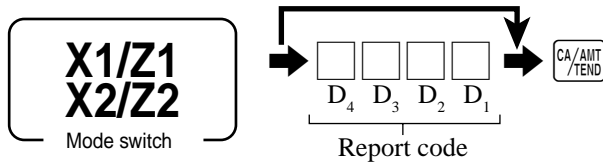

Note: If you skip to enter the report code, the 1st batch X/Z is executed.



The value (record No. of the batch X/Z file - 1)

In X1 mode,

“Issue daily file report” = 00

“Issue consolidation file report” = 03

In Z1 mode,

“Issue daily file report” = 00

“Issue consolidation file report” = 03

In X2/Z2 mode,

“Issue periodic 1/2 read/reset file report” = 00

(Read/reset and periodic 1/2 are the dependent upon the control flag of the batch X/Z file.)

“Issue periodic 1 file read report” = 01

“Issue periodic 1 file reset report” = 11

“Issue periodic 2 file read report” = 02

“Issue periodic 2 file reset report” = 12


“Issue periodic 1 consolidation file read report” = 04

“Issue periodic 1 consolidation file reset report” = 14

“Issue periodic 2 consolidation file read report” = 05

“Issue periodic 2 consolidation file reset report” = 15

File reset

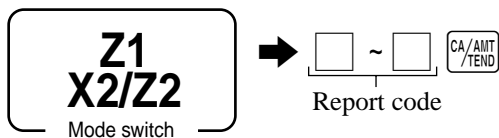

Report name	Report code		
	Daily	Periodic 1	Periodic 2
PLU reset (no report)	50014	51114	51214
Scanning PLU reset (no report)	50026	-----	-----
Not found PLU reset (no report)	50027	-----	-----
Not found PLU file reset (incl. program field)	80027	-----	-----
Not found PLU maintenance file reset	80082	-----	-----

Read/reset report

Report sample

Financial report

X	03-04-2003(THU)	19:00	X1 mode symbol/date/time
C01	MC#01	000001	Clerk descriptor/Mc-No./consecutive No.
X	FLASH		Report header/title
		0000071	Report code
DECLA		\$13,575.07	Declared amount of main currency
		-1.36	Difference between declared amount and accumulated amount
EURO MONEY		€26.33	Declared amount of sub currency
		-1.73	Difference between declared amount and accumulated amount
GROSS		2734.973	Gross character/gross quantity
		\$15,362.37	Gross amount
NET	No	846	Net character/net count
		\$13,601.80	Net amount
CAID		\$13,576.43	Cash in drawer of main currency
CATL		\$13,575.07	Declared cash in drawer amount of main currency
CA-		-1.36	Declared short cash amount
CAID2		€28.06	Cash in drawer of sub currency
CATL2		€26.33	Declared cash in drawer of sub currency
CA-		-1.73	Declared cash in drawer amount of sub currency
CR4 2		\$1.00	
FSID		\$4.63	Food stamp in drawer
EBTTL		-4.63	EBT total in drawer

Individual item/key report

X	03-04-2003(THU)	19:05	X1 mode symbol/date/time
C01	MC#01	000002	Clerk descriptor/Mc-No./consecutive No.
X	INDIVIDUAL		Report header/title
PLU0001		83.933	PLU character/quantity
25.27%		\$1,373.39	Sales ratio/amount
OLD PRC		\$26.35	Old price total
RED PRC		\$18.98	Red price total
DISCOUNT		\$56.37	Discount total
#000001			PLU code (4-digit) or Random code (6-digit)
SCAN-PLU0001		108	Scanning PLU character/quantity
6.10%		\$476.89	Sales ratio/amount
#49012345678904			Scanning PLU code
CASH	No	12	Key descriptor/counter
		\$240.43	Amount
DEPT01		15	Key descriptor/quantity
10%		\$780.92	Sales ratio/amount
OLD PRC		\$29.08	Old price total
RED PRC		\$25.33	Red price total
DISCOUNT		\$30.16	Discount total

TL		207.933	Quantity total
		\$2,871.63	Amount total
RED PRC		\$44.31	Red price total
DISCOUNT		\$86.53	Discount total

Fixed total report

Z	03-04-2003(THU)	19:10		Mode symbol/date/time
C01	MC#01	012343		Clerk descriptor/Mc-No./consecutive No.
Z	FIX		0001	Report header/title/reset counter (Z only)
			0001011	Report code
DECLA			\$13,575.07	Declared amount of main currency
			-1.36	Difference between declared amount and accumulated amount
EURO MONEY			€26.33	Declared amount of sub currency
			-1.73	Difference between declared amount and accumulated amount
GROSS			2734.973	Gross character/gross quantity
			\$15,362.37	Gross amount
NET	No	846		Net character/net count
			\$13,601.80	Net amount
CAID			\$13,576.43	Cash in drawer of main currency
CATL			\$13,575.07	Declared cash in drawer amount of main currency
CA-			\$1.36	Declared short cash amount
CAID2			€28.06	Cash in drawer of sub currency
CATL2			€26.33	Declared cash in drawer of sub currency
CA-			\$1.73	Declared cash in drawer amount of sub currency
			\$1.28	
FSID			\$4.63	Food stamp in drawer
EBTTL			-4.63	EBT total in drawer
RF	No	1		Refund mode count
			\$10.25	Refund mode total
CUST	CT	123		Customer count
AVRG			\$110.58	Average sales amount per customer
FEE			\$2.73	Check cashing service fee total
+			\$10.25	New balance fee
NB			\$102.54	New balance total
C-1			\$2.38	Clerk commission 1 total
C-2			\$57.46	Clerk commission 2 total
CECA1			¥12,793	Foreign currency cash in drawer 1
CECK1			¥1,000	Foreign currency check in drawer 1
CECK4			DM10	
DC			\$95.96	Reduction total
COUPON			\$10.26	Coupon total
REF			\$7.68	Item return total
CLEAR			866	Clear count
ROUND			€2.55	Rounding total of sub currency
ROUND			\$6.37	Rounding total of main currency
CANCEL	No	6		Cancellation count
			\$7.36	Cancellation total
DECLA	No	4		Declaration count
TA1			\$1,364.76	Taxable amount 1 total
TX			\$136.48	Tax amount 1 total
EX10			\$407.58	
NON TAX			\$9.75	Nontaxable amount
GT1			\$00000000462846.73	Grand total 1
GT2			\$00000000645230.72	Grand total 2
GT3			\$00000000449096.81	Grand total 3
			011462--->012343	Consecutive number range of the day

Read/reset report

Transaction key report

Z	03-04-2003(THU)	19:15		Mode symbol/date/time
C01	MC#01	000004		Clerk descriptor/Mc-No./consecutive No.
Z	TRANS	0001		Report header/title/reset counter (Z only)
		0001012		Report code
CASH	No	846		Cash count
		\$13,601.80		Cash total
CH	No	12		Charge count
CHKP	No	1		Check print count
CLK TRANS	No	3		
		\$12.24		
VOID	No	4		Void total
		\$64.48		Validation count
VLD	No	3		
RCT	No	18		
STORE	No	23		Store count
RECALL	No	23		Recall count

Transaction keys are printed by function code order.

Subdepartment report

Z	03-04-2003(THU)	19:20		Mode symbol/date/time
C01	MC#01	000005		Clerk descriptor/Mc-No./consecutive No.
Z	SUB DEPT	0001		Report header/title/reset counter (Z only)
		0001013		Report code
SUBDEPT01		15		Subdepartment descriptor/quantity
10%		\$780.92		Sales ratio/amount
DISCOUNT		\$30.16		Discount total
SUBDEPT02		164		
22.03%		\$1,720.95		
DISCOUNT		\$30.89		
SUBDEPT03		15		
10%		\$180.00		
DISCOUNT		\$10.23		

TL		207.933		Quantity total
		\$2,871.63		Amount total
DISCOUNT		\$86.53		Discount total

PLU report

All PLU/range/menu report

Z	03-04-2003(THU)	19:25	Mode symbol/date/time
C01	MC#01	000006	Clerk descriptor/Mc-No./consecutive No.
Z	PLU	0001	Report header/title/reset counter (Z only)
		0001014	Report code
	#000001 - #000500		PLU range (range report only)
PLU0001		83.933	PLU character/quantity
25.27%		\$1,373.39	Sales ratio/amount
OLD PRC		\$26.35	Old price total
RED PRC		\$18.98	Red price total
DISCOUNT		\$56.37	Discount total
#000001			PLU code (4-digit) or Random code (6-digit)
PLU0003		23	
4.37%		\$63.41	
DISCOUNT		\$0.00	
#000500			

TL		207.933	Quantity total
		\$2,871.63	Amount total
RED PRC		\$44.31	Red price total
DISCOUNT		\$86.53	Discount total

By group/department/subdepartment report

GROUP0101	Classification title (by group/dept./subdept.)
PLU0001	83.933	PLU character/quantity
25.27%	\$1,373.39	Sales ratio/amount
OLD PRC	\$26.35	Old price total
RED PRC	\$18.98	Red price total
DISCOUNT	\$56.37	Discount total
#000001		PLU code (4-digit) or Random code (6-digit)

	83.933	
	\$1,373.39	Total column of this classification
RED PRC	\$26.35	
DISCOUNT	\$56.37	
.....		
PLU0101	9	
12.27%	\$389.80	
OLD PRC	\$6.35	Not classified items
RED PRC	\$1.98	
DISCOUNT	\$9.37	

	9	
	\$389.80	Total column of not classified items
RED PRC	\$1.98	
DISCOUNT	\$9.37	

TL	207.933	Quantity total
	\$2,871.63	Amount total
RED PRC	\$44.31	Red price total
DISCOUNT	\$86.53	Discount total

Read/reset report

Read/reset report

Best 50 report

1.....			Ranking
PLU0001	83.933		PLU character/quantity
25.27%	\$1,373.39		Sales ratio/amount
OLD PRC	\$26.35		Old price total
RED PRC	\$18.98		Red price total
DISCOUNT	\$56.37		Discount total
#000001			PLU code (4-digit) or Random code (6-digit)
2.....			
PLU0050	67		
21.19%	\$1,152.06		
OLD PRC	\$66.75		
RED PRC	\$38.96		
DISCOUNT	\$11.07		
#000045			
50.....			
PLU0038	3		
6.87%	\$373.39		
OLD PRC	\$2.57		
RED PRC	\$7.64		
DISCOUNT	\$8.37		
#000038			

TL	207.933		Quantity total
	\$2,871.63		Amount total
RED PRC	\$44.31		Red price total
DISCOUNT	\$86.53		Discount total

PLU stock report

All PLU/range report

Z	03-04-2003(THU) 19:30		Mode symbol/date/time
C01	MC#01	000008	Clerk descriptor/Mc-No./consecutive No.
Z	PLU STOCK		Report header/title
		0001064	Report code
	#000001 - #000500		PLU range (range report only)
PLU0001	10		PLU character/optimum stock quantity
	73		Current stock quantity
#000001			PLU code (4-digit) or Random code (6-digit)
PLU0002	* 10		* means out of optimum stock quantity
	3		
#000002			

By group/department/subdepartment report

GR0UP0101		Classification title (by group/dept./subdept)
PLU0001		15	PLU character/optimum stock quantity
		73	Current stock quantity
#000001			PLU code (4-digit) or Random code (6-digit)
PLU0002	* 15		* means out of optimum stock quantity
		3	
#000002			
GR0UP0202		
PLU0010		30	
		73	
#000010			
PLU0011		20	
		23	
#000011			

Department report

All department report

Z	03-04-2003(THU)	19:30	Mode symbol/date/time
C01	MC#01	000007	Clerk descriptor/Mc-No./consecutive No.
Z	DEPT	0001	Report header/title/reset counter (Z only)
		0001015	Report code
DEPT01		83.933	Department character/quantity
	25.27%	\$1,373.39	Sales ratio/amount
OLD PRC		\$26.35	Old price total
RED PRC		\$18.98	Red price total
DISCOUNT		\$56.37	Discount total
DEPT02		23	
	4.37%	\$63.44	
DISCOUNT		\$0.00	

TL		207.933	quantity total
		\$2,871.63	Amount total
RED PRC		\$44.31	Red price total
DISCOUNT		\$86.53	Discount total

Read/reset report

Best 50 report

1.....		Ranking
DEPT01	83.933	Department character/quantity
25.27%	\$1,373.39	Sales ratio/amount
OLD PRC	\$26.35	Old price total
RED PRC	\$18.98	Red price total
DISCOUNT	\$56.37	Discount total
2.....		
DEPT50	67	
21.19%	\$1,152.06	
OLD PRC	\$66.75	
RED PRC	\$38.00	
DISCOUNT	\$43.37	
50.....		
DEPT38	3	
6.87%	\$373.39	
OLD PRC	\$2.57	
RED PRC	\$7.64	
DISCOUNT	\$8.37	

TL	207.933	Quantity total
	\$2,871.63	Amount total
RED PRC	\$44.31	Red price total
DISCOUNT	\$86.53	Discount total

Group report

Z	03-04-2003(THU) 19:35	Mode symbol/date/time
C01	MC#01 000008	Clerk descriptor/Mc-No./consecutive No.
Z	GROUP 0001	Report header/title/reset counter (Z only)
	0001016	Report code
GROUP01	83.933	Group character/quantity
25.27%	\$1,373.39	Sales ratio/amount
GROUP02	23	
4.37%	\$63.44	
GROUP03	45	
4.37%	\$63.44	

TL	207.933	Quantity total
	\$2,871.63	Amount total

Clerk report

Z	03-04-2003(THU)	19:10		Mode symbol/date/time
C01	MC#01	000008		Clerk descriptor/Mc-No./consecutive No.
Z	CASHIER	0001		Report header/title/reset counter (Z only)
		0001017		Report code
DECLA		\$13,575.07		Declared amount of main currency
		-1.36		Difference between declared amount and accumulated amount
EURO MONEY		€26.33		Declared amount of sub currency
		-1.73		Difference between declared amount and accumulated amount
C01	1		Clerk (manager) name/drawer No.
GROSS		2734.973		Gross character/gross count
		\$15,362.37		Gross amount
NET	No	846		Net character/net count
		\$13,601.80		Net amount
CAID		\$13,576.43		Cash in drawer
CHID		\$4.87		Charge in drawer
CKID		\$273.97		Check in drawer
CRID		\$28.06		Credit in drawer
RF	No	1		Refund mode total
		\$10.00		
C-1		\$3.09		Commission amount
C-2		\$8.93		
CLEAR	No	325		Clear total
----- Separator between manager and cashier				
C02	1		Clerk (cashier) name/drawer No.
GROSS		734		
		\$7,362.37		
NET	No	346		
		\$8,601.80		
CLEAR	No	315		
----- Separator between cashier and clerk				
C05	1		Clerk name/drawer No.
GROSS		34		
		\$362.37		
NET	No	26		
		\$501.80		
CLEAR	No	15		

Read/reset report

Hourly sales report

Z	03-04-2003(THU)	19:45		Mode symbol/date/time
C01	MC#01	000010		Clerk descriptor/Mc-No./consecutive No.
Z	HOURLY	0001		Report header/title/reset counter (Z only)
		0001019		Report code
	00:00->01:00			Time frame
		CT	12	Customer count
GROSS			\$1,373.39	Gross total
NET	No		12	Net count
	10.67%		\$1,373.39	Sales ratio/Net amount
	01:00->02:00			Time frame
		CT	26	Customer count
GROSS			\$4,253.64	Gross total
NET	No		12	Net count
	2.67%		\$343.55	Sales ratio/Net amount

TL		CT	4357	Customer count total
GROSS			\$12,871.63	Gross amount total
NET	No		3674	Net count total
			\$12,881.00	Net amount total

Monthly report

Z	03-04-2003(THU)	19:50		Mode symbol/date/time
C01	MC#01	000011		Clerk descriptor/Mc-No./consecutive No.
Z	MONTHLY	0001		Report header/title/reset counter (Z only)
		0001020		Report code
	1.....			Day
GROSS			198.486	Gross count
			\$1,373.39	Gross total
NET	No		12	Net count
			\$1,373.39	Net amount
	2.....			Day
GROSS			498	Gross count
			\$4,253.64	Gross total
NET	No		12	Net count
			\$4,203.64	Net amount

TL				Gross count total
GROSS			74657	Gross amount total
			\$12,871.63	Gross amount total
			\$0.17	Average gross sales total
NET	No		574	Net count total
			\$12,881.00	Net amount total
			\$22.44	Average net sales total

Table analysis report

Z	03-04-2003(THU)	19:55		Mode symbol/date/time
C01	MC#01	000012		Clerk descriptor/Mc-No./consecutive No.
Z	ANALYSIS	0001		Report header/title/reset counter (Z only)
		0001028		Report code
TBL01	CT	34		Table character/customer count
	10.66%	\$1,373.39		Sales ratio/net amount
TBL02	CT	27		
	29.24%	\$3,767.65		
TBL20		23		
	2.67%	\$344.84		
TL	CT	162		Customer count total
		\$12,881.00		Net amount total

Hourly item report

Z	03-04-2003(THU)	20:00		Mode symbol/date/time
C01	MC#01	000013		Clerk descriptor/Mc-No./consecutive No.
Z	HOURLY ITEM	0001		Report header/title/reset counter (Z only)
		0001031		Report code
PLU0001		#000001		Item character (PLU)/PLU code (4 digits), random code (6 digits)
00:00->01:00		28.278		Time frame/gross count
	22.02%	\$2,836.98		Sales ratio/gross total
01:00->02:00		23		
		\$465.00		
23:00->00:00		45.30%		
		\$5,836.36		
TL		3162		Item count total
		\$12,881.00		Item gross sales total
DEPT01				Item character (department)
00:00->01:00		128		
	8.63%	\$2,836.98		
01:00->02:00		22		
		\$465.00		
23:00->00:00		17.77%		
		\$5,836.36		
TL		3662		
		\$32,841.04		
SCAN PLU0001				Item character (scanning PLU)
#49012345678904				Scanning PLU code
00:00->01:00		338		
	5.37%	\$2,836.98		
01:00->02:00		53		
		\$465.00		
23:00->00:00		11.04%		
		\$5,836.36		
TL		3162		
		\$52,821.00		

Read/reset report

Open check report

Z	03-04-2003(THU)	20:05		Mode symbol/date/time
C01	MC#01	000014		Clerk descriptor/Mc-No./consecutive No.
Z	OPEN CHECK	0001		Report header/title/reset counter (Z only)
		0001025		Report code
REG	03-04-2003(THU)	09:02		Mode symbol/date/time
TABLE	No. 123456	CT 12		Table No./No. of customer
CHECK	No. 123			Check No.
			\$250.00	Subtotal amount
REG	03-04-2003(THU)	09:02		Mode symbol/date/time
TABLE	No. 111111	CT 14		Table No./No. of customer
CHECK	No. 12345678			Check No.
BUSY			\$300.00	Print "BUSY", if the check is currently opened.
TL	No	28		No. of open check
			\$1,374.00	Open check total

Scanning PLU report

By group/department/subdepartment report

Z	03-04-2003(THU)	20:10		Mode symbol/date/time
C01	MC#01	000015		Clerk descriptor/Mc-No./consecutive No.
Z	SCAN PLU	0001		Report header/title/reset counter (Z only)
		2001026		Report code
DEPT01	01		Classified title (by group/dept/subdept)
SCAN_PLU001		382		Scanning PLU character/quantity
	17.07%		\$1,583.47	Sales ratio/total
	#4901234567894			Scanning PLU code
SCAN_PLU002		382		Scanning PLU character/quantity
	38.01%		\$3,526.46	Sales ratio/total
	#4989012345674			Scanning PLU code
SCAN_PLU003		382		Scanning PLU character/quantity
	10.49%		\$973.45	Sales ratio/total
	#4967890123454			Scanning PLU code
		1253		Total of this classification
			\$9,275.83	Amount total
DEPT02	02		Classified title (by group/dept/subdept)
SCAN_PLU010		453		Scanning PLU character/quantity
	17.07%		\$1,583.47	Sales ratio/total
	#4945678901234			Scanning PLU code
		243		Total of this classification
			\$10,375.93	Amount total
TL		12653		Quantity total
			\$273,375.93	Amount total

Best 50 report

DEPT0101	Classified title
1.....		Ranking
SCAN_PLU002	382	Scanning PLU character/quantity
38.01%	\$3,526.46	Sales ratio/total
#4934567890124		Scanning PLU code
2.....		
SCAN_PLU001	285	
#4912345678904		
50.....		
SCAN_PLU003	72	
10.49%	\$973.45	
#4956789012344		

	1253	Total of this classification
	\$9,275.83	
DEPT0202	
1.....		
SCAN_PLU010	453	
17.07%	\$1,583.45	
#4990123456784		

	243	
	\$10,375.93	

TL	12653	Quantity total
	\$273,375.93	Amount total

Inactive report

DEPT0101	Classified title
SCAN_PLU001	3	Scanning PLU character/quantity
	\$5.83	Sales total
#4901234567894		Scanning PLU code
SCAN_PLU002	0	
	\$0.00	
SCAN_PLU050	0	
	\$0.00	
#4934567890124		

	3	Total of this classification
	\$5.83	
DEPT0202	
SCAN_PLU001	0	
	\$0.47	
#123456		

	2	
	\$10.93	

TL	25	Quantity total
	\$15.93	Amount total

Read/reset report

Not found PLU report

Z	03-04-2003(THU)	20:20		Mode symbol/date/time
C01	MC#01	000018		Clerk descriptor/Mc-No./consecutive No.
Z	NFP		0001	Report header/title/reset counter (Z only)
			0001027	Report code
#4901234567894			382	Scanning PLU code/quantity
17.07%			\$1,583.47	Sales ratio/total
#4989012345674			35	
38.01%			\$3,526.46	
#4967000123454			12	
10.49%			\$276.40	

TL			1265	Quantity total
			\$5,375.93	Amount total

Mix & match report

Z	03-04-2003(THU)	20:25		Mode symbol/date/time
C01	MC#01	000019		Clerk descriptor/Mc-No./consecutive No.
Z	MIX&MATCH		0001	Report header/title/reset counter (Z only)
			0001061	Report code
DISCOUNT01	No		6	Mix & match character/count
			\$3.00	Mix & match total
DISCOUNT02	No		12	
			\$12.00	
DISCOUNT03	No		24	
			\$3.00	

TL	No		65	Count total
			\$75.93	Amount total

Time & attendance report

Z	03-04-2003(THU)	20:30	Mode symbol/date/time
C01	MC#01	000021	Clerk descriptor/Mc-No./consecutive No.
Z	ATTENDANCE	0001	Report header/title/reset counter (Z only)
		0001029	Report code
CSHR01		1111111111	Employee name/employee No.
03-03-02	08:55->17:09	08:16	Clock-in/out date/clock-in time/clock-out time/work time
03-03-03	08:56->17:11	08:17	
03-03-04	08:55->--:--	--:--	

TL		16:33	Total work time
CSHR01		2222222222	

Read/reset report

File reset

PLU reset

Z	03-04-2000(MON)	22:25	Mode symbol/date/time
C01	MC#01	000050	Clerk descriptor/Mc-No./consecutive No.
Z	PLU	0001	Report header/title/reset counter
		0051014	Report code
PLU Z clear	Normal End		Action/result

Scanning PLU reset

Z	03-04-2000((MON)	22:30	Mode symbol/date/time
C01	MC#01	000051	Clerk descriptor/Mc-No./consecutive No.
Z	SCAN PLU	0001	Report header/title/reset counter
		0051026	Report code
PLU Z clear	Normal End		Action/result

Not found PLU reset

Z	03-04-2003(THU)	22:35	Mode symbol/date/time
C01	MC#01	000052	Clerk descriptor/Mc-No./consecutive No.
Z	NFP	0001	Report header/title/reset counter
		0051027	Report code
PLU Z clear	Normal End		Action/result

Not found PLU file reset

Z	03-04-2003(THU)	22:40	Mode symbol/date/time
C01	MC#01	000053	Clerk descriptor/Mc-No./consecutive No.
Z	NFP	0001	Report header/title/reset counter
		0081027	Report code
PLU Reset	Normal End		Action/result

Not found PLU maintenance reset

Z	03-04-2003(THU)	22:45	Mode symbol/date/time
C01	MC#01	000054	Clerk descriptor/Mc-No./consecutive No.
Z	NFP	0001	Report header/title/reset counter
		0081082	Report code
PLU Reset	Normal End		Action/result

Consolidation

X/Z consolidation


This is used when it is desirable to obtain the counters and totals of all terminals in the store.

After consolidating data from all specified terminals, the master prints the details on the receipt/journal printer.

First of all, allocate the appropriate consolidation files and program the terminal connection table.

During the X consolidation, the satellite terminals send data and do not print out the reports. But, during the Z consolidation, satellites are locked from registrations, and reports can be printed out on the receipt/journal of a terminal in accordance with the program. Also, you can program the behavior of the master, when the satellite does not respond for the first polling (refer to the address 13 of the general function program).

X consolidation processing

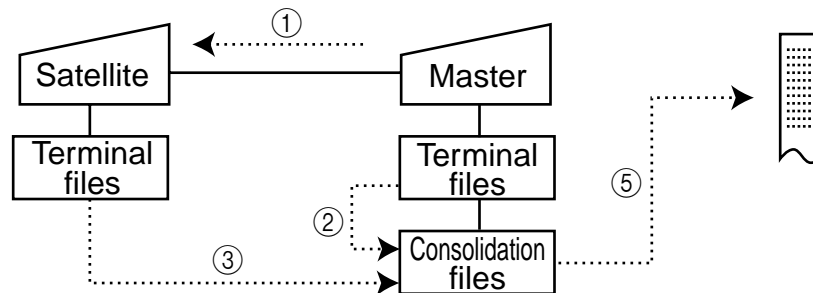


X consolidation processing is performed as the figure shown below.

- ① An X consolidation command is started up from the master terminal.
- ② Data of the master's terminal file are copied to the consolidation file, if the master is included in the target terminal.
- ③ Data of the satellite's terminal file are sent to the master terminal, and are added to the consolidation file.
- ④ The same process described in step 3 is executed for other terminal.
- ⑤ After the above consolidation processing is completed for all target terminals, the data are reported on the master's R/J printer.

Consolidation

Z consolidation processing (except for scanning PLU)

Z consolidation processing is performed as the figure shown below.

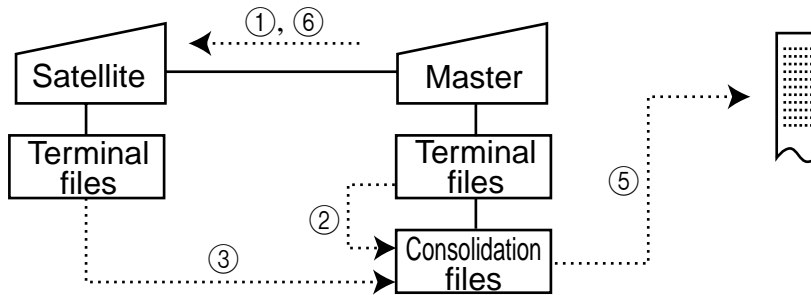


- ① A Z consolidation command is started up from the master terminal.
The master first locks objected terminals.
- ② Data of the master's terminal files are copied to the consolidation file.
- ③ Data of the satellite's terminal files are sent to the master terminal, and are added to the consolidation file.
- ④ The same process described in step 3 is executed for other terminal.
- ⑤ The data accumulated in the consolidation file are reported on the master's R/J printer.
If reporting on the satellite is programmed, the reports are printed out on the satellite R/J printer in accordance with the program. The files of the master terminal are cleared, if the master is included in the target terminal. The files of the satellite terminal are cleared.
- ⑥ After the above consolidation processing completes for all target terminals, the stock data in the consolidation file is copied to the terminal file of the master and then satellite's Z lock statuses are released.

Z consolidation processing (for scanning PLU)

Scanning PLU has Z consolidation only, because there is no consolidation file for scanning PLU.

Z consolidation for scanning PLU processing is performed as the figure shown below.

(Only "consolidate all terminals" is possible.)

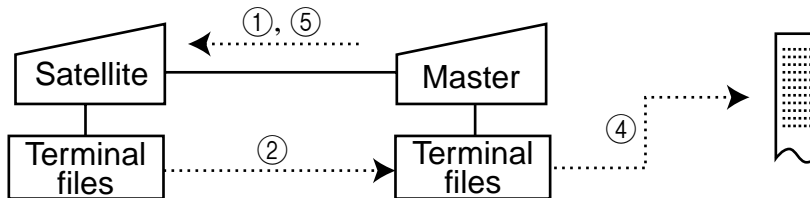


- ① A Z consolidation command is started up from the master terminal.
The master first locks objected terminals. No report is printed out on the satellite R/J printer.
- ② Data of the satellite's terminal files are sent to the master terminal, and are added to the terminal file. The sent part of the satellite terminal's file are cleared.
- ③ The same process described in step 2 is executed for other terminal.
- ④ The data accumulated in the consolidation file are reported on the master's R/J printer in accordance with the program.
- ⑤ After the above consolidation processing completes for all target terminals, satellite's Z lock statuses are released.

Scanning PLU maintenance by consolidating the not found PLU file

During registrations, the item that has not existed in the PLU or not found PLU file is stored in the not found PLU file when the item is registered. So, after business hours, you should merge the items in the not found PLU file to the PLU (main) file. To merge the contents of the not found PLU file to the main file, consolidation of the not found PLU is necessary, even if you have only one scanning terminal.

Consolidation for not found PLU processing is performed as the figure shown below.
(Only “consolidate all terminals” is possible.)

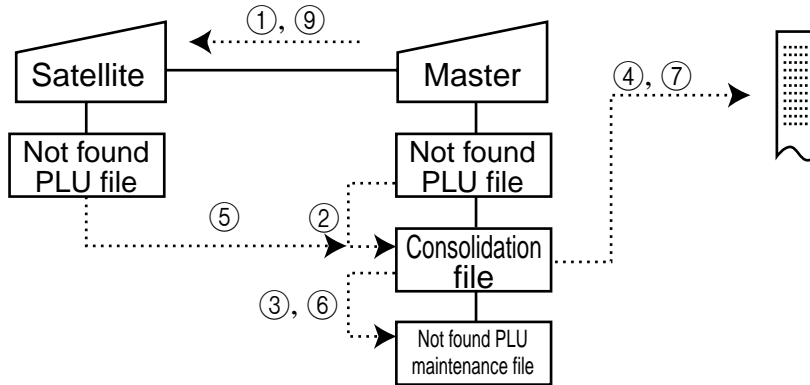


- ① A consolidation command is started up from the master terminal.
The master first locks objected terminals. No report is printed out on the satellite R/J printer.
- ② Data of the master's not found PLU file is copied to the consolidation file.
- ③ Data of the consolidation file is merged in the not found PLU maintenance file. (If the same item exists in the maintenance file, the merger of this item is skipped.)
- ④ Issue not found PLU report, and reset the not found PLU file if Z consolidation is performed.
- ⑤ Data of the satellite's not found PLU file is copied to the master's consolidation file.
- ⑥ Data of the consolidation file is merged in the not found PLU maintenance file. (If the same item exists in the maintenance file, the merger of this item is skipped.)
- ⑦ Issue not found PLU report, and reset the not found PLU file if Z consolidation is performed.
- ⑧ The same process described in steps 5 ~ 7 is executed for other terminal.
- ⑨ After the above consolidation processing completes for all target terminals, satellite's Z lock statuses are released.

To merge the items in the not found PLU file, perform the “Not found PLU maintenance” (refer to the “Scanning PLU section.”)

Standalone Z consolidation processing (except for scanning PLU)

In case of your store has one terminal per one store and every terminal are connected via online, you can consolidate the daily total not by executing consolidation but issuing report. (A program is necessary to use this option. Refer to the address code 13 of the general function program.) Standalone Z consolidation processing is performed as the figure shown below.

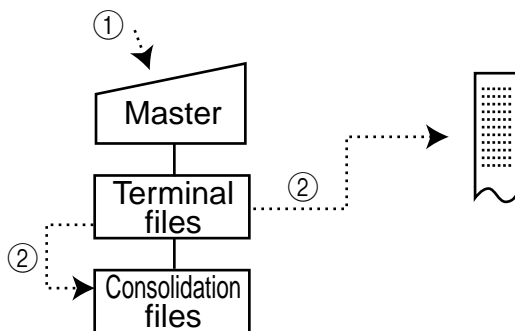


- ① A Z report issuance command is executed.
- ② Data of the terminal files are added to the consolidation file, and the Z report of the files are issued.
- ③ The files of the terminal are cleared.

Consolidation


X/Z consolidation execution

Consolidate terminal by terminal

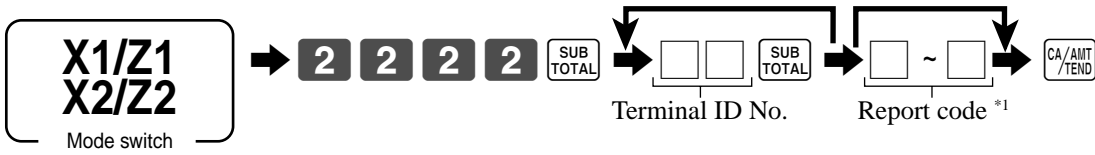

*1 If you skip to enter the report code, the 1st batch X/Z is executed.

Consolidate by group No./all terminal

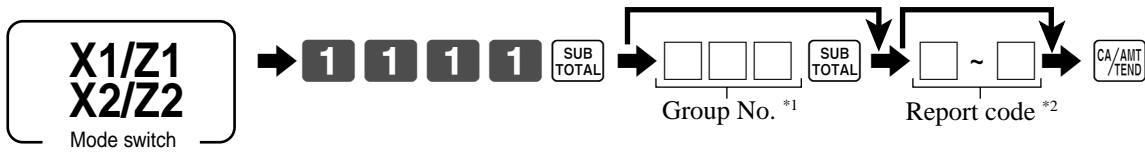


*1 All terminals are selected, if you skip to enter the group No.

*2 If you skip to enter the report code, the 1st batch X/Z is executed.

Report name	Report code Read: #=0 / Reset: # = 1		
	Daily	Periodic 1	Periodic 2
Fixed totalizer	11	#111	#211
Transaction key	12	#112	#212
Subdepartment	13	#113	#213
PLU	14	#114	#214
by group	24	#124	#224
PLU stock	64	-----	-----
by group	34	-----	-----
Department	15	#115	#215
Group	16	#116	#216
Clerk	17	#117	#217
Hourly sales	19	#119	#219
Monthly sales	20	#120	#220
Scanning PLU (Z only)	26	-----	-----
Table analysis	28	#128	#228
Hourly item	31	#131	#231
Mix & match	61	#161	#261
Batch X/Z (1st record)	-----	-----	-----
2nd ~ 10th record	1 ~ 9	#100 ~ #109	#200 ~ #209

Execute file reset command to all terminal

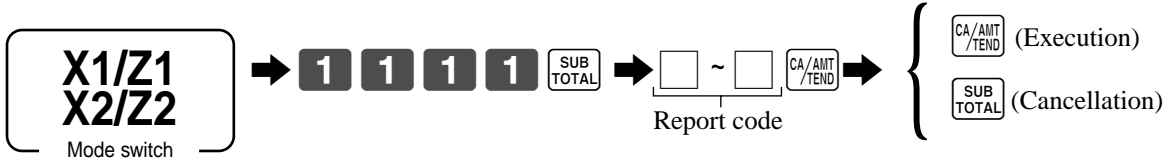

Report name	Report code		
	Daily	Periodic 1	Periodic 2
Scanning PLU reset (no report)	50026	-----	-----
Not found PLU file reset (incl. program field)	80027	-----	-----
Not found PLU maintenance file reset	80082	-----	-----

X/Z consolidation report sample

Z consolidation

Master terminal

Z	03-04-2003(THU)	20:15		
C01	MC#01	000024		
INLINE	2222	01	00011	INLINE/command No./Report code

Report of the consolidation file before processing*1				

Report master itself*1				

01 MC#01	Z	19:01		Physical ID/logical ID/mode symbol/time (consolidate successfully)
02 MC#02	Z	19:02		
03 MC#03		Error End		Physical ID/logical ID/error end symbol (consolidate unsuccessfully)
		2036		Error code

Consolidation report*1				

*1 Refer to the address 13 of the general function program.

Satellite terminal

INLINE	Z	00011		INLINE/mode/Report code
		Normal End		Normal end symbol (consolidate successfully)
INLINE	Z	00011		
		Error End		Error end symbol (consolidate unsuccessfully)
		2036		Error code

(Journal)

Reports on satellite terminal is controlled by the address 13 of the general function program.

X consolidation

Master terminal

X	03-04-2003(THU)	20:19		
C01	MC#01	000025		
INLINE	2222	01	00011	INLINE/command No./Report code

01 MC#01	X	19:01		Physical ID/logical ID/mode symbol/time (consolidate successfully)
02 MC#02	X	19:02		
03 MC#03		Error End		Physical ID/logical ID/error end symbol (consolidate unsuccessfully)
		2036		Error code

Consolidation report				

Satellite terminal


No report or no message is printed.

Application systems

Scanning PLU

You can register items by scanning.

System configuration of the scanning PLU system

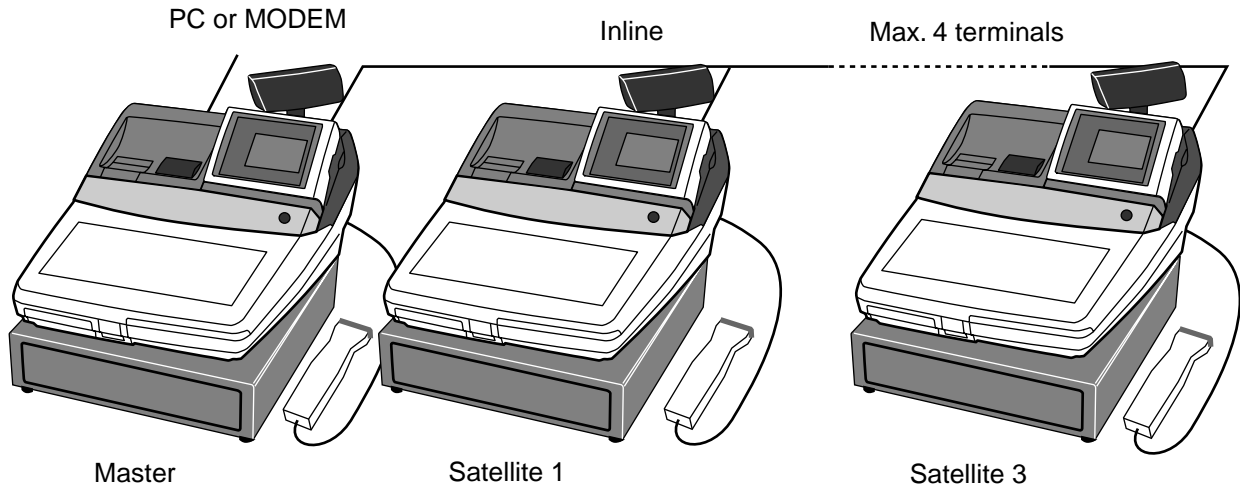

- Maximum 4 terminals
- Each terminal has its own scanning PLU files.
- Scanning PLU files (such as scanning PLU file, batch maintenance PLU file, not found PLU file, not found PLU maintenance file and PLU direct maintenance file) are necessary to all terminals connected in the same inline (cluster).

Setup

1. After connecting a barcode scanner, program I/O parameter table to fit the scanner.
2. Allocate scanning PLU function keys (such as <OBR>, <One touch NLU>, <PRICE CHANGE>, and <PRICE INQUIRY>). If you use multi price, allocate <PRICE SHIFT> too.
3. Allocate scanning PLU files and non-PLU table file.
4. Program the non-PLU table to suit your scanning system.
5. Broadcast the programs above to all of the terminals of the cluster and flag clear all terminals.
6. Program batch maintenance PLU file to add items and broadcast it to all of the terminals.
7. Activate the batch maintenance PLU file.

Barcode system

Scanning PLU code		Input method		
		Scanner	OBR code <OBR>	One touch NLU
PLU type	EAN-13 (JAN-13)	✓	13 digits with check digit	✓
	EAN-8 (JAN-8)	✓	8 digits with check digit	✓
	UPC-A	✓	11 digits without check digit	✓
	UPC-E	✓	6 digits without check digit	✓
Non PLU type	EAN-13 (JAN-13)	✓	13 digits with check digit	✓
	EAN-8 (JAN-8)	✓	8 digits with check digit	✓
	UPC-A	✓	11 digits without check digit	✓


PLU maintenance

There are three ways to maintain scanning PLU, i.e. not found PLU maintenance, batch PLU maintenance and direct PLU maintenance.

Not found PLU maintenance

When an item which code is not existed in the scanning PLU file is registered, the “Not found” error occurs. You can register this item by not found PLU maintenance procedure. After this maintenance, this item is registered without the “Not found” error.

This item is stored in the not found PLU file, so you can check which item is registered and how many item is sold to read this file. Also, you can merge the contents of the not found PLU file to the scanning PLU file by the not found PLU maintenance.

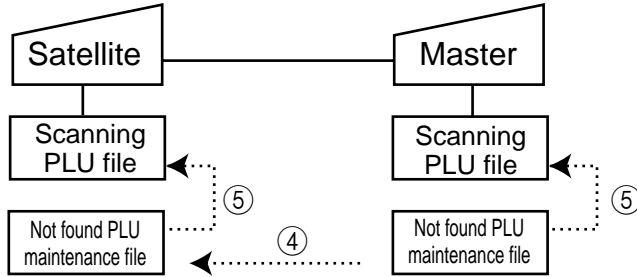


- ① Consolidate not found PLU file of all terminal to the master. (After this operation, not found items of all terminal are collected to the not found PLU maintenance file of the master.)
- ② Issue report of the not found PLU maintenance file.
- ③ Edit the not found PLU maintenance file.
- ④ Broadcast the not found PLU maintenance file to all terminal of the cluster manually.
- ⑤ Activate the not found PLU maintenance file from the master terminal. (After this operation, not found items are merged to the scanning PLU file.)
- ⑥ Reset the not found PLU maintenance file.

Note:

1. Only addition to the scanning PLU file can be made by the not found PLU maintenance.
2. In case of using stand-alone (master only) system, you can skip the step ④.
3. Even in stand-alone system, terminal connection table program is necessary.

Batch maintenance

Batch maintenance is used for adding items to the scanning PLU file, changing the scanning PLU item programming data or deleting items from the scanning PLU file.

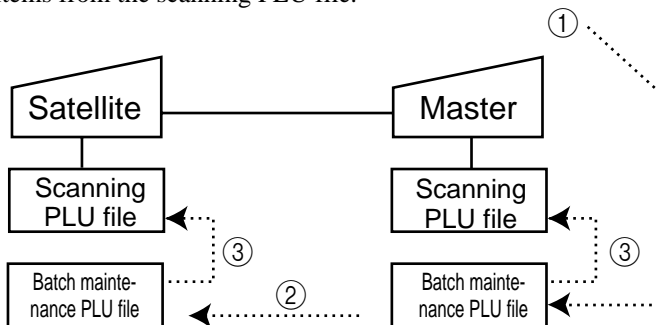

- ① Program the batch maintenance PLU file.
- ② Broadcast the batch maintenance PLU file to all terminals of the cluster manually.
- ③ Activate the batch maintenance file.

Note:


1. In case of using stand-alone (master only) system, you can skip the step ②.
2. Even in stand-alone (master only) system, terminal connection table program is necessary.

Direct maintenance

Direct maintenance is used for adding items to the scanning PLU file, or changing the scanning PLU item programming data.

- ① Program the direct maintenance PLU file.

Note: After direct maintenance, broadcast the scanning PLU file to all terminals of the cluster.

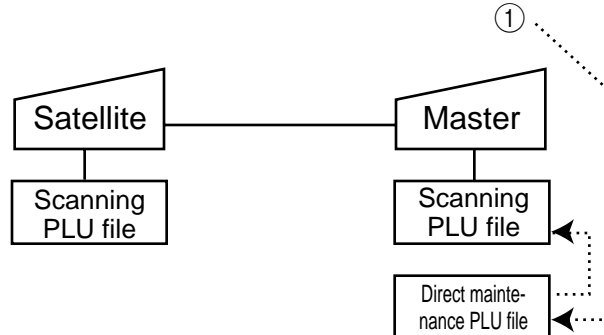

Scanning PLU registration

By scanner/code input/one touch NLU key

OPERATION			RECEIPT			
Item 1 (scan)	Scan-PLU	(\$2.35)	“Scanning” <div style="display: flex; justify-content: center; gap: 10px;"> 1 2 3 </div> <div style="display: flex; justify-content: center; gap: 10px;"> 4 5 6 OBR </div> <p>Scanning-PLU code and OBR key</p> <div style="text-align: center; margin: 10px 0;"> NLU </div> <p>One touch NLU</p> <div style="text-align: center; margin-top: 10px;"> CA / AMT TEND </div>	1 PLU0001	· 2.34	Scanning PLU code *1
	PLU code	49012347		#49012347		
Item 2 (code)	Scan-PLU	(\$2.00)		1 PLU0002	· 2.00	
	PLU code	123456		#123456		
Item 3 (OTN)	Scan-PLU	(\$1.23)		1 PLU0003	· 1.23	
	PLU code	49012354		#49012354		
Payment	Cash	\$5.58	TL	- 5.58		
			CASH	· 5.58		

*1 Programmable option

Not found PLU item

OPERATION			RECEIPT			
Item 1 (scan)	Scan-PLU	(\$1.00)	“Scanning” Does not exist in the scanning PLU file “Not Found Error” <div style="display: flex; justify-content: center; gap: 10px;"> 1 0 0 1 </div> <p>Input price and press the linked department key.</p> <p>“Scanning” Register normally.</p> <div style="text-align: center; margin-top: 10px;"> CA / AMT TEND </div>	1 DEPT01	· 1.00	Link department descriptor/amount
	PLU code	49012361		#49012361		
	Dept.	1		1 DEPT01	· 1.00	
Item 2 (scan)	Scan-PLU	(\$1.00)		#49012361		
	PLU code	49012361		TL	- 2.00	
Payment	Cash	\$2.00		CASH	· 2.00	

Application systems

Price change operation

When a scanning PLU item is programmed to enable to change price, you can change the unit price temporarily. The preset price in the scanning PLU file is not changed by this operation. You can restrict the temporary price is less/greater than the programmed unit price by the general function program.

OPERATION			RECEIPT		
Item	Scan-PLU	(\$1.20) ↓ \$1.00	1 0 0 PRC CHG Temporary unit price “Scanning” This item should be programmed as “Enable to price change.”	1 SCAN-PLU0001 · 1.00 #49012361 TL - 1.00 CASH · 1.00	
	PLU code	49012361			
	Dept.	1			
Payment	Cash	\$1.00	<input type="button" value="CA/AMT / TEND"/>		

Force to enter price manually

When a scanning PLU item is programmed to force to enter unit price, you must enter the unit price. The preset price in the scanning PLU file is not changed by this operation. You can restrict the temporary price is less/greater than the programmed unit price by the general function program.

OPERATION			RECEIPT		
Item	Scan-PLU	(\$1.20) ↓ \$1.00	“Scanning” The message “Input Price” is shown. 1 0 0 PRICE	1 SCAN-PLU0001 · 1.00 #49012361 TL - 1.00 CASH · 1.00	
	PLU code	49012361			
	Dept.	1			
Payment	Cash	\$1.00	<input type="button" value="CA/AMT / TEND"/>		

Multiple price

Before registering multiple price PLU, allocate <PRICE SHIFT> and program the appropriate price shift number to the key.

OPERATION			RECEIPT		
Item 1	Scan-PLU (1st rec.)	(\$1.00)	“Scanning” No <PRICE SHIFT> designates the 1st record of the item. <input type="button" value="PRC SFT2"/> “Scanning” <input type="button" value="PRC SFT3"/> “Scanning”	1 SCAN-PLU(1st) · 1.00 #49016321 1 SCAN-PLU(2nd) · 2.00 #49016321 1 SCAN-PLU(3rd) · 6.00 #49016321 TL - 9.00 CASH · 9.00	
	PLU code	49016321			
Item 2	Scan-PLU (2nd rec.)	(\$2.00)			
	PLU code	49016321			
Item 3	Scan-PLU (3rd rec.)	(\$6.00)			
	PLU code	49016321			
Payment	Cash	\$9.00	<input type="button" value="CA/AMT / TEND"/>		

Mix & match discount

There are three types of mix & match processing:

- Discount 1 (discount every required quantity)
- Discount 2 (discount one time per one transaction)
- Discount 3 (discount continuously)

Mix & match discount affects to the item totalizer, link dept/subdept totalizer and link dept/subdept discount totalizer, when the “Net totaling” option is selected.

Discount type 1:

In this type of processing, a discount is made when the quantity of a particular scanning PLU reaches a certain number during registration.

For example, assume that when three units of a particular scanning PLU, \$0.34 a piece, are sold at \$1.00. In this case, a discount is made automatically when the third unit of that scanning PLU is registered.

OPERATION			RECEIPT		
Item	Scan-PLU	(\$0.34)	“Scanning” “Scanning” “Scanning” Mix & match discount is made. <div style="border: 1px solid black; padding: 2px; display: inline-block;">CA / AMT / TEND</div>	1 SCAN-PLU0001	· 0.34
	PLU code	49012361		#49012361	
	Quantity	3		1 SCAN-PLU0001	· 0.34
Discount	type 1: 3/	\$0.02	#49012361		
Payment	Cash	\$1.00	1 SCAN-PLU0001	· 0.34	
			#49012361		
			DISCOUNT01	-0.02	
			TL	- 1.00	
			CASH	· 1.00	

Discount type 2:

In this type of processing, a discount is made when the quantity of a particular scanning PLU reaches a certain number during registration. But this discount is made only one time per one transaction.

OPERATION			RECEIPT		
Item	Scan-PLU	(\$0.34)	“Scanning” “Scanning” “Scanning” Mix & match discount is made. “Scanning” “Scanning” “Scanning” Mix & match discount is not made. <div style="border: 1px solid black; padding: 2px; display: inline-block;">CA / AMT / TEND</div>	1 SCAN-PLU0001	· 0.34
	PLU code	49012361		#49012361	
	Quantity	6		1 SCAN-PLU0001	· 0.34
Discount	type 2: 3/	\$0.02	#49012361		
Payment	Cash	\$2.02	1 SCAN-PLU0001	· 0.34	
			#49012361		
			DISCOUNT01	-0.02	
			1 SCAN-PLU0001	· 0.34	
			#49012361		
			1 SCAN-PLU0001	· 0.34	
			#49012361		
			1 SCAN-PLU0001	· 0.34	
			#49012361		
			TL	- 2.02	
			CASH	· 2.02	

Application systems

Discount type 3:

In this type of processing, a discount is made when the quantity of a particular scanning PLU reaches a certain number during registration. And this discount is made after this item registration.


OPERATION			RECEIPT		
Item	Scan-PLU	(\$0.34)	“Scanning”	1 SCAN-PLU0001	.0.34
	PLU code	49012361	“Scanning”	#49012361	
	Quantity	4	“Scanning”	1 SCAN-PLU0001	.0.34
Discount	type 3: 3/	\$0.02	Mix & match discount is made.	#49012361	.0.34
Payment	Cash	\$1.32	“Scanning”	DISCOUNT01	-0.02
			Mix & match discount is made.	1 SCAN-PLU0001	.0.34
				#49012361	
				DISCOUNT01	-0.02
				TL	- 1.32
				CASH	.1.32

CA/AMT
/TEND


Check tracking system

Shared check tracking system

- Maximum 4 terminals
- Maximum 3 external printers
- Any terminal of this cluster can be used to recall a temporary closed check for additional registration or finalization.

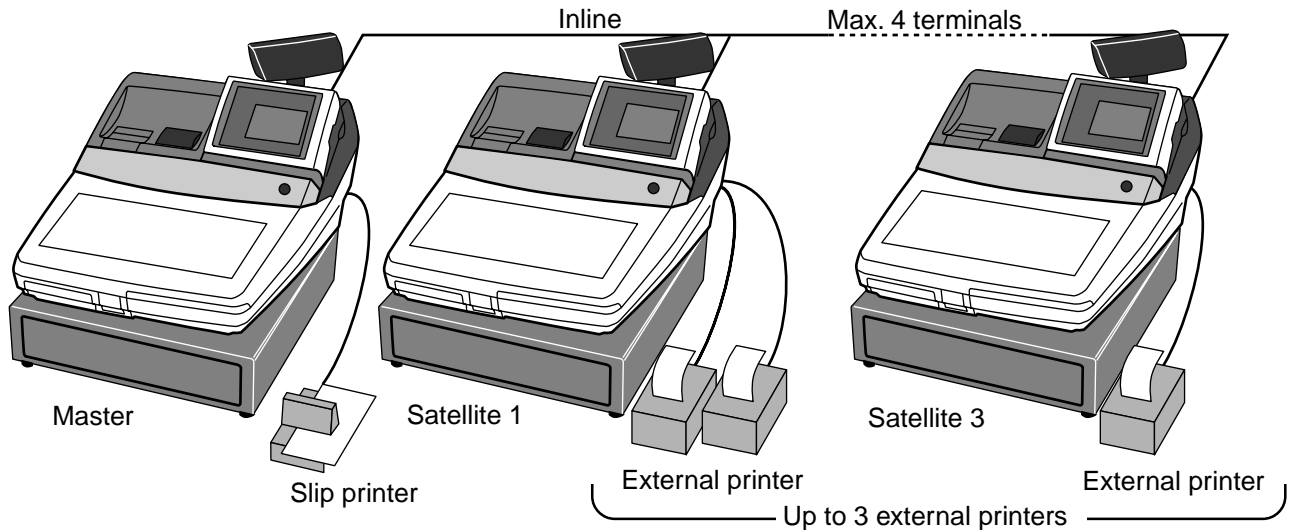

Data processing

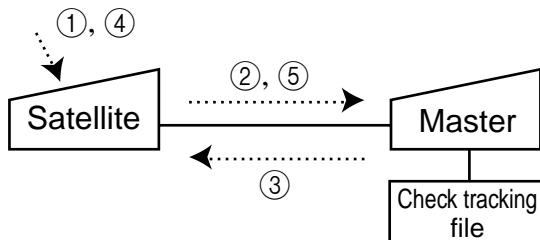

Shared check tracking processing is performed as shown in the figure below.

- ① A shared check operation (such as "new check" or "old check" etc.) is made at the terminal.
- ② The terminal sends the check number to the check tracking master. The master turns on the busy status of the check memory.
- ③ The master sends back the check data (if the check number exists) or opens a new check number.
- ④ A shared check transaction is finalized (by "new balance" or other finalize key).
- ⑤ The terminal sends the check data to the master. And the master clears the busy status of the check number.

When the master goes down

When a satellite detects master down, it generates an error condition. In this error condition, you can choose 2 options; 1. Retry to communicate with master (press <CA> key) / 2. Disconnect master terminal (press the <ST> key). After disconnecting master terminal, the satellite behaves as self master (stand alone check tracking). The minus sign on the left-most digit is displayed when the satellite behaves as self master.

Recovery processing

1. Issue open check reset report from the satellites which detect master down (minus sign on the left-most digit is lit).
2. Perform master re-connection operation by that terminals.

Printing on the external (local/remote) printers

You can print receipts/orders on external printer even if it is connected with this terminal (local printer) or other terminal (remote printer). Maximum 2 external printers can be connected to one terminal. It is possible to print out to another printer (i.e. another external, another external connected with another terminal, or internal R/J) for backup.

Note: The printouts from other terminal which is connected in the same inline can be printed on the local printer or remote printer.


The printouts from R/J printer and external printer can be divided into 3 types; 1. Receipt type, 2. Report type, and 3. Order type.

For receipt type, only <RECEIPT> and <BILL> have this option – Receipt 1/Receipt 2/Receipt 3 – of the target printer; R/J, local 1, local 2, remote 1 or remote 2.

For report type, you can define one target printer; R/J, local 1 or local 2.

For order type, each item has its own option – Order1/Order 2/Order 3 – of the target printer; R/J, local 1, local 2, remote 1 or remote 2.

System configuration of the external printer system

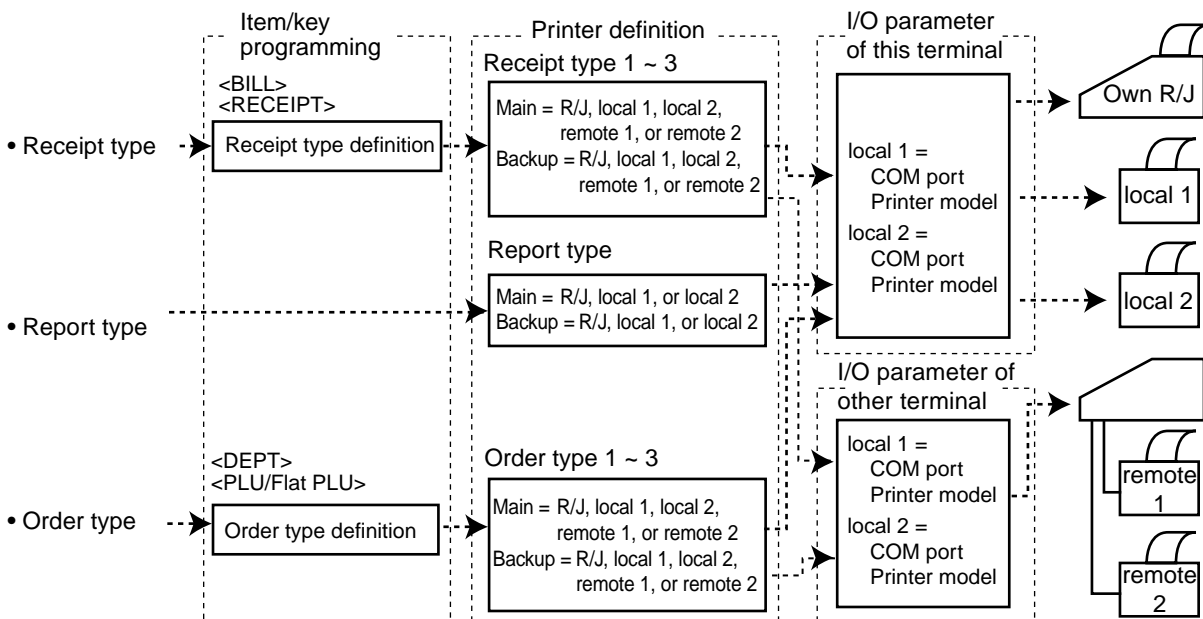

- Maximum 2 printers/1 terminal (Refer to the system configuration chapter.)
- Local printer buffer (file 049) and remote printer buffer (file 035) should be allocated. (Refer to the program 5 chapter.)

Setup

1. Program the target printer (Order1, Order 2, Order 3) to each item by address 16 of the item individual feature programming.
2. Program the target printer (Receipt 1, Receipt 2, Receipt 3) to <BILL> or <RECEIPT>. If you want to print out these receipt to an external (local/remote) printer, select "Buffered print" of the address 05 of the general function program.
3. Program the main printout destination and backup destination to the printer connection table. If you want them onto remote printer, program inline ID of the terminal connected with remote printer also.
4. Program the I/O parameter table to define the peripheral devices including external printer(s).

Note: FC operation is necessary, if you change the I/O parameter table.

Backup system

If the main destination printer is out of order (such as power failure, or paper out), the terminal sends this data to the backup destination printer automatically.

Note:

1. The destination of normal registrations is "Receipt 1" (fixed).
"Buffered print" of the address 05 of the general function is necessary.
2. The destination of post receipts/guest receipts is programmable.
"Buffered print" of the address 05 of the general function is NOT necessary.
3. The destination of bill copy is programmable.
"Buffered print" of the address 05 of the general function is necessary.
4. You cannot back up the printouts to the R/J printer to external printers.
That is, R/J printer is the last backup printer.

Printing control options for order

Below shows the summary of the programmable options for order printing.

Programmable option	for R/J	for local/ remote printer	Program location
Number of feed lines before order printing (1 ~ 9)		✓	Address code 19 of the general control program
Number of feed lines after order printing (1 ~ 9)		✓	Address code 19 of the general control program
Cut order		✓	Address code 19 of the general control program
Show guidance for backup print of order.	✓		Address code 19 of the general control program
Alert when the external printer goes down.		✓	Address code 19 of the general control program
Baud rate		✓	I/O parameter table
Backup destination		✓	Printer connection table
Merge the same item registration on order receipt. (Item consolidation)	✓	✓	Address code 19 of the general control program
Breakdown set menu printing on order.	✓	✓	Address code 19 of the general control program
Print order with amount.	✓	✓	Address code 19 of the general control program
Print order with order character.	✓	✓	Address code 19 of the general control program
Print order even if training clerk is registered items.	✓	✓	Address code 19 of the general control program
Printing color of order		✓	Address code 16 of item program
Definition of order 1 ~ 3	✓	✓	Address code 16 of item program
Definition of order character	✓	✓	Address code 16 of item program

Time and attendance

You can control your employees' working time.

For this function, the employee file (file 061), the time and attendance file (file 019) and the <CLOCK-IN/OUT> key is necessary.

Note: Use this function by one fixed terminal, even if the system has other terminals. Since the employee file and time & attendance file cannot be collected or consolidated.

Clock-in operation

1. Press the <CLOCK-IN/OUT> key, enter employee number and press the <CLOCK-IN/OUT> key. And then press the <CASH> key.

If you enter the employee number who has clocked in already, this operation is treated as clocked-out.

Clock-out operation

1. Press the <CLOCK-IN/OUT> key, enter employee number and press the <CLOCK-IN/OUT> key. And then press the <CASH> key.

If you enter the employee number who does not have clocked in yet, this operation is treated as clocked-in.

Tips

Future order

This is an enhancement of the training function.

By using the original training specification, the training clerk cannot accept any customer. Because no journal printing and no memory affection of this function is made.

By using “Future order”, you can get this sales data and journal printing even if the transaction is registered by the training clerk.

Usage

Receipt issuance: **OFF**

1. Start training. (Sign on a training clerk.)

During training

2. Register items and finalize this transaction.

In case of accepting a customer

3. Register items and finalize this transaction.

4. Issue receipt or slip. (Press <GUEST RECEIPT> or <SLIP PRINT>.)

Journal printing and memory affection is made at this point.

:

5. End training. (Sign off the clerk.)

Preparation

1. Allocate <GUEST RECEIPT> or <SLIP PRINT>. (See program 4.)

2. Set training flag to the training clerk. (See clerk program in the program 3 mode.)

3. Set the option “print journal when the key is pressed” to the key <GUEST RECEIPT>, <SLIP PRINT>.

4. Set to affect training registrations to the periodic 1 (or 2) total, all registrations (both normal and training) to the periodic 2 (or 1) by the address code 16 of the general control program in the program 3 mode.

5. Set space to the training filler and future order message in the special character table in the program 2 mode.

Eat-in/takeout

This function is used for specifying if the customer eat in the restaurant or takeout. When the <EAT-IN> or <TAKEOUT> is pressed before finalize operation, the “Eat-in/takeout” compulsion is released and the tax exemption is applied.

After pressing <EAT-IN> or <TAKEOUT>, only finalize operation is possible.

The compulsion is released by <OPEN2>, so be sure to allocate this key before using this function.

Receipt sample

1 HAMBURGER	·2.00
1 POTATO	·1.50
1 COKE	·1.00
TAKE-OUT	


Automatic execution of Euro switchover by arrangement and scheduler

The following sample shows an automatic execution program of arrangement and scheduler.

Sample program


Execution date/time: 31. December 2003 23:59
 Currency definition type: 3 (Main currency = Euro, Sub currency = Local, Change = Euro)
 Currency conversion rate: 1 Euro = 6.55957 F Franc
 Drawer of sub currency: Main
 Unit price conversion: Yes

• Arrangement

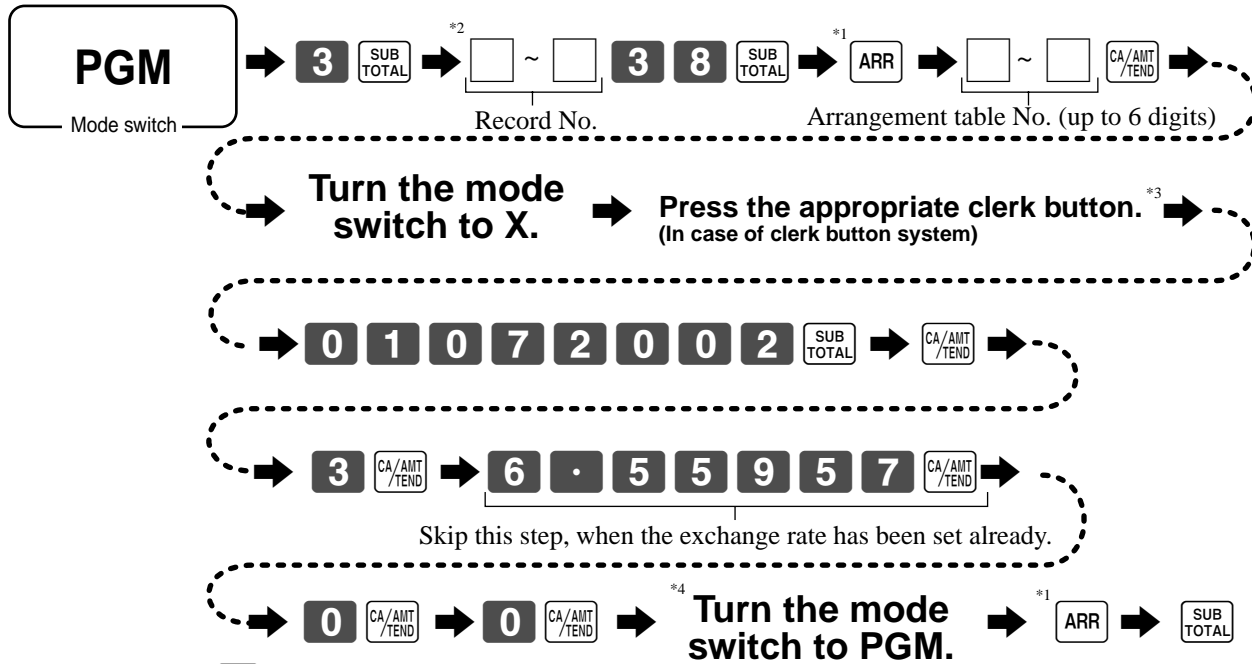

*1 The same **ARR** should be pressed.
 *2 Vacant record search: If you want to set an arrangement program to a new record, “vacant record search” is possible. (enter **0 0 0 0** instead of entering a record No.)
 *3 A clerk who is programmed to enable to operate in X1 mode must be signed on.
 *4 If necessary, sign on the original clerk who is programmed to disable to operate in X1 mode.

• Scheduler

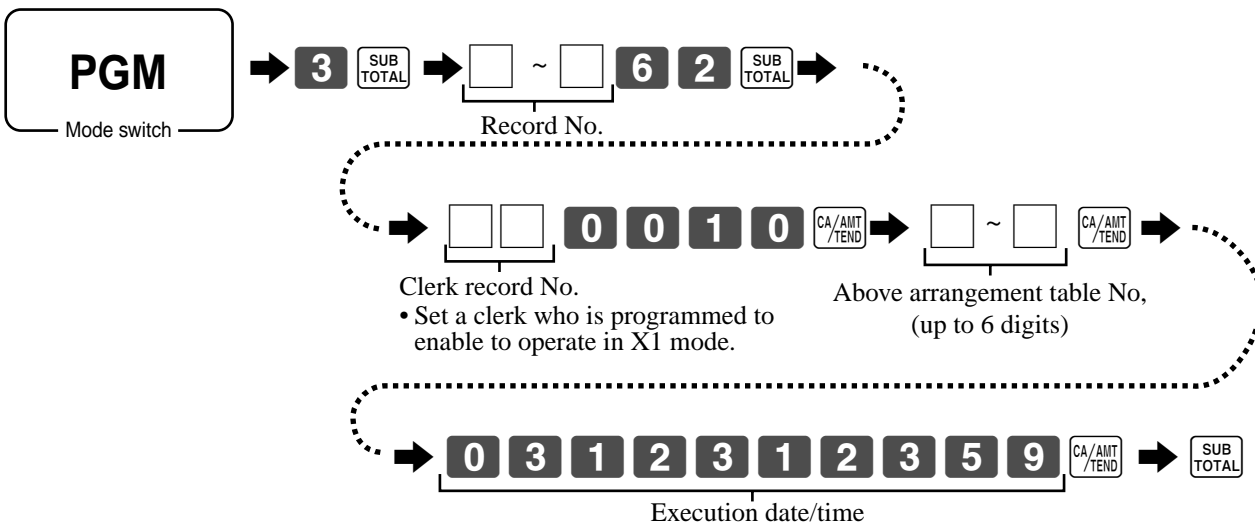

Appendix: Calculation method

The following calculation methods of totalizer memories are explained in this chapter.

- All formulas in these explanations are calculated in the registration mode.
- In the RF mode, the values in totalizers are calculated using the opposite sign.
- In the REG- mode, the value in totalizers and counters are calculated using the opposite sign.

Fixed total file

Total or Counter	Increments or Decrements by
Gross sales quantity	Number of products registered for Departments + PLUs + Scanning PLUs (non hash) {For Department, PLUs and Scanning PLUs Single items : +1 Multiplication : Input quantity Split price : Input quantity Square : Input quantity × Input quantity Cube : Input quantity × Input quantity × Input quantity – Last item void – Return item – Previous item void – Cancel
Gross sales amount	Number of products registered for Departments + PLUs + Scanning PLUs (non hash) {For Department, PLUs and Scanning PLUs Single items : Preset or manually input prices Multiplication : Preset or manually input prices × Input quantity Split price : (Preset or manually input prices / Input unit quantity) × Input quantity Square : Preset or manually input prices × Input quantity × Input quantity Cube : Preset or manually input prices × Input quantity × Input quantity × Input quantity – Last item void – Return item – Previous item void – Cancel
In gross/net calculation: 1) When gross calculation is specified 2) When net calculation is specified	Adjustment amounts in Minus, Plus, Discount (%-), Premium (%+), Coupon transactions are not reflected. Adjustment amounts in Minus, Plus, Discount (%-), Premium (%+) Coupon transactions are reflected.
Net sales quantity	+1 (When a transaction is finalized for sale. For REG- mode -1 is affected.)
Net sales amount	{Department + PLU + Scanning PLU product registration amounts – Last item void amounts for the above – Item return amounts for the above – Previous item void amounts for the above – Cancel amounts for the above} + {Plus (+ key) + Premium (%+ key) – Error correction amounts – Cancel amounts} – {Minus (- key) – Discount(%- key) – Coupon – Error correction amounts – Cancel amounts} + {Manual tax – Error correction amounts – Cancel amounts} + Results of tax table calculations (add-on tax)

Appendix (Calculation method)

Total or Counter	Increments or Decrements by
Medium in drawer (Cash, charge, check, credit, Food stamp, EBT)	Sales total or tendered total by specified medium + Received on account total (Cash in drawer only) – Paid out (Cash in drawer only) + Loan totals (by selected medium) – Pick up totals (by selected medium) – Change amounts (Cash in drawer only) – Total of check cashing transaction (When specified as cash in drawer)
Declared short medium amount (except Food stamp, EBT)	Declared medium in drawer – Medium in drawer (Only effective when the result of this formula becomes negative)
Declared over medium amount (except Food stamp, EBT)	Medium in drawer – Declared medium in drawer (Only effective when the result of this formula becomes negative)
Number of RF mode items	+1 (When cash sales, charge sales, credit sales, and check sales transaction are finalized in the RF/REG– mode.)
RF mode amount	Absolute value of total sales amount for RF/REG– mode registrations.
Customer count	Entered number of covers
Average sales per customer	Net sales amount / Customer count
Check cashing service fee	+ Check amount × Service ratio or + Service fee amount
New balance fee	+ MD/ST amount × Service charge ratio or + Service charge fee amount
Clerk commission total	Item sales (commissionable) × Clerk commission rate
Foreign currency in cash drawer	Entered amount in cash payment in foreign currency.
Foreign currency in check drawer	Entered amount in check payment in foreign currency.
Discount amount	+ Registered amount of Minus/Discount key
Coupon amount	+ Registered amount of Coupon key
Item return amount	+ Registered item amount by RF/Void key
Clear count	+ 1 (REG, RF, REG– mode) (When the <CLEAR> key is pressed.)
Declaration count	+ 1 (whenever declaration is performed)
Rounding	+ Fraction amount by roundings (Roundings include IF1/2, Danish, Norwegian, Singaporean, and Finnish.)
Taxable amount	Subtotal of taxable amount at finalization of sale (in case of add-on tax) Subtotal of taxable amount – VAT (in case of add-in tax)
Tax amount	Result of calculation using tax table for taxable amount at finalization of sales
GT 1	Grand total of net sales totals
GT 2	Absolute value of {Registration amount (Department, Subdepartment, PLU) + Last item void amount + Previous item void amount + Refund amount} + {Plus, Minus, Premium, Discount, Coupon + Last item void amount} + Tax
GT 3	Net sales total – add-on tax – add-in tax – commission

Appendix: Font code tables

These models have the capability to print/display in Slavic, Greek, Cyrillic, Baltic, Arabic fonts.

If you want to use these special font set, initialize the machine and enter the special initialization code (D₁₄ ~ D₁₂) before the original code 1 (D₁₁ ~ D₁). (Refer to the initialization chapter.)

Standard font set (default)

Multilingual + Euro (Windows code page 858)

				Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code
				Space	32	0	48	@	64	P	80	`	96	p	112
				!	33	1	49	A	65	Q	81	a	97	q	113
				"	34	2	50	B	66	R	82	b	98	r	114
				#	35	3	51	C	67	S	83	c	99	s	115
				\$	36	4	52	D	68	T	84	d	100	t	116
				%	37	5	53	E	69	U	85	e	101	u	117
				&	38	6	54	F	70	V	86	f	102	v	118
				'	39	7	55	G	71	W	87	g	103	w	119
				(40	8	56	H	72	X	88	h	104	x	120
)	41	9	57	I	73	Y	89	i	105	y	121
				*	42	:	58	J	74	Z	90	j	106	z	122
				+	43	;	59	K	75	^	91	k	107	{	123
				,	44	<	60	L	76	¥	92	l	108		124
				-	45	.	61	M	77	[93	m	109	}	125
				.	46	>	62	N	78	\	94	n	110	~	126
				/	47	?	63	O	79]	95	o	111		127

Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code
Ç	128	É	144	á	160	■	176	Ł	192	ð	208	ó	224	-	240
Ü	129	æ	145	í	161	■	177	ł	193	Ð	209	ø	225	±	241
é	130	Æ	146	ó	162	■	178	τ	194	Ê	210	ô	226	-	242
â	131	Ô	147	ú	163		179	†	195	Ë	211	ò	227	¾	243
ä	132	Ö	148	ñ	164	†	180	-	196	È	212	õ	228	¶	244
à	133	ò	149	Ñ	165	Á	181	†	197	€	213	ő	229	§	245
â	134	Û	150	á	166	Â	182	ä	198	í	214	µ	230	÷	246
ç	135	ù	151	â	167	À	183	Ä	199	Î	215	þ	231	,	247
ê	136	ÿ	152	č	168	©	184	Ł	200	İ	216	Þ	232	°	248
ë	137	Ï	153	©	169	†	185	ł	201	Ј	217	Ú	233	¨	249
è	138	Û	154	¬	170		186	ł	202	ı	218	Û	234	.	250
ï	139	φ	155	½	171	†	187	τ	203	■	219	Ü	235	¹	251
î	140	£	156	¼	172	Ј	188	†	204	■	220	Ý	236	³	252
ì	141	∅	157	ı	173	¢	189	-	205		221	Ÿ	237	²	253
Ä	142	×	158	«	174	¥	190	†	206	ì	222	-	238	■	254
Å	143	ƒ	159	»	175	ł	191	α	207	■	223	,	239	Double size	255

Appendix (Font table)

Special font set

Slavic (Windows code page 852)

Special initialization code $D_{14} D_{13} D_{12} = 010$

Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code
Ç	128	É	144	á	160	█	176	Ł	192	à	208	Ó	224	–	240
ü	129	Ĺ	145	í	161	█	177	ł	193	Ð	209	ß	225	ˆ	241
é	130	Í	146	ó	162	█	178	ṽ	194	Ď	210	Ô	226	˘	242
â	131	ô	147	ú	163		179	†	195	Ě	211	Ń	227	˙	243
ä	132	ö	148	Ą	164	†	180	–	196	ď	212	ń	228	˘	244
û	133	Ľ	149	ą	165	Á	181	†	197	ň	213	ň	229	§	245
ć	134	ĭ	150	Ž	166	Ã	182	Ǻ	198	í	214	š	230	÷	246
ç	135	Ś	151	ž	167	Ě	183	ǻ	199	î	215	š	231	,	247
ł	136	ś	152	Ę	168	Ş	184	Ł	200	ë	216	Ř	232	°	248
ë	137	Ö	153	ę	169	†	185	ŕ	201	ĵ	217	Ú	233	˙	249
Ů	138	Ü	154		170		186	ł	202	ŕ	218	ř	234	•	250
ó	139	Ť	155	ž	171	ŕ	187	ṽ	203	█	219	Ů	235	ů	251
î	140	ť	156	Č	172	ĵ	188	†	204	■	220	ý	236	Ř	252
ź	141	ł	157	ş	173	Ž	189	–	205	ṽ	221	Ý	237	ř	253
Ä	142		158	«	174	ž	190	†	206	Ů	222	ṽ	238	█	254
Ć	143	č	159	»	175	ı	191	ṽ	207	■	223	˘	239	Double size	255

Greek

Special initialization code $D_{14} D_{13} D_{12} = 020$

Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code
A	128	P	144	ι	160	█	176	Ł	192	ł	208	ω	224	≡	240
B	129	Σ	145	κ	161	█	177	ł	193	ł	209	ά	225	±	241
Γ	130	Τ	146	λ	162	█	178	ṽ	194	ṽ	210	έ	226	≥	242
Δ	131	Υ	147	μ	163		179	†	195	Ł	211	ή	227	≤	243
E	132	Φ	148	ν	164	†	180	–	196	ł	212	ϊ	228		244
Z	133	X	149	ξ	165	†	181	†	197	ŕ	213	ί	229	∫	245
H	134	Ψ	150	ο	166	†	182	†	198	ŕ	214	ό	230	÷	246
Θ	135	Ω	151	π	167	ŕ	183	†	199	†	215	ύ	231	≈	247
I	136	α	152	ρ	168	ŕ	184	Ł	200	†	216	ü	232	°	248
K	137	β	153	σ	169	†	185	ŕ	201	ĵ	217	ώ	233	•	249
Λ	138	γ	154	ς	170		186	ł	202	ŕ	218	Ω	234	·	250
M	139	δ	155	τ	171	ŕ	187	ṽ	203	█	219	δ	235	√	251
N	140	ε	156	ν	172	ĵ	188	†	204	■	220	∞	236	ⁿ	252
Ξ	141	ζ	157	φ	173	ĵ	189	–	205		221	∅	237	²	253
O	142	η	158	χ	174	ĵ	190	†	206		222	∈	238	█	254
Π	143	θ	159	ψ	175	ŕ	191	ł	207	■	223	∩	239	Double size	255

Cyrillic (Windows code page 866)

Special initialization code $D_{14} D_{13} D_{12} = 030$

Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code
А	128	Р	144	а	160	■	176	Љ	192	↓	208	р	224	Ё	240
Б	129	С	145	б	161	■	177	↓	193	↓	209	с	225	ё	241
В	130	Т	146	в	162	■	178	т	194	т	210	т	226	Є	242
Г	131	У	147	г	163		179	†	195	Љ	211	у	227	е	243
Д	132	Ф	148	д	164	†	180	-	196	Љ	212	ф	228	ї	244
Е	133	Х	149	е	165	†	181	†	197	г	213	х	229	і	245
Ж	134	Ц	150	ж	166	†	182	†	198	г	214	ц	230	Ў	246
З	135	Ч	151	з	167	г	183	†	199	†	215	ч	231	ў	247
И	136	Ш	152	и	168	г	184	Љ	200	†	216	ш	232	°	248
Й	137	Щ	153	й	169	†	185	г	201	Ј	217	щ	233	•	249
К	138	Ъ	154	к	170		186	↓	202	г	218	ъ	234	·	250
Л	139	Ы	155	л	171	г	187	т	203	■	219	ы	235	ч	251
М	140	Ь	156	м	172	Ј	188	†	204	■	220	ь	236	ⁿ	252
Н	141	Э	157	н	173	Ј	189	-	205		221	э	237	²	253
О	142	Ю	158	о	174	Ј	190	†	206		222	ю	238	■	254
П	143	Я	159	п	175	г	191	↓	207	■	223	я	239	Double size	255

Baltic

Special initialization code $D_{14} D_{13} D_{12} = 040$

Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code
	128		144		160		176	Ą	192	Š	208	ą	224	š	240
	129		145		161		177	Į	193	Ń	209	į	225	ń	241
	130		146	φ	162		178	Ā	194	Ņ	210	ā	226	ņ	242
	131		147	£	163		179	Ć	195	Ó	211	£	227	ó	243
	132		148	▣	164		180	Ä	196	Ö	212	▣	228	ö	244
	133	•	149		165		181	Å	197	Õ	213	•	229	õ	245
	134		150		166		182	Ę	198	Ö	214	ę	230	ö	246
	135		151	§	167		183	Ě	199	x	215	§	231		247
	136		152	Ø	168	ø	184	Č	200	Ū	216	Ø	232	ų	248
	137		153		169		185	É	201	Ł	217		233	ł	249
	138		154	Ŕ	170	ŕ	186	Ž	202	Ś	218	Ŕ	234	ś	250
	139		155	«	171	»	187	Ě	203	Ū	219	«	235	ū	251
	140		156		172		188	Ĝ	204	Ü	220		236	ü	252
	141		157		173		189	Ķ	205	Ž	221		237	ž	253
	142		158		174		190	Ī	206	Ž	222		238	ž	254
	143		159	Æ	175	æ	191	Ł	207	ß	223	Æ	239	Double size	255

Appendix (Font table)

Arabic


Special initialization code $D_{14} D_{13} D_{12} = 050$

Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code	Chara	Code
°	128	β	144		160	◦	176	⊕	192	د	208	—	224	ي	240
·	129	∞	145		161	٦	177	ء	193	ر	209	ظ	225	ر	241
•	130	∅	146		162	٧	178	أ	194	ز	210	ظ	226	ن	242
√	131	±	147	£	163	٣	179	أ	195	س	211	ك	227	ه	243
■	132	1/2	148	¤	164	٤	180	ؤ	196	ش	212	ل	228	ث	244
—	133	1/4	149	ل	165	٥	181	ع	197	ط	213	م	229	ي	245
	134	≈	150	!	166	٦	182	ن	198	ظ	214	ن	230	ي	246
†	135	«	151	ل	167	٧	183	ا	199	ط	215	ه	231	غ	247
‡	136	»	152	ل	168	٨	184	ب	200	ظ	216	و	232	ق	248
⌈	137	لا	153	ب	169	٩	185	ة	201	ع	217	ي	233	لا	249
⌋	138	لا	154	ت	170	ف	186	ن	202	غ	218	ب	234	لا	250
⌌	139	لا	155	ث	171	:	187	ش	203		219	ن	235	ل	251
⌍	140	لا	156	ٴ	172	س	188	د	204	ر	220	ع	236	ك	252
⌎	141	لا	157	ج	173	ش	189	د	205	÷	221	غ	237	ي	253
⌏	142	لا	158	ح	174	ع	190	ن	206	×	222	غ	238	-	254
⌐	143	ل	159	خ	175	؟	191	د	207	ع	223	م	239	Double size	255

Appendix: Peripheral device configuration

UP-350

SW No.	Function	ON	OFF	
1	1	Data reception error	Ignored	Print "?"
	2	Receive buffer capacity	45 bytes	4k bytes *
	3	Handshaking	XON/XOFF	DTR/DSR
	4	Data word length	7 bits	8 bits
	5	Parity check	Yes	No
	6	Parity selection	Even	Odd
	7	Transmission speed	See transmission speed setting	
	8			

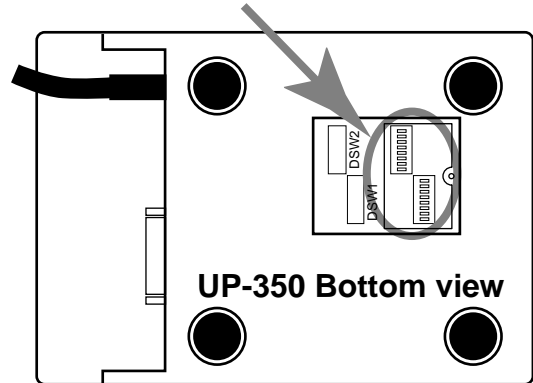

SW No.	Function	ON	OFF	
2	1	Busy condition	Buffer full	Buffer full or offline
	2	Reserved		Fixed
	3	Print density	See density setting	
	4			
	5	Reserved		Fixed
	6	Reserved		Fixed
	7	I/F 6 pin reset signal	Enabled	Disabled
	8	I/F 25 pin reset signal	Enabled	Disabled

Transmission speed setting

bps	SW No.	
	7	8
2400	ON	ON
4800	OFF	ON
9600	ON	OFF
19200	OFF	OFF


Density setting

	SW No.	
	3	4
Light	ON	ON
↕	OFF	OFF
Dark	ON	OFF
	OFF	ON

* Please select this option.

UP-250

SW No.	Function	ON	OFF	
1	1	Data reception error	Ignored	Print "?"
	2	Receive buffer capacity	40 bytes	1k bytes *
	3	Handshaking	XON/XOFF	DTR/DSR
	4	Data word length	7 bits	8 bits
	5	Parity check	Yes	No
	6	Parity selection	Even	Odd
	7	Baud rate	4800 bps	9600 bps
	8	Busy condition	Buffer full	Offline & buffer full

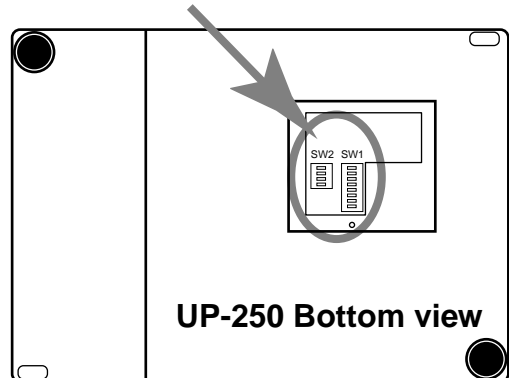

SW No.	Function	ON	OFF	
2	1	No. of digits (7 x 9 font / 9 x 9 font)	42 / 35 digits	40 / 33 digits
	2	Internal use		
	3	#6 pin reset signal	Yes	No
	4	#25 pin reset signal	Yes	No


* Please select this option.

Appendix (Peripheral configuration)

SP-1300

SW No.	Function	ON	OFF
1	Baud rate setting	See baud rate setting	
2			
3	Data length	8 bits	7 bits
4	Parity check	Disabled	Enabled
5	Parity	Odd	Even
6	Handshake	DTR/DSR	XON/XOFF
7	Receive buffer size	2 kbytes *	35 bytes
8	Character code set	Katakana	PC437
9	Pin 6 (DSR) reset signal	Enabled	Disabled
10	Pin 25 (INIT) reset signal	Enabled	Disabled

DIP switch under the document table



Baud rate setting

bps	SW No.	
	7	8
1200	OFF	OFF
2400	ON	OFF
4800	OFF	ON
9600	ON	ON

* Please select this option.

Quick scan 6000

Select these options:

1. Interface selection:

SNI RS-232C interface selection

2. Baud rate:

Baud rate = 9600 bps

3. Data format settings:

Parity = Odd

Stop bits = One

Data bits = Eight bits

4. Software control:

Hardware control = Enable CTS/RTS flow control

Software control = Disable Xon/Xoff

5. RS-232C ACK/NAK options:

ACK/NAK enable = Disable ACK/NAK

6. Setting symbology specific label identifiers:

Transmit label I.D. as prefix

“SNI RS232C” default value:

1. General features:

Audible signal = Enable

Power-up beeping = Enable

Beeper volume = Low

Beeper duration = 100ms

When to beep = Beep/LED after decode

Low power mode = Disable

Debug mode = Disable

Auto sense stand mode = Disable

2. RS-232 I/F settings:

RS-232 I/F = N/A

SNI RS-232 I/F = Enable

Baud rate = 9600

Parity = Odd

Stop bit = 1

Data bit = 8

Hardware control = Use CTS/RTS flow control

Software control = Disable = Xon/Xoff

Intercharacter delay = 0

Keyboard wedge I/F settings:

KBD wedge I/F type = N/A

External keyboard/No keyboard = N/A

Send control characters = N/A

Intercharacter delay = N/A

3. Label transmit format config items:

Prefix = Disable

Suffix = Global D00

Label I.D. control = Transmit as prefix

UPC-A label I.D. = 4100

4. Symbology:

UPC/EAN = Enable

5. UPC/EAN options:

UPC-A to EAN-13 expansion = Expand

UPC-E to UPC-A expansion = Don't expand

EAN-8 to EAN-13 expansion = Don't expand

UPC-E to EAN-13 expansion = Don't expand

NCI 6710

Follow the setup steps described in the user's manual of the scale to set the configuration.

We recommend the baud rate as 4800bps, even parity (the scale displays “48e”), and protocol as Cash register compatible (the scale displays “ECR”).

Appendix: File record format

Fixed totalizer file

Fixed totalizer (daily)

File name: Fixed totalizer (daily)

File No.: 001 Max. allocatable records: 99(fixed)

0	12	17	22
Character	Counter	Totalizer	

Fixed totalizer (periodic/consolidation)

File name: Fixed totalizer (periodic 1)

File No.: 101 Max. allocatable records: 99(fixed)

File name: Fixed totalizer (periodic 2)

File No.: 201 Max. allocatable records: 99(fixed)

File name: Fixed totalizer (daily consolidation)

File No.: 301 Max. allocatable records: 99(fixed)

File name: Fixed totalizer (periodic 1 consolidation)

File No.: 401 Max. allocatable records: 99(fixed)

File name: Fixed totalizer (periodic 2 consolidation)

File No.: 501 Max. allocatable records: 99(fixed)

0	5	10
Counter	Totalizer	

Rec No.	Description	Rec No.	Description	Rec No.	Description
001	Gross sales total	034	Credit 1 in drawer *	067	Cancellation
002	Net sales total	035	Credit 2 in drawer *	068	Money declaration count
003	Cash in drawer	036	Credit 3 in drawer *	069	Taxable amount 1
004	Cash declared amount	037	Credit 4 in drawer *	070	Tax 1
005	Declared short cash amount	038	Credit declared amount *	071	Tax exempt 1
006	Declared over cash amount	039	Declared short credit amount *	072	Taxable amount 2
007	Charge in drawer	040	Declared over credit amount *	073	Tax 2
008	Charge declared amount	041	Food stamp in drawer	074	Tax exempt 2
009	Declared short charge amount	042	Food stamp cash change	075	Taxable amount 3
010	Declared over charge amount	043	EBT in drawer	076	Tax 3
011	Check in drawer	044	EBT cash change	077	Tax exempt 3
012	Check declared amount	045	Refund mode total	078	Taxable amount 4
013	Declared short check amount	046	Customer count	079	Tax 4
014	Declared over check amount	047	Average sales per customer	080	Tax exempt 4
015	Credit 1 in drawer	048	Check cashing service fee	081	Taxable amount 5
016	Credit 2 in drawer	049	New balance fee	082	Tax 5
017	Credit 3 in drawer	050	New balance total	083	Tax exempt 5
018	Credit 4 in drawer	051	Clerk commission 1 total	084	Taxable amount 6
019	Credit declared amount	052	Clerk commission 2 total	085	Tax 6
020	Declared short credit amount	053	Foreign currency cash in drawer 1	086	Tax exempt 6
021	Declared over credit amount	054	Foreign currency check in drawer 1	087	Taxable amount 7
022	Cash in drawer *	055	Foreign currency cash in drawer 2	088	Tax 7
023	Cash declared amount *	056	Foreign currency check in drawer 2	089	Tax exempt 7
024	Declared short cash amount *	057	Foreign currency cash in drawer 3	090	Taxable amount 8
025	Declared over cash amount *	058	Foreign currency check in drawer 3	091	Tax 8
026	Charge in drawer *	059	Foreign currency cash in drawer 4	092	Tax exempt 8
027	Charge declared amount *	060	Foreign currency check in drawer 4	093	Taxable amount 9
028	Declared short charge amount *	061	Reduction	094	Tax 9
029	Declared over charge amount *	062	Coupon	095	Tax exempt 9
030	Check in drawer *	063	Item return	096	Taxable amount 10
031	Check declared amount *	064	Clear counter	097	Tax 10
032	Declared short check amount *	065	Rounding2 *	098	Tax exempt 10
033	Declared over check amount *	066	Rounding1	099	Nontaxable amount

* Totalizers for sub currencies

Appendix (File record format)

Transaction key file

Transaction key (daily)

File name: Transaction key (daily) File No.: 002 Max. allocatable records: 999

0	2	14	21	25	30	35
Function code	Character	Program	@/Rate	Counter	Totalizer	

Transaction key (periodic/consolidation)

File name: Transaction key (periodic 1)	File No.: 102	Max. allocatable records: 999
File name: Transaction key (periodic 2)	File No.: 202	Max. allocatable records: 999
File name: Transaction key (daily consolidation)	File No.: 302	Max. allocatable records: 999
File name: Transaction key (periodic 1 consolidation)	File No.: 402	Max. allocatable records: 999
File name: Transaction key (periodic 2 consolidation)	File No.: 502	Max. allocatable records: 999

0	5	10
Counter	Totalizer	

Subdepartment file

Subdepartment (daily)

File name: Subdepartment (daily) File No.: 003 Max. allocatable records: 99

0	12	15	20	25	30
Character	Link	Counter	Totalizer	Discount totalizer	

Subdepartment (periodic/consolidation)

File name: Subdepartment (periodic 1)	File No.: 103	Max. allocatable records: 99
File name: Subdepartment (periodic 2)	File No.: 203	Max. allocatable records: 99
File name: Subdepartment (daily consolidation)	File No.: 303	Max. allocatable records: 99
File name: Subdepartment (periodic 1 consolidation)	File No.: 403	Max. allocatable records: 99
File name: Subdepartment (periodic 2 consolidation)	File No.: 503	Max. allocatable records: 99

0	5	10	15
Counter	Totalizer	Discount totalizer	

PLU file

PLU (daily)

File name: PLU File No.: 004 Max. allocatable records: 9999

0	16	23	26	29	32	35	38	41	44	45	48	53	
Character			Program	Link	Unit quantity	@	Random code	Minimum stock	Bottle/set-menu link	HALO	Double Bon	Order	Counter
53	58	63	68	73	78								
Totalizer	Discount totalizer	Old amount totalizer	Red amount totalizer	Stock									

PLU (periodic/consolidation)

File name: PLU (periodic 1)	File No.: 104	Max. allocatable records: 9999
File name: PLU (periodic 2)	File No.: 204	Max. allocatable records: 9999
File name: PLU (daily consolidation)	File No.: 304	Max. allocatable records: 9999
File name: PLU (periodic 1 consolidation)	File No.: 404	Max. allocatable records: 9999
File name: PLU (periodic 2 consolidation)	File No.: 504	Max. allocatable records: 9999

0	5	10	15	20	25	30
Counter	Totalizer	Discount totalizer	Old amount totalizer	Red amount totalizer	Stock	

PLU 2nd unit price (program)

File name: PLU 2nd unit price File No.: 054 Max. allocatable records: 9999

0	16	23	26	29	32
Character		Program	Link	Unit quantity	@

Appendix (File record format)

Department file

Department (daily)

File name: Department (daily)

File No.: 005 Max. allocatable records: 99

0	16	23	26	29	32	3536	39	44	49	54	59	64
Character	Program	Link	Unit quantity	@	HALO	Double Bon	Order	Counter	Totalizer	Discount totalizer	Old amount totalizer	Red amount totalizer

Department (periodic/consolidation)

File name: Department (periodic 1)

File No.: 105 Max. allocatable records: 99

File name: Department (periodic 2)

File No.: 205 Max. allocatable records: 99

File name: Department (daily consolidation)

File No.: 305 Max. allocatable records: 99

File name: Department (periodic 1 consolidation)

File No.: 405 Max. allocatable records: 99

File name: Department (periodic 2 consolidation)

File No.: 505 Max. allocatable records: 99

0	5	10	15	20	25
Counter	Totalizer	Discount totalizer	Old amount totalizer	Red amount totalizer	

Group file

Group (daily)

File name: Group (daily)

File No.: 006 Max. allocatable records: 99

0	12	17	22
Character	Counter	Totalizer	

Group (periodic/consolidation)

File name: Group (periodic 1)

File No.: 106 Max. allocatable records: 99

File name: Group (periodic 2)

File No.: 206 Max. allocatable records: 99

File name: Group (daily consolidation)

File No.: 306 Max. allocatable records: 99

File name: Group (periodic 1 consolidation)

File No.: 406 Max. allocatable records: 99

File name: Group (periodic 2 consolidation)

File No.: 506 Max. allocatable records: 99

0	5	10
Counter	Totalizer	

Clerk file

Clerk (programming)

File name: Clerk (programming) File No.: 007 Max. allocatable records: 99

0	12	15	16	18	23	27	33	38
Character	Clerk initial check #	Drawer #	Clerk #	Program	Commission rate	Check # range	Mode/operation control	

Clerk detail (daily, periodic/consolidation)

File name: Clerk detail (daily)	File No.: 011	Max. allocatable records: 99
File name: Clerk detail (periodic 1)	File No.: 111	Max. allocatable records: 99
File name: Clerk detail (periodic 2)	File No.: 211	Max. allocatable records: 99
File name: Clerk detail (daily consolidation)	File No.: 311	Max. allocatable records: 99
File name: Clerk detail (periodic 1 consolidation)	File No.: 411	Max. allocatable records: 99
File name: Clerk detail (periodic 2 consolidation)	File No.: 511	Max. allocatable records: 99

0	5	10
Counter	Totalizer	

Clerk detail link (program)

File name: Clerk detail link File No.: 030 Max. allocatable records: 200

0	7	8	9
Record No/ Scanning PLU code	Multi price flag	File No.	

Dallas key ID (program)

File name: Dallas key ID File No.: 027 Max. allocatable records: 200

0	12	13	14
Key ID character	Not used	Clerk rec-#	

Appendix (File record format)

Hourly sales file

Hourly sales (daily)

File name: Hourly sales (daily)

File No.: 009 Max. allocatable records: 99

0	2	4	9	14	19	24
Start time	End time	No. of customer	Gross total	No. of transaction	Net total	

Hourly sales (periodic/consolidation)

File name: Hourly sales (periodic 1)

File No.: 109 Max. allocatable records: 99

File name: Hourly sales (periodic 2)

File No.: 209 Max. allocatable records: 99

File name: Hourly sales (daily consolidation)

File No.: 309 Max. allocatable records: 99

File name: Hourly sales (periodic 1 consolidation)

File No.: 409 Max. allocatable records: 99

File name: Hourly sales (periodic 2 consolidation)

File No.: 509 Max. allocatable records: 99

0	5	10	15	20
No. of customer	Gross total	No. of transaction	Net total	

Monthly sales file

Monthly sales (daily, periodic/consolidation)

File name: Monthly sales (daily)

File No.:010 Max. allocatable records: 31 (fixed)

File name: Monthly sales (periodic 1)

File No.:110 Max. allocatable records: 31 (fixed)

File name: Monthly sales (periodic 2)

File No.:210 Max. allocatable records: 31 (fixed)

File name: Monthly sales (daily consolidation)

File No.:310 Max. allocatable records: 31 (fixed)

File name: Monthly sales (periodic 1 consolidation)

File No.:410 Max. allocatable records: 31 (fixed)

File name: Monthly sales (periodic 2 consolidation)

File No.:510 Max. allocatable records: 31 (fixed)

0	5	10	15	20
Counter (Gross)	Totalizer (Gross)	Counter (Net)	Totalizer (Net)	

Scanning PLU files

Scanning PLU file (daily)

File name: Scanning PLU File No.:016 Max. allocatable records: 25000

0	7	8	24	27	31	33	36	38	40	41	46	51
PLU code	Multi price flag	Character	Program	Link	Unit quantity	@	Bottle link	Last update date	Mix & match link	Counter	Totalizer	

Not found PLU file (daily)

File name: Not found PLU File No.:017 Max. allocatable records: 100

0	7	8	11	14	16	21	26
PLU code	Multi price flag	Link	@	Last update	Counter	Totalizer	

Non PLU table file (program)

File name: Non PLU table File No.:040 Max. allocatable records: 100

0	8
Program	

Batch maintenance PLU file (program)

File name: Batch maintenance PLU File No.:070 Max. allocatable records: 1000

0	7	8	9	25	28	31	34	37	39	40
PLU code	Multi price flag	Flag	Character	Program	Link	Unit quantity	@	Bottle link	Mix & match link	

Direct maintenance PLU file (program)

File name: Direct maintenance PLU File No.:071 Max. allocatable records: 1000

0	7	8	9	25	28	31	34	37	39	40
PLU code	Multi price flag	Flag	Character	Program	Link	Unit quantity	@	Bottle link	Mix & match link	

Not found PLU maintenance file (program)

File name: Not found PLU maintenance File No.:072 Max. allocatable records: 400

0	7	8	9	25	28	31	34	37	39	40
PLU code	Multi price flag	Flag	Character	Program	Link	Unit quantity	@	Bottle link	Mix & match link	

Appendix (File record format)

One touch NLU table file

File name: One touch NLU table

File No.:077 Max. allocatable records: 999

0	7
Scanning PLU code	

Mix & match table file

Mix & match table file (daily)

File name: Mix & match table (daily)

File No.: 051 Max. allocatable records: 99

0	12	15	18	23	28	30
Character	@	Program	Counter	Totalizer	Work	

Mix & match table file (periodic/consolidation)

File name: Mix & match table (periodic 1)

File No.: 151 Max. allocatable records: 99

File name: Mix & match table (periodic 2)

File No.: 251 Max. allocatable records: 99

File name: Mix & match table (daily consolidation)

File No.: 351 Max. allocatable records: 99

File name: Mix & match table (periodic 1 consolidation)

File No.: 451 Max. allocatable records: 99

File name: Mix & match table (periodic 2 consolidation)

File No.: 551 Max. allocatable records: 99

0	5	10
Counter	Totalizer	

Bottle link table file

Bottle link table file (program)

File name: Bottle link table

File No.: 073 Max. allocatable records: 999

0	3	4
Record No./random PLU code	File No.	

Table analysis file

Table analysis (daily)

File name: Table analysis (daily)

File No.: 018 Max. allocatable records: 99

0			12		15		18		23		28
Character				Minimum check No.	Maximum check No.	Counter (customer)		Totalizer			

Table analysis (periodic/consolidation)

File name: Table analysis (periodic 1)

File No.: 118 Max. allocatable records: 99

File name: Table analysis (periodic 2)

File No.: 218 Max. allocatable records: 99

File name: Table analysis (daily consolidation)

File No.: 318 Max. allocatable records: 99

File name: Table analysis (periodic 1 consolidation)

File No.: 418 Max. allocatable records: 99

File name: Table analysis (periodic 2 consolidation)

File No.: 518 Max. allocatable records: 99

0		5		10
Counter (customer)		Totalizer		

Time and attendance file

Time and attendance (daily)

File name: Time and attendance (daily)

File No.: 019 Max. allocatable records: 99

0		3		5		8		10		12		14		16
Clock-in date	Clock-in time	Clock-out date	Clock-out time	Employee rec-#	Next rec-#	Work time								

Employee file

File name: Employee

File No.: 061 Max. allocatable records: 99

0			12		17
Character				Employee number	

Appendix (File record format)

Grand total file

Grand total (daily)

File name: Grand total (daily)

File No.: 020 Max. allocatable records: 3 (fixed)

0	12	20
Character	Totalizer	

Grand total (consolidation)

File name: Grand total (consolidation)

File No.: 320 Max. allocatable records: 3 (fixed)

0	8
Totalizer	

Hourly item file

Hourly item sales file

File name: Hourly item sales (daily)

File No.: 021 Max. allocatable records: 99 × 99

File name: Hourly item sales (periodic 1)

File No.: 121 Max. allocatable records: 99 × 99

File name: Hourly item sales (periodic 2)

File No.: 221 Max. allocatable records: 99 × 99

File name: Hourly item sales (daily consolidation)

File No.: 321 Max. allocatable records: 99 × 99

File name: Hourly item sales (periodic 1 consolidation)

File No.: 421 Max. allocatable records: 99 × 99

File name: Hourly item sales (periodic 2 consolidation)

File No.: 521 Max. allocatable records: 99 × 99

0	5	10
Counter	Totalizer	

Hourly item link file

File name: Hourly item link (daily)

File No.: 031 Max. allocatable records: 99

0	7	8	9
Record No/ Scanning PLU code	Multi price flag	File No.	

Hourly item time range file

File name: Hourly item time range (program)

File No.: 084 Max. allocatable records: 99

0	2	4
Start time	End time	


General control file

General control

File name: General control

File No.: 022

Max. allocatable records: 37 (fixed)



Rec No.	Contents	Rec No.	Contents
001	Date order, Monetary mode	020	(future use)
002	Password, Machine ID., Machine No.	021	Message control
003	Consecutive number	022	(future use)
004	Clerk interrupt, Rounding, Tax system	023	(future use)
005	Receipt control (1)	024	(future use)
006	Calculation, Operation control	025	Condiment
007	Menu shift control	026	Check tracking
008	Fixed totalizer report control (1)	027	Clerk control
009	Fixed totalizer report control (2)	028	Euro (definition, exchange rate)
010	Print control, Till timer	029	Euro (display, rounding)
011	Scale control (1)	030	Internal thermal printer control
012	Scale control (2)	031	Scanning PLU
013	Communication control	032	Direct maintenance PLU
014	Print control (currency exchange totalizers)	033	Batch and not found PLU maintenance
015	Report control (1)	034	Backlight control
016	Report control (2)	035	(future use)
017	Report control (3), Money declaration	036	Store/Recall range
018	Slip/Guest/KP print	037	Auto check range
019	Order control		


Appendix (File record format)

Special character file

Special character

File name: Special character

File No.: 023 Max. allocatable records: 42 (fixed)

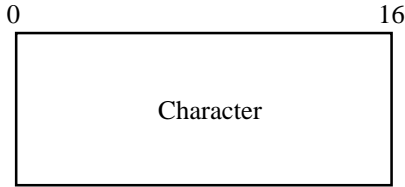


Address code	Contents	Initial character
0123	main currency symbol (2), @ (2), No. (2), split pricing (2), not used (1) training filler (1), training symbol (1), not used (1), sub currency symbol (2)	U.S. \$ @ No / **
		Others . @ No / ** €
0223	No. of item sold (2), No. of customer (2), scalable item @ (2), scale weight (2), new price (2), multiplication display (2)	U.S. NoCT @LB *QT
		Others NoCT@ LB *QT
0323	multiplication (6) check in use (6)	U.S. BUSY
		Others X BUSY
0423	taxable symbol 1 (3 each) for tax 1, tax 2, tax 3, tax 4, tax 5	T1 T2 T3 T4 T5
0523	taxable symbol 2 (3 each) for tax 6, tax 7, tax 8, tax 9, tax 10	T6 T7 T8 T9 T10
0623	taxable symbol 3 (3 each) for tax 1/2, tax 1/3, tax 1/4, not used, tax 2/3	T12T13T14 T23
0723	taxable symbol 4 (3 each) for not used, not used, not used, nontax, all, F/S	F
0823	foreign currency (2 each), character edit mode (INS/OVR) (4 each)	* * * * *
0923	mode symbol 1 (4 each) REG1/2, RF, REG-	REG RFR -
1023	mode symbol 2 (4 each) PGM, Daily X, Daily Z, Periodic	PnX Z XZ
1123	mode symbol 3 (4 each) training, not used, PGM read	TRG PGMX
1223	decimal: amount/q'ty, separator (main/sub) (1 each), not used (3), square (7) X
1323	A.M., P.M. (3 each), ST displayed on the dot display (2)	AM PM ST
1423	slip continued (12), page (2)	CONTINUED P
1523	(not used)	
1623	display subtotal symbol (ST key) (16)	ST
1723	subtotal symbol (16)	ST
1823	total symbol (16)	TL
1923	change symbol (16)	CG
2023	check cashing fee (16)	
2123	check cashing amount (16)	CACG
2223	Bon message (12)	** STUB **
2323	break (16)	**BREAK END**
2423	check No. (10)	CHECK No.
2523	service total (16)	SRVC TL
2623	item discount total (16)	DISCOUNT
2723	scale manual entry (12)	MANUAL ENTRY
2823	(not used)	
2923	report total symbol (12)	TL
3023	report old price symbol (16)	OLD PRC
3123	red price symbol (16)	RED PRC
3223	food stamp change symbol (16)	FSCG
3323	table No. symbol (10)	TABLE No.
3423	future order message (16)	**Future Order**
3523	declared amount (16)	DECLA
3623	entering child item in separate check or void item in previous item void operation	Sub item ?
3723	current stock (16)	STK(NEW)
3823	last stock (16)	STK(OLD)
3923	added stock (16)	STK(ADD)
4023	reviewing (16)	** REVIEW **
4123	end of transaction (16)	** END **
4223	designating sub currency (16)	EURO money

Report header file

Report header

File name: Report header

File No.: 024 Max. allocatable records: 26 (fixed)




Record No.	Contents	Initial character
01	Fixed totalizer report	FIX
02	Transaction key report	TRANS
03	PLU report	PLU
04	Department report	DEPT
05	Group report	GROUP
06	Cashier/clerk report	CASHIER
07	Not used	
08	Hourly sales report	HOURLY
09	Monthly sales report	MONTHLY
10	Subdepartment report	SUB DEPT
11	Table analysis report	ANALYSIS
12	Open check report	OPEN CHK
13	Scanning PLU	SCAN PLU
14	Hourly item	HOURLY ITEM
15	PLU stock report	PLU STOCK
16	Financial report	FLASH
17	Mix & match	MIX&MATCH
18	PLU by amount	PLU AMT
19	PLU by quantity	PLU QTY
20	Department by amount	DEPT AMT
21	Department by quantity	DEPT QTY
22	Scanning PLU best	PLU BEST
23	Inactive scanning PLU	NON ACTIVE
24	Individual item	INDIVIDUAL
25	Not found PLU	NFP
26	Time & attendance	ATTENDANCE

Tax table file

Tax table

File name: Tax table

File No.: 025 Max. allocatable records: 10

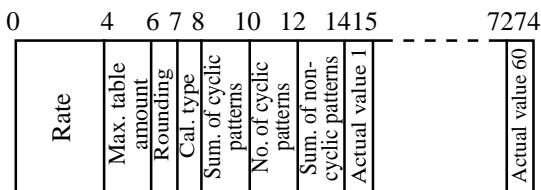


Set menu table file

Set menu table

File name: Set menu table

File No.: 028 Max. allocatable records: 999

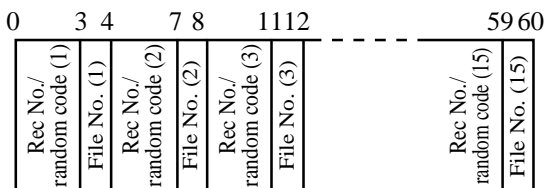


Appendix (File record format)

Batch X/Z file

Batch X/Z

File name: Batch X/Z

File No.: 029 Max. allocatable records: 10

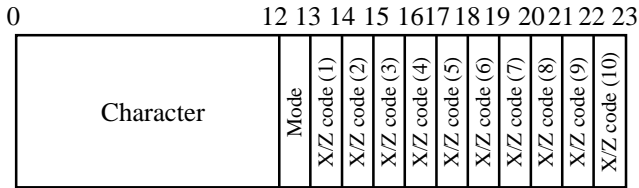


Receipt message file

Receipt message

File name: Receipt message

File No.: 032 Max. allocatable records: 42

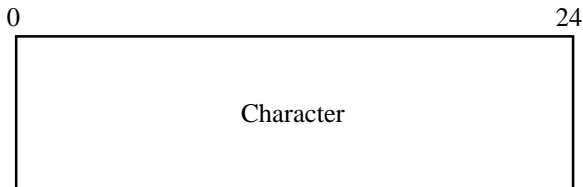


Rec No.	Message
1 ~ 4	Receipt logo message
5 ~ 8	Receipt commercial message
9 ~ 12	Receipt bottom message
13 ~ 16	Bill top message
17 ~ 20	Bill copy message
21 ~ 24	Bill bottom message
25	Post receipt message
26 ~ 29	Guest/slip intermediate message
30 ~ 39	Guest bottom message
40 ~ 42	Australian MOF message

Check endorsement message file

Check endorsement message

File name: Check endorsement message

File No.: 033 Max. allocatable records: 4

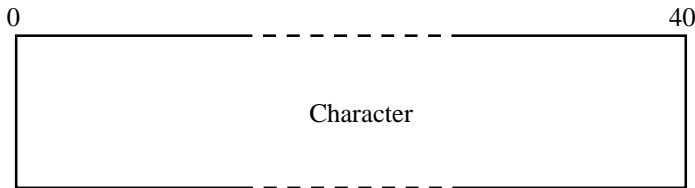


Slip/local/remote printer message file

Slip/local/remote printer message

File name: Slip/local/remote printer message

File No.: 034 Max. allocatable records: 42

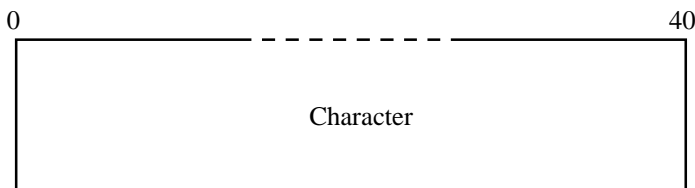

Rec No.	Message
1 ~ 4	Receipt logo message
5 ~ 8	Receipt/slip commercial message
9 ~ 12	Receipt/slip bottom message
13 ~ 16	Bill top message
17 ~ 20	Bill copy message
21 ~ 24	Bill bottom message
25	Post receipt message
26 ~ 29	Guest/slip intermediate message
30 ~ 39	Guest bottom message
40 ~ 42	Australian MOF message

Arrangement file

Arrangement file

File name: Arrangement

File No.: 038 Max. allocatable records: 9999


0	1	2	3	4	5	6	7	8	9	10	11
Flag	Key code (1)	Key code (2)	Key code (3)	Key code (4)	Key code (5)	Key code (6)	Key code (7)	Key code (8)	Key code (9)	Key code (10)	

Character recall file

Character recall

File name: Character recall

File No.: 039 Max. allocatable records: 999

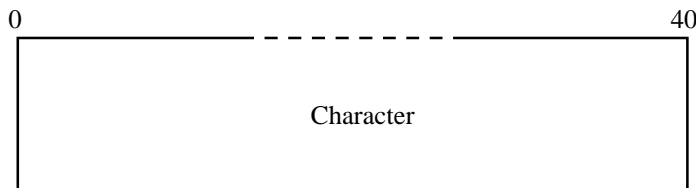


Check print file

Check print

File name: Check print

File No.: 041 Max. allocatable records: 9



Scheduler file

Scheduler

File name: Scheduler

File No.: 062 Max. allocatable records: 99


0	3	10	15	22
Type	Job	Date/ time	Work	

Order character file

Order character

File name: Order character

File No.: 065 Max. allocatable records: 99



Key table file

File name: Key table

File No.: 074

Max. allocatable records: 150 (fixed)

0 3 4

Record No./random
PLU code
File No.

Key/key table record No.

TE-3000S

RECEIPT FEED	JOURNAL FEED	077	C	070	068	066	060	054	048	042	036	030	024	018
087	082	076	071	069	067	065	059	053	047	041	035	029	023	017
086	081	075	7	8	9	064	058	052	046	040	034	028	022	015
085	080	074	4	5	6	063	057	051	045	039	033	027	014	016
084	079	073	1	2	3	062	056	050	044	038	032	026	020	021
083	078	072	0	011	012	061	055	049	043	037	031	025	019	013

TE-4000F

RECEIPT FEED	JOURNAL FEED	035	030	021
042	039	034	029	020
041	038	033	028	019
040	037	032	027	018
C	036	031	026	017
7	8	9	025	016
4	5	6	024	015
1	2	3	014	023
0	011	012	013	022

051	060	069	078	087	096	105	114	123	132	141	150
050	059	068	077	086	095	104	113	122	131	140	149
049	058	067	076	085	094	103	112	121	130	139	148
048	057	066	075	084	093	102	111	120	129	138	147
047	056	065	074	083	092	101	110	119	128	137	146
046	055	064	073	082	091	100	109	118	127	136	145
045	054	063	072	081	090	099	108	117	126	135	144
044	053	062	071	080	089	098	107	116	125	134	143
043	052	061	070	079	088	097	106	115	124	133	142

TE-4500F

RECEIPT FEED	JOURNAL FEED	067	076	085	094	103	112	121	130	139	148	042	038	033	028	021
050	058	066	075	084	093	102	111	120	129	138	147	041	037	032	027	020
049	057	065	074	083	092	101	110	119	128	137	146	040	036	031	026	019
048	056	064	073	082	091	100	109	118	127	136	145	039	035	030	025	018
047	055	063	072	081	090	099	108	117	126	135	144	C	034	029	024	017
046	054	062	071	080	089	098	107	116	125	134	143	7	8	9	023	016
045	053	061	070	079	088	097	106	115	124	133	142	4	5	6	022	015
044	052	060	069	078	087	096	105	114	123	132	141	1	2	3	014	
043	051	059	068	077	086	095	104	113	122	131	140	0	011	012	013	


The shadowed key cannot be programmed with any other function keys.

Appendix (File record format)

LCD back light color control file

File name: LCD back light color control


File No.: 069 Max. allocatable records: 9 (fixed)



Terminal connection table file

File name: Terminal connection table


File No.: 091 Max. allocatable records: 32



Printer connection table

File name: Printer definition table

File No.: 093 Max. allocatable records: 7



Operation start date file

File name: Operation start date


File No.: 094 Max. allocatable records: 1 (fixed)



Initialize code file

File name: Initialize code


File No.: 095 Max. allocatable records: 1 (fixed)



AT command file

File name: AT command


File No.: 096 Max. allocatable records: 2 (fixed)

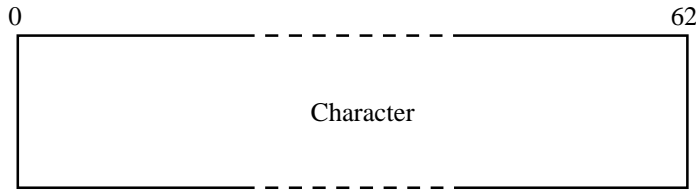

Online password file

File name: Online password


File No.: 097 Max. allocatable records: 1



I/O parameter table file

File name: I/O parameter table


File No.: 098 Max. allocatable records: 4 (fixed)



System error log file

File name: System error log

File No.: 099 Max. allocatable records: 99



Graphic image files

Graphic logo file

File name: Graphic logo

File No.: 047 Max. allocatable records: 168 (fixed)

Graphic logo file (for local/remote printer)


File name: Graphic logo

File No.: 067 Max. allocatable records: 168 (fixed)

Watermark print file

File name: Watermark print

File No.: 068 Max. allocatable records: 168 (fixed)

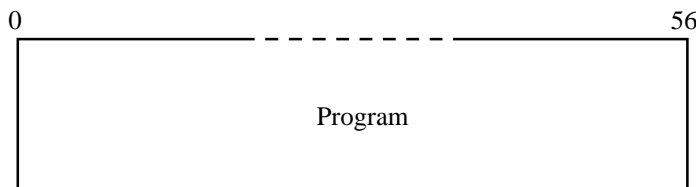


Appendix (File record format)

Guidance message files

Error message file

File name: Error message

File No.: 080 Max. allocatable records: 238(fixed)

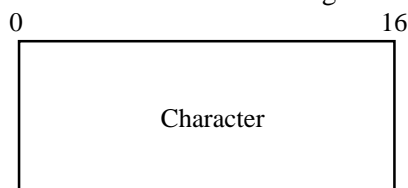

Rec-No.	Meaning	Default (English) message
001	Error code (do NOT change)	E 0 0 1
002	Mode switch position changed before finalization.	W r o n g m o d e
003	Error code (do NOT change)	E 0 0 3
004	Clerk button pressed before finalization of a registration being performed under another clerk button. The signed on clerk differs from the clerk performed the tracking check registration.	W r o n g o p e r a t o r
005	Error code (do NOT change)	E 0 0 4
006	Initialization or unit lock clear operation in progress.	E r r o r I N I T / F C
007	Error code (do NOT change)	E 0 0 5
008	Memory allocation exceeds total memory capacity. (1/2)	I n s u f f i c i e n t m e m
009	Memory allocation exceeds total memory capacity. (2/2)	o r y
010	Error code (do NOT change)	E 0 0 8
011	Registration without entering a clerk number.	P l e a s e s i g n o n
012	Error code (do NOT change)	E 0 0 9
013	Operation without entering the password.	E n t e r p a s s w o r d
014	Error code (do NOT change)	E 0 1 0
015	The drawer is left open longer than the program time (drawer open alarm).	C l o s e t h e d r a w e r
016	Error code (do NOT change)	E 0 1 1
017	Attempt to register while the cash drawer is open.	C l o s e t h e d r a w e r
018	Error code (do NOT change)	E 0 1 3
019	Journal paper near end. (option) (1/2)	J o u r n a l p a p e r n e
020	Journal paper near end. (option) (2/2)	a r e n d
021	Error code (do NOT change)	E 0 1 6
022	Two consecutive transactions attempted in the refund mode. (1/2)	C h a n g e b a c k t o R
023	Two consecutive transactions attempted in the refund mode. (2/2)	E B m o d e
024	Error code (do NOT change)	E 0 1 7
025	Attempt made to register an item without inputting a check number. (1/2)	E n t e r C H K / T B L n u
026	Attempt made to register an item without inputting a check number. (2/2)	m b e r
027	Error code (do NOT change)	E 0 1 8
028	Attempt made to register an item without inputting a table number. (1/2)	E n t e r T a b l e n u m b
029	Attempt made to register an item without inputting a table number. (2/2)	e r
030	Error code (do NOT change)	E 0 1 9
031	Finalize operation attempted without entering the number of customer. (1/2)	E n t e r n u m b e r o f
032	Finalize operation attempted without entering the number of customer. (2/2)	c u s t o m e r s
033	Error code (do NOT change)	E 0 2 1
034	No department linked PLU is registered.	N o D E P T L i n k
035	not used	
036	not used	
037	Error code (do NOT change)	E 0 2 3
038	Actual stock quantity becomes less than the minimum stock quantity.	S t o c k s h o r t a g e
039	Error code (do NOT change)	E 0 2 4
040	Actual stock quantity becomes/is negative.	N o s t o c k
041	Error code (do NOT change)	E 0 2 5
042	Scale read error/perform non-scale registration to scalable item. (1/2)	I l l e g a l s c a l e r e
043	Scale read error/perform non-scale registration to scalable item. (2/2)	a d o r e n t r y
044	Error code (do NOT change)	E 0 2 6
045	No condiment/preparation PLU is registered. (1/2)	E n t e r c o n d i m e n t /
046	No condiment/preparation PLU is registered. (2/2)	p r e p a r a t i o n P L U
047	Error code (do NOT change)	E 0 2 9
048	Item registration is prohibited, while partial tender. (1/2)	I n t h e t e n d e r o p
049	Item registration is prohibited, while partial tender. (2/2)	e r a t i o n
050	Error code (do NOT change)	E 0 3 0
051	Finalization of a transaction attempted without registering rate-tax. (1/2)	P r e s s R A T E T A X k
052	Finalization of a transaction attempted without registering rate-tax. (2/2)	e y

Rec-No.	Meaning	Default (English) message
053	Error code (do NOT change)	E 0 3 1
054	Finalization of a transaction attempted without confirming the subtotal.	P r e s s S T k e y
055	Error code (do NOT change)	E 0 3 2
056	Finalization of a transaction attempted without confirming of the food stamp subtotal.	P r e s s F S S T k e y
057	Error code (do NOT change)	E 0 3 3
058	Finalize operation attempted without entering amount tender. (1/2)	E n t e r t e n d e r e d a
059	Finalize operation attempted without entering amount tender. (2/2)	m o u n t
060	Error code (do NOT change)	E 0 3 5
061	Change amount exceeds preset limit. (1/2)	C h a n g e a m o u n t e x
062	Change amount exceeds preset limit. (2/2)	c e e d s l i m i t
063	Error code (do NOT change)	E 0 3 6
064	Contents of the drawer exceed programmed limit. (1/2)	R e m o v e m o n e y f r o
065	Contents of the drawer exceed programmed limit. (2/2)	m t h e d r a w e r
066	Error code (do NOT change)	E 0 3 7
067	High amount lock out/low digit lock out error (1/2)	D i g i t o r a m o u n t
068	High amount lock out/low digit lock out error (2/2)	l i m i t a t i o n o v e r
069	Error code (do NOT change)	E 0 3 8
070	Read/reset operation without declaring cash in drawer. This error appears only when this function is activated. (1/2)	P e r f o r m m o n e y d e
071	Same as above (2/2)	c l a r a t i o n
072	Error code (do NOT change)	E 0 4 0
073	Attempt to register a new transaction without issuing a guest receipt. (1/2)	I s s u e g u e s t r e c e
074	Attempt to register a new transaction without issuing a guest receipt. (2/2)	i p t
075	Error code (do NOT change)	E 0 4 1
076	Attempt to register a new transaction without validation.	P r i n t v a l i d a t i o n
077	Error code (do NOT change)	E 0 4 2
078	Validation paper (slip printer) has run out. (1/2)	I n s e r t V L D p a p e r
079	Validation paper (slip printer) has run out. (2/2)	a n d r e t r y
080	Error code (do NOT change)	E 0 4 4
081	Attempt to register a new transaction without printing check.	P r i n t C h e q u e
082	Error code (do NOT change)	E 0 4 5
083	Attempt to register a new transaction without printing check endorsement. (1/2)	P r i n t C h e c k E n d o
084	Attempt to register a new transaction without printing check endorsement. (2/2)	r s e m e n t
085	Error code (do NOT change)	E 0 4 6
086	Registration buffer full. Separate check buffer full.	R E G b u f f e r f u l l
087	Error code (do NOT change)	E 0 4 7
088	Attempt to register a new transaction without printing slip.	P r i n t b i l l
089	Error code (do NOT change)	E 0 4 8
090	No paper is inserted or paper is out in the slip printer. (1/2)	I n s e r t s l i p p a p e
091	No paper is inserted or paper is out in the slip printer. (2/2)	r a n d r e t r y
092	Error code (do NOT change)	E 0 4 9
093	Check tracking index memory full. (1/2)	C h e c k m e m o r y f u l
094	Check tracking index memory full. (2/2)	l
095	Error code (do NOT change)	E 0 5 0
096	Check tracking detail memory full. (1/2)	D E T A I L m e m o r y f u
097	Check tracking detail memory full. (2/2)	l
098	Error code (do NOT change)	E 0 5 1
099	Attempt to made use <New Check> to open a new check using a number that is already used for an existing check in check tracking memory. (1/2)	C H K / T B L N o . i s o
100	Same as above (2/2)	c c u p i e d
101	Error code (do NOT change)	E 0 5 2
102	Attempt to made use <Add Check>, <Separate Check> to open a check using a number that is already opened. (1/2)	C H K / T B L N o . i s B
103	Same as above (2/2)	u s y
104	Error code (do NOT change)	E 0 5 3
105	Attempt made to use <Old Check> reopen a new check using a number that is not used for an existing check in check tracking memory. (1/2)	C H K / T B L N o . i s n
106	Same as above (2/2)	o t o p e n e d
107	Error code (do NOT change)	E 0 5 4
108	Check number range over (1/2)	O u t o f C H K / T B L N
109	Check number range over (2/2)	o . r a n g e
110	Error code (do NOT change)	E 0 5 5
111	Normal registration is prohibited during separate check operation. (1/2)	I n t h e S E P C H K o
112	Normal registration is prohibited during separate check operation. (2/2)	p e r a t i o n
113	Error code (do NOT change)	E 0 5 6
114	Store/auto new check range full	C H K r a n g e f u l l

Appendix (File record format)

Rec-No.	Meaning	Default (English) message
115	Error code (do NOT change)	E 0 5 9
116	Attempt to finalize a transaction without specifying <EAT-IN> or <TAKE-OUT>. (1/2)	P r e s s E A T - I N o r
117	Attempt to finalize a transaction without specifying <EAT-IN> or <TAKE-OUT>. (2/2)	T A K E - O U T k e y
118	Error code (do NOT change)	E 0 6 0
119	External printer offline	P r i n t e r o f f l i n e
120	Error code (do NOT change)	E 0 6 1
121	External printer went down.	P r i n t e r e r r o r
122	Error code (do NOT change)	E 0 6 2
123	External printer paper end (1/2)	P r i n t e r p a p e r e n
124	External printer paper end (2/2)	d
125	Error code (do NOT change)	E 0 6 3
126	External printer is now printing.	P r i n t e r b u s y
127	Error code (do NOT change)	E 0 6 4
128	Printing buffer full (1/2)	P r i n t b u f f e r f u l
129	Printing buffer full (2/2)	l
130	Error code (do NOT change)	E 0 7 5
131	Attempt to finalize a transaction when balance is less than or equal to zero. (1/3)	N e g a t i v e b a l a n c e
132	Attempt to finalize a transaction when balance is less than or equal to zero. (2/3)	c a n n o t b e f i n a l
133	Attempt to finalize a transaction when balance is less than or equal to zero. (3/3)	i z e d
134	Error code (do NOT change)	E 0 8 5
135	Data exists in the consolidation file. (1/2)	D a t a e x i s t i n c o
136	Data exists in the consolidation file. (2/2)	n s o l i d a t i o n f i l e
137~138	not used	
139	Error code (do NOT change)	E 0 9 9
140	Disable to read/reset or consolidate the not found PLU item.	C h e c k N F P i t e m s
141	Error code (do NOT change)	E 1 0 0
142	Prohibit master operation. (1/2)	O p e r a t e a t t h e M
143	Prohibit master operation. (2/2)	a s t e r t e r m i n a l
144	Error code (do NOT change)	E 1 0 1
145	Scanning PLU direct maintenance/batch maintenance file becomes full. (1/3)	P L U m a i n t e n a n c e
146	Scanning PLU direct maintenance/batch maintenance file becomes full. (2/3)	f i l e f u l l . P r e s s
147	Scanning PLU direct maintenance/batch maintenance file becomes full. (3/3)	< # 2 > t o e x i t .
148	Error code (do NOT change)	E 1 0 2
149	Not found PLU file becomes full. (1/3)	N F P m a i n t e n a n c e
150	Not found PLU file becomes full. (2/3)	f i l e f u l l . P r e s s
151	Not found PLU file becomes full. (3/3)	< # 2 > t o e x i t .
152	Error code (do NOT change)	E 1 0 5
153	Scanning PLU/not found PLU file full	P L U f i l e f u l l
154	Error code (do NOT change)	E 1 2 1
155	Network startup error. (1/2)	I n l i n e s t a r t u p e
156	Network startup error. (2/2)	r r o r
157~158	not used	
159	Error code (do NOT change)	E 1 3 9
160	Attempt to register <-> or <CPN> when the balance becomes negative. (1/2)	N e g a t i v e b a l a n c e
161	Attempt to register <-> or <CPN> when the balance becomes negative. (2/2)	i s n o t a l l o w e d
162~164	not used	
165	Error code (do NOT change)	E 1 4 6
166	Arrangement file is full. (1/2)	A r r a n g e m e n t f i l e
167	Arrangement file is full. (2/2)	f u l l
168~169	not used	
170	Error code (do NOT change)	E 1 7 0
171	No CF card is set.	I n s e r t C F c a r d
172	Error code (do NOT change)	E 2 0 2
173	Can not read, because no designated file is in the CF card or internal flash memory.	F i l e n o t f o u n d
174	Error code (do NOT change)	E 2 0 3
175	Insufficient memory in the CF card or internal flash memory. (1/2)	I n s u f f i c i e n t m e m
176	Insufficient memory in the CF card or internal flash memory. (2/2)	o r y
177	Error code (do NOT change)	E 2 0 4
178	Write protect switch of the CF card is on. (1/2)	C h e c k t h e w r i t e
179	Write protect switch of the CF card is on. (2/2)	p r o t e c t s w i t c h
180	Error code (do NOT change)	E 2 0 5
181	Can not write, because designated file has already been in the CF card or internal flash memory. (1/2)	F i l e a l r e a d y e x i
182	Same as above (2/2)	s t

Rec-No.	Meaning	Default (English) message
183	Error code (do NOT change)	E 0 6 6
184	Attempt to print the last separated transaction on slip. (1/3)	P r i n t f r o m t h e b
185	Attempt to print the last separated transaction on slip. (2/3)	e g i n n i n g o f t h e
186	Attempt to print the last separated transaction on slip. (3/3)	t r a n s a c t i o n
187	Error code (do NOT change)	E 0 1 5
188	Printer error: Paper jam, Printer head is released. (1/2)	C h e c k R / J p r i n t e
189	Printer error: Paper jam, Printer head is released. (2/2)	r
190	Error code (do NOT change)	E 2 0 1
191	Flash memory format is illegal.	I l l e g a l F o r m a t
192	Error code (do NOT change)	E 1 4 0
193	This sheet holder is prohibited by PGM.	W r o n g m e n u
194	Error code (do NOT change)	E 1 6 4
195	Employee No. is not found. (1/3)	E m p l o y e e N o . i s
196	Employee No. is not found. (2/3)	n o t F o u n d i n t h e
197	Employee No. is not found. (3/3)	E m p l o y e e F i l e
198	Error code (do NOT change)	E 1 6 5
199	This employee is not clocking in. (1/2)	E m p l o y e e N o . i s
200	This employee is not clocking in. (2/2)	n o t C l o c k i n g - i n
201	Error code (do NOT change)	E 1 6 6
202	This employee No. is used on another terminal. (1/2)	E m p l o y e e N o . i s
203	This employee No. is used on another terminal. (2/2)	O c c u p i e d
204	Error code (do NOT change)	E 1 7 6
205	Time & attendance file becomes full. (1/2)	T i m e & A t t e n d a n c e
206	Time & attendance file becomes full. (2/2)	f i l e f u l l
207	Error code (do NOT change)	E 1 7 7
208	Time & attendance data communication error (1/3)	T i m e & A t t e n d a n c e
209	Time & attendance data communication error (2/3)	D a t a C o m m u n i c a t i
210	Time & attendance data communication error (3/3)	o n E r r o r
211	Error code (do NOT change)	E 1 1 0
212	Communication error message with master terminal (1/3)	M a s t e r i s b u s y / d
213	Communication error message with master terminal (2/3)	o w n . R e t r y : < C A >
214	Communication error message with master terminal (3/3)	R e m o v e : < S T >
215	Error code (do NOT change)	E 1 0 3
216	Entered scanning PLU code is illegal or not found. (1/3)	P L U C o d e i s n o t
217	Entered scanning PLU code is illegal or not found. (2/3)	e x i s t . I n p u t P L U
218	Entered scanning PLU code is illegal or not found. (3/3)	C o d e
219	CHK/TBL master is removed from the system. (1/4)	* * P r e s s < C > K e y * *
220	CHK/TBL master is removed from the system. (2/4)	C H K / T B L M a s t e r i
221	CHK/TBL master is removed from the system. (3/4)	s r e m o v e d f r o m s
222	CHK/TBL master is removed from the system. (4/4)	y s t e m
223	Error code (do NOT change)	E 0 7 0
224	The terminal connected with the target printer is busy/down. (1/2)	T a r g e t p r i n t t e r
225	The terminal connected with the target printer is busy/down. (2/2)	m i n a l b u s y / d o w n
226	Error code (do NOT change)	E 0 7 1
227	The print buffer of the terminal connected with the target printer becomes full. (1/2)	T a r g e t t e r m i n a l
228	The print buffer of the terminal connected with the target printer becomes full. (2/2)	p r i n t B F f u l l
229	Error code (do NOT change)	E 0 7 3
230	Receipt/order print error (1/3)	Y o u r r e c e i p t / o r d
231	Receipt/order print error (2/3)	e r m a y n o t b e i s
232	Receipt/order print error (3/3)	s u e d
233	Error code (do NOT change)	E 0 1 2
234	Journal paper end (1/2)	J o u r n a l p a p e r e n
235	Journal paper end (2/2)	d
236	Error code (do NOT change)	E 0 1 3
237	Receipt paper end (1/2)	R e c e i p t p a p e r e n
238	Receipt paper end (2/2)	d


Appendix (File record format)

Guidance message file

Miscellaneous message file

File name: Miscellaneous message

File No.: 078 Max. allocatable records: 58 (fixed)

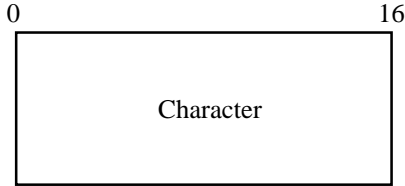

Rec-No.	Meaning	Default (English) message
001	Register total working time message	G T T I M E
002	Register start date message	S T A R T D A T E
003	RAM message in PGM5	R A M
004	bytes message in PGM5	b y t e s
005	FILE message in PGM5	F I L E
006	ROM version message	V E R . :
007	ROM label name message	L A B E L :
008	IPL message while initial program loading	I P L
009	INIT message while initializing	I N I T . :
010	FC message while flag clear	F C
011	Error End message after completion of communication	E r r o r E n d
012	Normal End message after completion of communication	N o r m a l E n d
013	not used	
014	Separator of date symbol	- -
015	Day of a week (monday)	(M O N)
016	Day of a week (tuesday)	(T U E)
017	Day of a week (wednesday)	(W E D)
018	Day of a week (thursday)	(T H U)
019	Day of a week (friday)	(F R I)
020	Day of a week (saturday)	(S A T)
021	Day of a week (sunday)	(S U N)
022	Communicating message	- - - - -
023	Program downloading/uploading message	A U T O P G M
024	Flash memory message	F L A S H
025	Inline message	I N L I N E
026	Online COM1 port message	C O M 1
027	Job No. message	J O B N o .
028	REG1 mode message in arrangement program	R E G 1
029	REG2 mode message in arrangement program	R E G 2
030	RF mode message in arrangement program	R F
031	not used	
032	X1 mode message in arrangement program	X 1
033	Z1 mode message in arrangement program	Z 1
034	X2/Z2 mode message in arrangement program	X 2 / Z 2
035	Receipt on/off message in arrangement program	R C T O N / O F F
036	Menu sheet 1st page message in arrangement program	M E N U - 1
037	Menu sheet 2nd page message in arrangement program	M E N U - 2
038	Designation of sub currency to the Euro message	E U R O m o n e y
039	Designation of sub currency to the local money message	L O C A L m o n e y
040	Daily read report message	X
042	Daily reset report message	Z
042	Periodic 1 read report message	X X 1
043	Periodic 1 reset report message	Z Z 1
044	Periodic 2 read report message	X X 2
045	Periodic 2 reset report message	Z Z 2
046	Daily consolidation read report message	C X
047	Daily consolidation reset report message	C Z
048	Periodic 1 consolidation read report message	C X X 1
049	Periodic 1 consolidation reset report message	C Z Z 1
050	Periodic 2 consolidation read report message	C X X 2
051	Periodic 2 consolidation reset report message	C Z Z 2
052	Model name (do NOT change)	
053	Taxable amount 1 descriptor for Australian GST	T A X A B L E A M T
054	Tax amount 1 descriptor for Australian GST	G S T I N C L U D E D
055	Main currency monetary symbol for Australian GST	\$
056	Taxable 1 symbol for Australian GST	*
057	Subtotal key descriptor (display) for Australian GST	R N D / S T
058	Delete file in the CF card.	D E L E T E


Appendix (File record format)

Rec-No.	Meaning	Default (English) message																					
079	Remove the master terminal from the system. (1/2)	*		C	H	K	/	T	B	L		M	a	s	t	e	r	i	s			*	
080	Remove the master terminal from the system. (2/2)	*		r	e	m	o	v	e	d		f	r	o	m		s	y	s	t	e	m	*
081	Reconnect the master to the system. (1/2)	*		M	a	s	t	e	r		C	o	n	n	e	c	t	i	o	n			*
082	Reconnect the master to the system. (2/2)	*		N	o	r	m	a	l		E	n	d										*
083	Busy reset.	B	u	s	y		R	e	s	e	t												
084	Clock-in message	C	L	O	C	K	-	I	N														
085	Clock-out message	C	L	O	C	K	-	O	U	T													

X/Z guidance message file

File name: X/Z guidance message

File No.: 082 Max. allocatable records: 48(fixed)

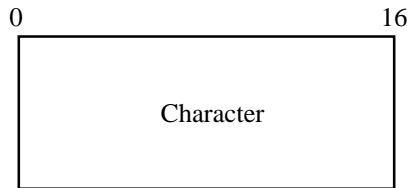

Rec-No.	Meaning	Default (English) message
001	PLU range report message 1st line	PLU by range
002	Input start No. message 1st line	Input start No.
003	Input start No. message 2nd line	and press <#1>
---	PLU range report message 1st line (quote from rec-001)	PLU by range
004	Input end No. message 1st line	Input end No. an
005	Input end No. message 2nd line	d press <#1>
006	PLU stock range report message 1st line	STOCK by RANGE
---	Input start No. message 1st line (quote from rec-002)	Input start No.
---	Input start No. message 2nd line (quote from rec-003)	and press <#1>
---	PLU stock range report message 1st line (quote from rec-006)	STOCK by RANGE
---	Input end No. message 1st line (quote from rec-004)	Input end No. an
---	Input end No. message 2nd line (quote from rec-005)	d press <#1>
007	PLU individual group report message 1st line	PLU by GROUP
008	Input target No. message 1st line	Input No. and pr
009	Input target No. message 2nd line	ess <#1>
010	PLU individual department report message 1st line	PLU by DEPT
---	Input target No. message 1st line (quote from rec-008)	Input No. and pr
---	Input target No. message 2nd line (quote from rec-009)	ess <#1>
011	PLU individual subdepartment report message 1st line	PLU by SUBDEPT
---	Input target No. message 1st line (quote from rec-008)	Input No. and pr
---	Input target No. message 2nd line (quote from rec-009)	ess <#1>
012	Group stock report message 1st line	STOCK by GROUP
---	Input target No. message 1st line (quote from rec-008)	Input No. and pr
---	Input target No. message 2nd line (quote from rec-009)	ess <#1>
013	Department stock report message 1st line	STOCK by DEPT
---	Input target No. message 1st line (quote from rec-008)	Input No. and pr
---	Input target No. message 2nd line (quote from rec-009)	ess <#1>
014	Subdepartment stock report message 1st line	STOCK by SUBDEPT
---	Input target No. message 1st line (quote from rec-008)	Input No. and pr
---	Input target No. message 2nd line (quote from rec-009)	ess <#1>
015	Individual clerk report message 1st line	Individual CLK
---	Input target No. message 1st line (quote from rec-008)	Input No. and pr
---	Input target No. message 2nd line (quote from rec-009)	ess <#1>
016	Scanning PLU by group report message 1st line	SCAN PLU by GP
---	Input start No. message 1st line (quote from rec-002)	Input start No.
---	Input start No. message 2nd line (quote from rec-003)	and press <#1>
---	Scanning PLU by group report message 1st line (quote from rec-016)	SCAN PLU by GP
---	Input end No. message 1st line (quote from rec-004)	Input end No. an
---	Input end No. message 2nd line (quote from rec-005)	d press <#1>
017	Scanning PLU by department report message 1st line	SCAN PLU by DEPT
---	Input start No. message 1st line (quote from rec-002)	Input start No.
---	Input start No. message 2nd line (quote from rec-003)	and press <#1>
---	Scanning PLU by department report message 1st line (quote from rec-017)	SCAN PLU by DEPT
---	Input end No. message 1st line (quote from rec-004)	Input end No. an
---	Input end No. message 2nd line (quote from rec-005)	d press <#1>
018	Scanning PLU by subdepartment report message 1st line	SCAN PLU by SDPT
---	Input start No. message 1st line (quote from rec-002)	Input start No.
---	Input start No. message 2nd line (quote from rec-003)	and press <#1>
---	Scanning PLU by subdepartment report message 1st line (quote from rec-018)	SCAN PLU by SDPT
---	Input end No. message 1st line (quote from rec-004)	Input end No. an
---	Input end No. message 2nd line (quote from rec-005)	d press <#1>


Appendix (File record format)

Rec-No.	Meaning	Default (English) message
019	PLU best report message 1st line	PLU BEST by DEPT
---	Input start No. message 1st line (quote from rec-002)	Input start No.
---	Input start No. message 2nd line (quote from rec-003)	and press <#1>
---	PLU best report message 1st line (quote from rec-016)	PLU BEST by DEPT
---	Input end No. message 1st line (quote from rec-004)	Input end No. an
---	Input end No. message 2nd line (quote from rec-005)	d press <#1>
020	PLU inactive report message 1st line	PLU NON ACTIVE
---	Input start No. message 1st line (quote from rec-002)	Input start No.
---	Input start No. message 2nd line (quote from rec-003)	and press <#1>
---	PLU inactive report message 1st line (quote from rec-020)	PLU NON ACTIVE
---	Input end No. message 1st line (quote from rec-004)	Input end No. an
---	Input end No. message 2nd line (quote from rec-005)	d press <#1>
021	not used	
022	Scanning PLU reset message 1st line	SCAN PLU Z clear
023	Execution message	Start Yes: <#1>
024	Cancellation message	No: <#2>
025	NFP reset message 1st line	NFP Z clear
---	Execution message (quote from rec-023)	Start Yes: <#1>
---	Cancellation message (quote from rec-024)	No: <#2>
026	NFP file reset 1st message	NFP reset
---	Execution message (quote from rec-023)	Start Yes: <#1>
---	Cancellation message (quote from rec-024)	No: <#2>
027	NFP maintenance file reset message 1st line	NFP MAINT reset
---	Execution message (quote from rec-023)	Start Yes: <#1>
---	Cancellation message (quote from rec-024)	No: <#2>
028	PLU stock maintenance (addition) message 1st line	PLU STOCK
029	PLU stock maintenance (addition) message 2nd line	Add stock QTY
030	PLU stock maintenance (input new stock) message 1st line	PLU STOCK
031	PLU stock maintenance (input new stock) message 2nd line	Input new QTY
032	Inline consolidation (terminal by terminal) message 1st line	--- INLINE ---
033	Input target machine No. message 1st line	Input Term No. a
034	Input target machine No. message 2nd line	nd press <#2>
---	Inline consolidation message 1st line (quote from rec-032)	--- INLINE ---
035	Input report code message 1st line	Input Report COD
036	Input report code message 2nd line	E and press <#1>
037	Inline consolidation (all terminal) message 1st line	--- INLINE ---
---	Input report code message 1st line (quote from rec-035)	Input Report COD
---	Input report code message 2nd line (quote from rec-036)	E and press <#1>
038	PLU reset message 1st line	PLU Z clear
---	Execution message (quote from rec-023)	Start Yes: <#1>
---	Cancellation message (quote from rec-024)	No: <#2>
039	Reconnection master terminal message 1st line	Master Connect
040	Reconnection master terminal message 2nd line	Start Yes: <#1>
041	Reconnection master terminal message 3rd line	No: <#2>
042	Succeeded result message of master reconnection 1st line	Master Connectio
043	Succeeded result message of master reconnection 2nd line	n Normal End
044	Failed result message of master reconnection 1st line	Master Connectio
045	Failed result message of master reconnection 2nd line	n Error End
046	Busy reset message 1st line	Busy Reset
047	Busy reset message 2nd line	Input CHK/TBL# a
048	Busy reset message 3rd line	nd press <#1>

Program guidance message file

File name: Program guidance message

File No.: 083 Max. allocatable records: 93(fixed)

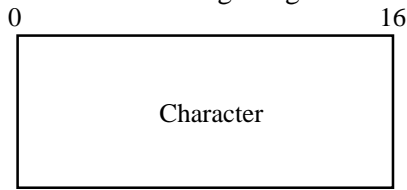

Rec-No.	Meaning	Default (English) message
001	Range program message 1st line	R a n g e P G M
002	Input start No. message 1st line	I n p u t s t a r t N o .
003	Input start No. message 2nd line	a n d p r e s s < # 1 >
---	Range program message 1st line (quote from rec-001)	R a n g e P G M
004	Input end No. message 1st line	I n p u t e n d N o . a n
005	Input end No. message 2nd line	d p r e s s < # 1 >
---	Range program message 1st line (quote from rec-001)	R a n g e P G M
006	Input program data message 1st line	I n p u t P G M d a t a a
007	Input program data message 2nd line	n d p r e s s < # 1 >
008	PLU direct maintenance message 1st line	D i r e c t M a i n t e
009	Input PLU code message	P L U C o d e ?
---	PLU direct maintenance message 1st line (quote from rec-008)	D i r e c t M a i n t e
010	Input unit price/quantity message	U n i t Q t y & P r i c e ?
---	PLU direct maintenance message 1st line (quote from rec-008)	D i r e c t M a i n t e
011	Input link department message	D E P T L i n k a g e ?
012	NFP maintenance activation message 1st line	N F P M a i n t e n a n c e
013	Execution message	S t a r t Y e s : < # 1 >
014	Cancellation message	N o : < # 2 >
015	NFP maintenance programming message 1st line	N F P M a i n t e n a n c e
016	Input action code message 1st line	U p d a t e : 1 D e l e t e
017	Input action code message 2nd line	: 2
---	NFP maintenance programming message 1st line (quote from rec-015)	N F P M a i n t e n a n c e
018	Input PLU code message	P L U C o d e ?
---	NFP maintenance programming message 1st line (quote from rec-015)	N F P M a i n t e n a n c e
---	Input unit price/quantity message (quote from rec-010)	U n i t Q t y & P r i c e ?
---	NFP maintenance programming message 1st line (quote from rec-015)	N F P M a i n t e n a n c e
---	Input link department message (quote from rec-011)	D E P T L i n k a g e ?
---	NFP maintenance programming message 1st line (quote from rec-015)	N F P M a i n t e n a n c e
019	Input descriptor message	P L U D e s c r i p t o r ?
---	NFP maintenance programming message 1st line (quote from rec-015)	N F P M a i n t e n a n c e
020	Input status message	P L U S t a t u s ?
---	NFP maintenance programming message 1st line (quote from rec-015)	N F P M a i n t e n a n c e
021	Input bottle link message	B o t t l e L i n k ?
---	NFP maintenance programming message 1st line (quote from rec-015)	N F P M a i n t e n a n c e
022	Input mix & match link message	M i x & M a t c h L i n k ?
023	One touch NLU key program message 1st line	O n e t o u c h N L U
---	Input PLU code message (quote from rec-018)	P L U C o d e ?
---	One touch NLU key program message 1st line (quote from rec-023)	O n e t o u c h N L U
024	Designate NLU key message	P r e s s < N L U > K e y
025	Direct maintenance programming message 1st line	D i r e c t M a i n t e
026	Input action code message	A d d : 0 M o d i f y : 1
---	Direct maintenance programming message 1st line (quote from rec-025)	D i r e c t M a i n t e
---	Input PLU code message (quote from rec-018)	P L U C o d e ?
---	Direct maintenance programming message 1st line (quote from rec-025)	D i r e c t M a i n t e
---	Input unit price/quantity message (quote from rec-010)	U n i t Q t y & P r i c e ?
---	Direct maintenance programming message 1st line (quote from rec-025)	D i r e c t M a i n t e
---	Input link department message (quote from rec-011)	D E P T L i n k a g e ?
---	Direct maintenance programming message 1st line (quote from rec-025)	D i r e c t M a i n t e
---	Input descriptor message (quote from rec-019)	P L U D e s c r i p t o r ?
---	Direct maintenance programming message 1st line (quote from rec-025)	D i r e c t M a i n t e
---	Input status message (quote from rec-020)	P L U S t a t u s ?
---	Direct maintenance programming message 1st line (quote from rec-025)	D i r e c t M a i n t e
---	Input bottle link message (quote from rec-021)	B o t t l e L i n k ?
---	Direct maintenance programming message 1st line (quote from rec-025)	D i r e c t M a i n t e
---	Input mix & match link message (quote from rec-022)	M i x & M a t c h L i n k ?
027	Batch maintenance activation message 1st line	B a t c h m a i n t e
---	Execution message (quote from rec-013)	S t a r t Y e s : < # 1 >
---	Cancellation message (quote from rec-014)	N o : < # 2 >

Appendix (File record format)

Rec-No.	Meaning	Default (English) message
028	Batch maintenance programming message 1st line	B a t c h M a i n t e
029	Input batch maintenance record No. message	R E C # ?
---	Batch maintenance programming message 1st line (quote from rec-028)	B a t c h M a i n t e
030	Input action code message 1st line	A d d : 0 M o d i f y : 1
031	Input action code message 2nd line	D e l e t e : 2
---	Batch maintenance programming message 1st line (quote from rec-028)	B a t c h M a i n t e
---	Input PLU code message (quote from rec-018)	P L U C o d e ?
---	Batch maintenance programming message 1st line (quote from rec-028)	B a t c h M a i n t e
---	Input unit price/quantity message (quote from rec-010)	U n i t Q t y & P r i c e ?
---	Batch maintenance programming message 1st line (quote from rec-028)	B a t c h M a i n t e
---	Input link department message (quote from rec-011)	D E P T L i n k a g e ?
---	Batch maintenance programming message 1st line (quote from rec-028)	B a t c h M a i n t e
---	Input descriptor message (quote from rec-019)	P L U D e s c r i p t o r ?
---	Batch maintenance programming message 1st line (quote from rec-028)	B a t c h M a i n t e
---	Input status message (quote from rec-020)	P L U S t a t u s ?
---	Batch maintenance programming message 1st line (quote from rec-028)	B a t c h M a i n t e
---	Input bottle link message (quote from rec-021)	B o t t l e L i n k ?
---	Batch maintenance programming message 1st line (quote from rec-028)	B a t c h M a i n t e
---	Input mix & match link message (quote from rec-022)	M i x & M a t c h L i n k ?
032	Tax table programming message 1st line	T a x t a b l e
033	Input tax rate message 1st line	I n p u t t a x r a t e a
034	Input tax rate message 2nd line	n d p r e s s < # 1 >
---	Tax table programming message 1st line (quote from rec-032)	T a x t a b l e
035	Input tax table maximum message 1st line	I n p u t m a x i m u m t a
036	Input tax table maximum message 2nd line	b l e a m o u n t a n d p
037	Input tax table maximum message 3rd line	r e s s < # 1 >
---	Tax table programming message 1st line (quote from rec-032)	T a x t a b l e
038	Input rounding/calculation type message 1st line	I n p u t r o u n d i n g ,
039	Input rounding/calculation type message 2nd line	c a l . t y p e a n d p r e
040	Input rounding/calculation type message 3rd line	s s < # 1 >
---	Tax table programming message 1st line (quote from rec-032)	T a x t a b l e
041	Input sum of cyclic patterns message 1st line	I n p u t s u m o f c y c
042	Input sum of cyclic patterns message 2nd line	l i c p a t t e r n s a n d
043	Input sum of cyclic patterns message 3rd line	p r e s s < # 1 >
---	Tax table programming message 1st line (quote from rec-032)	T a x t a b l e
044	Input No. of cyclic patterns message 1st line	I n p u t N o . o f c y c
045	Input No. of cyclic patterns message 2nd line	l i c v a l u e s a n d p
046	Input No. of cyclic patterns message 3rd line	r e s s < # 1 >
---	Tax table programming message 1st line (quote from rec-032)	T a x t a b l e
047	Input sum of non-cyclic values message 1st line	I n p u t s u m o f n o n
048	Input sum of non-cyclic values message 2nd line	- c y c l i c v a l u e s a
049	Input sum of non-cyclic values message 3rd line	n d p r e s s < # 1 >
---	Tax table programming message 1st line (quote from rec-032)	T a x t a b l e
050	Input actual values message 1st line	I n p u t a c t u a l v a l
051	Input actual values message 2nd line	u e s a n d p r e s s < #
052	Input actual values message 3rd line	1 >
053	Mix & match programming message 1st line	M i x & M a t c h t a b l e
054	Input discount amount message 1st line	I n p u t d i s c o u n t a
055	Input discount amount message 2nd line	m o u n t a n d p r e s s
056	Input discount amount message 3rd line	< # 1 >
---	Mix & match programming message 1st line (quote from rec-052)	M i x & M a t c h t a b l e
057	Input status message 1st line	I n p u t s t a t u s a n d
058	Input status message 2nd line	p r e s s < # 1 >
059	Memory allocation programming message 1st line	M e m o r y A l l o c
060	Input No. of records of file message 1st line	I n p u t N o . o f r e c
061	Input No. of records of file message 2nd line	o r d s a n d p r e s s <
062	Input No. of records of file message 3rd line	# 1 >
063	Program reading by range message 1st line	P G M r e a d
---	Input start No. message 1st line (quote from rec-002)	I n p u t s t a r t N o .
---	Input start No. message 2nd line (quote from rec-003)	a n d p r e s s < # 1 >
---	Program reading by range message 1st line (quote from rec-03)	P G M r e a d
---	Input start No. message 1st line (quote from rec-002)	I n p u t s t a r t N o .
---	Input start No. message 2nd line (quote from rec-003)	a n d p r e s s < # 1 >

Rec-No.	Meaning	Default (English) message
064	Please wait message	P l e a s e w a i t
065		
066	Auto-program (register to register) message	I N L I N E A U T O P G M
067	Input target machine No. message 1st line	I n p u t T e r m / G P N o
068	Input target machine No. message 2nd line	. a n d p r e s s < # 2 >
---	Auto-program (register to register) message (quote from rec-066)	I N L I N E A U T O P G M
069	Input command code message 1st line	I n p u t O P E C O D E a
070	Input command code message 2nd line	n d p r e s s < # 1 >
071	CF card formatting message 1st line	C F f o r m a t
---	Execution message (quote from rec-013)	S t a r t Y e s : < # 1 >
---	Cancellation message (quote from rec-014)	N o : < # 2 >
072	Internal flash memory formatting message 1st line	F L A S H f o r m a t
---	Execution message (quote from rec-013)	S t a r t Y e s : < # 1 >
---	Cancellation message (quote from rec-014)	N o : < # 2 >
073	Auto-program (register to internal flash) message 1st line	S a v e t o F L A S H
074	Input command code message 1st line	I n p u t O P E C O D E a
075	Input command code message 2nd line	n d p r e s s < # 1 >
076	Auto-program (register to CF card) message 1st line	S a v e t o C F
---	Input command code message 1st line (quote from rec-013)	S t a r t Y e s : < # 1 >
---	Input command code message 2nd line (quote from rec-014)	N o : < # 2 >
077	Auto-program (CF card to register) message 1st line	R e s t o r e C F
---	Input command code message 1st line (quote from rec-074)	I n p u t O P E C O D E a
---	Input command code message 2nd line (quote from rec-075)	n d p r e s s < # 1 >
078	Auto-program (internal flash to register) message 1st line	R e s t o r e F L A S H
---	Input command code message 1st line (quote from rec-074)	I n p u t O P E C O D E a
---	Input command code message 2nd line (quote from rec-075)	n d p r e s s < # 1 >
079	Auto-program (register to COM port) message 1st line	C O M A U T O P G M
---	Input command code message 1st line (quote from rec-074)	I n p u t O P E C O D E a
---	Input command code message 2nd line (quote from rec-075)	n d p r e s s < # 1 >
080	Send IPL data to INLINE message 1st line	I P L t o I N L I N E
---	Input command code message 1st line (quote from rec-074)	I n p u t O P E C O D E a
---	Input command code message 2nd line (quote from rec-075)	n d p r e s s < # 1 >
081	Send IPL data to CF card message 1st line	I P L t o C F
---	Input command code message 1st line (quote from rec-074)	I n p u t O P E C O D E a
---	Input command code message 2nd line (quote from rec-075)	n d p r e s s < # 1 >
082	Send IPL data to COM port message 1st line	I P L t o C O M P O R T
---	Input command code message 1st line (quote from rec-074)	I n p u t O P E C O D E a
---	Input command code message 2nd line (quote from rec-075)	n d p r e s s < # 1 >
083	Set AT command to MODEM message 1st line	M o d e m S e t
---	Execution message (quote from rec-013)	S t a r t Y e s : < # 1 >
---	Cancellation message (quote from rec-014)	N o : < # 2 >
084	Arrangement table program message	A r r a n g e N o . ?
085		
086	Setting the graphic logo to the external printer message	L o g o i m a g e s e t
---	Execution message (quote from rec-013)	S t a r t Y e s : < # 1 >
---	Cancellation message (quote from rec-014)	N o : < # 2 >
087	Error code	E 1 0 6
088	Error message 1st line of an attempt of adding an existing item in the PLU file	I t e m e x i s t s i n t
089	Error message 2nd line of an attempt of adding an existing item in the PLU file	h e P L U F I L E
090	Error message 1st line of an attempt of adding an existing item in the batch maintenance file	P L U i s o c c u p i e d
091	Error message 2nd line of an attempt of adding an existing item in the batch maintenance file	M o d i f y : < # 1 > S k i
092	Error message 3rd line of an attempt of adding an existing item in the batch maintenance file	p : < # 2 >
---	NFP Maintenance (quote from rec-015)	N F P M a i n t e n a n c e
093	Field number inputting for partial maintenance	I n p u t F i e l d N o .
---	Direct Maintenance (quote from rec-025)	D i r e c t M a i n t e
---	Field number inputting for partial maintenance (quote from rec 093)	I n p u t F i e l d N o .
---	Batch Maintenance (quote from rec-028)	B a t c h M a i n t e
---	Field number inputting for partial maintenance (quote from rec 093)	I n p u t F i e l d N o .


Appendix (File record format)

Registration guidance message file

File name: Registration guidance message

File No.: 081 Max. allocatable records: 23(fixed)

0 16

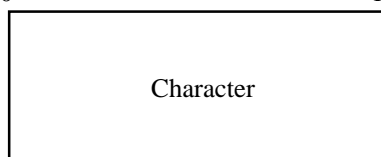

Rec-No.	Meaning	Default (English) message
001	Guidance message of registering not found PLU 1st line	N o t F o u n d P L U
002	Guidance message of registering not found PLU 2nd line	I n p u t U n i t P r i c e
003	Guidance message of registering not found PLU 3rd line	, a n d P r e s s D E P T
004	Guidance message of registering not found PLU 4th line	K e y
005	Guidance message of backup printing of order 1st line	B a c k u p P r i n t
006	Guidance message of backup printing of order 2nd line	< C A > : B a c k u p < S T >
007	Guidance message of backup printing of order 3rd line	: R e t r y
008	Guidance message of scanning PLU price input compulsory 1st line	P r i c e E n t r y
009	Guidance message of scanning PLU price input compulsory 2nd line	I n p u t U n i t P r i c e
010	Guidance message of scanning PLU price input compulsory 3rd line	, a n d P r e s s < P R C
011	Guidance message of scanning PLU price input compulsory 4th line	> k e y
012	(not used)	
013	(not used)	
014	(not used)	
015	(not used)	
016	Guidance message of registering employee 1st line	T i m e & A t t e n d a n c e
017	Guidance message of registering employee 1st line	I n p u t E M P L O Y E E N
018	Guidance message of registering employee 3rd line	o . a n d p r e s s < C L
019	Guidance message of registering employee 4th line	O C K - I N / O U T >
020	Guidance message of clock-in operation 1st line	C L O C K - I N O K ?
021	Guidance message of clock-in operation 2nd line	Y e s : < C A > N o : < S T >
022	Guidance message of clock-out operation 1st line	C L O C K - O U T O K ?
023	Guidance message of clock-out operation 2nd line (quote from rec-021)	Y e s : < C A > N o : < S T >

Appendix: Compulsory

This section explains the priority compulsions and the methods to solve them.

Compulsions at the first item registration

Priority	Error code	Meaning	Released by <OPEN2>	Action
1	E017	Force to enter check number.	✓	Register check number by <NEWCHK>, <OLDCHK>, <SEPCHK>.
2	E018	Force to enter table number.	✓	Register table number.
3	E019	Force to enter the number of customer.	✓	Register the number of customer.

Compulsion during item registration

Priority	Error code	Meaning	Released by <OPEN2>	Action
1	E026	Force to register condiment/preparation item.	✓	Register condiment/preparation item.
2	E041	Force to validate.	✓	Perform validation.

Compulsions during finalizing

Priority	Error code	Meaning	Released by <OPEN2>	Action
1	E030	Force to register <RATE TAX>.	✓	Register <RATE TAX>.
2	E075	Disable to finalize while the ST amount is negative or equal to zero.	✓	Register items until the ST amount becomes positive.
3	E059	Force to register <EAT-IN> or <TAKEOUT>.	✓	Register <EAT-IN> or <TAKEOUT>.
4	E032	Force to register <FSST>.		Press <FSST>.
5	E031	Force to register <ST>.		Press <ST>.
6	E033	Force to enter tendered amount.		Enter tendered amount.
7	E047	Force to print slip auto batch printing	✓	Insert paper to slip printer.

Compulsions after finalization

Priority	Error code	Meaning	Released by <OPEN2>	Action
1	E047	Force to slip batch print manually.	✓	Insert paper to slip and press <SLIP>.
2	E040	Force to issue guest receipt.	✓	Issue guest receipt.
3	E041	Force to print validation.	✓	Insert paper and press <VALID>.
4	E044	Force to print check.	✓	Insert check to slip and press <CHK PRT>.
5	E045	Force to print check endorsement.	✓	Insert check to slip and press <CHK ENDS>.

Appendix: Error code

Error code	Message	Meaning	Action
E001	Wrong mode	Mode switch position changed before finalization.	Return the mode switch to its original setting and finalize the operation.
E003	Wrong operator	Clerk button pressed before finalization of a registration being performed under another clerk button. The signed on clerk differs from the clerk performed the tracking check registration.	Press the original clerk button and finalize the transaction before pressing another clerk button. Input correct check number or assign the proper clerk number.
E004	Error INIT/FC	Initialization or unit lock clear operation in progress.	Complete operation.
E005	Insufficient memory	Memory allocation exceeds total memory capacity.	Reallocate memory or expand memory (if possible).
E008	Please sign on	Registration without entering a clerk number.	Enter a clerk number.
E009	Enter password	Operation without entering the password.	Enter password.
E010	Close the drawer	The drawer is left open longer than the program time (drawer open alarm).	Close the drawer.
E011	Close the drawer	Attempt to register while the cash drawer is open.	Shut the cash drawer.
E015	Check R/J printer	Printer error	
E016	Change back to REG mode	Two consecutive transactions attempted in the refund mode.	Switch to another mode and then back to the RF mode for the next transaction.
E017	Enter CHK/TBL number	Attempt made to register an item without inputting a check number.	Input a check number.
E018	Enter Table number	Attempt made to register an item without inputting a table number.	Input a table number.
E019	Enter number of customers	Finalize operation attempted without entering the number of customer.	Enter the number of customer.
E021	No Dept Link	No department linked PLU is registered.	Correct the program.
E023	Stock shortage	Actual stock quantity becomes less than the minimum stock quantity.	Perform stock maintenance.
E024	No stock	Actual stock quantity becomes/is negative.	Perform stock maintenance.
E025	Illegal scale read or entry	Scale read error/perform non-scale registration to scalable item.	Retry registration/register to a proper department or PLU.
E026	Enter condiment/preparation PLU	No condiment/preparation PLU is registered.	Register condiment/preparation PLU.
E029	In the tender operation	Item registration is prohibited, while partial tender.	Finalize the transaction.
E030	Press RATE TAX key	Finalization of a transaction attempted without registering rate-tax.	Register <RATE TAX>.
E031	Press ST key	Finalization of a transaction attempted without confirming the subtotal.	Press <SUBTOTAL>.
E032	Press FSST key	Finalization of a transaction attempted without confirming of the food stamp subtotal.	Press <FS/ST>.
E033	Enter tendered amount	Finalize operation attempted without entering amount tender.	Enter the amount tendered.
E035	Change amount exceeds limit	Change amount exceeds preset limit.	Input amount tendered again.
E036	Remove money from the drawer	Contents of the drawer exceed programmed limit.	Perform pick up operation.
E037	Digit or amount limitation over	High amount lock out/low digit lock out error	Enter correct amount.
E038	Perform money declaration	Read/reset operation without declaring cash in drawer. This error appears only when this function is activated.	Perform money declaration.
E040	Issue guest receipt	Attempt to register a new transaction without issuing a guest receipt.	Issue a guest receipt.
E041	Print validation	Attempt to register a new transaction without validation.	Perform validation operation.
E042	Insert VLD paper and retry	Validation paper (slip printer) has run out.	Insert new validation paper.
E044	Print cheque	Attempt to register a new transaction without printing check.	Perform check print.
E045	Print Check Endorsement	Attempt to register a new transaction without printing check endorsement.	Perform check endorsement.
E046	REG buffer full	Registration buffer full. Separate check buffer full.	Finalize the transaction. Allocate sufficient separate check buffer.
E047	Print bill	Attempt to register a new transaction without printing slip.	Perform slip printing operation.
E048	Insert slip paper and retry	No paper is inserted or paper is out in the slip printer.	Insert new slip paper.
E049	CHECK memory full	Check tracking index memory full.	Finalize and close the check number currently used.
E050	DETAIL memory full	Check tracking detail memory full.	Finalize and close the check number currently used.

Appendix (Error code)

Error code (...continued)

Error code	Message	Meaning	Action
E051	CHK/TBL No. is occupied	Attempt to made use <NEW CHECK> to open a new check using a number that is already used for an existing check in check tracking memory.	Finalize and close the check that is currently under the number that you want to use or use a different check number.
E053	CHK/TBL No. is not opened	Attempt made to use <OLD CHECK> reopen a new check using a number that is not used for an existing check in check tracking memory.	Use the correct check number (if you want to reopen a check that already exists in check tracking memory) or use <NEW CHECK> to open a new check.
E054	Out of CHK/TBL No. range	Check number range over.	Enter correct number.
E055	In the SEP CHK operation	Normal registration is prohibited during separate check operation.	Terminate separate check operation.
E059	Press EAT-IN or TAKE-OUT key	Attempt to finalize a transaction without specifying <EAT-IN> or <TAKEOUT>.	Press <EAT-IN> or <TAKEOUT>.
E060	Printer offline	External (local) printer offline	
E061	Printer error	External (local) printer went down.	
E062	Printer paper end	External (local) printer paper end	Replace new paper.
E064	Print buffer full	External (local) printing buffer full	
E066	Print from the beginning of the transaction	Attempt to print the last separated transaction on slip.	Print from the beginning of the transaction
E070	Target print terminal busy/down	The terminal connected with the external (remote) printer is busy or goes down.	
E071	Target terminal print BF full	The print buffer of the terminal connected with the external (remote) printer becomes full.	
E073	Your receipt/order may not be issued	The terminal connected with the external (remote) printer goes down,	
E075	Negative balance cannot be finalized	Attempt to finalize a transaction when balance is less than or equal to zero.	Register item(s) until the balance becomes positive amount.
E085	Data exist in consolidation file	Data exists in the consolidation file.	Clear the data.
E099	Check NFP items	Disable to read/reset or consolidate the not found PLU item.	
E100	Operate at the master terminal	Prohibit master operation.	Perform it at master terminal.
E101	PLU maintenance file full. Press <#2> to exit	Scanning PLU direct maintenance/batch maintenance file becomes full.	Terminate the maintenance.
E103	PLU Code is not exist. Input PLU Code	The PLU code you input is not existed in the PLU file.	Input the correct PLU code again.
E105	PLU file full	Scanning PLU/not found PLU file full	
E106	Item exists in the PLU FILE	The designated item has already existed in the scanning PLU file.	Modify the designated item.
E110	Master is busy/down. Retry:<CA> Remove:<ST>	The check tracking master terminal is busy or goes down.	Follow the prompt message.
E121	Inline startup error	Network startup error.	
E139	Negative balance is not allowed	Attempt to register <-> or <CPN> when the balance becomes negative.	Enter proper minus/coupon amount.
E140	Wrong menu	This sheet holder is prohibited by PGM.	Set correct sheet holder.
E146	Arrangement file full	Arrangement file is full.	Set the arrangement properly.
E164	Employee No. is not Found in the Employee File	The employee number does not exist in the employee file.	Enter the correct employee number.
E165	Employee No. is not Clocking-in	The employee number has not been clocked-in yet.	Enter the correct employee number.
E166	Employee No. is Occupied	The employee number has already been clocked-in.	Enter the correct employee number,
E176	Time&Attendance file full	Time and attendance file becomes full.	Issue the time and attendance reset report.
E200	Insert CF card	No CF card is set.	Set CF card.
E203	Insufficient memory	Insufficient memory in the CF card.	Use a vacant (formatted) CF card.
E205	File already exist.	Can not write, because designated file has already been in the CF card.	Check the operation and retry.

System error code

Error code	Meaning	Error code	Meaning
File I/O errors		2022	File I/O error
750	File cannot be created.	2023	Retry error
751	No designated drive	2024	Receive SYN error
752	FCB area shortage of flash memory	2025	Receive FIN error
753	No appropriate record number is designated.	2026	FIN is in sending sequence whole recalling n_write()
754	No partition exists.	2027	Illegal format
755	No vacant record is remained.	2028	Illegal command
756	Changing is not permitted.	2029	Busy with response
757	The designate file cannot be found.	2030	Communication abortion
758	The same file has already existed.	2031	Online receiving hardware error
759	The same page has already existed.	2032	Inline receiving hardware error
760	No vacant record is remained.	2033	Online receiving overrun
762	The contents of internal memory and CF card are different.	2034	Online sending hardware error
763	The contents of scanning PLU file among the master/satellite terminals are different.	2035	Inline sending hardware error
764	Write error	2036	Token is not detected while sending
CF card I/O errors		2037	Time over while detecting DSR ON
781	CF card device error	Program data send/receive (auto-program) errors	
783	CF card format error	2100	Command code error
785	No designated file	2101	Index format error
788	The file is already existed in the CF card.	2102	Machine ID number error
Communication errors		2103	Maximum record number error
2000	Network join error	Mail box function errors	
2001	Inline port open error	2300	Mail box full error
2002	Inline synchronize error	2301	Job number error
2003	Inline command error	Other errors	
2004	Time over	2900	Break operation
2005	Parameter error	2901	Password error
2006	Time out	2902	I/O parameter program error
2007	ID number over error	Logic driver initialize common errors	
2008	Packet error	5000	Parameter error (Illegal information of I/O parameter)
2009	ID	5001	No connection (Illegal information of I/O parameter)
2010	WAK receive error	5010	Logical driver COM open error
2011	Packet type error	5011	Logical driver COM double open
2012	Sequence error	5012	Logical driver COM not open
2013	Packet format error	5013	Logical driver COM device error
2014	Time over (5 seconds)	5014	Logical driver COM remain data error
2015	User time out	MODEM errors	
2016	Other communication error	5300	MODEM initialize error
2017	Not found PLU area error	5301	MODEM open error
2018	Online port open error	5302	Negotiation error
2019	No response	5303	AT command sending error
2020	File not found	5304	Control ER error
2021	File create error	5305	Receive status error

A

action code 111
activation of batch maintenance 108
activation of Not found PLU maintenance 109
add check 37, 87
add-in rate tax 96
add-in tax 204
add-on rate tax 93
add-on tax 203
Arabic font 208
arrangement 32, 37, 77, 99, 225
arrangement table 32, 135, 143
AT command 30, 121, 135, 147
AT command file 229
Australian GST 53, 162
auto sign-off 54
auto-program 149, 153
average sales per customer 204

B

backlight color 32, 101, 135, 145
backlight color control 13
backup system for local/remote printer 199
Baltic font 207
barcode system 191, 199
batch feature programming 59
batch maintenance PLU 32, 108, 192
batch maintenance PLU file 217
batch X/Z 32, 97, 119, 135, 141, 169, 188, 224
best 50 report 174, 176, 181
bill 78
bill bottom message 53
bill copy 37
bill copy message 53
bill top message 53
Bon receipt control 63
bottle link 111
bottle link table 32, 104, 135, 145, 218
bottle return 37, 87
bottom message 53

C

calculation & operation control 42
calculation method 203
cancel 37, 87, 203
cash 37, 64, 133
cash drawer 13
CF card 11, 12
CF card directory report 155
character code 128
character key table 32
character key table file 226
character keyboard 126
character print 67
character recall 32, 67, 135, 143
character recall file 225

charge 37, 64
check 64, 133
check cashing service fee 204
check detail 31
check endorse message 32
check endorsement 37, 76, 142
check endorsement message 119, 135
check endorsement message file 224
check file 31
check index 31
check number 58, 88
check print 32, 37, 87
check print control 99, 135, 143
check print file 225
check tender 37
check tracking 54, 197
check tracking system 17
clerk 31, 97, 116, 135, 139, 167, 169, 188
clerk assignment 157, 159
clerk control 89
clerk detail 31, 142, 215
clerk detail link 31, 88, 135, 215
clerk file 31, 215
clerk interrupt system 17
clerk number 37, 82, 157
clerk program 88
clerk report 177
clerk transfer 37, 67
clock-in 200
clock-in/out 37, 85
clock-out 200
COM port 14
commercial message 53
commission 204
commission rate 90
condiment 54, 59, 81, 243
connect the drawer 13
consecutive number 30, 39
consolidation 185, 188
contrast control 13
coupon 37, 70, 133, 203, 204
coupon 2 37, 87
credit 37, 65
cube 37, 84, 203
currency exchange 37, 78, 133
currency exchange control 48
customer 77, 204
customer display 11
customer number 37
Cyrillic font 207

D

Dallas key 12, 88, 215
Dallas key ID 31, 135, 141
Dallas key receiver 11
date order 39
date setting 131

decimal point 37
declaration 37, 44, 87, 170, 171, 177, 204
deleting a file from CF card 155
department
30, 37, 59, 61, 97, 125, 135, 138, 169, 188
department best 50 169
department file 214
department report 175
deposit 37, 71
descriptor 115
diag mode 26
direct maintenance PLU 32, 193
direct maintenance PLU file 217
discount 37, 73, 133, 203, 204
drawer
12, 14, 40, 43, 44, 46, 49, 55, 65, 66, 71, 78, 88, 103,
157, 160
drawer assignment 157

E

eat-in 37, 86, 201
EBT 66
EBT tender 37
editing character 129
employee 31, 97, 120, 135, 145
employee file 219
employee number 101
enter 37
error code 245, 246, 247
error correction 37, 74, 203
error message 32, 121, 135, 148
error message file 230
Euro 55, 56, 157, 160, 202, 205
exempt 80
external printer 12, 15, 198

F

file allocation 29
file reset 169, 184
financial report 170
fixed totalizer
30, 97, 115, 135, 136, 169, 188, 203
fixed totalizer file 211
flag clear 25
flat-PLU 37, 59, 61, 125
font code 205
food stamp shift 37, 87
food stamp subtotal 37, 87
food stamp tender 37, 66
foreign currency in drawer 204
formatting CF card 155
function and total file 30
future order 201

G

general control 32, 135, 140
general control file 221
general control program 39
grand total 31, 116, 135, 140, 204
grand total file 220
graphic image file 229
graphic logo 32, 53
graphic logo file 229
Greek font 206
gross sales 203
group 30, 97, 116, 135, 138, 169, 188
group file 214
group report 176
guest receipt 201
guidance message file 230, 234

H

hardware configuration 11
HHS-15 12, 15
high amount limit 62
hourly item 31, 97, 98, 135, 142, 146, 169, 188
hourly item file 31
hourly item link 31
hourly item link file 220
hourly item report 179
hourly item sales file 220
hourly item time range file 220
hourly range 31
hourly sales 30, 135, 139, 169, 188
hourly sales file 216
hourly sales report 178
HS1250 15

I

I/O parameter table 30, 105, 135, 147, 191
I/O parameter table file 229
I/O PB-17 12, 30, 31, 32
in drawer 165, 170, 171, 177, 204
in/online configuration 15
in/online control 47
individual feature programming 61
individual item/key report 170
init 2 25
initialization 23
initialize code 30
initialize code file 228
inline 14
inline cable 18
inline connector 14
intermediate message 53
IPL (Initial program loading) 19
IPL via CF card 21
IPL via COM port 19
IPL via inline 20
issuing program reading report 135
item/clerk descriptors by range 125

J

job command table 103

K

Ketten Bon 37, 84
key allocation 35
key function/machine feature 39
key table 32
key table file 227

L

link 61
loan 37, 69, 204
local printer 198
local printer buffer 32
logo message 53

M

magnet Dallas key 54
manager control mode 157
manager operation 157
manual tax 37, 74, 203
master down 197
media change 37, 87
memory map 19
menu 80
menu & price shift 43
menu shift 37
merchandise subtotal 37, 83
message 118
message control 53
minus 37, 70, 133, 203
miscellaneous message 32, 121, 135, 147
miscellaneous message file 234
mix & match
97, 100, 111, 120, 135, 144, 169, 188, 195
mix & match report 182
mix & match table 32
mix & match table file 218
mode control 90
mode switch 11
MODEM 14, 15
money declaration 43, 165, 166
money declaration in the REG1/REG2/RF modes 165
money declaration in the X1/Z1 modes 165
monthly 97
monthly report 178
monthly sales 31, 169, 188
monthly sales file 216
multi drawer 12
multilingual font 205
multiple price 194
multiplication 37, 84, 203

N

NCI 6710 210
net sales 203
new balance 37, 66, 133
new balance fee 204
new check 37, 84
new/old check 37, 84
no sale 37, 87
non add (#) 76
non add (#)/no sale 76
non PLU table 32
non PLU table file 217
non scanning system 17
non-add 37
non-add/no sale 37
non-PLU table 107, 135, 143, 191, 198
normal receipt 37, 87
not found PLU 32, 169, 193, 194, 195
not found PLU batch maintenance 32
not found PLU file 217
not found PLU file reset 169, 184
not found PLU maintenance 109, 192
not found PLU maintenance file 217
not found PLU maintenance file reset 169
not found PLU maintenance reset 184
not found PLU maintenance work 32
not found PLU report 182
not found PLU reset 169, 184

O

OBR 37, 87, 191
old check 37, 87
one touch NLU 37, 86, 112, 146, 191, 193
one touch NLU table 32, 135
one touch NLU table file 218
online configuration 15
online password 30, 135, 147
online password file 229
open 37
open check 37, 87, 169
open check report 180
open2 37, 81
operation control 42
operation start date file 228
operator display 11
operator number 37, 87
operator read/reset 37
operator x/z 82
order 120
order character 32, 135, 145
order character file 225
order control 52, 62

P

paid out 37, 69, 204
password 26, 27, 39, 165
peripheral device 15, 209
pick up 37, 69, 204
PLU 30, 37, 59, 61, 87, 97, 125, 135, 137, 188
PLU 2nd @ 32, 135, 144
PLU best 50 169
PLU by group 97, 169
PLU by record number/random code 169
PLU file 213
PLU individual by department 167
PLU individual by group 167
PLU individual by subdepartment 167
PLU menu 169
PLU range by random code 168
PLU range by record number 168
PLU report 173
PLU reset 169, 184
PLU stock 97, 188
PLU stock all PLU by record number 169
PLU stock by group 97, 169
PLU stock individual by department 167
PLU stock individual by group 167
PLU stock range by random code 168
PLU stock range by record number 168
PLU stock report 174
PLU stock individual by subdepartment 167
plus 37, 70, 133, 203
power switch 14
power switch cover 11
premium 37, 73, 133, 203
preparation 59, 243
previous balance 37, 72
previous balance subtotal 37, 87
price 37, 87
price change 37, 85, 191
price inquiry 37, 87, 191
price shift 37, 43, 81, 191
print control 51
print control for fixed total report 44, 45
print control for grand total 50
print control for guest receipt and slip 52
print control for receipt 41
print control for report 49
print control for taxable amount 46
printer connection table 30, 135, 146, 198, 228
printer cover 11
printing guidance message 32, 121, 135, 147
printing guidance message file 235
printing history 2
program / message / buffer file 32
program 1 programming in X1 mode 157, 162
program guidance message 32, 122, 135, 148
Program guidance message file 239
program reading report of program 1 134

program reading report of program 2 130
program reading report of program 3 113
program reading report of program 4 38
program reading report of program 5 33
program sub mode 27

Q

quantity/for 37, 84
Quick Scan 6000 15, 210

R

random code 62
rate 131
rate tax 37, 74, 133
read/reset report 165
recall 37, 87
recall character message 120
receipt 37, 75
receipt message 32, 135, 142
receipt message file 224
receipt on/off 37, 87
received on account 37, 69, 204
recovery processing 197
red price 37, 87
refund 37, 87
registration buffer 32
registration guidance message 32, 122, 135, 148
registration guidance message file 242
remote printer 198
remote printer buffer 32
report (batch) 169
report (individual file) 168
report (individual item/key) 166
report (range) 167
report code 97
report header 32, 119, 135, 141
report header file 223
return 203
review 37, 82
revised point 2
RF mode 204
Robotics sports star 15
rounding 40, 204

S

sales ratio 166
scale 14, 15, 37, 84
scale control 46, 47
scanner 12, 14, 15
scanning 56
scanning PLU 32, 97, 135, 139, 169, 188, 191
scanning PLU best 50 by range department 168
scanning PLU by range department 168
scanning PLU by range group 168
scanning PLU by range subdepartment 168
scanning PLU direct maintenance 110, 133
scanning PLU file 32, 217

- scanning PLU inactive item by range department 168
- scanning PLU index 32
- scanning PLU maintenance 108, 187
- scanning PLU report 180
- scanning PLU reset 169, 184
- scanning system 17
- scanning system setup 191
- scheduler 32, 102, 135, 145
- scheduler file 225
- secret number 88
- separate check 37, 87
- separate check buffer 31
- set menu 62
- set menu table 32, 135, 141
- set menu table file 223
- set the AT command to default value 156
- set the AT command to MODEM 156
- sheet holder 11, 12
- Singapore tax 96
- single item 203
- Slavic font 206
- slip 79
- slip back feed/release 37
- slip backfeed/release 87
- slip feed/release 37, 87
- slip print 37, 201
- slip print buffer 32
- slip printer 12, 14, 15
- slip/local/remote printer message 32, 120, 143
- slip/local/remote printer message file 224
- slip/locl/remote printer message 135
- slit drawer 43
- SP-1300 12, 15, 210
- special character 32, 117, 135, 140
- special character file 222
- split price 203
- square 37, 84, 203
- standalone Z consolidation 187
- standard font 205
- start date 30
- stock 62
- stock inquiry 37, 87
- stock quantity maintenance 157, 158
- store 37, 87
- store/recall/auto new check number 56, 57, 58
- stroke keyboard 11
- subdepartment
 - 30, 61, 97, 116, 135, 136, 169, 188, 212
- subdepartment report 172
- subtotal 37, 83
- system configuration 11
- system error log 30
- system error log file 229
- system error log report 154
- system file 30
- system utilities 149

T

- table analysis 31, 97, 116, 135, 140, 169, 188
- table analysis file 219
- table analysis report 179
- table number 37, 87
- table number range 90
- table range 91
- table transfer 37, 68
- takeout 37, 86, 201
- tare 37, 84
- tax exempt 37
- tax shift 37, 79
- tax system 40
- tax table 32, 92, 135, 141
- tax table file 223
- taxable amount subtotal 37
- taxable status 60, 70, 72, 73, 100, 112
- taxable subtotal 79
- terminal connection table 30, 104, 121, 135, 146
- terminal connection table file 228
- terminator (CAT5) 15
- text print 37
- text recall 37
- three zero 37
- till timer 46
- tilt LCD 13
- time & attendance 169
- time & attendance report 183
- time and attendance 31, 200
- time and attendance file 31, 219
- time setting 131
- time zone 91, 97
- tip 37, 68
- touch keyboard 11
- training 201
- transaction key
 - 30, 97, 124, 135, 136, 169, 188, 212
- transaction key program 64
- transaction key report 172
- tray total 37, 83
- two zero 37

U

- U.S. tax table with rate setting 95
- U.S. tax table without rate setting 94
- unit price 131
- unit price and unit quantity (1st) 131
- unit price and unit quantity (2nd) 132
- unit weight 37, 84
- UP-250 12, 15, 209
- UP-350 12, 15, 209

V

- validation 37, 87
- VAT 37, 87
- void 37, 75, 203

W

watermark 53
watermark print 32
watermark print file 229

X

X consolidation 185
X/Z guidance message 32, 122, 135, 148
X/Z guidance message file 237

Z

Z consolidation 186, 187

CASIO®

CASIO COMPUTER CO., LTD.
6-2, Hon-machi 1-chome
Shibuya-ku, Tokyo 151-8543, Japan

IR0307-000501A TE3000DM*E

Printed in Japan