


ASSEMBLY & INSTALLATION INSTRUCTIONS

American Standard
Style That Works Better

Standard COUNTERTOP SINK 0293 Series



Thank you for selecting our products...products which have been the benchmarks of fine quality for over 100 years. To help insure that the installation process will proceed smoothly, please read these instructions carefully before you begin. Also, review the recommended tools and materials list; carefully unpack and examine your new plumbing fixture.



Recommended Tools & Materials




Pipe Wrench



Adjustable Wrench




Saber Saw



Drill



Channel Lock Pliers



Phillips Screwdriver




Basin Wrench




Tape Measure



Putty Knife



Plumbers' Putty
or Caulking



Hacksaw



Tubing Cutter




Level

1


Using the template provided, locate the position of the lavatory. Provide proper clearance under the countertop for the faucet supply lines, drain assembly and the structural parts of the cabinet.

NOTE: If replacing an existing lavatory be certain to shut off water supply before removing old lavatory.


2

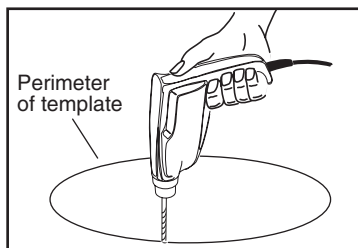


Drill a clearance hole inside the perimeter line of the template.

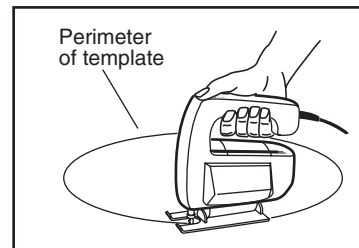

Cut opening around the perimeter of the template.

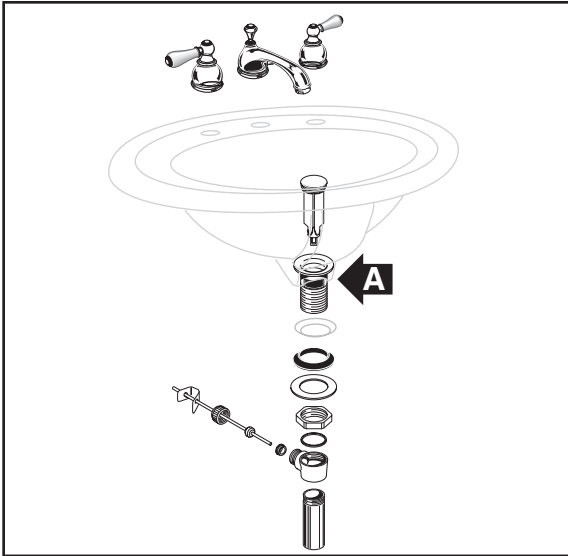3


Mount the faucet and drain assembly (not included) on the lavatory following faucet manufacturer's instructions. Be certain to apply a bead of sealing putty on the underside of the drain (Part "A") in order to ensure a watertight seal between the lavatory and drain. Remove excess putty after installing drain on lavatory.

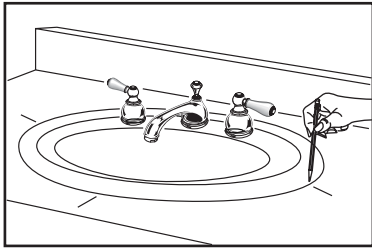4


Before applying the sealant, place the lavatory temporarily into the cut-out. Check for alignment and clearance. Then mark the lavatory *and* countertop in several places as a guide for the installation location.

5


After checking fit and alignment, turn lavatory upside down and apply a generous portion of sealant around the underside of the rim near the edge. Carefully lower lavatory in place, align with marks made earlier, and press down firmly. Allow sealant to set before connecting supplies and drain.

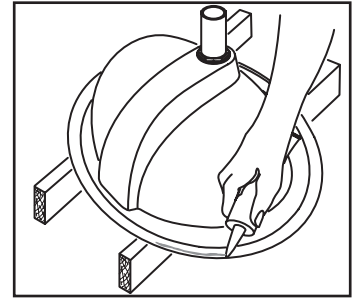**6**

Connect supply line to faucet (finger tight) and carefully bend tubes to engage with the supply shut-off valves. Tighten connections at faucet and shut-off valves for secure seal.

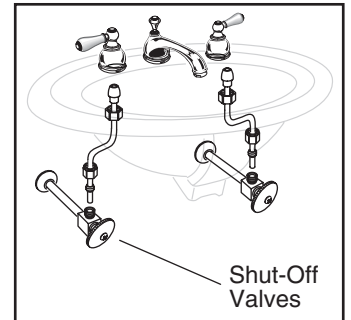**7**

Connect trap to drain assembly hand tight to check alignment. It may be necessary to cut off part of the tailpiece (area "B") or part of the horizontal leg of the trap (area "C"). Secure joints for watertight assembly.

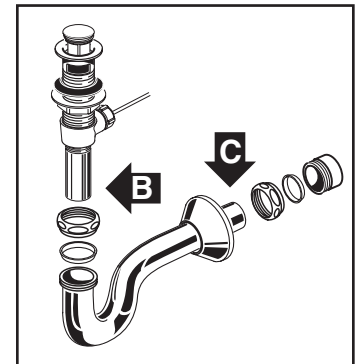**In the United States:**

American Standard Brands
P.O. Box 6820
Piscataway, New Jersey 08855
Attention: Director of Consumer Affairs

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 442-1902

www.americanstandard-us.com

In Canada:

AS Canada ULC
2480 Stanfield Rd.
Mississauga, Ontario
Canada L4Y 1S2
Toll Free: (800) 387-0369

www.americanstandard.ca

In Mexico:

Customer Service Manager
AS Maquilia Mexico, S.A. de C.V.
Via Morelos #330
Col. Santa Clara
Ecatepec 55540 Edo. Mexico

www.americanstandard.com.mx