



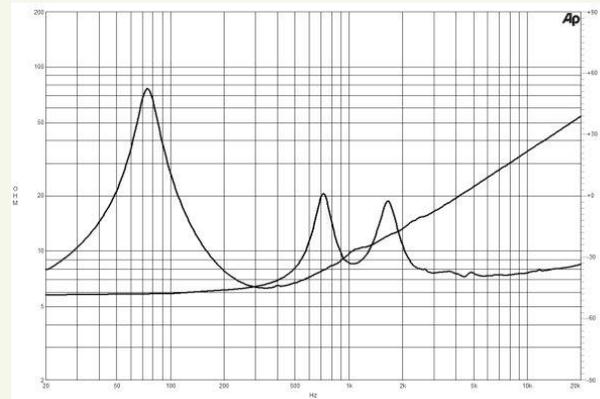

8CXT | Coaxials

400 W continuous program power capacity
100° nominal coverage
75 – 20000 Hz response
94 dB sensitivity

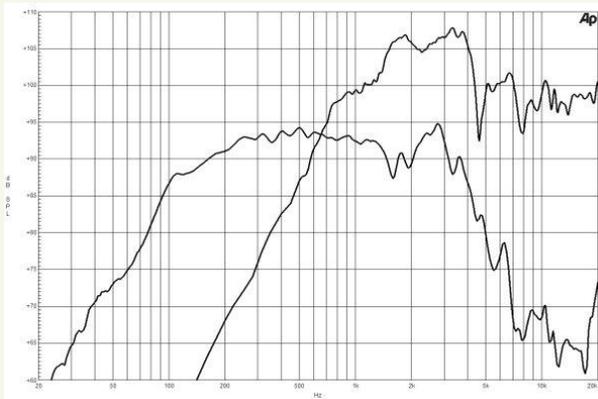

Horns
HF Drivers
Coaxials
LF Nd Drivers

Specifications

Nominal Diameter	210 mm (8 in)
Nominal Impedance	8 ohm
Minimum Impedance	6.3 ohm (LF)
	7.7 ohm (HF)
Frequency Range	75-20000 Hz
Dispersion Angle (1)	100°
LF Unit	
Sensitivity (1W/1m) (2)	94 dB
Nominal Power Handling (3)	200 W
Continuous Power Handling (4)	400 W
Voice Coil Diameter	52 mm (2 in)
Winding Material	Copper
HF Unit	
Sensitivity (1W/1m) (5)	103 dB
Nominal Power Handling (6)	50 W
Continuous Power Handling (7)	100 W
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Diaphragm Material	Titanium
Recom. Crossover (8)	2 kHz

Parameters

Fs	76 Hz
Re	5.1 ohm
Qes	0.36
Qms	5
Qts	0.34
Vas	11.5 dm3 (0.4 ft3)
Sd	220 cm2 (34.1 in2)
Eta Zero	1.4 %
Xmax	+/- 6 mm
Mms	25 g
Bl	13 Txm
Le	1.0 mH

Mounting and Shipping Info



Overall Diameter	225 mm (8.8 in)
Bolt Circle Diameter	210 mm (8.3 in)
Baffle Cutout Diameter	187 mm (7.4 in)
Depth	129 mm (5.1 in)
Flange and Gasket Thickness	11 mm (0.4 in)
Net Weight	3.9 kg (8.6 lb)

¹Included by -6 dB down points, averaged from 1 kHz to 8 kHz with B&C XO-1 crossover filter.

²Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.

³2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum



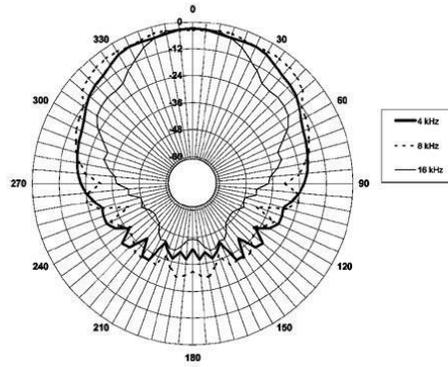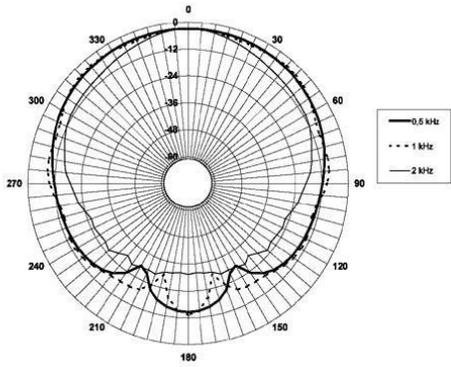

impedance. Loudspeaker in free air.

⁴Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

⁵Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.

⁶2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum impedance. Loudspeaker in free air.

⁷Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

⁸12 dB/oct. or higher slope high-pass filter.

