

IMPORTANT:
Refer to www.extron.com for the complete user guide and installation instructions before connecting the product to the power source.

DFX 100 Series • Setup Guide

The Extron DFX 100 Series consists of a transmitter (DFX 100 Tx) and receiver (DFX 100 Rx) that use one multimode fiber optic cable to extend a DVI-D signal up to 984 feet (300 m).


This guide provides basic instructions for an experienced installer to set up and operate the DFX 100 (for full instructions see the DFX 100 Series User Guide, at www.extron.com).

Installation

Step 1 – Mounting

Mount the DFX 100 Tx close to the DVI source and the DFX 100 Rx close to the DVI display device. See the *DFX 100 Series User Guide* for all mounting options. Follow the instructions provided with the appropriate installation kit.

Step 2 – Cable Connections

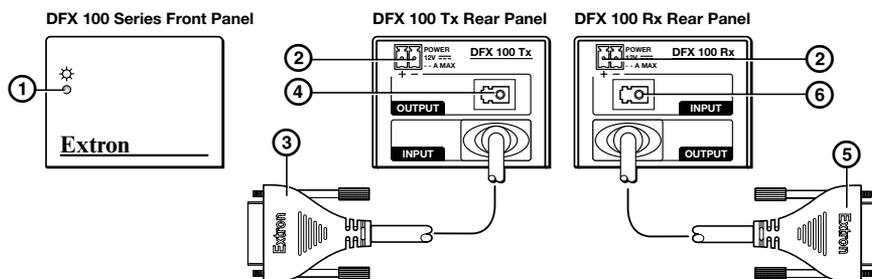

1. Connect one of the provided 12 VDC power supplies to the rear panel captive screw connectors of the transmitter and the other to the receiver (2).

ATTENTION: Before connecting power to the DFX 100 Tx or Rx, see the attention box in the “Power Supply” section of the DFX 100 Series User Guide for important information about power supplies.

NOTES:

- When the units receive power but no input signals, the front panel LED (1) lights amber.
- When the transmitter receives power and a DVI input signal, the front panel LED lights green.
- When the receiver receives power and a fiber optic input signal, the front panel LED lights green.

2. Connect the DFX 100 Tx output (4) to the DFX 100 Rx input (6) using one multimode cable (not provided).

WARNING: Possible Damage to Eyesight. The DFX 100 outputs continuous invisible light (Class 1 rated), which may be harmful and dangerous to the eyes; use with caution. Do not look into the rear panel fiber optic cable connector or into the fiber optic cable itself. Plug the attached dust cap into the optical transceiver when the fiber optic cable is unplugged.


3. Connect the DVI display to the DVI output connector of the DFX 100 Rx (5). Power on the display.

DFX 100 Series • Setup Guide (Continued)

4. Connect the DVI source to the DVI input connector of the DFX 100 Tx (3). Power on the source.

NOTE: Although the transmitter and receiver have DVI-I connectors, both devices are compatible only with a single link DVI-D signal.

Application Diagram

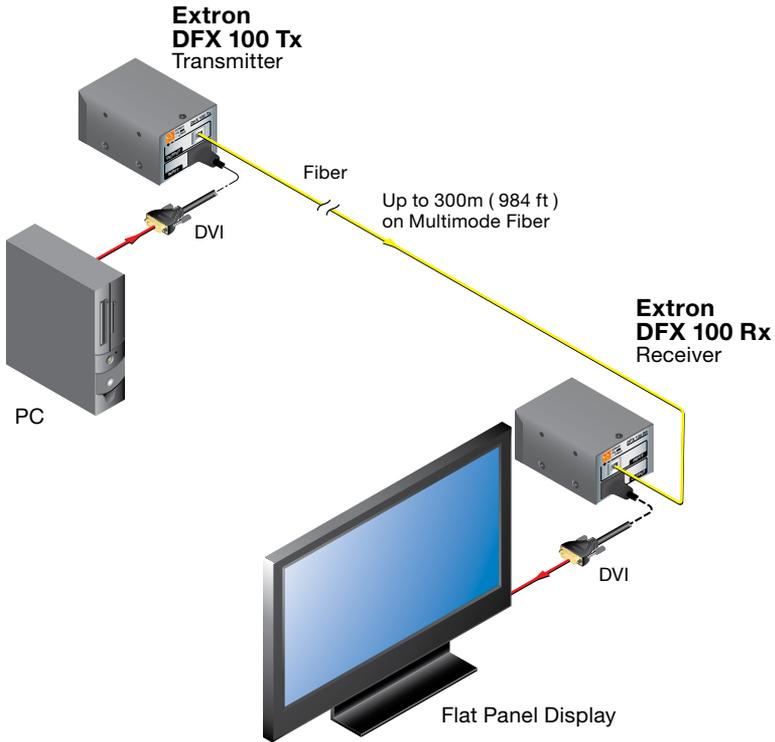

Extron Headquarters +800.633.9876 Inside USA/Canada Only		Extron Europe +800.3987.6673 Inside Europe Only	Extron Asia +800.7339.8766 Inside Asia Only	Extron Japan +81.3.3511.7655 FAX: +81.3.3511.7656	Extron China +4000.EXTRON +4000.398766 Inside China Only +86.21.3760.1568 FAX: +86.21.3760.1566	Extron India 1800.3070.3777 Inside India Only +91.80.3055.3777 FAX: +91.80.3055.3737
Extron USA - West +1.714.491.1500 FAX: +1.714.491.1517	Extron USA - East +1.919.850.1000 +1.919.850.1001	+31.33.453.4040 FAX: +31.33.453.4050	+65.6383.4400 FAX: +65.6383.4664	Extron Middle East +971.4.299.1800 FAX: +971.4.299.1880	+82.2.3444.1571 FAX: +82.2.3444.1575	Extron Korea +82.2.3444.1571 FAX: +82.2.3444.1575