




So easy, nothing stands between you and a great shot.

Built-in Help Guide

Menu Guide




Shooting Guide

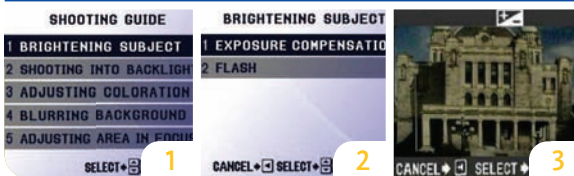

Menu Guide explains all of the camera's functions. Shooting Guide educates on how to accomplish specific effects, such as brightening your subject and adjusting colors.

One-Touch Easy Print

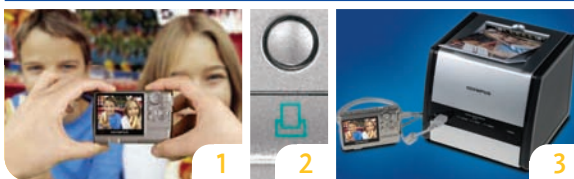


Shoot, connect and press a Print Button on the top of camera. Everything is just "One-Touch".

22 Shooting Modes


Cuisine

Night Scene

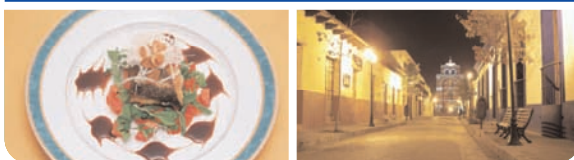

Easy to capture great images in a variety of lighting situations.

- ▶ **Built-In Help Guide** No need to check the manual. With the press of a button, see a description of the camera's features. Or use the built-in tutorial via the mode dial to help you quickly choose the ideal setting for each situation and purpose.
- ▶ **One-Touch Easy Print** Connect to any PictBridge™-enabled printer and enjoy photo lab quality pictures, fast. No computer needed.
- ▶ **22 Shooting Modes including QuickTime® Movie** Select the right mode for cuisine, night scenes, fireworks and much more. And bring your images to life with QuickTime movie mode.
- ▶ **Digital Image Stabilization Mode** Capture crisp, clear pictures with high ISO sensitivity and fast shutter speed even if your subject is moving.
- ▶ **2.5" LCD (FE-140) / 2.0" LCD (FE-130)** Shooting and sharing are so much easier and more enjoyable with the view you get on this bright, large LCD.
- ▶ **6.0 Megapixel CCD (FE-140) / 5.1 Megapixel CCD (FE-130)** Capture high-quality images that can be cropped and printed to 8" x 10" and larger.
- ▶ **12x Total Seamless Zoom** 3x optical zoom plus 4x digital zoom moves you closer to your subject without taking a step.
- ▶ **TruePic TURBO™ Image Processor** With this exclusive technology, you not only get truer colors – you also get quicker startup and shutter release times so you can shoot faster.
- ▶ **In-Camera Editing** Easily add colorful borders and titles on your images, adjust brightness and saturation, switch from color to black-and-white or sepia, even fix red-eye – all without using a computer.
- ▶ **Flexible Battery Options** Camera operates on AA batteries, available anywhere, or rechargeable and economical Ni-MH batteries.



Olympus® FE-130/FE-140 Specifications Stock No. 225735/225740

Imager:	FE-130: 5.1 Megapixel effective, 5.4 Megapixel gross, 1/2.5" (1cm) CCD FE-140: 6.0 Megapixel effective, 6.4 Megapixel gross, 1/2.5" (1cm) CCD
Lens:	6.3 – 18.9mm (38 – 114mm equivalent in 35mm photography), 6 lenses in 5 groups
Zoom:	Seamless to 12x (3x optical and 4x digital combined)
Aperture Range:	f3.1 – f5.9
LCD:	FE-130: 2.0" (5.1cm) LCD, approx. 85,000 pixels FE-140: 2.5" (6.4cm) LCD, approx. 110,000 pixels
Focus System:	CCD Contrast Detection
Focus Range:	Normal/Macro Mode (Tele): 23.6" – infinity (0.6m – infinity) Normal/Macro Mode (Wide): 3.9" – infinity (0.1m – infinity) Super Macro Mode: 2.0" – infinity (5cm – infinity)
Focus Mode:	Autofocus, Single
Shutter Speed:	1/2000 sec. – 4 sec.
ISO:	FE-130: Auto (64 – 320 equivalent), up to ISO 800 when using Digital Image Stabilization Mode FE-140: Auto (80 – 320 equivalent), up to ISO 800 when using Digital Image Stabilization Mode
Metering Mode:	Digital ESP Multi-Pattern
White Balance:	Auto
Exposure Compensation:	±2 EV steps in 1/3 EV steps
Recording Modes:	Still Image: JPEG; Movie: QuickTime® motion JPEG
Adjustment Resolutions:	FE-130: 2,592 x 1,944, SHQ/HQ FE-140: 2,816 x 2,112, SHQ/HQ 2,048 x 1,586, SQ1 640 x 480, SQ2
Shooting Modes:	22 Shooting Modes: Auto, Scene Preset (Portrait, Landscape, Landscape & Portrait, Night Scene, Sport, Night Scene & Portrait, Indoor, Candle, Self-Portrait, Available Light Portrait, Sunset, Fireworks, Museum, Behind Glass, Cuisine, Documents, Auction, Beach, Snow), Digital Image Stabilization, Movie
Panorama:	Up to 10 frames automatically stitchable with OLYMPUS Master software when using Olympus brand xD-Picture Card™
Shooting Assist Functions:	Panorama
Movie Mode:	320x240/15fps (HQ), 160x120/15fps (SQ)
Image Processing:	TruePic TURBO™ Image Processor
Pixel Mapping:	Automatic Pixel Mapping (APM) available via menu setting
Noise Reduction:	Set automatically at shutter speeds of 0.5 second or longer
Image Playback:	Still Image: Single, Index Display (4/9/16/25), Rotation, Up to 10x Enlargement, Slide-Show (Normal, Fader, Slide, Zoom), Calendar Display Movie: Normal, Reverse, Frame-By-Frame Black & White, Sepia, Resize, Trimming, Red-Eye Fix, Brightness, Saturation, Frame, Title, Layout, Calendar PictBridge™, DPOF, ImageLink™
Playback Edit Effects:	Black & White, Sepia, Resize, Trimming, Red-Eye Fix, Brightness, Saturation, Frame, Title, Layout, Calendar PictBridge™, DPOF, ImageLink™
Direct Printing Options:	Built-in
Flash Modes:	Auto (for low light and backlit conditions) Red-Eye Reduction Fill-In Off
Flash Working Range:	Wide: 0.7 ft. (0.2m) – 10.8 ft. (3.3m) Tele: 2.0 ft. (0.6m) – 6.6 ft. (2.0m)
Self-Timer:	12 Seconds/Auto
Settings Memorization:	On/Off (Reset to default settings)
Date/Time Calendar:	Simultaneous recording into image data, Automatic up to 2099
Memory:	22MB internal memory (for shooting)
Removable Media Card:	xD-Picture Card™ (16, 32, 64, 128, 256, 512MB or 1GB)
Outer Connectors:	Multi-Connector (USB Connector, Video Output, DC Input)
Auto-Connect USB:	2.0 Full Speed
System Requirements:	Auto-Connect USB: Windows® 98SE/ME/2000PRO/XP with USB Port, Mac OS® 9.0-9.2x/OS X 10.1-10.4 with USB Port Software: Windows® 98SE/ME/2000PRO/XP, Mac® 10.2 and Higher
Operating Environment:	Operation: 32° – 104°F (0° – 40°C), 30% – 90% humidity Storage: -4° – 140°F (-20° – 60°C), 10% – 90% humidity
Power Supply:	2 AA Alkaline Batteries, AC Adapter (CB-MA1 & E-7AU/7AE)
Size:	3.8" W x 2.5" H x 1.0" D (96.0mm x 63.0mm x 26.0mm)
Weight:	4.6 oz (130g) without battery and media card



olympusamerica.com


Available Accessories

	xD-Picture Card™ 128MB (200843) 256MB (202025) 512MB (200395) 1GB (200495)		CWPC-03 Water-resistant Case (9.8 ft.) 202029
	P-11 Digital Photo Printer 201125		MAUSB-300 xD-Picture Card™ USB Reader/Writer 200335
	FE Accessory Kit (Leather Case and 4 AA Ni-MH Batteries with Overnight Charger) 202056		200398 Leather Case (Vertical, Top-Loading) 200496 Metal Neck Strap 200751 E-7AU AC Adapter 202053 CB-MA1 DC Coupler (For Use with E-7AU)
	B-90SU Ni-MH Quick Charger and Battery Set 200899		200372 CB-USB6 Digital Camera USB Cable (Replacement) 202009 CB-VC2 Video Cable (Replacement) 202044 2-Year Extended Digital Warranty

Package Contents

FE-130 or FE-140 Digital Camera	Basic Manual
2 AA Alkaline Batteries	2 CD-ROMs (OLYMPUS Master Software and Advanced Manual)
USB Cable, Video Cable	USB Reader (OPTIONAL)
Wrist Strap	ImageLink™ Tray
Quick Start Guide	Warranty Card



 Olympus Digital Still Cameras can be used with confidence wherever you go. They are backed by a one-year repair warranty service that is available worldwide. Please contact our service center or check the Authorized Distributors list for service and applicable areas of service. May not be available in all areas.

Specifications subject to change without notice or obligation on the part of the manufacturer.
© 2006 Olympus Imaging America Inc. All rights reserved. Printed in the United States of America. Olympus and Stylus are trademarks or registered trademarks of Olympus Corporation, Olympus Imaging America Inc. or their affiliated entities. All trademarks and registered trademarks listed herein are the property of their respective holders.