


Specifications

XS-102X		XS-122X	
Speaker	Woofer 25 cm (10 in.), cone type	Speaker	Woofer 30 cm (12 in.), cone type
Maximum input power	400 watts	Maximum input power	450 watts
Rated input power	120 watts	Rated input power	150 watts
Impedance	4 ohms	Impedance	4 ohms
Sensitivity	87 dB/W/m	Sensitivity	89 dB/W/m
Frequency response	25 – 3,500 Hz	Frequency response	20 – 3,000 Hz
Mass	Approx. 3.1 kg per speaker	Mass	Approx. 5.2 kg per speaker

Dimensions

Unit: mm

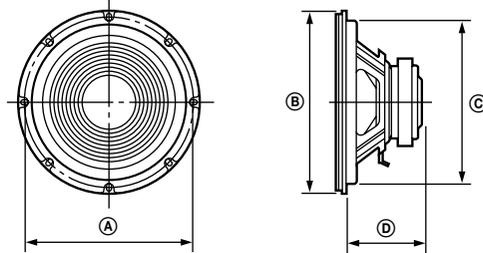


	A	B	C	D
XS-102X	φ245	φ256	φ235	120
XS-122X	φ294	φ307	φ283	136

Subwoofer

Installation/Connections

Connections

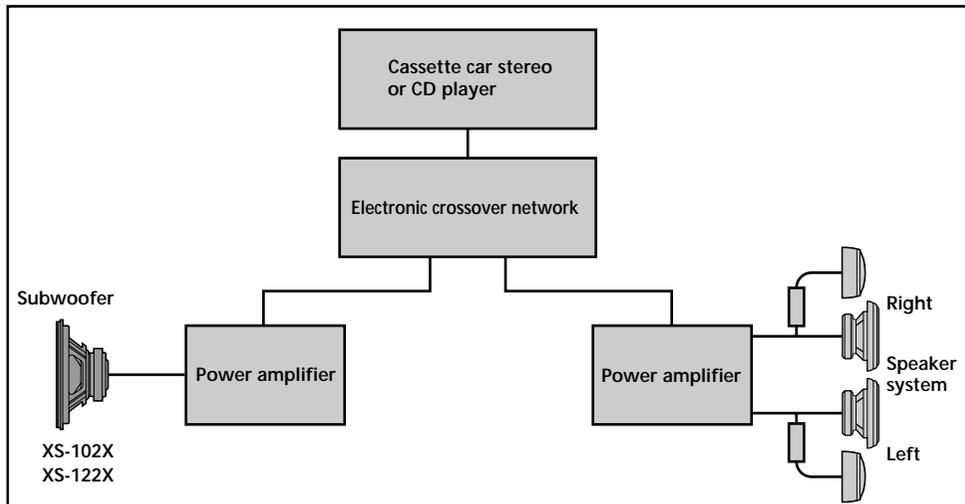


XS-122X/102X

Installation


Precautions

- Be careful not to drive the speaker system continuously with the power exceeding the power handling capacity.
- Keep recorded tapes, watches, and personal credit cards using magnetic coding away from the speaker system to prevent their possible damage caused by the magnets in the speakers.
- When installing the unit, be careful not to damage the diaphragm by hand or tools.
- The subwoofer is heavy, so attach it firmly to a solid thick, baffle plate or metal board.

Parts for installation and connections

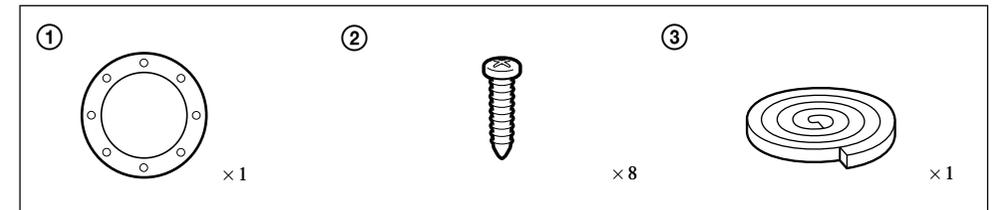


1

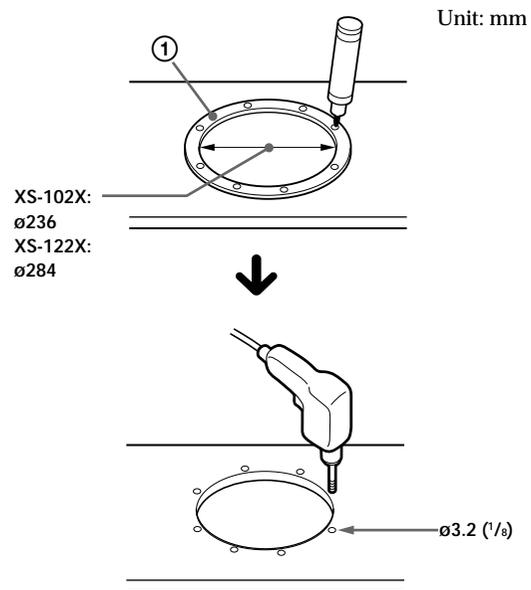


2

Speaker cord
(not supplied)

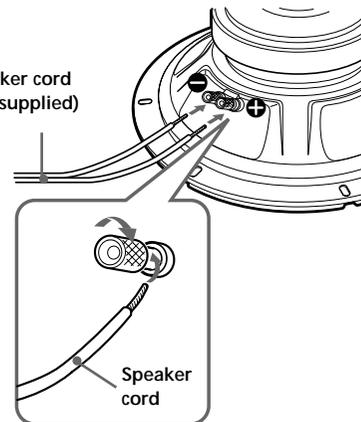

3

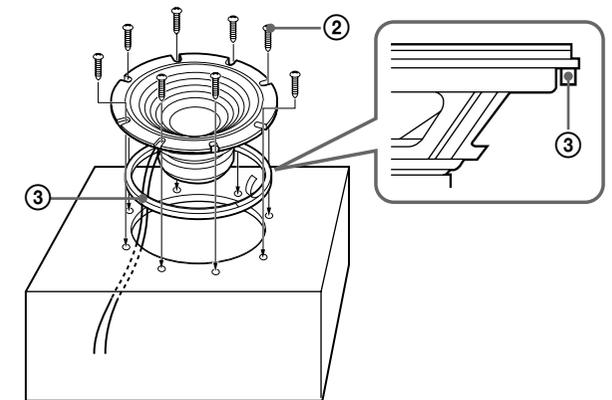

In separate enclosures

