



Operating Manual

PK18SBA



www.pyleaudio.com

IMPORTANT SAFETY INSTRUCTIONS



Intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to person.

CAUTION

RISK OF ELECTRIC SHOCK
DO NOT OPEN

CAUTION:
To reduce the risk of electric shock, do not remove cover (or back). No user-serviceable parts inside. Refer servicing to qualified service personnel.



Intended to alert the user of the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

WARNING:


1. To prevent electrical shock or fire hazard, this apparatus should not be exposed to rain or moisture, and objects filled with liquids, such as vases, should not be placed on this apparatus. Before using this apparatus, read the operating guide for further warnings.
2. Power Sources- The unit should be connected to a power supply only of the type described in the operation instructions or as marked on the unit.
3. Water and Moisture- The unit should not be used near water. For example, near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool, etc.
4. Heat- The unit should be situated away from heat sources such as radiators, stoves, or other appliances that produces heat.

ATTENTION:

The power cord of the unit should be unplugged from the outlet when left unused for a long period of time.

FEATURES:

15" Subwoofer Enclosure with built-in Amplifier Module
Heavy Duty MDF Construction
Two 8" High Efficiency 2-Way Speakers
8" Midrange Driver
1" Transparent Silk Side Titanium Tweeter
Main Speakers Stack on Subwoofer for Easy Transport
Caster Wheels On Subwoofer
Telescoping Tripod Speaker Stands
Dual XLR 1/4" Combo Input Jacks
Includes Speakon Cables
Stereo/Mono Selector
Independent Output Gain Controls for all 3 Speakers
Integrated Crossover Provides Optimum Signal Routing
Independent Peak LED Indicators
High Speed, Low Noise Fan for Cooling
Main Speakers Amplification: 200W x 2 RMS, 400W x 2 Peak
Subwoofer Amplification: 600W RMS, 1400W peak
Frequency Response: 20Hz-20KHz
110/220 Voltage Selectable
Subwoofer Dimensions: 22" x 26.2" x 25.2"
Subwoofer Weight: 90.5lbs
Total System Weight: 155.5lbs

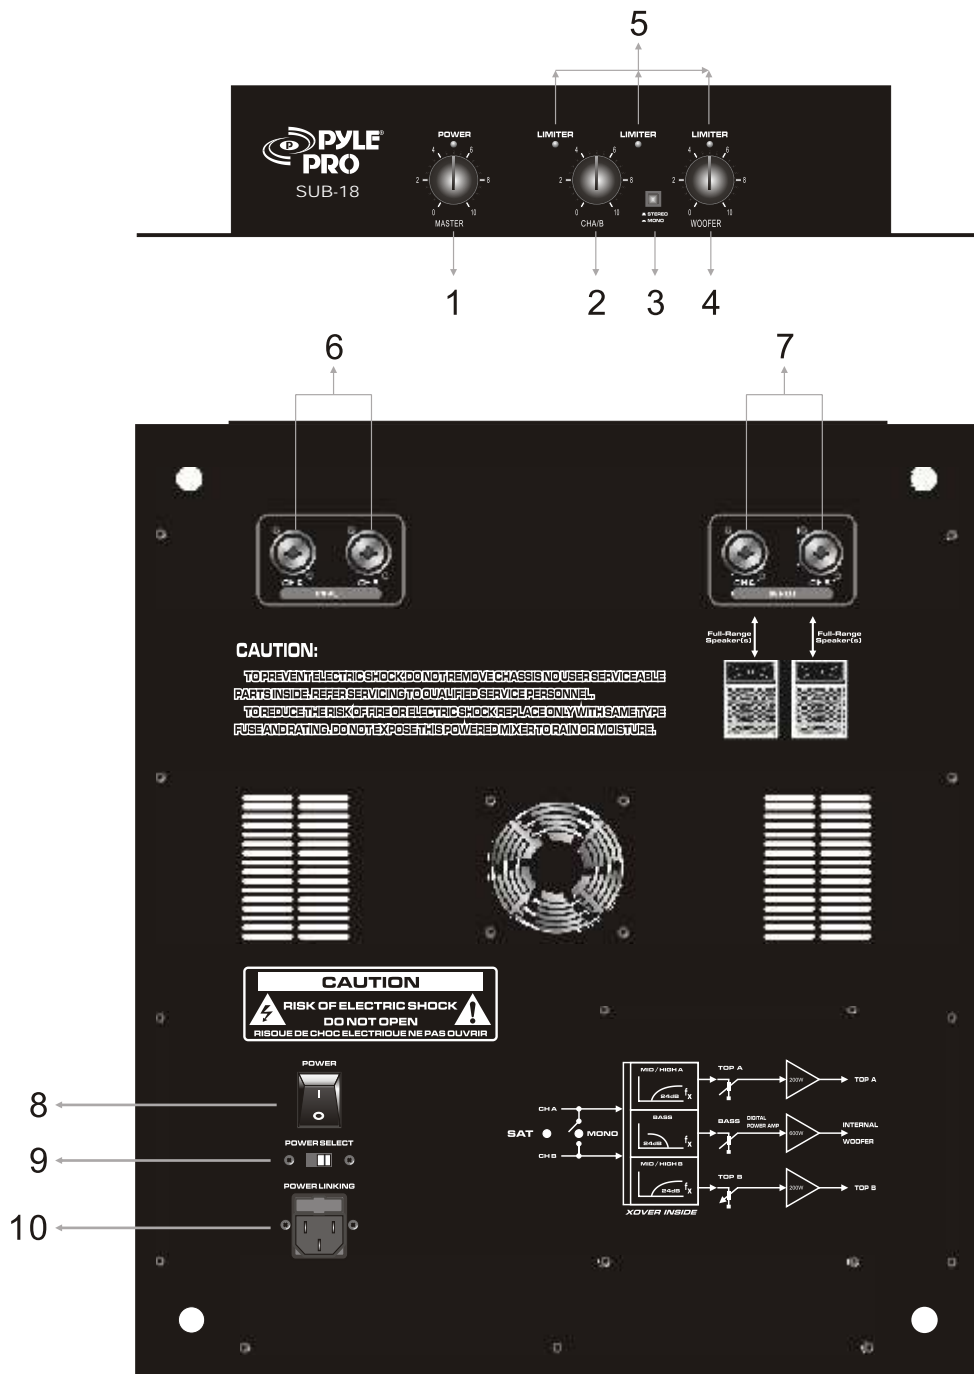

- 1. Master Level
- 2. Main Audio Volume
- 3. Stereo/Mono Selector
- 4. Subwoofer Volume
- 5. Peak Indicating Lamps

- 6. Signal Inputs
- 7. Main Audio Outputs
- 8. Power Switch
- 9. Power Voltage Switch
- 10. Power Socket

SPECIFICATIONS



Power	200W RMS, 400W Peak P/CH 600W RMS, 1400W Peak Subwoofer
Frequency Response	20Hz-20KHz all Output.
Harmonic Distortion	Less than 0.5% @ 20Hz - 20KHz
Hum/Noise	-45dB
Power Requirement	115/230 Volt. AC,50-60Hz.
Power Consumption	600W