



COOPER LIGHTING - LUMARK®

DIMENSIONS

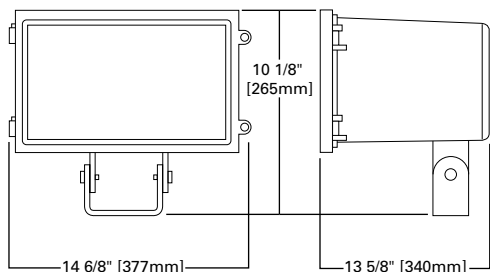

TRUNNION-MOUNT DRILL PATTERN

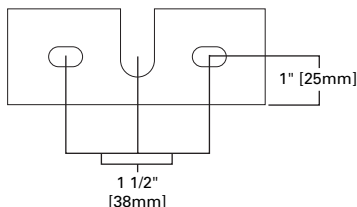

EPA-Effective Projected Area: .876 Square Feet

ORDERING INFORMATION

SAMPLE NUMBER: HPXF40T

Lamp Type	Fixture Type ¹	Lamp Wattage	Mounting Type	Accessories
MH=Metal Halide	XF=Falcon	25=250W	T=Trunnion	(See Below)
HP=High Pressure Sodium		40=400W		

Accessories²

XF/WG=Wire Guard
 XF/GS=Replacement Door (Bronze)
 XF/FC=Side and Top Visor (Bronze)
 XF/SF=Slipfitter (Bronze)

DESCRIPTION

The compact die-cast aluminum Falcon floodlight blends well in almost any setting. It features an adjustable trunnion which allows exceptional mounting flexibility and light control. U.L. listed and labeled for wet locations. CSA certified.

The Falcon floodlight can be wall or pole mounted, making it perfect for all commercial, industrial and residential low wattage floodlighting applications.



XF FALCON

250 - 400 W

High Pressure Sodium
Metal Halide

FLOODLIGHT

- Tempered glass lens is impact- and thermal shock-resistant. Four point door connection provides positive seal to housing
- Die-cast aluminum housing is finished in weather- and abrasion-resistant dark bronze polyester powder coat
- Full-circumference silicone gasket seals out external contaminants
- 5KV pulse-rated mogul-base porcelain lamp socket for HID lamps
- Mogul-base lamp included and available up to 400W HPS or MH
- Formed-aluminum reflector optimizes beam efficiency and control
- Polyester powder coated steel trunnion mount provides stability and adjustable aiming. Optional slipfitter available (order separately)
- Approximate net weight: 33 lbs. (15 kgs.)

LAMP TYPE	WATTAGE
Metal Halide	250, 400W
High Pressure Sodium	250, 400W

NOTES: 1 Add "W" to the end of catalog number for white finish. 2 Order separately. Add "WHT" to the end of accessory number for white finish (Example: XF/WG-WHT). 3 Specifications and dimensions subject to change without notice.