

12•20MW 12•20W

COMPANION HOLDING CABINET WITH ROLL-IN CART



- HALO HEAT . . . a controlled, uniform heat source that gently holds and surrounds food to provide a better appearance, taste, and longer holding life.
- Uses one-third to one-half the energy of conventional holding equipment.
- Motionless air inside cabinet prevents transfer of flavors, retains more product moisture, and preserves color.
- Close temperature tolerance, along with even heat distribution, maintains an ideal serving temperature throughout the cabinet.
- Non-magnetic stainless steel interior resists corrosion.
- Roll-In Pan Rack (trolley) is designed for maximum capacity and is completely interchangeable with the Combitherm® Combi Oven/Steamer electric model 12•20es, or gas model 10•20esG, and the Alto-Shaam Quickchiller™ QC-50.

The CombiMate® holding cabinet features 20 gauge stainless steel construction. The cabinet is controlled with an adjustable, electronic control which includes a ON/OFF button, heat indicator light, temperature set button, and temperature increase and decrease buttons. The control has a range of 60° to 205°F (16° to 96°C) and includes a digital display indicating the air temperature within the cabinet. The door has a heavy duty rotary handle.

Each holding cabinet includes one (1) Roll-In Pan Cart (trolley) which features removable handle, pan support rails to hold twenty-four (24) full-size pans, and six (6) stainless steel wire shelves for sheet pans. Cart includes two (2) rigid casters and two (2) swivel casters with brake.

MODEL 12•20MW: Mobile CombiMate® Companion Holding Cabinet, supported by four (4) heavy duty casters, 2 rigid and 2 swivel with brake

MODEL 12•20W: Stationary CombiMate® Companion Holding Cabinet, supported by four (4) heavy duty equipment legs




FACTORY INSTALLED OPTIONS:

- Left hand door swing is standard.
- ➔ Specify right-hand door swing as a special order.

12•20MW 12•20W

COMPANION HOLDING CABINET WITH ROLL-IN CART

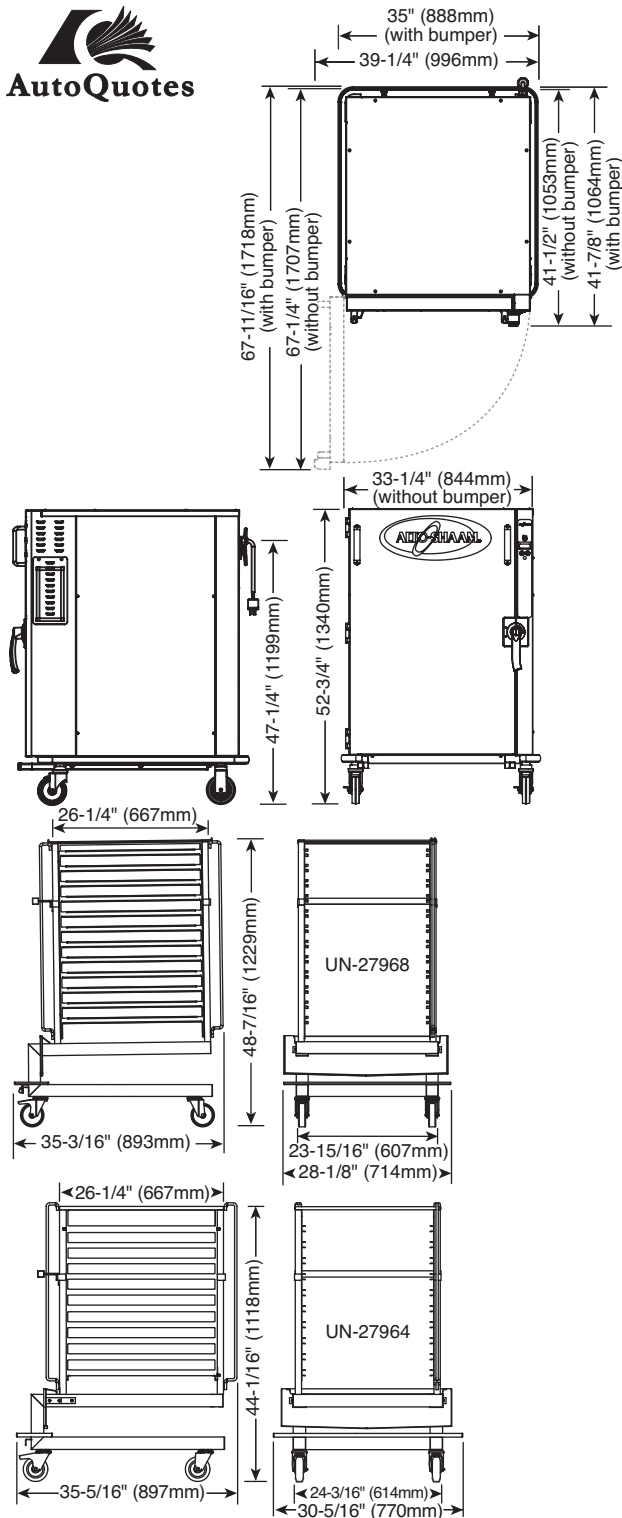

ELECTRICAL						
VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG	
208-240 (AGCY)	1	50/60	17.1	4.1		NEMA L6-30P 30A-250V Plug
208	1	50/60	13.9	2.9		
240	1	50/60	16.1	3.9		
230 (AGCY)	1	50/60	15.6	3.4	NO CORD OR PLUG	

DIMENSIONS: H x W x D	
EXTERIOR:	52-3/4" x 35" x 41-7/8" (1340mm x 888mm x 1064mm)
INTERIOR:	37-7/16" x 25-5/16" x 33-7/8" (950mm x 642mm x 860mm)

WEIGHT		
	12•20MW with cart	12•20W with cart
NET	420 lb (191 kg)	420 lb (191 kg)
SHIP	515 lb (234 kg)	515 lb (234 kg)
CARTON (H x W x D)	60" x 40" x 48"	
DIMENSIONS:	(1524mm x 1016mm x 1219mm)	

PRODUCT \ PAN CAPACITY	
288 lb (132 kg) MAXIMUM	
VOLUME MAXIMUM: 180 QUARTS (228 LITERS)	
FULL-SIZE PANS:	Twenty-four (24) 20" x 12" x 2-1/2" MAXIMUM
GN 1/1:	Twenty-four (24) 530mm x 325mm x 65mm
GN 2/1:	Twelve (12) 650mm x 530mm x 65mm
FULL-SIZE SHEET PANS: Six (6) 18" x 26" x 1" (12 WITH ADDED SHELVES)	
Roll-in Pan Cart (UN-27968)	
—Six (6) stainless steel wire shelves	
—Two (2) pan support rail positions	
2-9/16" (65mm) vertical spacing between rails,	
21-1/16" (535mm) horizontal width between rails	

OPTIONS & ACCESSORIES	
<input type="checkbox"/> Preheat Sealing Strip	5007925
<input type="checkbox"/> Roll-in Pan Cart, 12•20es & QC-50	UN-27968
<input type="checkbox"/> Roll-in Pan Cart, 10•20esG & QC-50	UN-27964
<input type="checkbox"/> Roll-in Plate Cart, 12•20es & QC-50	UN-27969
2-3/4" (70mm) BETWEEN PLATES, 70 PLATES	
<input type="checkbox"/> Roll-in Plate Cart, 12•20es & QC-50	UN-28456
3-3/4" (96mm) BETWEEN PLATES, 52 PLATES	
<input type="checkbox"/> Stainless Steel Wire Shelves	SH-22473
TO ACCOMMODATE FULL-SIZE SHEET PANS	

CLEARANCE REQUIREMENTS
3-inches (76mm) at the back, 2-inches (51mm) at the top, and 1-inch (25mm) at both sides

INSTALLATION REQUIREMENTS
Cabinet must be installed level. It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.