




*Dial-In-Handset  
Extension Telephone*

*MODEL 2-9200*



**USE & CARE GUIDE**



## INTRODUCTION

---

Thank you for purchasing a telephone from GE Communications Products. Your GE Telephone is a carefully engineered, high-quality, durable product with natural sound quality, modern features and elegant styling. It is designed to give you the quality and convenience you expect in a telephone.

To familiarize yourself with all the features of your telephone, please read the following instructions carefully. Retain this Guide for future reference.

FCC NUMBER IS LOCATED ON THE HANDSET BOTTOM END NEAR THE CORD  
REN NUMBER IS LOCATED ON THE HANDSET BOTTOM END NEAR THE CORD.  
OTHER IMPORTANT INFORMATION ON BACK COVER OF THIS GUIDE.

## TELEPHONE FEATURES

---


### Features

- **Tone/Pulse Switchable**
  - Offers Tone dialing for use on Touch Tone Lines or
  - Pulse dialing or
  - Total integration of Tone and Pulse for access to long distance services without added cost of Tone.
- **Flash Function** for use with enhanced phone company services such as Call Waiting.
- Handy **index of phone numbers** in base.
- **Tone Feedback** confirms each digit was dialed.
- **One-Touch Redial** of last number dialed.
- **Two Tone Ringer** for a rich sounding ring.
- **Hi/Lo/Off ringer control.**
- Tangle resistant **cord.**

### Decorator Styling in a Versatile Design

- New elegance in a two-piece design.
- Full wall and desk capability. Covers standard wall jack completely.

# TELEPHONE CONTROLS

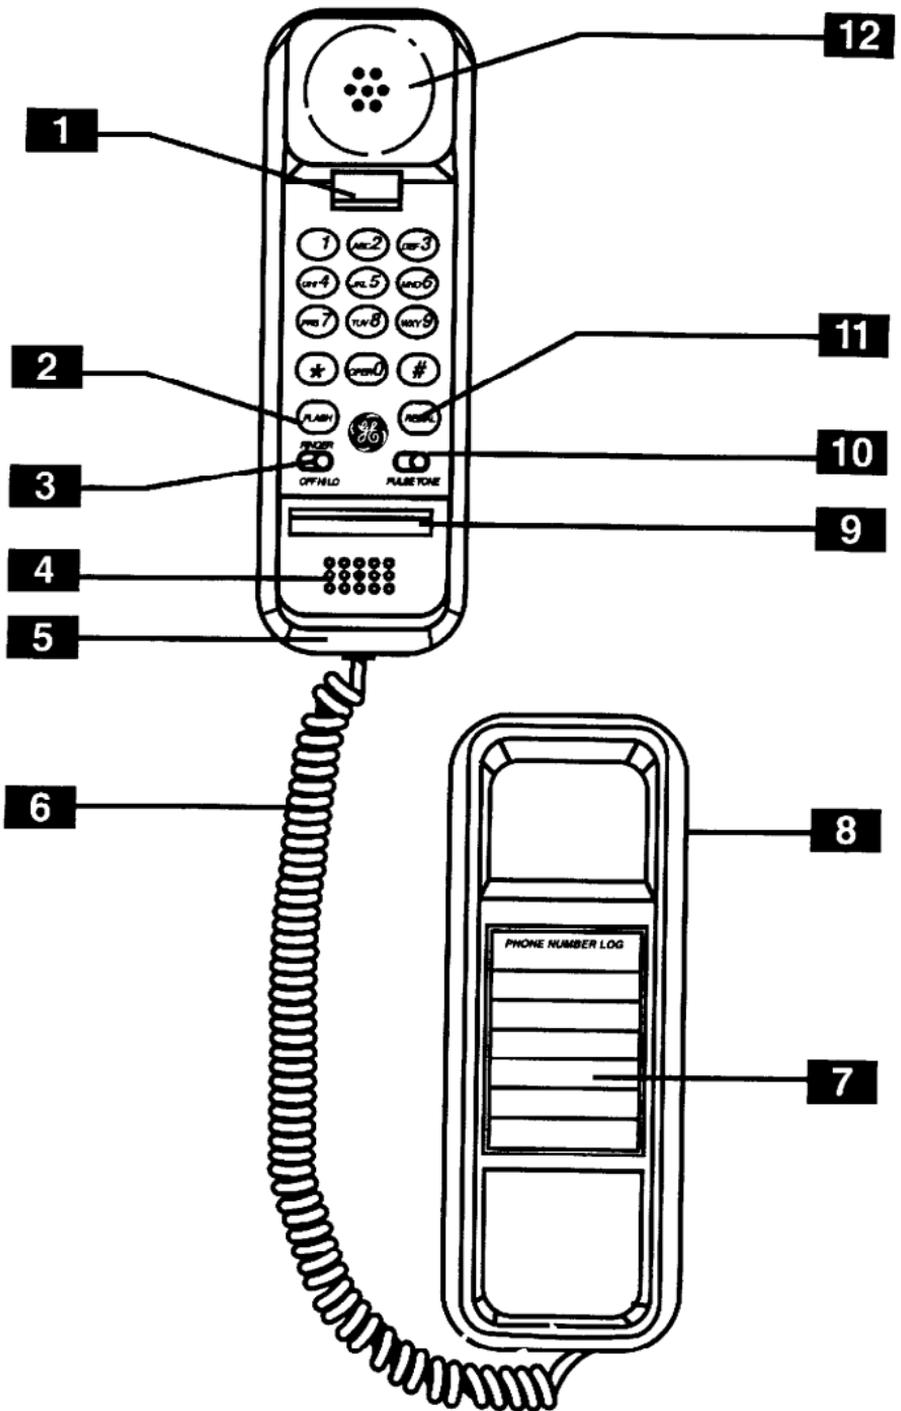

## **TELEPHONE CONTROLS**

---


- 1. HOOK SWITCH**
- 2. FLASH BUTTON**
- 3. RINGER LOUDNESS SWITCH**
- 4. MICROPHONE**
- 5. FCC and MODEL LABEL**
- 6. REPLACEABLE CORD**  
Tangle-resistant and replaceable cord for convenience.
- 7. PHONE NUMBER LOG**  
Record the names and numbers of the people you most frequently call.
- 8. CRADLE**
- 9. TELEPHONE NUMBER DISPLAY**
- 10. PULSE/TONE SWITCH**  
Touch Tone or Pulse Dialing, or combinations of Tone and Pulse, for access to long distance service
- 11. REDIAL BUTTON**  
For quick call-back of last number dialed.
- 12. EARPIECE**

### **Tone Feedback**

Confirms each digit was dialed.

## **TELEPHONE OUTLET REQUIREMENTS**

---

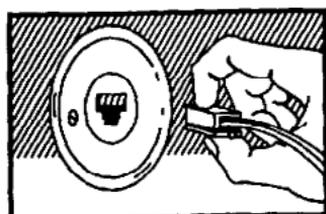


A modular (Universal Service Order Code) USOC; CA11A outlet editjack (example illustrated) is required.

Installation of this telephone in locations with 4-prong jacks or with hard-wired outlets will require additional Converters. (not included). The dealer from whom you purchased your phone or a telephone supply store can advise you regarding the proper Converter.


# INSTALLATION – DESK OR TABLETOP

Telephone is packaged for desk use, to install do the following:

1. Plug coiled end of *CORD* into *HANDSET MODULAR JACK*.

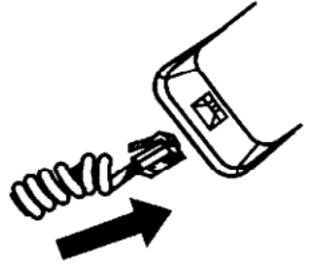

2. Plug straight end of cord into *MODULAR (RJ11C) WALL JACK*.

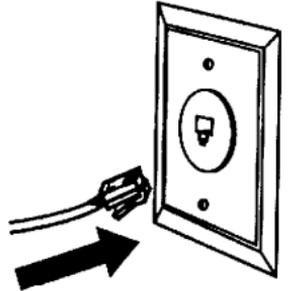

3. Set *RINGER* Switch to HI
  - LO = Sound will be lower.
  - OFF=Telephone will not ring.




4. Set *PULSE/TONE* Switch to *TONE*. If dialing cannot be accomplished, switch to *PULSE*.




You are now ready to try your new telephone.

## INSTALLATION – WALL MOUNTING

1. Turn telephone cradle over and push release door off in direction of arrow. Remove *CRADLE BOTTOM*.

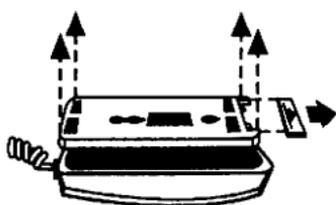


2. Locate *CORD WRAP POST* and unwrap *CORD* completely from base.

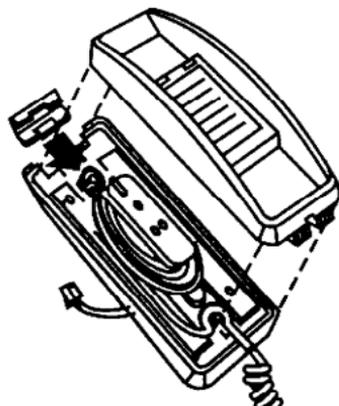

3. Feed plug and about 2 inches of straight cord thru hole in *CORD WRAP POST*.

4. Wrap remaining straight *CORD* around *CORD WRAP POST*, leaving enough to go down and through the restrainer at the coiled cord end of the cradle.

5. Attach cradle bottom to *CRADLE TOP*. **Be sure** the coiled cord aligns with the *COILED CORD* graphics on the underside of the *CRADLE TOP*. Replace release door to secure cradle.

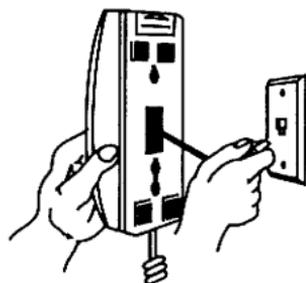

**NOTE: There is only one configuration in which the halves fit together properly.**

6. Connect coiled end of *CORD* to *HANDSET* and then, plug straight end of cord in wall phone modular jack.



7. Slip *CRADLE* over *WALL PLATE*

You are now ready to try your new telephone.

## **HOW TO MAKE AND RECEIVE CALLS**

### ***To Make A Call***

1. Pick up *HANDSET*.
2. Wait for dial tone.
3. Dial telephone number.
4. When finished, hang-up.

### ***To Receive a Call***

(Make sure the Ringer Switch is **not** OFF)

1. When phone rings, pick up *HANDSET* and talk.
2. When finished, hang-up *HANDSET*.

## **HOW TO USE AUTOMATIC REDIAL**

The telephone automatically remembers the last number dialed (up to 16 digits long), This number will remain in redial memory until another number is dialed.

### ***To Redial Last Number***

1. Pick up *HANDSET*.
2. Wait for dial tone.
3. Press *REDIAL*.

## **IN CASE OF DIFFICULTY**

Should your phone not operate properly, follow the Service Check List. If still inoperative, disconnect the phone and try another phone (if one is available) or another cord to determine whether the problem is in the telephone, the cord or the line. If in the phone, discontinue its use and follow the SERVICE procedure in this manual. If in the line, notify the telephone company immediately. The telephone company will charge for a service call if the problem is attributable to equipment you own.

## **SERVICE CHECKLIST**

In case of difficulty, check the following before seeking service.

<b>PROBLEM</b>	<b>SOLUTION</b>
1. No dial tone.	<ul style="list-style-type: none"><li>• Check Cords: Are they inserted properly and securely? Are they damaged?</li><li>• Check <i>HOOK SWITCH</i>: Does it fully extend when Handset is lifted from cradle</li></ul>
2. Phone does not dial out.	<ul style="list-style-type: none"><li>• Check <i>PULSE/TONE</i> switch. Is it in <i>TONE</i> position which may not be compatible with your local dialing service?</li></ul>
3. Phone does not ring.	<ul style="list-style-type: none"><li>• Is <i>RINGER SWITCH</i> in OFF position?</li><li>• Are you using too many phones on one line? (The total <i>REN</i> of all phones on the same line should not be greater than the maximum <i>REN</i> for your calling area. See FCC Registration Information on page 12.)</li><li>• Perform checks under first problem (Number 1).</li></ul>
4. Incoming and outgoing voice volume low.	<ul style="list-style-type: none"><li>• Are other phones off hook at same time? If so, this is normal condition as volume drops when additional phones are used at once.</li></ul>
5. Tone feedback flutter when dialing in Pulse mode.	<ul style="list-style-type: none"><li>• This is normal as power is fluctuating with phone outpulsing.</li></ul>

## PRODUCT CARE

---

To keep your GE Telephone working and looking good, follow these few simple rules:



- Avoid putting telephone near heating appliances and devices that generate electrical noise. (i.e., motors, fluorescent lamps.)



- Telephone should not be exposed to direct sunlight or moisture.



- Avoid dropping the Handset and other rough treatment to the phone.



- Clean telephone with a soft cloth. (Remember to first unplug phone from wall outlet)



- Never use a strong cleaning agent or abrasive powder, as this will damage the finish.



- Retain the original packaging for future use.

## SERVICE

---

FCC requires this product be serviced only by the manufacturer or its authorized service agents. In accordance with FCC requirements, changes or modifications not expressly approved by Thomson Consumer Electronics could void the user's authority to operate this product. For instructions on how to obtain service, refer to the warranty included in this Guide or call Consumer Information 800-448-0329.

Attach your sales receipt to the booklet for future reference or jot down the date this product was purchased or received as a gift. This information will be valuable if service should be required during the warranty period.

Purchase date \_\_\_\_\_

Name of store \_\_\_\_\_

## **TWO-YEAR LIMITED WARRANTY**

---

### **What does your warranty cover?**

- Any defect in material or workmanship.

### **For how long after the original purchase?**

- Two year.
- The warranty for rental units begins with the first rental.

### **What will we do?**

- Provide you with a new, or at our option, a reconditioned unit.
- The exchange unit is warranted for the remainder of your product's original two-year warranty period.

### **How do you make a warranty claim?**

- Properly pack your unit. Include any cables, etc., which were originally provided with the product. We recommend using the original carton and packing materials.
- Include in the package a copy of the sales receipt or other evidence of date of original purchase. If the unit was a gift, provide a statement specifying the date received. Also print your name and address and a description of the defect.
- Ship the unit standard UPS or equivalent to:  
Thomson Consumer Electronics, Inc.  
Product Exchange Center  
32 Spur Drive  
El Paso, Texas 79906
- Pay any charges billed to you by the Exchange Center for service not covered by the warranty.
- A new or reconditioned unit will be shipped to you prepaid freight.

### **What does your warranty not cover?**

- Customer instruction. Your Owner's Manual provides information regarding operating instructions and user controls. For additional information, ask your dealer.
- Installation and set-up service adjustments.
- Batteries.
- Damage from misuse or neglect.
- Products which have been modified or incorporated into other products.
- Product purchased or serviced outside the USA.

### **How does state law relate to this warranty?**

- This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

### **What if you purchased your unit in Canada?**

- Refer to the Canadian Warranty.

---

For products purchased outside the United States and Canada, see dealer for warranty.

---

Thomson Consumer Electronics, Inc.

## **FCC REGISTRATION INFORMATION**

---

Your GE telephone equipment is registered with the Federal Communications Commission and is in compliance with parts 15 and 68, FCC Rules and Regulations.

### **1. Notification to the Local Telephone Company**

On the bottom of this equipment is a label indicating among other information, the FCC Registration number and Ringer Equivalence Number (REN) for the equipment. You must, upon request, provide this information to your telephone company.

The REN is useful to determine the number of devices you may connect to your telephone line and still have all these devices ring when your telephone number is called. In most (but not all) areas, the sum of the REN's of all devices connected to one line should not exceed 5. To be certain of the number of devices you may connect to your line as determined by the REN, you should contact your local telephone company.

**NOTES:** This equipment may not be used on coin service provided by the telephone company.

Party lines are subject to state tariffs, and therefore, you may not be able to use your own telephone equipment if you are on a party line. Check with your local telephone company.

Notice must be given to the telephone company upon permanent disconnection of your telephone from your line.

### **2. Rights of the Telephone Company.**

Should your equipment cause trouble on your line which may harm the telephone network, the telephone company shall, where practicable, notify you that temporary discontinuance of service may be required. Where prior notice is not practicable and the circumstances warrant such action, the telephone company may temporarily discontinue service immediately. In case of such temporary discontinuance, the telephone company must: (1) promptly notify you of such temporary discontinuance, (2) afford you the opportunity to correct the situation and (3) inform you of your right to bring a complaint to the Commission pursuant to procedures set forth in Subpart E of Part 68, FCC Rules and Regulations.

The telephone company may make changes in its communications facilities, equipment, operations or procedures where such action is required in the operation of its business and not inconsistent with FCC Rules and Regulations. If these changes are expected to affect the use or performance of your telephone equipment, the telephone company must give you adequate notice, in writing, to allow you to maintain uninterrupted service.

## **INTERFERENCE INFORMATION**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna (that is, the antenna for radio or television that is "receiving" the interference).
- Reorient or relocate and increase the separation between the telecommunications equipment and receiving antenna.
- Connect the telecommunications equipment into an outlet on a circuit different from that to which the receiving antenna is connected.
- Consult the dealer or an experienced radio/TV technician for help

If these measures do not eliminate the interference, please consult your dealer or an experienced radio/television technician for additional suggestions. Also, the Federal Communications Commission has prepared a helpful booklet, "How To Identify and Resolve Radio/TV Interference Problems". This booklet is available from the U.S. Government Printing Office, Washington, D.C. 20402. Please specify stock number 004-000-00345-4 when ordering copies.

## **HEARING AID COMPATIBILITY**

This telephone is judged to be hearing aid compatible per FCC standards.





---

*Model 2-9200*  
*349A1309-0001 (Rev.0)*  
*93-05*  
*Printed in USA*