


## 4. Camera Specifications


<b>Image Device</b>	1/4" Color Image Sensor
<b>Effective Pixels</b>	656H x 492V
<b>Scanning System</b>	2:1 Interlace NTSC: 525 Lines
<b>Resolution</b>	Horizontal 480 TV lines
<b>AES Shutter Speed</b>	1/60 ~ 1/50,000 sec.
<b>S/N Ratio</b>	More than 48dB (AGC off)
<b>Sync. System</b>	Internal
<b>Min. Illumination</b>	3 LUX @F1.2 (no LED) 0 LUX (with LED)
<b>IR Night Vision</b>	24 IR LED / 850nm / 50' (15m)
<b>Video Output</b>	1.0 Vp-p (75 ohms)
<b>White Balance</b>	AWB
<b>Termination</b>	6 Pin DIN
<b>Lens</b>	Fixed Lens (3.6mm)
<b>Viewing Angle</b>	H: 59°; V:44°; D: 73°
<b>FOV (Diagonal)</b>	70 Degrees
<b>Power Requirement</b>	DC 12V ± 10%
<b>Power Consumption</b>	With IR: Max 330mA W/o IR: Max 90mA
<b>Operating Temp</b>	14°F ~ 122°F (-10° ~ 50°C)
<b>Operating Humidity</b>	Within 90% RH
<b>Weight (With Stand)</b>	0.81lb / 0.36 kg

### Dimensions:

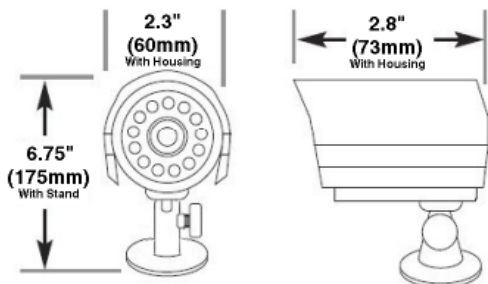

## It's all on the web

- Product Information
- User Manuals
- Quick Start Guides
- Specification Sheets
- Software Upgrades
- Firmware Upgrades

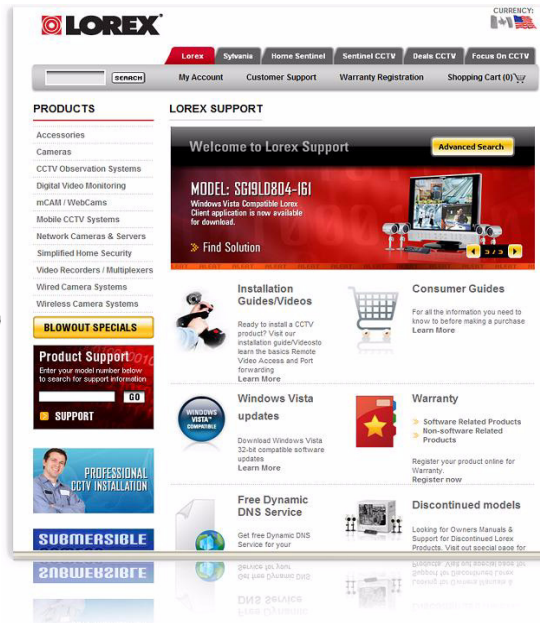

VISIT  
[www.lorexcctv.com](http://www.lorexcctv.com)

LOREX Technology Inc.  
Copyright © 2008 LOREX Technology Inc. As our products are subject to continuous improvement, LOREX and its subsidiaries reserve the right to modify product design, specifications and prices, without notice and without incurring any obligation. E&OE

HOME & BUSINESS SECURITY

**HIGH RESOLUTION  
WEATHERPROOF COLOR CAMERA  
WITH NIGHT VISION AND AUDIO**

**Model: SG7555RPK4**

Refer to the Product Package or online  
Spec Sheet for specific Packaging  
Configurations.



**Quick Set-up Guide**

English Revision 1.0



## 1. Package Contents



4 x Cameras



4x Camera Stands



4 x 100' (30m) DIN  
Extension Cables

### Features:

- High Resolution Image Sensor
- 24 High Intensity IR LEDs provides effective night vision range up to 50 ft. (15 m)\*\*
- Day / Night mode: Picture automatically switches to B&W delivering better clarity in low light conditions
- Built in microphone provides one-way audio from the camera to the system
- Weatherproof\*\*\* Cameras ideal for indoor and outdoor applications (IP66)
- 100 ft.(30m) extension cable included per camera
- Ceiling or Wall Mountable Camera with versatile stand provides flexible mounting options

**NOTE** - This Camera includes a Mechanical Auto IR Cut Filter. When the Camera changes between Day/Night lighting, an audible clicking noise may be heard from the camera. This clicking is normal, and indicates the Camera filter is working.

\*\* Night Vision Range up to 50ft. (15m) in ideal conditions. Objects at or beyond this range may be partially or completely obscured, depending on the camera application.


\*\*\* Not recommended for submersion in water.

## 2. Installing the Camera


**Note:** Test the cameras prior to selecting a permanent mounting location by temporarily connecting the Cameras and Cables to the System.

1. Mount the camera stand to the desired mounting surface. Attach the camera to the supplied stand.

**NOTE:** The camera can be mounted to either a wall or a ceiling.

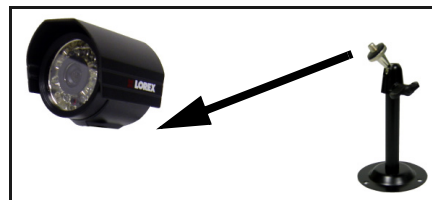

2. Aim the camera. Remove the protective film from the lens.



Lift the plastic tab on the lower edge of the camera to remove the protective film.

3. Connect the Extension cable to the camera. Connect the other end of the Extension Cable to the Observation System or DVR.



**Note:** Confirm that the arrows on the DIN Extension cable are aligned with the Camera Cable and System ports when connecting the cable. If the pins in the DIN Cable are bent, the Camera will NOT function




## 3. Camera Diagram



### 6-PIN DIN Connection:

Cameras with 6 Pin DIN connections draw power from the Observation System or DVR. Additional power adapters are not needed for these cameras.



6 PIN DIN

### System Connection Diagram:

