


Fluorescent or optional incandescent lamp AC-only and emergency exit models meet Chicago requirements. Rugged steel signs for wall, ceiling or end mount applications.


*Standard Exit*



NOTE: Add 1" (2.5cm) for canopy if ceiling or end mounted.



*Combination Model (DEH option)*

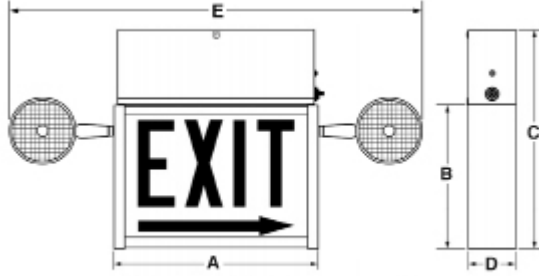

NOTE: Add 1" (2.5cm) for canopy if ceiling or end mounted.

A	B	C	D	E
12.75"	9.5"	14.5"	2.5"	26.25"
32.4cm	24.1cm	36.8cm	6.4cm	66.7cm

### How to Specify:

<div style="border: 1px solid black; padding: 5px; width: 40px; margin: 0 auto;">MJ5</div> <p><b>SERIES</b></p> <p>MJ5 = Chicago Exit</p>	<div style="border: 1px solid black; width: 40px; height: 40px; margin: 0 auto;"></div> <p><b>MODE OF OPERATION</b></p> <p>A = AC Only Exit E = Emergency Operation Exit</p>	<div style="border: 1px solid black; width: 40px; height: 40px; margin: 0 auto;"></div> <p><b># OF FACES</b></p> <p>1 = Single face 2 = Double face</p>	<div style="border: 1px solid black; padding: 5px; width: 40px; margin: 0 auto;">RW</div> <p><b>LETTER COLOR</b></p> <p>RW = Red on White</p>	<div style="border: 1px solid black; width: 40px; height: 40px; margin: 0 auto;"></div> <p><b>EXIT FACE DESIGNATOR</b></p> <table border="0" style="font-size: small;"> <tr> <td><i>Single Face Models</i></td> <td><i>Double Face Models</i></td> </tr> <tr> <td>3 = EXIT (No Arrow)</td> <td>18 = EXIT (No Arrow)</td> </tr> <tr> <td>6 = EXIT (Right Arrow)</td> <td>21 = EXIT (Right or</td> </tr> <tr> <td>9 = EXIT (Left Arrow)</td> <td>24 = EXIT (Double Arrow)</td> </tr> <tr> <td>12 = EXIT (Double Arrow)</td> <td>17 = STAIRS (No Arrow)</td> </tr> <tr> <td>2 = STAIRS (No Arrow)</td> <td>20 = STAIRS (Right or</td> </tr> <tr> <td>5 = STAIRS (Right Arrow)</td> <td>Left Arrow)</td> </tr> <tr> <td>8 = STAIRS (Left Arrow)</td> <td>23 = STAIRS (Double</td> </tr> <tr> <td>11 = STAIRS (Double Arrow)</td> <td>Arrow)</td> </tr> </table>	<i>Single Face Models</i>	<i>Double Face Models</i>	3 = EXIT (No Arrow)	18 = EXIT (No Arrow)	6 = EXIT (Right Arrow)	21 = EXIT (Right or	9 = EXIT (Left Arrow)	24 = EXIT (Double Arrow)	12 = EXIT (Double Arrow)	17 = STAIRS (No Arrow)	2 = STAIRS (No Arrow)	20 = STAIRS (Right or	5 = STAIRS (Right Arrow)	Left Arrow)	8 = STAIRS (Left Arrow)	23 = STAIRS (Double	11 = STAIRS (Double Arrow)	Arrow)
<i>Single Face Models</i>	<i>Double Face Models</i>																					
3 = EXIT (No Arrow)	18 = EXIT (No Arrow)																					
6 = EXIT (Right Arrow)	21 = EXIT (Right or																					
9 = EXIT (Left Arrow)	24 = EXIT (Double Arrow)																					
12 = EXIT (Double Arrow)	17 = STAIRS (No Arrow)																					
2 = STAIRS (No Arrow)	20 = STAIRS (Right or																					
5 = STAIRS (Right Arrow)	Left Arrow)																					
8 = STAIRS (Left Arrow)	23 = STAIRS (Double																					
11 = STAIRS (Double Arrow)	Arrow)																					

### Features

- 1. Illumination:** *AC Light Source:* Standard exit face illumination is provided by two 7 watt PL type fluorescent lamps. Letter brightness and illumination uniformity exceed UL requirements with both incandescent and fluorescent models. *Emergency Light Source:* Exit illumination in all models is provided by two 6 volt, 5.4 watt wedge base incandescent DC lamps. MJ5E-DEH combination models with side mounted lighting heads are provided with 6 volt, 12 watt halogen bi-pin lamps.
- 2. Housing:** MJ5 Series exits are constructed of heavy duty steel finished in white baked-on powder paint providing scratch and corrosion resistance. Exit face features 6" letters with 3/4" stroke on translucent glass panels and Full length directional arrows to meet City of Chicago visibility requirements. Mounting canopy is standard.
- 3. Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Fully automatic, temperature compensating, variable rate float charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
- 4. Battery:** Maintenance-free, sealed, lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 65°F (19°C) to 85°F (30°C).
- 5. Input Power Requirements:** AC Only: 19W; Emergency Operation: 29W
- 6. Warranty:** Unit: (excluding lamps) 3-years full coverage against defects in materials and workmanship from date of shipment. Battery: 3 years full warranty plus an additional 7 years of pro-rata coverage

### Code Compliance

All models are UL Listed and meet NFPA 101 Life Safety Code, NEC, OSHA and City of Chicago codes. Emergency models are UL924 Listed.

### Options

- DEH** = Combination Model w/ Side Mounted Par 36 12W Halogen Heads
- 277** = 277VAC, 60Hz. Input (AC models only)
- SW** = Special Wording (consult factory)
- SX** = Self-Diagnostic Circuit (emergency models only)
- IA** = Audible Intermittent Alarm (emergency models only)
- IV** = Visual Intermittent Alarm (emergency models only)
- FA** = Fire Alarm Panel Interface
- INC** = Two candelabra base 15T6 120 volt, 15 watt incandescent AC lamps.

### Accessories

- MJSKW** = 18" Stem Mounting Kit (white)
- MJSKB** = 18" Stem Mounting Kit (black)
- MJPG9** = Wire Guard - Wall Mount (AC and emergency models)
- MJPG10** = Wire Guard - Wall Mount (combination models)

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2008 Philips Group • A0508