

**HIFONICS®**  
**C A R A U D I O**  
**POWER FROM THE GODS**

**XXV**  
**OLYMPUS**  
**SUBWOOFERS**

**OLM1612 / OLM1615**  
**OLM2412 / OLM2415**

# H I F N I C S

## OLYMPUS SERIES CAR AUDIO SUBWOOFERS

**Congratulations on your purchase of the new Hifonics OLYMPUS Series High Power subwoofer system.**

**The OLYMPUS subwoofer series offer superior sonic accuracy, intense high power sound quality with exotic build materials and outstanding good looks.**

**These subwoofers are ideal for high power listening levels as well as high SPL competition.**

- **3" DVC 2-Ohm High-Temp Black Aluminum Former**
- **1" Tall Roll Polyester Foam Surround For Long Excursion**
- **Large Air Cooled 160 oz. Double Stack Magnet Assembly On The OLM1612 & OLM1615 And 180 oz. Double Stack Magnet Assembly On the OLM2412 & OLM2415**
- **Double Laminated Poly Cotton Spider w/ Woven Tinsel Leads**
- **FEA Structured Glass Impregnated Paper Cone**
- **Nickel Plated Push & Insert Speaker Terminals**
- **Full Press Pulp Paper Dust Cap w/ Silk Screen**
- **Heat Dispersing Ported Back Plate**
- **Ultra Ridged Aluminum Die Cast Basket w/ White Chrome Finish**
- **26mm Top Magnet Plate w/ White Chrome Finish On The OLM2412 & 2415 And 20mm On the OLM1612 & OLM1615**

**As with all high quality car audio products, we recommend professional installation by an authorised Hifonics dealer.**

**Your dealers knowledge and experience can ensure a problem free and cosmetically integrated installation.**

**If you choose to install the subwoofers yourself, please read the entire manual very carefully.**

# **SUBWOOFER INSTALLATION AND WIRING DIRECTIONS**

## **Enclosure Materials**

Typically, 5/8" or 3/4" MDF (Medium Density Fiber Board) is best for most applications. 3/4" MDF is recommended.

## **Enclosure Build Materials**

Connecting joints need to be glued and screwed to ensure no air escapes and joints do not separate under high pressure. Mitered and rabbit joints also help to ensure the enclosure joints are secure.

## **Bracing**

Internal bracing is also recommended to prevent flexing and to strengthen the enclosure.

**Note:** The volume taken up by the bracing should be added to the total enclosure interior volume.

There are two common bracing methods.

1. **Corner Bracing:** These help prevent the connection joints from separating under heavy vibration and air pressure.

Use 1' x 1" MDF at all interior joints

2. **Diagonal Bracing:** These internal braces connect the top side to the bottom side as well front side to back side. This prevents the wood from bowing or pushing outwards.

Use 1" x 2" with 1" surface contact that is glued and screwed.

## **Wiring**

Wiring Parallel, Series or Parallel/Series will affect the final impedance at the amp and great care must be taken to ensure the amp is not driven below its intended impedance capabilities.

## HIFONICS OLYMPUS SERIES SUBWOOFERS

Parameters	OLM1612	OLM1615	OLM2412	OLM2415	
Wiring	Parallel	Parallel	Parallel	Parallel	Coils
NomZ	1	1	1.5	1.5	Ohm
Sd	0.05	0.085	0.05	0.085	sqM
Revc	1	1	1.25	1.25	Ohm
BL	11	11	10	10	TxM
Vas	35	101	35	101	Liter
Cms	98.58	98.58	98.58	98.58	uM/N
Mms	204	270	222	285.5	Grams
Fs	35.5	30.85	34	30	Hz
Qms	3.8	3.8	3.8	3.8	
Qes	0.376	0.433	0.594	0.673	
Qts	0.342	0.388	0.513	0.572	
no	0.4	0.662	0.22	0.39	%
SPL@1W	88.18	90.36	85.64	88.07	dB
Xmax	20	20	25	25	mm
Rms	1600	1600	2400	2400	Watts
Maxx	3200	3200	4800	4800	Watts

\*\*NOT RECOMMENDED FOR CLOSED BOX DESIGNS (SEALED)\*\*

### Vented Box Designs

#### Standard Tight Bass

Box Volume	1.75 / 49.55	2.5 / 70.79	2 / 56.63	2.75 / 77.87	Cubic Feet / Liters
Fb	47	44	48	45	Hz
Port Size (Height)	10 / 254	13 / 330.2	12.5 / 317.5	15.5 / 393.7	Inches/ Millimeters
Port Size (Width)	2 / 50.8	2 / 50.8	2 / 50.8	2 / 50.8	Inches/ Millimeters
Port Length	15.2 / 386	16 / 406.4	16 / 406.4	16.8 / 426.72	Inches/ Millimeters
F3	40	40	38	38	Hz

#### Optimal Sound Quality-Flat Response

Box Volume	2.25 / 63.71	3 / 84.95	2.5 / 70.79	3.25 / 92.03	Cubic Feet / Liters
Fb	36	36	39	38	Hz
Port Size (Height)	10 / 254	13 / 330.2	12.5 / 317.5	15.5 / 393.7	Inches/ Millimeters
Port Size (Width)	2 / 50.8	2 / 50.8	2 / 50.8	2 / 50.8	Inches/ Millimeters
Port Length	21 / 533.4	20.7 / 525.78	20 / 508	20 / 508	Inches/ Millimeters
F3	32	35	32	34	Hz

#### SPL Very Boomie - Loud

Box Volume	2.5 / 70.79	3.25 / 92.03	2.75 / 77.87	3.5 / 99.11	Cubic Feet / Liters
Fb	50	49	50	50	Hz
Port Size (Height)	12.5 / 317.5	15.5 / 393.7	12.5 / 317.5	15.5 / 393.7	Inches/ Millimeters
Port Size (Width)	3 / 76.2	3 / 76.2	3.5 / 88.9	3.5 / 88.9	Inches/ Millimeters
Port Length	17.5 / 444.5	17.5 / 444.5	18.75 / 476.25	18 / 457.2	Inches/ Millimeters
F3	41	41	39	40	Hz

### FEATURES ARE SUBJECT TO CHANGE WITHOUT NOTICE

NOTE: All above box volumes are internal values and already include subwoofer and port displacement.


The F3 value represents the -3db cut off of the enclosure in Hz.

## Glossary of Terms


- Q The energy losses of relative damping (ratio of stored to dissipated energy or ratio of reactive to resistive energy).
- F<sub>s</sub> Free air resonance of driver in Hz.
- Q<sub>ms</sub> Mechanical Q.
- V<sub>as</sub> Volume of air equivalent to driver from the rest position.
- C<sub>ms</sub> Mechanical compliance of a loud speaker piston.
- M<sub>ms</sub> Moving mass of total loud speaker piston assembly.
- X<sub>max</sub> The maximum linear excursion of a loud speaker.
- S<sub>d</sub> Surface area of the cone.
- D<sub>ia</sub> The piston diameter of a loud speaker.
- Q<sub>es</sub> Electrical Q of a system.
- R<sub>e</sub> DC resistance.
- L<sub>e</sub> VC inductance.
- P<sub>e</sub> Maximum input power.
- Q<sub>ts</sub> Total Q of the system.
- Sens Sensitivity. An efficiency measurement in dB's.
- V<sub>c</sub> Volume of a closed or sealed enclosure
- V<sub>b</sub> Volume of a vented enclosure.
- F<sub>c</sub> The resonant frequency of a closed or sealed system
- F<sub>b</sub> The resonant frequency of a vented system
- F<sub>3</sub> The half-power (-3dB) frequency of a loud speaker enclosure
- Q<sub>tc</sub> The Q of a loud speaker at F<sub>c</sub> in a closed box, considering both it's electrical and mechanical resistance.
- Q<sub>L</sub> The Q of a vented box, resulting from all box losses.
- D<sub>V</sub> Diameter of vent.
- L<sub>V</sub> Length of vent.
- H Height.
- W Width.
- D Depth

**OLM1612 / OLM1615 / OLM2412 / OLM2415**  
**DVC 2-Ohms**


**PARALLEL**

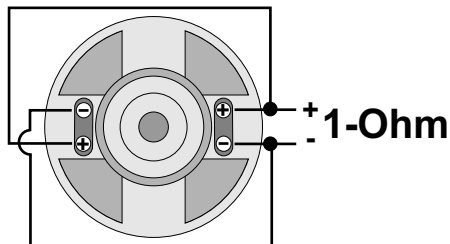


**SERIES**

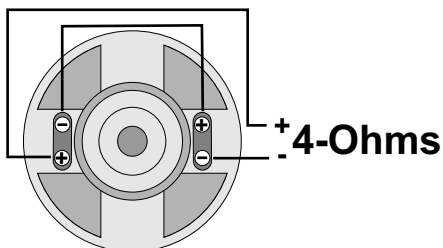


**PARALLEL COILS / PARALLEL SUBS**

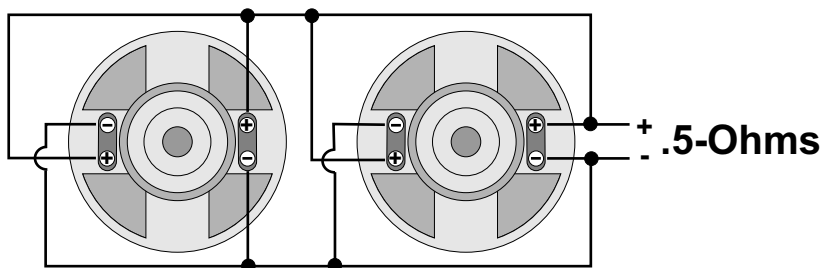

**SERIES COILS / PARALLEL SUBS**

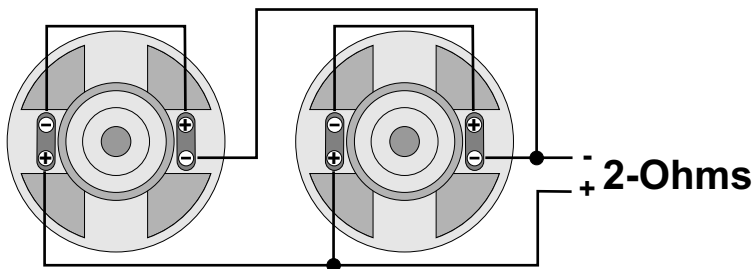

## Olympus Series Subwoofer Dimensions

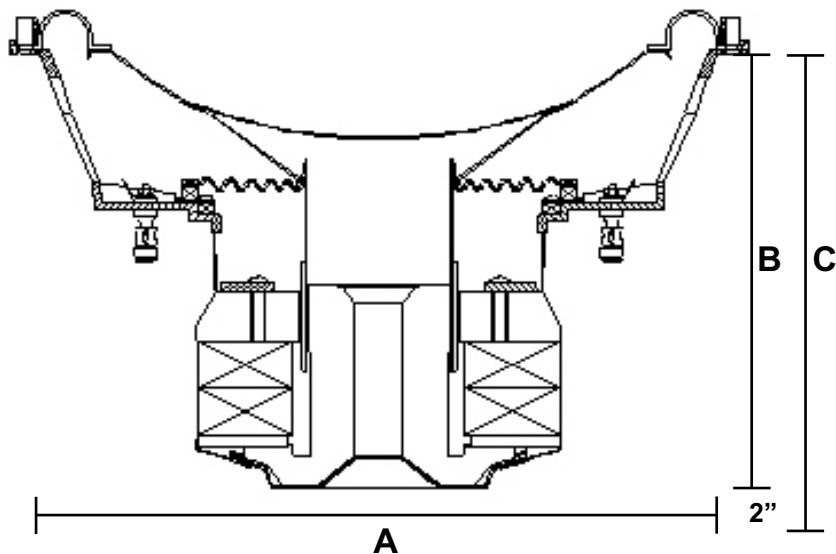

MODEL	A-Cut-Out	B-Mounting Depth	C-Clearance
OLM 1612	11.22"	7.13"	9.13"
OLM 1615	14"	8.38"	10.38"
OLM 2412	11.22"	7.76"	9.76"
OLM 2415	14"	9.01"	11.01"

**NOTE:** There must be atleast 2" of clearance from the back of the subwoofer to the encoussre.

## **Maxxsonics Limited Warranty**

**As the manufacturer of Maxxsonics, MB Quart, Autotek, Crunch and Hifonics car audio products, Maxxsonics USA Inc. Warrants to the original consumer purchaser the amplifier to be free from defects in material and workmanship for one (1) Year from date of purchase.**

**All other parts and accessories of the system are warranted to be free from defects in material and workmanship for one (1) year from date of purchase. Maxxsonics will repair or replace at it's option and free of charge during the warranty period, any system component that proves defective in materials and workmanship under normal installation, use and service provided that the product is returned to the authorized Maxxsonics dealer from where it was purchased. A photo copy of the original receipt must accompany the product being returned.**

**Valid purchase receipts will contain the name and address of the authorized reseller.**

**Any damage to the product as a result of misuse, abuse, accident, incorrect wiring, improper installation, alteration of date code or bar code labels, revolution, natural disaster, or any sneaky stuff because someone messed up, repair or alteration out side of our factory or authorized service centers and any thing else you have done that you should not have done is not covered.**

**This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. This warranty is not to be construed as an insurance policy.**

**Warranty on installation labor, removal, re-installation and freight charges are not the responsibility of Maxxsonics USA Inc.**

**Warranty products damaged as a result of insufficient or improper packing materials are not covered by this limited warranty and such damaged product will be returned "as is" at the expense of the owner.**



**MAXXSONICS™**

**Designed and Engineered in the USA**

**[www.maxxsonics.com](http://www.maxxsonics.com)**





**MAXXSONICS®**

**MBQUARTI®**

**autOTEK®**

**HIF◇NICS®**

**CRUNCH®**

**WWW.MAXXSONICS.COM**