



AC Adapter
AW-PS300


Operating Instructions



Panasonic®

Before attempting to connect or operate this product,
please read these instructions completely.

	CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN	
<p>CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.</p>		



SA 1965

The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



SA 1966

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING:
TO PREVENT FIRE OR ELECTRIC SHOCK HAZARD, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

For U.S.A.

Warning:
Do not install this product near any object that burns easily. In case of using a halogen lamp, installation of it near such an object could cause a fire due to the heat generated by the lamp.

For CANADA

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

The serial number of this product may be found on the bottom of the unit.
You should note the serial number of this unit in the space provided and retain this book as a permanent record of your purchase to aid identification in the event of theft.

Model No. _____

Serial No. _____

CONTENTS

FEATURES 1
PRECAUTIONS 2
MAJOR OPERATING CONTROLS AND THEIR FUNCTIONS 3
CONNECTION 6
SPECIFICATIONS 8
ACCESSORY 8

FEATURES

- This is the AC Adapter for the Pan/tilt Head AW-PH300.
- It has an AC outlet (500 W maximum) for halogen lamps that can be switched on and off from a Control Panel (AW-RP301, AW-RP305, AW-RP501, or AW-RP505).
- It also has an option switch (120V, 1A maximum) whose contact can be shorted or opened from a Control Panel (AW-RP301, AW-RP305, AW-RP501, or AW-RP505).
- The maximum allowable cable length between this adapter and pan/tilt head is 30 meters.

PRECAUTIONS

- **Handle the adaptor with care.**

Dropping the control panel or subjecting it to a strong shock can cause a failure or an accident.

- **Operating temperature range -10°C to $+45^{\circ}\text{C}$**

Avoid using it in a cold place below -10°C or a hot place above $+45^{\circ}\text{C}$ because low or high temperature will adversely affect the parts inside.

- **Switch power off before power cable connection or disconnection.**

Be sure to switch power off before connecting or disconnecting the power cable.

- **Avoid outdoor use.**

- **Install the control panel more than 1 meter away from the monitors.**

- **Care**


Pull out the power cable plug, and wipe the control panel clean with a dry cloth. If it is extremely dirty, dip a cloth into a diluted solution of kitchen detergent, squeeze it hard, and wipe the product surfaces carefully.

Note

- Do not use benzene, paint thinner, or other volatile liquids.
- When using a chemical duster, carefully read the caution notes on its use.

MAJOR OPERATING CONTROLS AND THEIR FUNCTIONS

■ FRONT PANEL

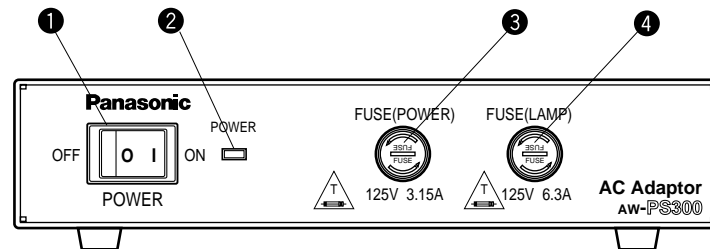

❶ Power Switch (POWER, ON/OFF)

Power is switched on to supply power to the pan/tilt head when this switch is pressed to the ON position (POWER Indicator lights), and is switched off when the switch is pressed to the OFF position.

❷ Power Indicator (POWER)

Lights red when POWER ON/OFF Switch ❶ is pressed to the ON position, and goes out when POWER ON/OFF Switch ❶ is pressed back to the OFF position.


❸ Fuse [FUSE (POWER)]

Power fuse. Use a 125V, 3.15A fuse to replace it.

❹ Lamp Fuse [FUSE (LAMP)]

Halogen lamp fuse. Use a 125V, 6.3A fuse to replace it.

■ FRONT PANEL

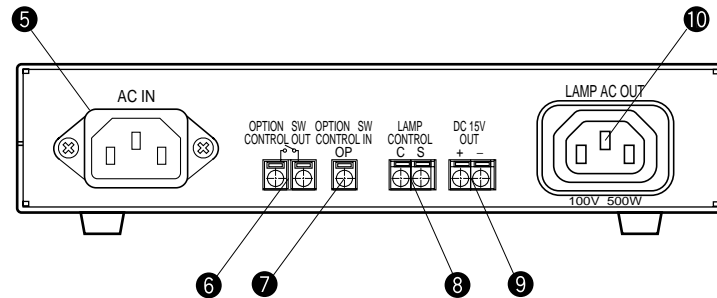

5 AC 120V Inlet [AC IN](AC 3P Inlet)

Connect the supplied AC cable.

6 Option Switch Terminal (OPTION SW CONTROL OUT) (2P Terminal Board)

A relay switch capable of controlling the contact to short or open from a Control Panel (AW-RP301, AW-RP305, AW-RP501, or AW-RP505). The terminal board has a maximum capacity of 120 V, 1 A (AC/DC), and is valid when it is connected to OPTION SW CONTROL IN Terminal **7** on the pan/tilt head.

7 Option Switch Control Input Terminal (OPTION SW CONTROL IN) (1P Terminal Board)

Connect it to OP Output Terminal on the pan/tilt head when controlling OPTION SW CONTROL OUT Terminal

6 to short or open, using a cable (to be locally purchased) with a nominal cross section of 0.3 mm² or more that meets the UL specifications. The maximum allowable cable length is 30 meters.

Applicable Wire

Solid wire: ϕ 1.02 (AWG 18)

Stranded wire: 0.75 mm²

Usable wire range

Solid wire: ϕ 0.64 to ϕ 1.02

(AWG 22 to 18)

Stranded wire: 0.3 mm² to 0.75 mm²

(AWG 22 to 20)

Strand diameter: ϕ 0.18 or more

Standard bare end length 10 mm

8 Lamp Control Input Terminals (LAMP CONTROL C/S) (2P Terminal Board)

Connect it to LAMP CONTROL C/S Terminals on the pan/tilt head when controlling the halogen lamp connected to LAMP AC OUT Connector 10 to switch it on and off, using a cable (to be locally purchased) with a nominal cross section of 0.3 mm² or more that meets the UL specifications. The maximum allowable cable length is 30 meters.

Applicable wire

Solid wire: $\varnothing 1.29$ (AWG 16)
Stranded wire: 1.25 mm² (AWG 16)

Usable wire range

Solid wire: $\varnothing 0.64$ to $\varnothing 1.29$
(AWG 22 to 16)
Stranded wire: 0.3 mm² to 1.25 mm²
(AWG 22 to 16)
Strand diameter $\varnothing 0.18$ or more

Standard bare end length 11 mm

9 DC 15V Output Terminal (DC 15V OUT +/-) (2P Terminal Board)

Connect it to (DC 15V IN +/- Terminals) on the pan/tilt head with a cable (to be locally purchased) with a nominal cross section of 1.25 mm² or more that meets the UL specifications. The maximum allowable cable length is 30 meters.

Applicable (usable) wire

Solid wire: $\varnothing 1.29$ (AWG 16)
Stranded wire: 1.25 mm² (AWG 16)
Strand diameter $\varnothing 0.18$ or more

Standard bare end length 11 mm

10 Lamp AC Output Connector [LAMP AC OUT] (AC 3P Outlet)

AC Output Connector for halogen lamps to be switched on and off from a Control Panel (AW-RP301, AW-RP305, AW-RP501, or AW-RP505). Locally purchase an AC plug conversion cable that matches the AC plug for the halogen lamp to be used. Connect a halogen lamp of 250 W to 500 W. If a halogen lamp of less than 250 W is connected, the LAMP Indicator on the control panel may flash to indicate a burnt bulb even though the lamp is normal.

CONNECTION

- Switch off all the devices before making any connection.
- Use the Pan/tilt Head AW-PH300.
- Connect the DC 15V OUT Terminals [+] and [-] on this adapter to the DC 15V IN Terminals [+] and [-] on the Pan/tilt Head (AW-PH300) respectively with cables (to be locally purchased) with a nominal cross section of 1.25 mm² or more that meets the UL specifications. The maximum allowable cable length between the adapter and pan/tilt head is 30 meters.

Applicable (usable) wire

Solid wire: ø1.29 (AWG 16)
Stranded wire: 1.25mm² (AWG 16)
 Strand diameter ø0.18 or more

Standard bare end length: 11 mm

- To switch on and off the halogen lamp from the control panel, connect the LAMP CONTROL Input Terminals [C] and [S] to the LAMP CONTROL Output Terminals [C] and [S] on the pan/tilt head respectively with cables (to be locally purchased) with a nominal cross section of 0.3 mm² or more that meets the UL specifications. The maximum allowable cable length is 30 meters. Locally purchase an AC plug conversion cable that matches the AC plug for the halogen lamp to be used, and connect a halogen lamp of 250 W to 500 W to the lamp AC outlet. If a halogen lamp of less than 250 W is connected, the LAMP Indicator on the control panel may flash to indicate a burnt bulb even though the lamp is normal.

Applicable wire

Solid wire: ø1.29 (AWG 16)
Stranded wire: 1.25 mm(AWG16)²

Usable wire range

Solid wire: ø0.64 to 1.29 (AWG 22 to 16)
Stranded wire: 0.3 mm² to 1.25 mm²
 (AWG 22 to 16)
 Strand diameter ø0.18 or more

Standard bare end length: 11 mm

- To control the option switch terminal to short or open from the control panel, connect the OPTION SW CONTROL IN Terminal [OP] on the adapter to the OP Output Terminal on the pan/tilt head with a cable (to be locally purchased) with a nominal cross section of 0.3 mm² or more that meets the UL specifications. The maximum capacity of the option switch terminal is 120V 1A (AC/DC).

Applicable wire

Solid wire: ø1.02 (AWG 18)
Stranded wire: 0.75 mm²


Usable wire range

Solid wire: ø0.64 to 1.02 (AWG 22 to 18)
Stranded wire: 0.3 mm² to 0.75 mm²
 (AWG 22 to 20)
 Strand diameter ø0.18 or more

Standard bare end length: 10 mm

- For details on the connection, refer to the Operating Instructions.

- For a detailed description of connecting the individual devices, refer to their Operating Instructions.
- Connect the supplied AC cable to the AC 120V inlet. Plug the AC cable to an AC outlet, and press the power switch on the adapter to the ON position.

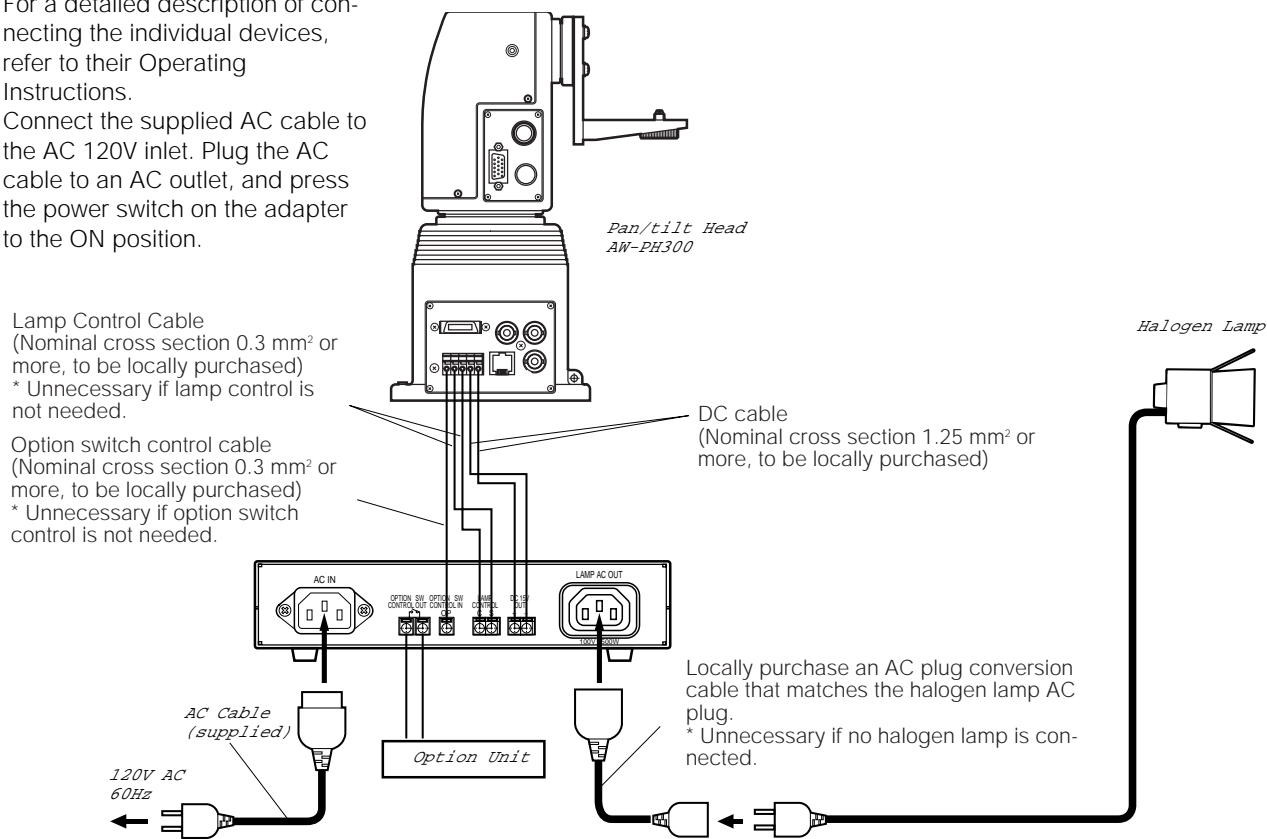

SPECIFICATIONS

Source Voltage:	120 V AC 60 Hz
Input Capacity:	552W
Power Output:	DC 15V OUT: DC15V 2.5A, with over-current protect circuit LAMP AC OUT: 120V AC, max. 500W, min. 250W
Pan/tilt head connecting cables:	5 cables (2 DC power cables, 2 lamp control cables, 1 option switch control cable) (in case of using the lamp control and option switch control functions)
Maximum cable length	30 m
Operating temperature:	-10°C to +45°C (14°F to 113°F)
Dimensions:	210(W) x 51(H) x 250(D) mm 8-1/4"(W) x 2"(H) x 9-7/8"(D)
Weight:	2.5 kg (5.5 lbs.)
Finish:	AV Ivory baking

Weight and dimensions indicated are approximate.
Specifications are subject to change without notice.

ACCESSORY

AC Cable1 pc.

Panasonic

Broadcast & Television Systems Company

Division of Matsushita Electric Corporation of America

Executive Office: One Panasonic Way 2E-6, Secaucus, NJ 07094

Regional Offices:

EASTERN ZONE: 43 Hartz Way, Secaucus, NJ 07094 (201) 348-7620

CENTRAL ZONE: 1707 North Randall Road, Elgin, IL 60123 (847) 468-5200

SOUTHERN ZONE:

Atlanta Region: 1225 Northbrook Parkway, Suite 1-160, Suwanee, GA 30174

Panazip 11 (770) 338-6841, fax (770) 338-6741

Law Enforcement Video Products: 1225 Northbrook Parkway, Suite 1-160, Suwanee, GA

30174, Panazip 11 (770) 338-6844, fax (770) 338-6721

WESTERN ZONE:

Los Angeles Region: 6550 Katella Ave. 17A-1, Cypress, CA 90630 (714) 373-7271

Government Marketing Department: 52 West Gude Drive, Rockville, MD 20850 (301) 738-3840

PANASONIC CANADA INC.

5770 Ambler Drive, Mississauga, Ontario, L4W 2T3 Canada (905) 624-5010

PANASONIC SALES COMPANY

DIVISION OF MATSUSHITA ELECTRIC OF PUERTO RICO, INC.

San Gabriel Industrial Park, 65th Infantry Ave. KM. 9.5 Carolina, Puerto Rico 00630 (809) 750-4300

N1197-0

7J1A110A

Printed in Japan