



500 Mbps Compact Powerline AV Adapter TPL-406E (V1.0R)

The 500 Mbps Compact Powerline AV Adapter, model TPL-406E, uses any electrical outlet to create a secure high speed network. Two adapters are needed to start a network. Connect one adapter to your router and plug another adapter into any outlet on your electrical system for instant high speed network access. The compact form factor saves space around crowded electrical outlets. This adapter automatically connects to other TRENDnet Powerline AV adapters with no installation required—TRENDnet recommends pressing the 'Sync' button to automatically change default encryption keys.

Use up to 8 adapters to network devices in different rooms without running new cabling. Power Save mode reduces power consumption by up to 80%. Quality of Service (QoS) technology prioritizes video, audio, and online gaming. LED displays convey device status for easy troubleshooting. Advanced 128-bit AES encryption secures your network. This adapter is ideal for use in buildings that interfere with wireless networking signals.

PRODUCT OVERVIEW

- 500 Mbps networking from an electrical outlet
- Two adapters are needed to start a network
- Compact form factor saves space
- Up to 80% power savings
- Use one unit to transmit, and up to 7 additional TPL-406Es to receive a network signal*
- Advanced AES data encryption



FEATURES

- Compliant with IEEE1901 and HomePlug AV standards
- High speed networking over an existing electrical system
- 1 x 10/100 Mbps Auto-MDIX Ethernet port
- Adapters automatically connect using an encrypted Powerline signal
- One-touch Sync button networks changes encryption keys
- Three LED indicators:
 - Power (on / off)
 - Powerline Connection: green (best), amber (better), red (good), off (no connection)
 - Ethernet Connection: solid (connection), blinking (transfer activity), off (no connection)
- Connect one 500 Mbps** Powerline AV Adapter to the Internet and then plug in up to 7* additional 500 Mbps** Powerline AV adapters for instant connectivity
- Share data intensive files, play games, download music and more at faster data transfer rates
- Advanced 128-bit AES encryption to ensure total network security
- Support for IPv6
- Supports up to 16** IGMP based IPTV streams
- Power Save mode reduces electrical consumption by up to 80%
- Neighbor network support for up to 4 overlapping networks
- Network signal transmits up to 300 meters (984ft.)
- Auto QoS support through traffic classification and multiple priority queuing
- Optional management utility compatible with Windows 7 (32/64-bit), Vista (32/64-bit), and XP (32/64-bit) operating systems
- 3-year limited warranty

* Maximum of 8 adapters (nodes) recommended for streaming video across your network.

** 500 Mbps is the maximum theoretical Powerline data rate. Actual throughput will vary depending on environment.

*** Networked Powerline devices need to be plugged into power outlets that are on the same electrical system.

**** GFCI outlets and AFCI circuit breakers may degrade Powerline network signals.



SPECIFICATIONS

HARDWARE


Standards	<ul style="list-style-type: none">• IEEE 1901, HomePlug® AV, IEEE 802.3, IEEE 802.3x, IEEE 802.3u
Interface	<ul style="list-style-type: none">• 1 x 10/100 Mbps Auto-MDIX RJ-45 port• Power prong<ul style="list-style-type: none">• A: North America Type B (NEMA 5-15)• EU: Euro Type C (CEE 7/16)• UK: United Kingdom Type G (BS 1363)
Frequency Band	<ul style="list-style-type: none">• 2 ~ 68 MHz
Modulation	<ul style="list-style-type: none">• OFDM Symbol Modulation on link synchronization• 1024/256/64/8 - QAM, QPSK, BPSK, ROBO Carrier
Protocol	<ul style="list-style-type: none">• TDMA, and CSMA/CA
Speed	<ul style="list-style-type: none">• Powerline: up to 500 Mbps**• Ethernet: up to 200 Mbps (Full Duplex mode)
Utility OS Compatibility	<ul style="list-style-type: none">• Windows 7 (32/64-bit), Vista (32/64-bit), XP(32/64-bit)
Nodes	<ul style="list-style-type: none">• Up to 8 (max)
Overlapping Powerline Networks	<ul style="list-style-type: none">• Up to 4 (per electrical system)
Coverage	<ul style="list-style-type: none">• Up to 300 m (984 ft.)
Security	<ul style="list-style-type: none">• 128-Bit AES (Advanced Encryption Standard)
LED	<ul style="list-style-type: none">• Power (PWR)• Powerline (PL) Connection<ul style="list-style-type: none">• Best (Green)• Better (Amber)• Good (Red)• No connection (Off)• Ethernet (ETH) Connection<ul style="list-style-type: none">• Solid• Blinking• Off
Buttons	<ul style="list-style-type: none">• Sync (3 sec.) / Reset (20 sec.)
Dimension (L x W x H)	<ul style="list-style-type: none">• A: 70 x 50 x 43 mm (2.76 x 1.97 x 1.69 in.)• EU: 70 x 50 x 63 mm (2.76 x 1.97 x 2.48 in.)• UK: 70 x 50 x 58 mm (2.76 x 1.97 x 2.28 in.)
Weight	<ul style="list-style-type: none">• A: 51 g (1.8 oz.)• EU: 56.7 g (2.0 oz.)• UK: 68 g (2.4 oz.)
Power Source	<ul style="list-style-type: none">• 100~240V AC, 50~60Hz
Consumption	<ul style="list-style-type: none">• Active mode: 2.2 Watts (max)• Standby mode: 0.5 Watts (max)
Temperature	<ul style="list-style-type: none">• Operating: 0° ~ 40°C (32° ~ 104°F)• Storage: -10° ~ 55°C (14° ~ 131°F)
Humidity	<ul style="list-style-type: none">• Max 95% (non-condensing)
Certifications	<ul style="list-style-type: none">• CE, FCC

500 Mbps Compact Powerline AV Adapter

TPL-406E (v1.0R)



NETWORKING SOLUTIONS

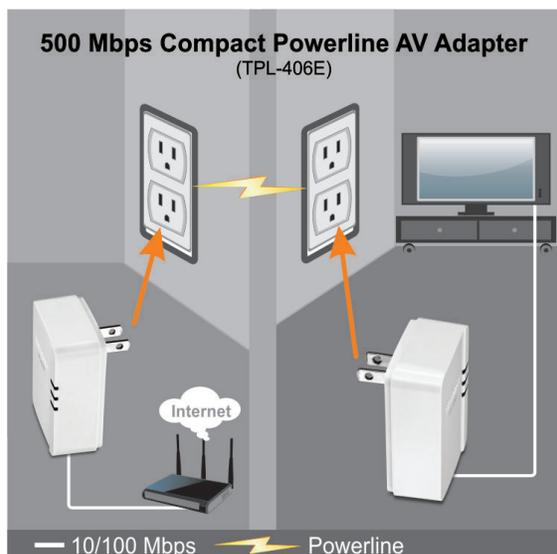

PACKAGE CONTENTS

TPL-406E

Quick Installation Guide

CD-ROM (Utility & User's Guide)

Network cable (1.5 m / 5 ft.)

RELATED PRODUCTS

TPL-401E2K	500 Mbps Powerline AV Adapter Kit
TPL-406E2K	500 Mbps Compact Powerline AV Adapter Kit
TPL-402E2K	500 Mbps Powerline AV Adapter Kit with Bonus Outlet

CONTACT INFORMATION

TRENDnet

Contact info China

Tel: 010-5128 6606

Fax: 010-8011 5555 ext 733906

Web: www.trendnet.com.cn

Email: lin@trendware.cc

-

