

Key Features

- ▶ Design goal: To bring the thrill of live performance and cinema sound to the small room and home environments by calling on JBL's professional engineering leadership.
- ▶ Pure titanium high frequency driver.
- ▶ Bi-radial constant directivity horn - 120°.
- ▶ Cast aluminum 5.25" woofer with Heat-Scape™ motor structure.
- ▶ Straight-Line Single Path™ (SSP) crossover Network.
- ▶ FreeFlow™ flared rear port.




Description

- ▶ 2-way 5.25" vertical loudspeaker.

Specifications

Frequency Response	80 Hz – 18 kHz (+/- 2dB)
Sensitivity	89 dB @ 2.83 Volts/1 Meter
Recommended Maximum Amplifier Power	150 Watts
Nominal Impedance	8 Ohms
High Frequency Transducer	1" Titanium Dome with Bi-Radial Horn
Crossover Frequency	1400 Hz
Low Frequency Transducer	5.25"
Weight	25 lbs / 11.4 kg
Dimensions (H x W x D)	20" x 6.81" x 11.13"
	508mm x 173mm x 283mm

Frequency Response

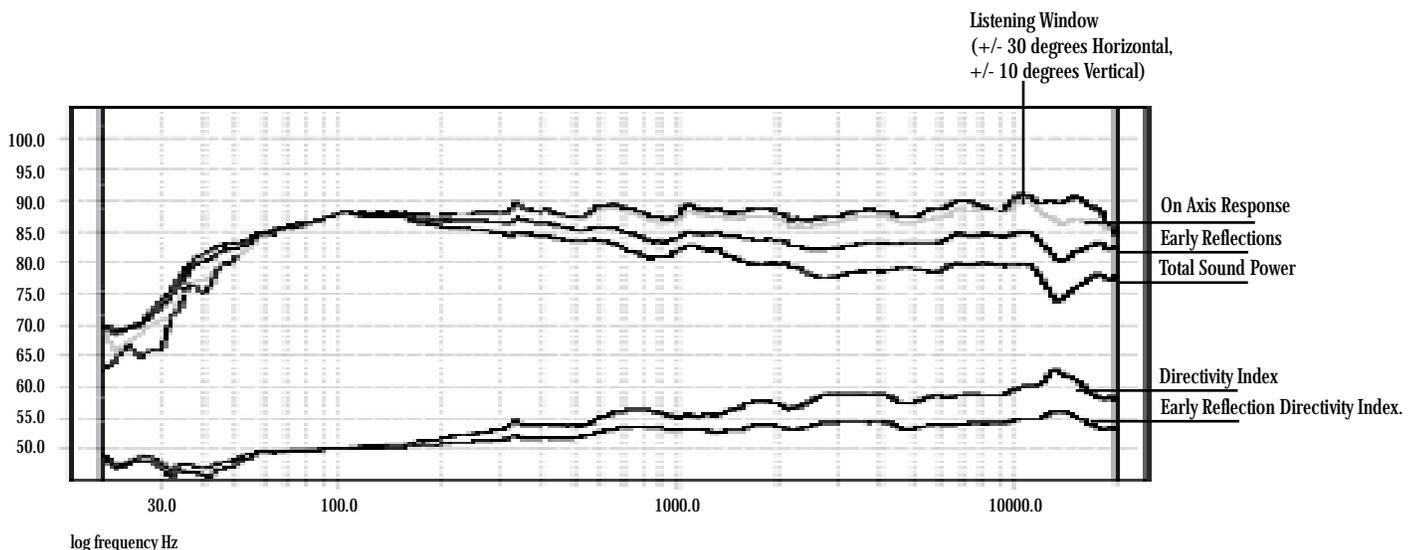

H A Harman International Company


JBL SIS Products Group: Tel 818-830-8757 Fax 818-891-6894
8500 Balboa Boulevard, Northridge, CA 91329
250 Crossways Park Drive, Woodbury, NY 11797




SYSTEMS INTEGRATION
SPECIALIST PRODUCTS

Quick Spec


HT5

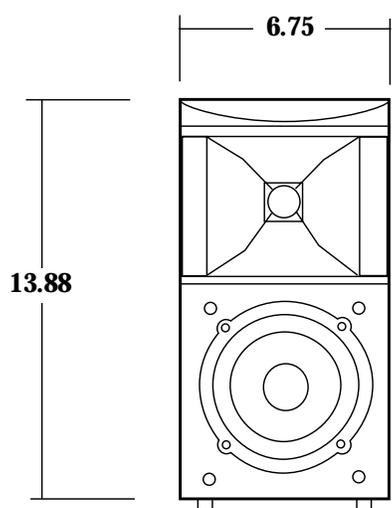


Front

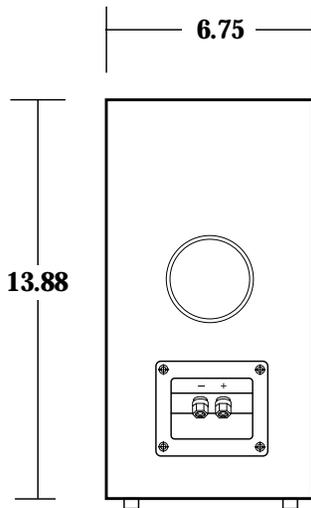


Back

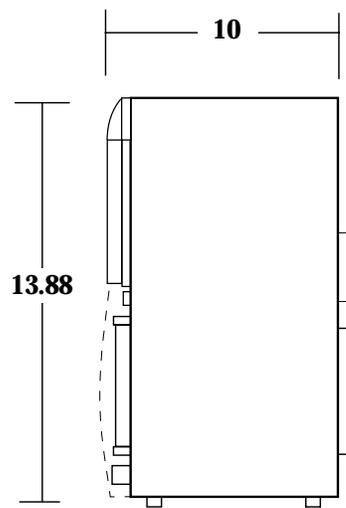

Side

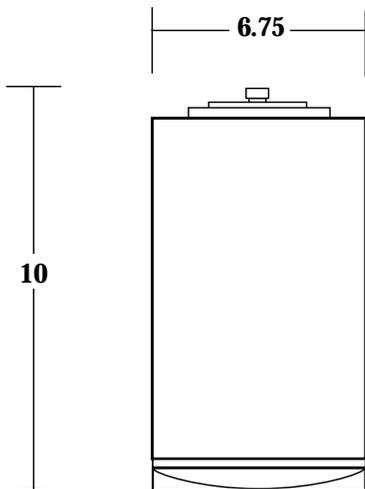

Top

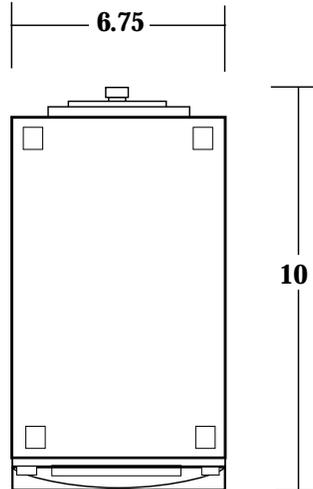

Footprint

All measurement in inches

H A Harman International Company

JBL SIS Products Group: Tel 818-830-8757 Fax 818-891-6894

8500 Balboa Boulevard, Northridge, CA 91329

250 Crossways Park Drive, Woodbury, NY 11797