

ProPatch® Miniature Series

Super High-Density Coax Patching System



The ProPatch® Miniature (PPM) Series is an all new Super High-Density Coax (SHDC) patching system designed for High Definition (HD), SDI, AES audio, 5.1 and 7.1 audio applications where coax medium is preferred but space is at a premium. The system is available in both 1 and 1.5 rack unit configurations. The 1 rack unit panel features a patent-pending pullout designation strip that dramatically increases space for text, and a high-density 2x48 circuit configuration of ports. The 1.5 rack unit panel features 4x48 ports.

The new SHDC jack features a unique patent-pending switchable termination system that allows the user to select terminating and non-terminating 75 Ω functions on each circuit pair. The normal-through system is also available in a straight-through configuration for tie-line panels and applications where normals are not required. The SHDC high-performance normalling and straight-through LCC jacks are rated to SMPTE 424M HD standard. The SHDC AES jacks are rated for AES digital audio and analog video transmission. Both versions feature modular screwless mounting, circuit identification icons on the rear of the jack, 10,000 insertion/withdrawal cycles and are fully qualified to MIL-STD 202 for the ultimate in durability.

The system features two options. ADC's patented push-pull LCC connector technology on the backplane, or standard 1.0/2.3 connectors and ADC's patented LCC and LCP connectors terminate like a BNC using standard tooling.

SPEC SHEET




www.adc.com • +1-952-938-8080 • 1-800-366-3891



ProPatch® Miniature Series

Super High-Density Coax Patching System


1 Rack Unit Super High-Density Coax Patch Panel

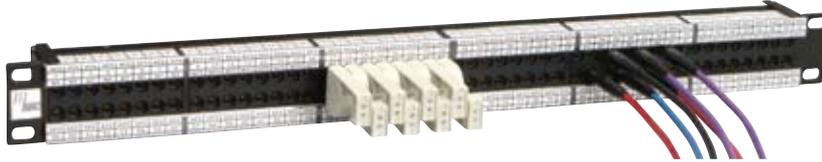

Features:

- High-density: 48 total jacks (2x48)
- Large designation strips: .440" wide designation on top and bottom; plus a 1" slide out designation
- Lightweight: Less than 1 Kg (2 lbs) total panel weight

1.5 Rack Unit Super High-Density Coax Patch Panel

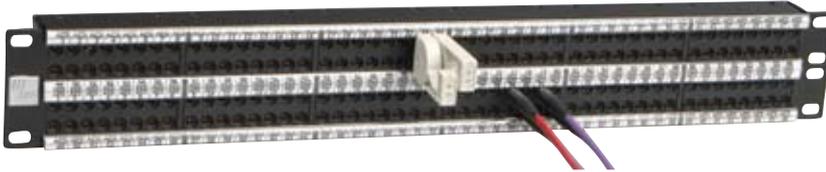

Features:

- High-density: 96 total jacks (4x48)
- Large designation strips: .440" wide middle designation, .289" on top and bottom
- Lightweight: Less than 1.8 Kg (3.8 lbs) total panel weight



ProPatch® Miniature Series

Super High-Density Coax Patching System

1.5 Rack Unit Super High-Density Coax Patch Panel



Features:

- High-density: 48 total jacks (2x48)
- Large designation strips: .680" designation on top and bottom
- Lightweight: Less than 1.4 Kg (3 lbs) total panel weight

SHDC Jack

Features:

- Switchable between terminating and non-terminating normalled-through
- Non-normalled jack offered in same jack housing, looping plug available for circuit patching

	Normalling AES	Straight-Through HD	Normalling HD
LCC	SHDC-LCC 	SHDC-LCC-NN 	SHDC-LCC-HP 
	SHDC-1023 	SHDC-1023-NN 	SHDC-1023-HP 
1.0/2.3			

5/08 • 105548AE ProPatch® Miniature Series (SHDC)



ProPatch® Miniature Series

Super High-Density Coax Patching System

Specifications

ELECTRICAL

Characteristic impedance:	75 Ω
Voltage rating:	600 Volts RMS
Bandwidth	
HD LCC:	Up to 3 GHz
HD 1.0/2.3:	Up to 1.0 GHz
Straight-through LCC:	Up to 3 GHz
Straight-through 1.0/2.3:	Up to 1.0 GHz
AES:	Up to 500 MHz
Contact resistance:	.030 Ω max change post environmental
Insulation resistance:	200 MΩ min change

MECHANICAL

Mechanical durability:	10,000 cycles min (Front port: LCP) 500 cycles min (Back port: LCC)
Center contact retention:	6 lbs min
SHDC jack panel retention:	20 lbs min
Patch cord cable bend and twist:	500 cycles min

ENVIRONMENTAL

Thermal shock:	-40°C to 65°C, operating; -55°C to 85°C, non-operating
Moisture resistance:	0% to 95%; MIL-STD-202 Method 106
Corrosion (salt spray):	MIL-STD-202 Method 101, test condition B
Flammability:	UL 94-VO rated (center conductor insulator)
Vibration:	MIL-STD-202 Method 201
Solvent resistance:	MIL-STD-202 Method 215


FINISH

Sheet metal panel:	.060 CRS with protective black finish
Jack plastic housing:	30% Glass Filled Valox
Nickel coax housings:	Tarnish-resistant electroless nickel plating
Springs:	Beryllium copper with 50 millionths inch gold plating
Center conductors:	50 millionths inch gold plating

ProPatch® Miniature Series (SHDC)

5/08 • 105548AE

**Gated Return Loss
High-Performance SHDC LCC Jack**

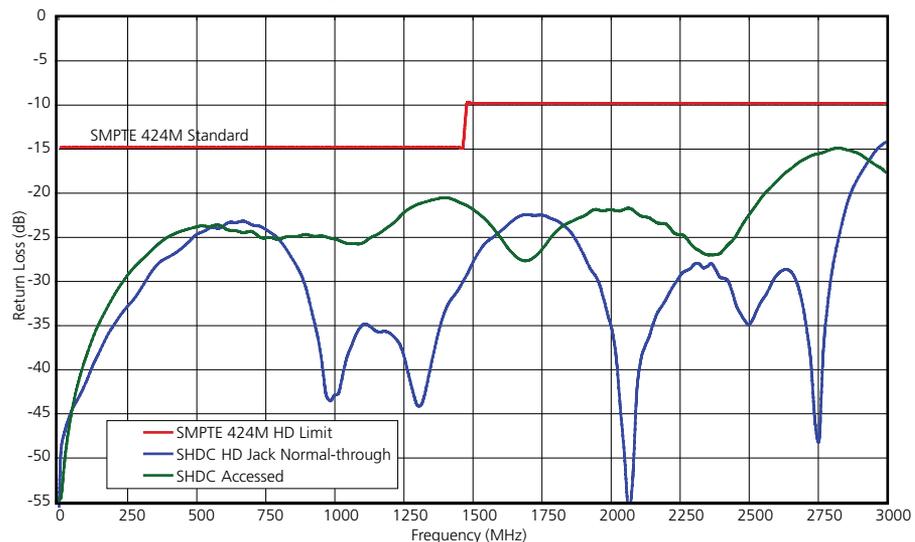



ProPatch® Miniature Series

Super High-Density Coax Patching System

5/08 • 105548AE ProPatch® Miniature Series (SHDC)

Ordering Information

Description					Catalog Number
ProPatch® Miniature Panels					
2x48	1 RU	LCC	Normalling	AES and Analog Video	PPM1248-LCC-BK
				High-Performance, HD	PPM1248-LCCHP-BK
			Non-Normalling	High-Performance	PPM1248-LCCNN-BK
		1.0/2.3 jack	Normalling	AES and Analog Video	PPM1248-1023-BK
				High-Performance, HD	PPM1248-1023HP-BK
			Non-Normalling	High-Performance	PPM1248-1023NN-BK
	1.5 RU	LCC	Normalling	AES and Analog Video	PPM15248-LCC-BK
				High-Performance	PPM15248-LCCHP-BK
			Non-Normalling	High-Performance	PPM15248-LCCNN-BK
		1.0/2.3 jack	Normalling	AES and Analog Video	PPM15248-1023-BK
				High-Performance	PPM15248-1023HP-BK
			Non-Normalling	High-Performance	PPM15248-1023NN-BK
4x48	1.5 RU	LCC	Normalling	AES and Analog Video	PPM15448-LCC-BK
				High-Performance	PPM15448-LCCHP-BK
		Non-Normalling	High-Performance		PPM15448-LCCNN-BK
			1.0/2.3 jack	Normalling	AES and Analog Video
	High-Performance	PPM15448-1023HP-BK			
	Non-Normalling		High-Performance		PPM15448-1023NN-BK



1 RU 2x48 PPM Panel



1.5 RU 2x48 PPM Panel



1.5 RU 4x48 PPM Panel



ProPatch® Miniature Series

Super High-Density Coax Patching System


5/08 • 105548AE ProPatch® Miniature Series (SHDC)



LCC Jack

Ordering Information

Description			Catalog Number
Super High-Density Coax Jacks			
LCC	Normalling	AES and Analog Video	SHDC-LCC
		High-Performance, HD	SHDC-LCC-HP
	Straight-Through	High-Performance, HD	SHDC-LCC-NN
1.0/2.3 connectors	Normalling	AES and Analog Video	SHDC-1023
		High-Performance	SHDC-1023-HP
	Straight-Through	High-Performance	SHDC-1023-NN

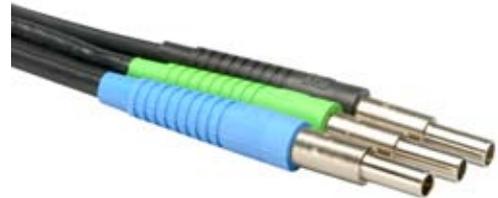

LCP Patch Cords

Ordering Information

Description	Catalog Number
LCP High-Performance Patch Cords	
2 feet	BK2VXM-LCP-LCP
3 feet	BK3VXM-LCP-LCP
4 feet	BK4VXM-LCP-LCP
6 feet	BK6VXM-LCP-LCP



LCP Looping Plug

Ordering Information

Description	Catalog Number
Looping plug; LCP .48" Centers	LP-SHDC-480



ProPatch® Miniature Series

Super High-Density Coax Patching System

5/08 • 105548AE ProPatch® Miniature Series (SHDC)



LCC Connector



LCC Connectors Bulk Pack

Ordering Information

Description	Catalog Number			
	Cable Type (or equivalent to)			
	1505, 9259 9100, VPM2000	1855 VDM230 VDM250	0.6/2.8 Image360 SDV-25	179DT
LCC Connectors				
1 each	LCC-1-BE	LCC-13-BE	LCC-26-BE	LCC-31-BE
bulk (100 pack)	LCC-1B-BE	LCC-13B-BE	LCC-26B-BE	LCC-31B-BE
Crimp Tools				
Features ergonomic handle for ADC die sets	WT-2			
Features long ergonomic handle for ADC die sets	WT-3			
Crimp Die Sets	WD-1	WD-2	WD-3	WD-2
	WD-2		WD-4	
	WD-3			
	WD-5			
Manual Stripper Tool Includes One Stripper Replacement Cassette	STC-12B	STC-13B	STC-13B	STC-13B
Manual Stripper Replacement Cassette	CCS-BLK			
Automatic Cable Stripper Tool	BNC-S1			
Cutter Head For Automatic Cable Stripper Tool	BNC-H2	BNC-H5	BNC-H5	BNC-H5
Insertion/Withdrawl Tool	LCA-400004			
Replacement Tips For Insertion/Withdrawal Tool (12-Pack)	LCA-400005-12			
LCC Tester	LCA-414001			



Insertion/Withdrawal Tool

SPEC SHEET



Website: www.adc.com

From North America, Call Toll Free: 1-800-366-3891 • Outside of North America: +1-952-938-8080

Fax: +1-952-917-3237 • For a listing of ADC's global sales office locations, please refer to our website.

ADC Telecommunications, Inc., P.O. Box 1101, Minneapolis, Minnesota USA 55440-1101

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting our headquarters office in Minneapolis. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents. Products or features contained herein may be covered by one or more U.S. or foreign patents. An Equal Opportunity Employer

105548AE 5/08 Revision © 2008, 2007 ADC Telecommunications, Inc. All Rights Reserved