

## Kit Includes:



## Installation:



1. Remove the original bulb connector from the back side of the housing.
2. Remove the light bulb.
3. Remove the tail light lens.
  - On the 60-65 Impala, the screws are directly in the lens.
  - On the 67 Impala, the nuts securing the tail light assembly must be removed first from inside the trunk. Once the assembly is removed, the screws on the back of the housing can be taken out.
  - On the 75-76 Caprice, the nuts securing the tail light assembly must be removed first from inside the trunk. Once the assembly is removed, the screws on the top and bottom sides of the housing are removed and the metal trim taken off. Last the screws holding the lens are removed so the lens can come off.
  - On the 71-73 Mustang, the lens is snapped into place with tabs around the outside edge. Carefully pry the lens off using a flat blade screwdriver.



4. Now is a good time to clean the lens and housing. If lenses are in bad shape a new set is recommended.
5. Remove the screw and aluminum back plate from the new LED assembly.





LED assembly

Back plate removed  
(attached to the assembly)

Back plate for '75-'76 Caprice  
(packaged separately)

6. Insert the new LED assembly into the hole where the original bulb and connector were located. Use caution when feeding the wires through to avoid damaging the wire insulation.

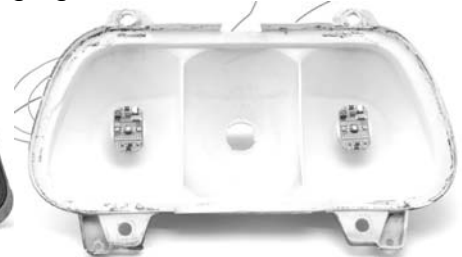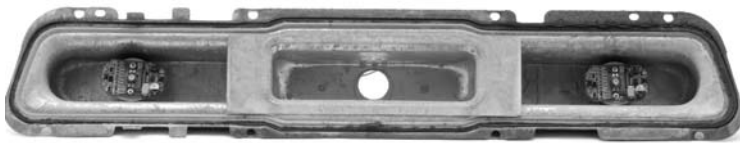

7. Feed the wires through the large hole on the back plate before attaching it to the back side of the tail light housing. On the plastic '75-'76 Caprice housing make sure to use the back plate with the three alignment tabs.



8. Secure the back plate with the supplied #6 screw and lock washer.



9. Place the original lens gasket into place and replace the tail light lens. Tighten the screws down carefully.




Cut off the existing light socket as it will not be used. Do not strip the wires. Trim the wires from LED assembly to appropriate length once mounted, making sure wires are routed cleanly and securely.

10. Use the supplied moisture resistant pigtail connectors\* to attach the wires from the new LED assembly to the existing vehicle harness. Insert appropriate wire from vehicle harness and mating LED assembly wire into a connector and crimp following instructions below.

\*For the best connection, soldering is recommended. But to simplify installation, the supplied connectors will provide a fast weather resistant connection.

**The correct crimp method for the supplied connectors is:**

- 1.) Insert **UNSTRIPPED** wires into the connector and ensure they are all they way in by observing the clear bottom of the connector to see the wires are touching the end.
- 2.) Use pliers to push the blue cap down flush with the edge of the clear body, completing the connection. The connection will only be correct if pressed firmly down with pliers.

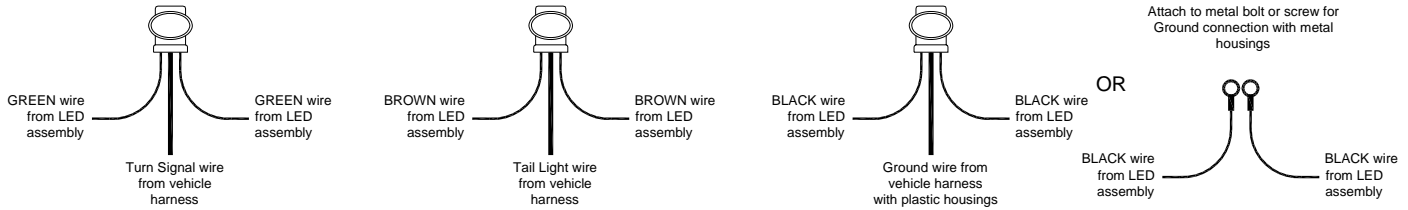

	LED wires	Vehicle harness
Taillight	Brown	Brown or Black
Driver's Turn	Green	Green or Pink
Passenger's Turn	Green	Yellow, Purple, or Orange
Ground	Black	Black, chassis, or body

11. Repeat for the other side.

12. Test the tail lights, brake lights, and turn signals. If the turn signals do not flash you will need to upgrade your flasher. If you are replacing only the rear turn signals you should be able to use a heavy duty electronic flasher from your local parts store. If you are replacing both front and rear or do not have front bulbs you will need a no-load flasher, Dakota Digital part number LAT-NLF.

**SERVICE AND REPAIR**

DAKOTA DIGITAL offers complete service and repair of its product line. In addition, technical consultation is available to help you work through any questions or problems you may be having installing one of our units.

Should you ever need to send the unit back for repairs, please package the product in a good quality box along with plenty of packing material. Ship the product by UPS or insured Parcel Post. Be sure to include a complete description of the problem, your full name and address (street address preferred), and a telephone number where you can be reached during the day. An authorization number for products being returned for repair is needed. We will contact you if any repair charges exist. Any returns for warranty work must include a copy of the dated invoice or bill of sale.

**LED LIGHTING LIMITED LIFETIME WARRANTY**

DAKOTA DIGITAL (the Company) warrants to the ORIGINAL PURCHASER of this LED Lighting product under normal use and condition, be proven defective in material or workmanship DURING THE LIFETIME OF THE CAR IN WHICH IT WAS ORIGINALLY INSTALLED, such defect(s) will be repaired or replaced (at the Company's option) without charge for parts or labor directly related to repairs of the defect(s).

To obtain repair or replacement within the terms of this Warranty, the product is to be delivered with proof of warranty coverage (e.g. dated bill of sale), specification of defects, transportation prepaid, to the factory. This Warranty is valid for the original purchaser only and may not be transferred.

This warranty does not cover damage to vehicle electrical system. This Warranty does not apply to any product or part thereof which in the opinion of the Company has been damaged through alteration, improper installation, mishandling, misuse, neglect, or accident.

This Warranty is in lieu of all other express warranties or liabilities. ANY IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, SHALL BE LIMITED TO THE DURATION OF THIS WRITTEN WARRANTY. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY MUST BE BROUGHT WITHIN A PERIOD OF 30 MONTHS FROM DATE OF ORIGINAL PURCHASE. IN NO CASE SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, WHATSOEVER. No person or representative is authorized to assume for the Company any liability other than expressed herein in connection with the sale of this product.

FOR SERVICE SEND TO: **DAKOTA DIGITAL**, 4510 W. 61<sup>st</sup> ST N., SIOUX FALLS, SD 57107 USA (800) 852-3228  
 Email us at [techsupport@dakotadigital.com](mailto:techsupport@dakotadigital.com)