



# KD 200-60 P Series

KD240GX-LPB KD245GX-LPB

## CUTTING EDGE TECHNOLOGY


As a pioneer with over 35 years in the solar energy industry, Kyocera demonstrates leadership in the development of solar energy products. Kyocera's *Kaizen* Philosophy, commitment to continuous improvement, is shown by repeatedly achieving world record cell efficiencies.

## QUALITY BUILT IN

- UV stabilized, aesthetically pleasing black anodized frame
- Supported by major mounting structure manufacturers
- Easily accessible grounding points on all four corners for fast installation
- Proven junction box technology with 12 AWG PV wire to work with transformerless inverters
- Quality locking MC4 plug-in connectors to provide safe and quick connections

## RELIABLE

- Proven superior field performance
- Tight power tolerance
- Only module manufacturer to pass rigorous long-term testing performed by TÜV Rheinland

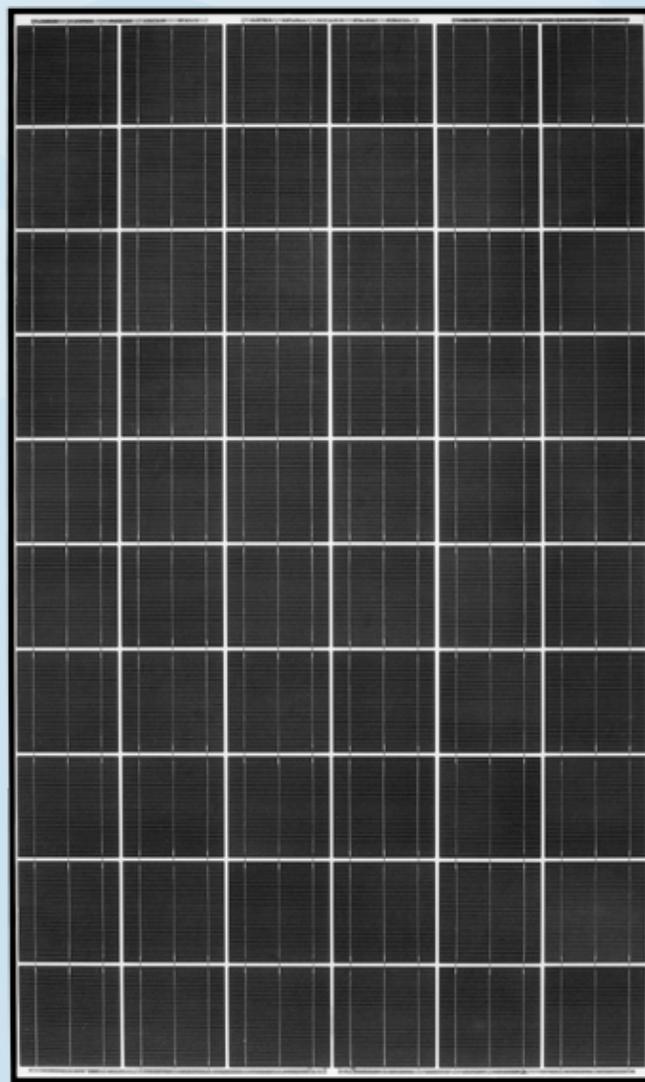

## QUALIFICATIONS AND CERTIFICATIONS

UL Listing  
QIGU.E173074



NEC 2008 Compliant, UL 1703, ISO 9001, and ISO 14001  
UL1703 Certified and Registered, UL Fire Safety Class C, CEC, FSEC  
Certified IEC61215 Ed 2 IEC61730 by JET

## ELECTRICAL SPECIFICATIONS

### Standard Test Conditions (STC)

STC = 1000 W/M<sup>2</sup> irradiance, 25°C module temperature, AM 1.5 spectrum\*

	KD240GX-LPB	KD245GX-LPB	
P <sub>mp</sub>	240	245	W
V <sub>mp</sub>	29.8	29.8	V
I <sub>mp</sub>	8.06	8.23	A
V <sub>oc</sub>	36.9	36.9	V
I <sub>sc</sub>	8.59	8.91	A
P <sub>tolerance</sub>	+5/-3	+5/-3	%

### Nominal Operating Cell Temperature Conditions (NOCT)

NOCT = 800 W/M<sup>2</sup> irradiance, 20°C ambient temperature, AM 1.5 spectrum\*

T <sub>NOCT</sub>	45	45	°C
P <sub>max</sub>	172	176	W
V <sub>mp</sub>	26.7	26.8	V
I <sub>mp</sub>	6.45	6.58	A
V <sub>oc</sub>	33.7	33.7	V
I <sub>sc</sub>	6.95	7.21	A
PTC	217.3	219.1	W

### Temperature Coefficients

P <sub>max</sub>	-0.46	-0.46	%/°C
V <sub>mp</sub>	-0.52	-0.52	%/°C
I <sub>mp</sub>	0.0064	0.0065	%/°C
V <sub>oc</sub>	-0.36	-0.36	%/°C
I <sub>sc</sub>	0.060	0.060	%/°C
Operating Temp	-40 to +90	-40 to +90	°C

### System Design

Series Fuse Rating	15 A
Maximum DC System Voltage (UL)	600 V
Hailstone Impact	1in (25mm) @ 51mph (23m/s)

\* Subject to simulator measurement uncertainty of +/- 3%. KYOCERA reserves the right to modify these specifications without notice.

NEC 2008 COMPLIANT  
UL 1703 LISTED  
CERTIFIED IEC61215 ED2 IEC61730 BY JET



WARNING: Read the instruction manual in its entirety prior to handling, installing & operating Kyocera Solar modules.

## MODULE CHARACTERISTICS

Dimensions: 65.43in/38.98in/1.8in  
length/width/height

Weight: 46.3lbs (21.0kg)


## PACKAGING SPECIFICATIONS

Modules per pallet: 20

Pallets per 53' container: 36

Pallet box dimensions: 66.54in/39.76in/47.24in  
length/width/height

Pallet box weight: 1050 lbs (480kg)

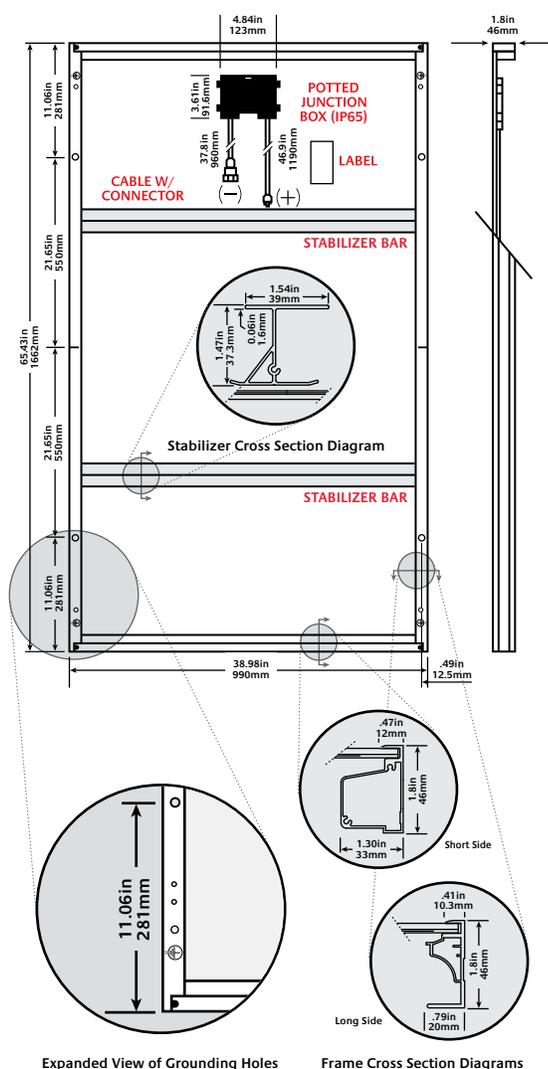

Expanded View of Grounding Holes

Frame Cross Section Diagrams

### Legend

○ MOUNTING HOLES .35in (9mm) ■ DRAINAGE HOLES ⊕ GROUND SYMBOL .35in (9mm)