



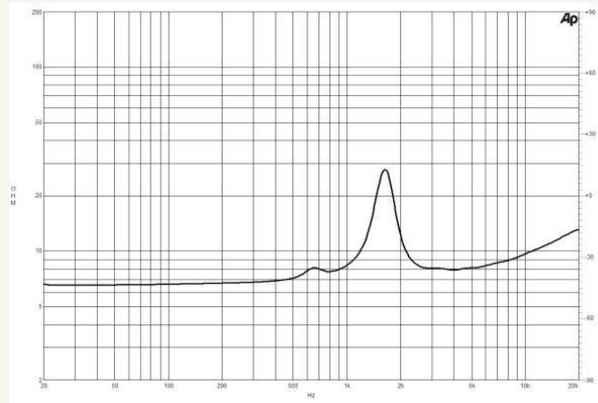

DE12TC | HF Drivers

60 W continuous program power capacity
 1" horn throat diameter
 36 mm (1.4 in) aluminium voice coil
 Titanium diaphragm
 1500 – 18000 Hz response
 105 dB sensitivity

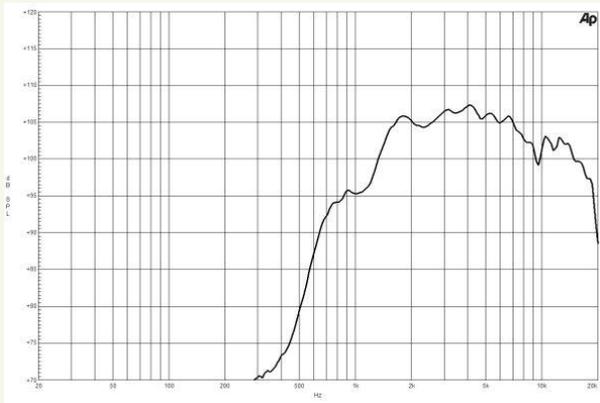

Specifications

Throat Diameter (1)	25 mm (1 in)
Nominal Impedance (2)	8 ohm
Minimum Impedance	8.1 ohm
Nominal Power Handling (3)	30 W
Continuous Power Handling (4)	60 W
Sensitivity (1W/1m) (5)	105 dB
Frequency Range	1.5 -18 kHz
Recommended Crossover (6)	2.2 kHz
Voice Coil Diameter	36 mm (1.4 in)
Winding Material	Aluminium
Inductance	0.14 mH
Diaphragm Material	Titanium
Flux Density	1.45 T

Mounting and Shipping Info

Two M5 holes 180° on 76 mm (3 in) diameter	
Overall Diameter	90 mm (3.5 in)
Depth	49 mm (2 in)
Net Weight (1 unit)	1 kg (2.2 lb)
Shipping Weight (8 units)	8.9 kg (20 lb)
Shipping Box (8 units)	220x220x150 mm (8.7x8.7x5.9 in)

- ¹Driver mounted on B&C ME45 horn
- ²Also available in 16 ohms, data upon request
- ³2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum impedance.
- ⁴Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- ⁵Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.
- ⁶12 dB/oct. or higher slope high-pass filter.

Horns
 HF Drivers
 Coaxials
 LF Nd Drivers
 LF Drivers

