

Warranty Registration:
register online today for
a chance to win a FREE Tripp Lite
product—www.tripplite.com/warranty



Quick Start Guide

Serial Adapter Cable

Model: B055-001-SER




The B055-001-SER Adapter Cable connects a serial device to the KVM switch.

Configuration

To configure the B055-001-SER to interact with the connected device, you need to set its serial parameters to match the parameters of the device:

1. In the Port Access page sidebar, select the port that the B055-001-SER is connected to.
2. Select the Access tab on the menu bar.

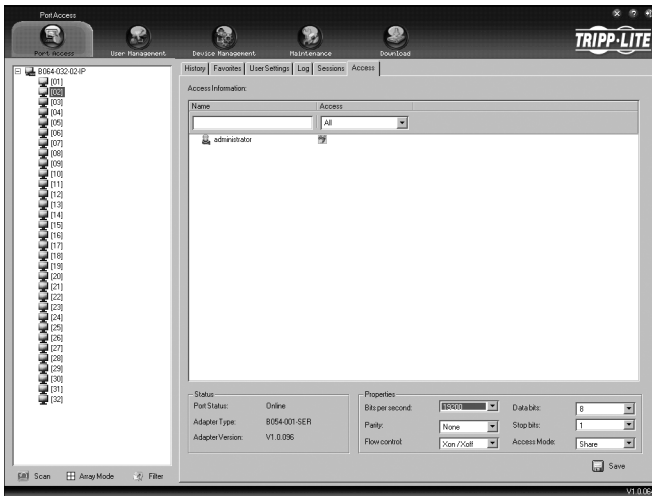

1111 W. 35th Street, Chicago, IL 60609 USA
www.tripplite.com/support

Configuration

3. In the *Properties* section, drop down each of the lists to select the port property values that match the ones used by the connected serial console device. The port property settings that the B055-001-SER support are listed in the following table:

Setting	Meaning
Bits per second (Baud Rate)	This sets the port's data transfer speed. Choices range from 300 to 38400 (drop down list shows them all). Set the rate to match the Baud Rate setting of the serial console device. The default is 9600. If the Baud Rate is set to 9600, FLOW CONTROL must be used. <i>Note: FLOW CONTROL is not supported by all devices. For these devices, 9600 is the max supported Baud Rate.</i>
Data Bits	This sets the number of bits used to transmit one character of data. Choices are 7 or 8. Set this to match the data bit setting of the serial console device. The default is 8 (this is the default for the majority of serial console devices).
Parity	This bit checks the integrity of the transmitted data. Choices are: None, Odd or Even. Set this to match the parity setting of the serial console device. The default is Odd.
Stop Bits	This indicates that a character has been transmitted. Set this to match the stop bit setting of the serial console device. Choices are 1 or 2. The default is 1 (this is the default for the majority of serial console devices).
Flow Control	This allows you to choose how the data flow will be controlled. Choices are None, Hardware and XON/XOFF. Set this to match the flow control setting of the serial console device. The default is None.
Access Mode	This allows you to set the serial console device's access mode. Choices are Share, Occupy and Exclusive. The default is Share. (See the B064-Series manual for details on access modes.)

4. When you have finished making all of your selections, click Save.

Operation

To operate the device connected to the port, simply double click the port in the Port Access page. After you switch to the port, issue the command that calls up the device.

Warranty

WARRANTY REGISTRATION

Visit www.tripplite.com/warranty today to register the warranty for your new Tripp Lite product. You'll be automatically entered into a drawing for a chance to win a FREE Tripp Lite product!*

* No purchase necessary. Void where prohibited. Some restrictions apply. See website for details.

Warning!

Use of this equipment in life support applications where failure of this equipment can reasonably be expected to cause the failure of the life support equipment or to significantly affect its safety or effectiveness is not recommended. Do not use this equipment in the presence of a flammable anesthetic mixture with air, oxygen or nitrous oxide.

WEEE Compliance Information for Tripp Lite Customers and Recyclers (European Union)

Under the Waste Electrical and Electronic Equipment (WEEE) Directive and implementing regulations, when customers buy new electrical and electronic equipment from Tripp Lite they are entitled to:

- Send old equipment for recycling on a one-for-one, like-for-like basis (this varies depending on the country)
- Send the new equipment back for recycling when this ultimately becomes waste

Tripp Lite follows a policy of continuous improvement. Product specifications are subject to change without notice.



1111 W. 35th Street, Chicago, IL 60609 USA
www.tripplite.com/support

200908129 • 932934-EN