

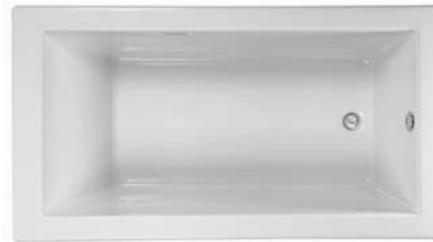




HOTSOAK 74

AQUATIC


HOTSOAK SERIES MODEL # A119AIR6636HS

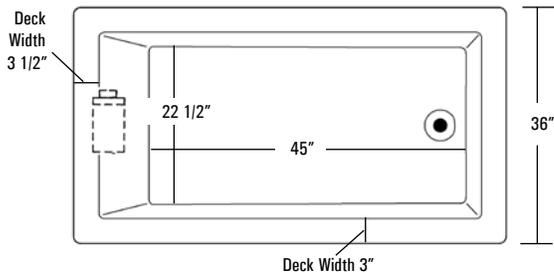

CAN BE USED IN AN UNDERMOUNT APPLICATION

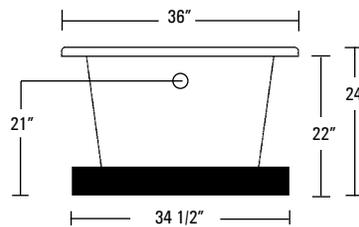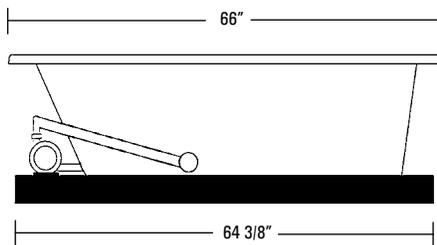

Rough-In Plumbing Measurements



SPECIFICATIONS:

GENERAL SPECIFICATIONS:

Tub Size	66" x 36" x 24"
	168 cm x 91 cm x 61 cm
Bathing Well	45" long
	22 1/2" wide
	22" interior depth
Shipping Weight	184 lbs. / 84 kg
Tub Weight Filled	910 lbs. / 414 kg
Tub Weight Only	134 lbs. / 61 kg
Gallons to Overflow	93 gal. / 353 L

ELECTRICAL SPECIFICATIONS:

Pump	1/15 HP; 1.3 AMP; 110V
Heater	1.5 kW; 12.5 AMP; 110V
Requirements	20 AMP; 110V, separate circuit required protected w/ Class A GFCI

STANDARD EQUIPMENT:

Aquatic Quality Features:

- 1.5 kW Inline Maintenance Heater
- Run-Dry Pump with 20-Minute Timer
- 2 Circulation Portal Covers
- Bath-Side On/Off Electronic Button
- "Quiet Pad" Anti-Vibration Pump Mount for Quiet Operation
- Slip Resistant Floor
- Extra Deep and Long Bathing Well
- Pre-leveled ABS Support Base
- Heat-bent Rigid PVC Piping for Optimum Sanitary Conditions
- Durable, Easy to Clean, Lucite® Cast Acrylic Surface
- Available in 8 Standard No-Charge Colors

UL & IAPMO Listed, Factory Tested
Limited Lifetime Warranty

OPTIONAL EQUIPMENT:

- Chromotherapy LED Lighting*
- Comfort Pillow - Oval or Rectangle
- Bolt-On Grab Bars
 - White, Biscuit, Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- Lift & Turn Waste and Overflow
 - Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- Cable Drive Waste and Overflow
 - Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel, Oil Rubbed Bronze or Color Matched (Bone, White and Biscuit Only)
- Integral Tiling Flange (Customer must specify which side(s) should receive flange)
- Premium Colors

All acrylic colors featured by Aquatic match the industry's leading fixture manufacturers.

*This whirlpool will need to be hard wired to the breaker box. Three outlets will be supplied on the whirlpool.

**Fax-On-Demand
Document #1249**



The manufacturer accepts a 1/4" variance. There are variations on each tub and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building should be measured from the tub; Aquatic Industries, Inc. assumes no responsibility for preparatory work. www.aquaticwhirlpools.com 800.555.5324