

NuTone®



RANGEMASTER

Kitchen  
Ventilation

# Why Kitchens *need ventilation...*



Steam. Grease. Smoke. They are the unwanted side effects of a home-cooked meal. Beside being unpleasant, they are unhealthy. Cooking creates more airborne contaminants than anything else in the home. Luckily, they are concentrated in one area and a kitchen ventilation system from NuTone® can easily alleviate the problem. Whether it's performance or design that matters most to you, you'll find just what you are looking for in the complete line of NuTone range hoods.

## Problem

While the over-the-stove microwave brought you additional counter space, you've sacrificed safety, convenience and function. The built-in exhaust fans are far less effective at capturing airborne contaminants. Children are reaching over a hot stove to reach a microwave that is too high for them. And, everyone is using the same workspace.



## Solution

A NuTone range hood will provide significantly better ventilation for your stove. Moving the microwave closer to the refrigerator improves the efficiency of quick reheating, provides added workspace for more than one chef, and moves your children away from the dangers of the stove.



# NuTone® Range Hoods

*a safer, more effective way  
to duct your kitchen.*

## Rangemaster® | 3-14 |

These Rangemaster range hoods provide a decorative solution to high ventilation requirements. All three designer models give your kitchen that special look that makes the difference. The professional series offers top performance and a high-end look.



## Specialty Ventilation | 15-20 |

For customers who want a custom look in kitchen ventilation, NuTone has the fans and motors to suit any requirement.



## Allure® Hoods | 21-24 |

We listened to our customers and designed the Allure line to offer optimum quiet, easy cleaning, choice of lighting, improved ventilating performance, and sleek, innovative styling.



## Intermediate & Economy Hoods | 25-30 |

The intermediate line offers more styles, sizes and colors to choose from than the competition. The economy line is the dependable quality you want from NuTone at an affordable price to fit any budget.



## Filters & Accessories | 31-34 |

NuTone offers customers a range of exterior blowers with powerful ventilation performance, as well as ducting accessories to assure proper installation, and one benefit they won't find anywhere else... NuTone quality.



## Index | 35-38 |

Quick reference for model numbers, color, dimension and power choices.

# RANGEMASTER<sup>®</sup>

by Broan-NuTone





# Elegant Designs *for gourmet tastes and* Uncompromising Performance.

As a cook, you look for the best ingredients to enhance the flavor of your meal. Removing unwanted smoke and grease from the air can also lead to the enjoyment of your cooking.

The [Rangemaster](#) series of range hoods from NuTone combines designs for gourmet tastes with superior function that connoisseurs of quality will appreciate.

This premium line offers styles to complement a well-designed kitchen and high ventilation function for the household that takes cooking seriously.

So make certain that dinner guests remember the aroma of their meal, not the scent of it cooking, with a Rangemaster range hood from NuTone.

[designer series | 3-11 |](#)  
[professional series | 11-14 |](#)



## 61000/61000EX



The **Ballista** offers streamline stainless steel construction in a wall mounted design. Its flawless look and seamless corners provide easy cleaning.

### 61000 Unique Features

- 450 CFM (900 CFM - 48") Internal centrifugal blower, HVI 2100 certified
- Convertible to ducted or non-ducted operation (excludes 48" model)
- Available widths: 30" (76.2 CM), 35-1/2" (90 CM), 48" (121.9 CM)

### 61000EX Unique Features

- Exterior blower design provides exhaust options of 600, 900, 1200 or 1500 CFM (see page 34 – sold separately)
- Available widths: 35-1/2" (90 CM), 48" (121.9 CM)

### General Features

- Concealed three-speed slide control adjusts to cooking conditions
- Two 20-watt (Four in 48") halogen lights (included)
- Telescopic flue fits 8' to 9' ceilings with optional ducted flue extension for up to 10' ceilings
- Easily removable, dishwasher-safe, stainless steel grease filters
- 6" round duct connector with built-in backdraft damper (8" round in 48" and EX models)



## 62000



The **Mirage** features a dramatic pairing of the high-tech look of stainless steel with the beauty of hand-blown glass all in a wall mounted design. Seamless corners and underside provide easy cleaning and recessed lighting.

- Variable speed 450 CFM centrifugal blower, HVI 2100 certified, features electronic touch control with delay off and filter maintenance indicator
- Two 20-watt halogen lights (included)
- Telescopic flue fits 8' to 10' ceilings
- Stylish stainless steel grease filter is dishwasher-safe
- 6" round duct connector with built-in backdraft damper
- Available width: 35-1/2" (90 CM)



## 63000/63000EX



The **Provisa** features free-hanging stainless steel design to draw the eye from every vantage point. It's the perfect choice for the household that makes cooking the center of attention.

- The 63000 has an internal 900 CFM dual centrifugal blower, HVI 2100 certified
- The 63000EX is designed to operate with Rangemaster exterior blowers that provide a choice of 600, 900, 1200 or 1500 CFM (see page 34 – sold separately)
- Concealed three-speed control
- Superior lighting from four 20-watt halogen lights (included)
- Telescopic flue fits 8' to 9' ceilings
- Seamless corners and easily removable, dishwasher-safe stainless steel grease filter provide easy cleaning
- 6" round duct connector with built-in backdraft damper
- Available widths: 39-3/8" x 27-5/8" (100 CM x 70 CM)

**RANGEMASTER BALLISTA 61000/61000EX**


Width	Stainless Steel Interior	Stainless Steel Exterior
30"	613004	-
90 cm	619004	619004EX
48"	614804	614804EX

**SPECIFICATIONS – Exterior Blowers Sold Separately**

Model	Volts	Amps	CFM (For exterior see page 34)	Duct
613004 & 619004	120	3.1	450	6" RD (V)
614804	120	5.5	900	8" RD (V)
619004EX	120	0.5**	600, 900, 1200, 1500	8" RD (V)
614804EX	120	0.8**	600, 900, 1200, 1500	8" RD (V)

\*\*Hood Amps without blower, for total system Amps combine hood with exterior blower Amps.

	C-Min	C-Max	D	CW
613004	25-5/8"	45-1/2"	6-5/8"	9-1/4"
619004	25-5/8"	45-1/2"	6-5/8"	9-1/4"
619004EX	22"	37"	10-3/8"	12-3/4"
614804	22"	37"	10-3/8"	12-3/4"
614804EX	22"	37"	10-3/8"	12-3/4"

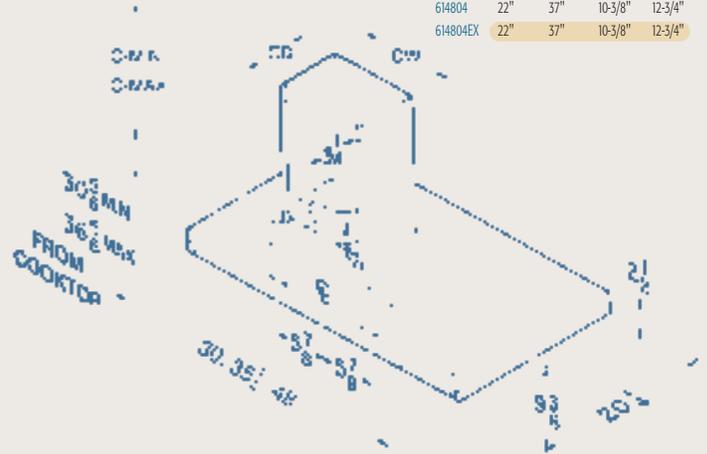

**RANGEMASTER MIRAGE 62000**

Width	Stainless Steel
35-1/2"	629004

**SPECIFICATIONS**

Volts	Amps	CFM	Duct
120	3.1	450	6" RD (V)




**RANGEMASTER PROVISA 63000/63000EX**

Width	Stainless Steel Interior	Stainless Steel Exterior*
39-3/8" x 27-5/8"	637004	637004EX

**SPECIFICATIONS – Exterior Blowers Sold Separately**

Model	Volts	Amps	CFM (For exterior see page 34)	Duct
637004	120	5.5	900	8" RD (V)
637004EX	120	0.8**	600, 900, 1200, 1500	8" RD (V)

\*\*Hood Amps without blower, for total system Amps combine hood with exterior blower Amps.

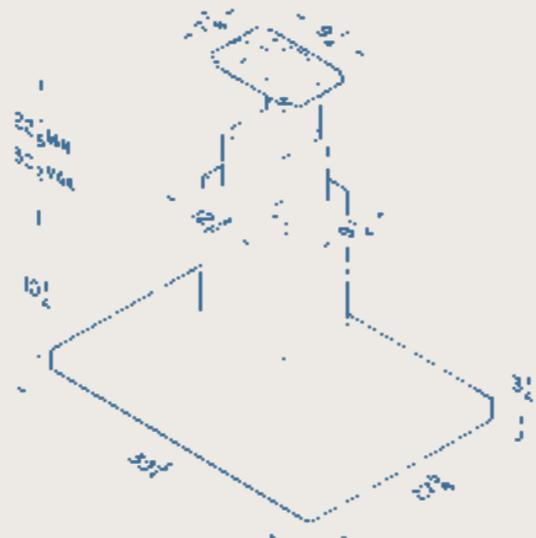



## RM65000



This delightful, hand-crafted design blends curved and angular surfaces for an uncommon union of stainless steel and glass.

- 450 CFM centrifugal blower, HVI 2100 certified, with an advanced, multi-speed, electronic control featuring a convenient 10-minute delay shutoff
- Multi-speed, electronic push-button control features stylish, rounded buttons with individual speed indicators
- Two 20-watt halogen lamps provided
- Dishwasher-safe aluminum filters feature a quick-release latch
- Control light flashes when it's time to clean the filter
- Two-level lighting provides bright cooktop illumination and a low nighttime setting
- Available widths: 30-7/16" (90 CM)



## RM50000



The 50000 Series combines stainless steel construction, European style and great value, designed to meet the requirements of today's conventional appliances and kitchens. A fully enclosed bottom contains a dishwasher-safe filter for easy cleaning. Dual lighting provides excellent cooktop illumination.

- Its 270 CFM centrifugal blower, HVI 2100 certified, and multi-speed control provide quiet, effective performance
- Multi-speed slide control and integrated dual-light assembly
- Dual 40-watt incandescent lamps (included)
- Dishwasher-safe aluminum filter features a quick-release latch
- Includes non-ducted kit for indoor exhaust recirculation
- Available widths: 30" (76.2 CM) and 36" (91.5 CM)



## RM51000



The 51000 Series is a wall-mounted stainless steel chimney hood with sleek, graceful curves engineered to blend with today's highly styled, conventional appliances and kitchens. Halogen lighting accentuates the beauty of a full enclosed bottom with dishwasher-safe filters.


- 370 CFM centrifugal blower, HVI 2100 certified, and multi-speed control provide quiet, enhanced performance
- Multi-speed slide control
- Two 20-watt halogen lamps (included)
- Dishwasher-safe aluminum filters feature a quick-release latch
- Requires separate purchase of a non-ducted kit for indoor exhaust recirculation – RRRK51
- Available widths: 35-1/16" (90 CM)

**RM65000**

Width	Stainless Steel
35-7/16"	RM659004

**SPECIFICATIONS**

Volts	Amps	CFM	Duct
120	3.1	450	6" RD (V)

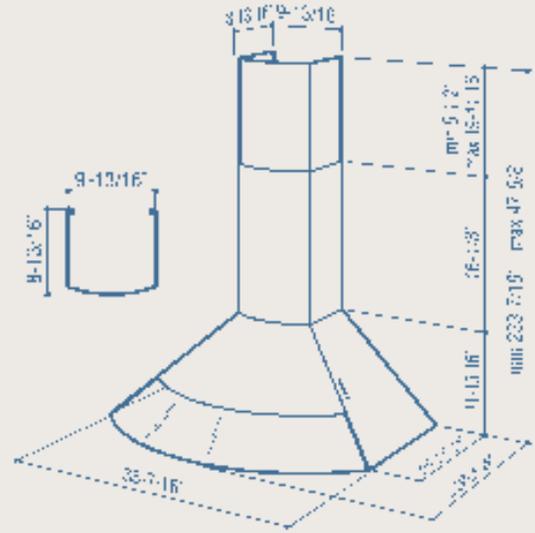


**RM50000**

Width	Stainless Steel	White	Black
30"	RM503004	RM503001	RM503023
36"	RM503604	RM503601	RM503623

**SPECIFICATIONS**

Volts	Amps	CFM	Duct
120	3.5	270	6" RD (V)

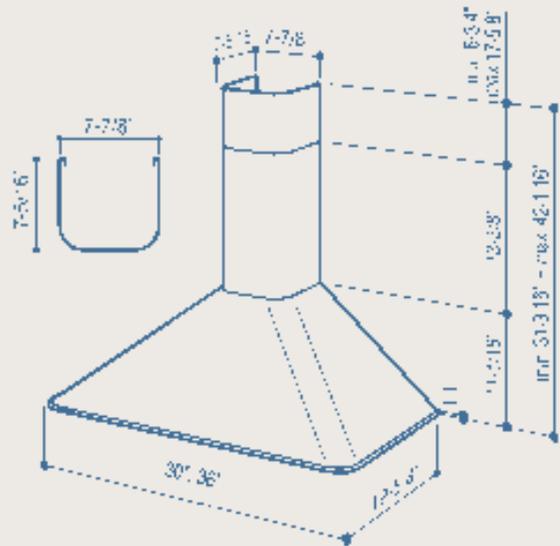


**RM51000**

Width	Stainless Steel
35-7/16"	RM519004

**SPECIFICATIONS**

Volts	Amps	CFM	Duct
120	3.1	370	6" RD (V)

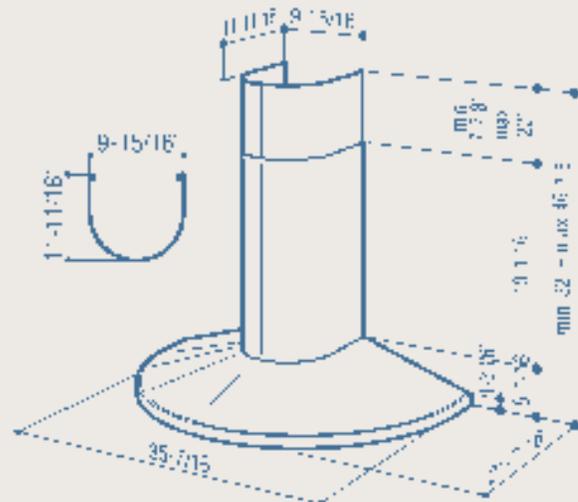




## RM52000

This wall-mounted stainless steel chimney hood combines graceful curves and traditional European styling, and is engineered to meet the requirements of today's highly styled, conventional appliances and kitchens. Halogen lighting accentuates the beauty of a fully enclosed bottom containing dishwasher-safe filters.

- 370 CFM centrifugal blower, HVI 2100 certified, and multi-speed control provide quiet, enhanced performance
- Multi-speed slide control
- Two 20-watt halogen lamps (included)
- Dishwasher-safe aluminum filters feature a quick-release latch
- Requires separate purchase of a non-ducted kit for indoor exhaust recirculation – RRK51
- Available widths: 30" (76.2 CM), 36" (91.5 CM), and 42" (106.7 CM)

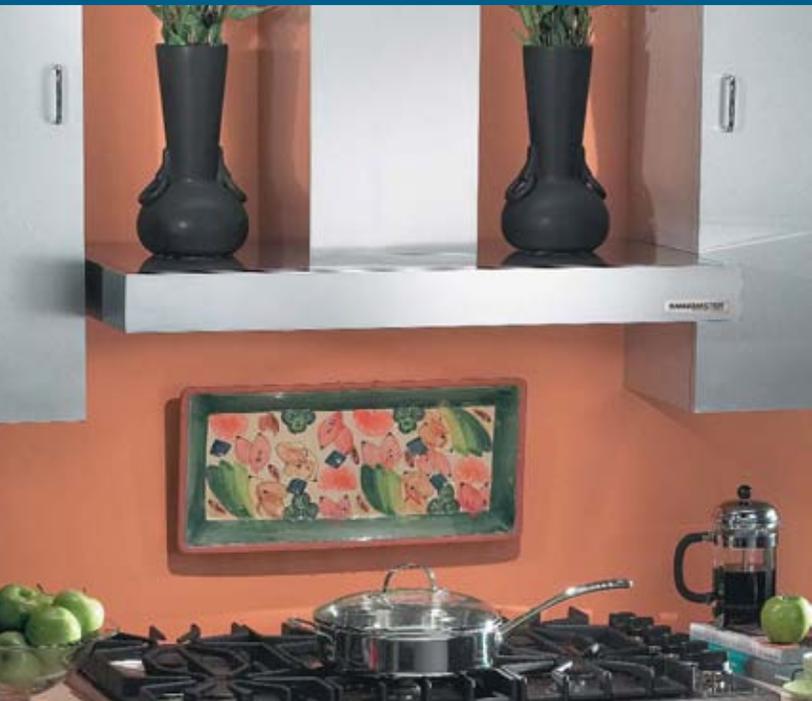

## RM53000

This Italian-inspired brushed stainless steel range hood proves that simplicity can be the perfect design statement, and a match for today's conventional cooking appliances. Clean lines complement the contemporary kitchen or boldly contrast the flowing styles of more traditional settings. A quiet 370 CFM multi-speed blower, convenient dishwasher-safe filters and generous lighting all perform beautifully as well.

- 370 CFM centrifugal blower
- Multi-speed slide control
- Ducted/non-ducted telescopic flue accommodates ceiling heights from 8 to 9 feet. Extension flues for higher ceilings are also available for ducted and non-ducted applications.
- Requires separate purchase of a non-ducted kit (RRK51) for indoor exhaust recirculation
- Dishwasher-safe aluminum filters feature a quick-release latch and professional-style appearance
- Two 20-watt halogen lamps (included)
- Heat Sentry adjusts speed of blower to high in case of excess heat
- Install hood so that the bottom of the unit is 24 to 30 inches above the cooking surface
- Available widths: 30" (76.2 CM), 36" (91.5 CM), and 42" (106.7 CM)



## RMDD / RMDDEX: Down Draft System

Designed to be compatible with most conventional and commercial cooktops, combining a sensational look with high performance features. Stainless steel construction on exposed surfaces provides a durable finish and unforgettable style.


- Quiet variable-speed operation, high-efficiency interior and exterior blower options
- RMDD model has an integrated 500 CFM interior blower, HVI 2100 certified
- RMDDEX model can be combined with all our exterior blowers (see page 34), for exhaust option up to 1500 CFM
- Dishwasher-safe filters are easy to remove
- Heat Sentry adjusts blower to high in the case of excess heat
- Optional remote control will activate system from an alternate location
- Unique ducting capability allows the internal or remote blower connection to be ducted to the left, right or downward
- Available widths: 30" (76.2 CM), 36" (91.5 CM), and 48" (121.9 CM)

### RM52000

Width	Stainless Steel
30"	RM523004
36"	RM523604
42"	RM524204

### SPECIFICATIONS

Volts	Amps	CFM	Duct
120	3.1	370	6" RD (V)

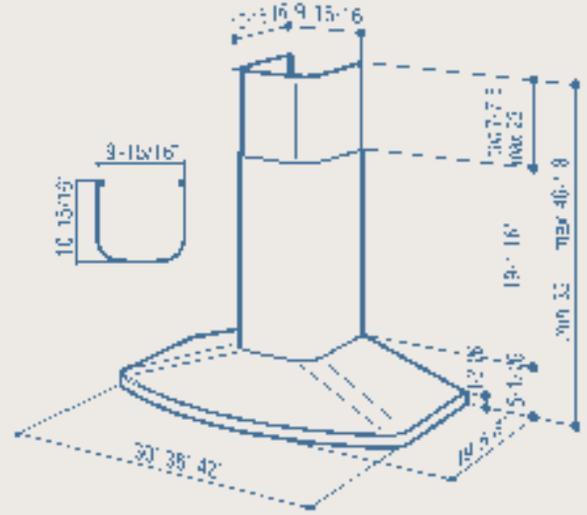


### RM53000

Width	Stainless Steel
30"	RM533004
36"	RM533604
42"	RM534204

### SPECIFICATIONS – Exterior Blowers Sold Separately

Model	Volts	Max Amps	CFM (For exterior see page 34)	Duct
Interior	120	3.1	370	6" RD (V)
Exterior	120	3.1	370	6" RD (V)

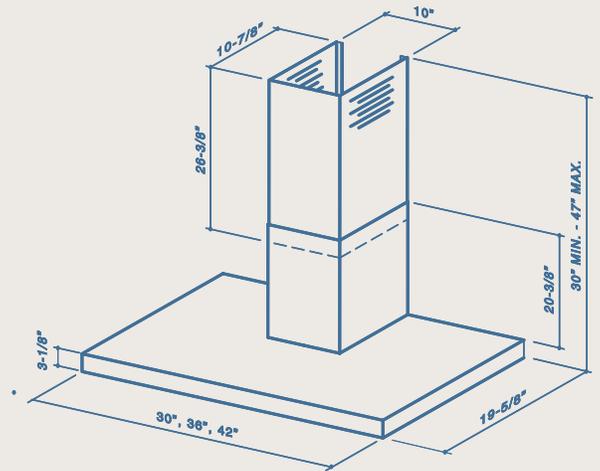


### RMDD: DOWN DRAFT SYSTEM

Width	Stainless Steel Interior	Stainless Steel Exterior
30"	RMDD3004	RMDD3004EX
36"	RMDD3604	RMDD3604EX
48"	RMDD4804	RMDD4804EX

### SPECIFICATIONS – Exterior Blowers Sold Separately

Model	Volts	Max Amps	CFM (For exterior see page 34)	Duct
Interior	120	4.0	500	3-1/4" x 10"
Exterior	120	6.0	600, 900, 1200, 1500	3-1/4" x 14"

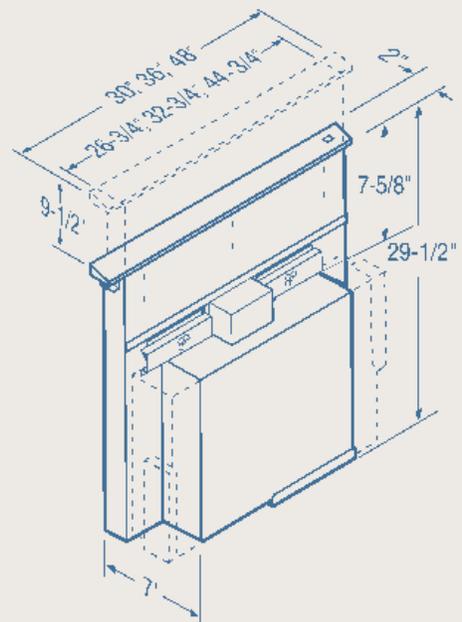



## Custom Power Pack RMP1/RMPE



The Rangemaster Custom Power Pack is designed to fit flush with the bottom of a cabinet or custom hood that's 30 to 48" wide.

- The RMP1 has an integrated 400 CFM centrifugal blower, HVI 2100 certified
- The RMPE model is designed to work with all our exterior blowers (see page 34), providing four exhaust options up to 1500 CFM (sold separately)
- Multi-speed control to provide quiet and effective performance
- Two 20-watt halogen lamps provided
- Dishwasher-safe aluminum filters feature a quick-release latch
- Optional non-ducted filters (FILTEREB40) for indoor exhaust recirculation, some ductwork required
- Available widths: 27-1/2" (70 CM) in stainless steel finish
- Optional custom hood liners in 30", 36" and 48" widths (see page 13)



## Custom Pro-Style Power Pack RMIP

The RMIP is equipped with a centrifugal blower, which has a multi-speed control to deliver from 500 to 1500 CFM. Unit is designed to fit flush with the bottom of the cabinet or custom hood. See optional liners on page 13 to help protect custom hoods.

- HVI certified blower performance for confidence in specification
- Optional remote wall control available (See below)
- Bright halogen lighting, two 50-watt lamps, bulbs not included
- Dishwasher-safe stainless steel/aluminum filters, or optional baffle filters
- Available widths: 33" and 45"



### RMPWC Wall-Mounted Remote Control

Remote wall control provides both variable-speed and lighting control from a more convenient location. Available for use with the RMIP Pro-Style Power Pack only. (6-3/8" w x 4-1/2" h x 2-7/16" d)

RMIP shown with optional custom hood liner and baffle filters



## 64000

The Rangemaster Encore offers the professional look and performance you want in the size to fit beneath just about any kitchen cabinet. Built of durable, heavy-gauge steel construction, the Encore can be combined with one of six ducted blower options; 500 or 850 CFM internal (see page 13) or 600, 900, 1200, 1500 CFM, external (see page 34).


- Two or three bright, 50-watt halogen lamps for multi-level cooktop lighting (lamps not included)
- Two 175-watt infrared food warming lamps keep side dishes warm (lamps not included)
- Available in your choice of colors
- Optional backsplash with fold-down wire shelves
- Optional stainless steel baffle filters
- Exclusive Heat Sentry™ automatically turns blower to high speed when high heat is detected
- Infinite-speed control with blower memory "remembers" last setting used
- Available widths: 30" (76.2 CM), 36" (91.5 CM), 42" (106.7 CM), 48" (121.9 CM)

**CUSTOM POWER PACK RMP1/RMPE**

Width	Stainless Steel Interior	Stainless Steel Exterior
27-1/2"	RMP17004	RMPE7004

**SPECIFICATIONS – Exterior Blowers Sold Separately**

Model	Volts	Amps	CFM (For exterior see page 34)	Duct
Interior	120	3.1	400	6" RD (V)
Exterior	120	0.5	600, 900, 1200, 1500	8" RD (V)

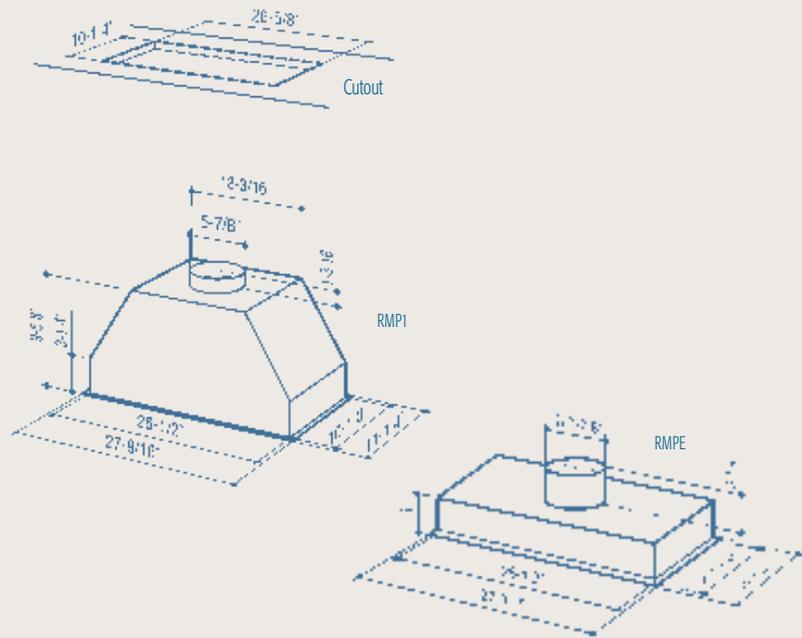


**CUSTOM PRO-STYLE POWER PACK**

Width	Stainless Steel
32-3/8", 33-3/4"	RMIP33
44-3/8", 45-3/4"	RMIP45

**SPECIFICATIONS – All Blowers Sold Separately**

Model(s)	CFM	FINISH
Interior	460V (P5), 850V (P8)	430 Brushed Stainless Steel
Exterior	600, 900, 1200, 1500	430 Brushed Stainless Steel

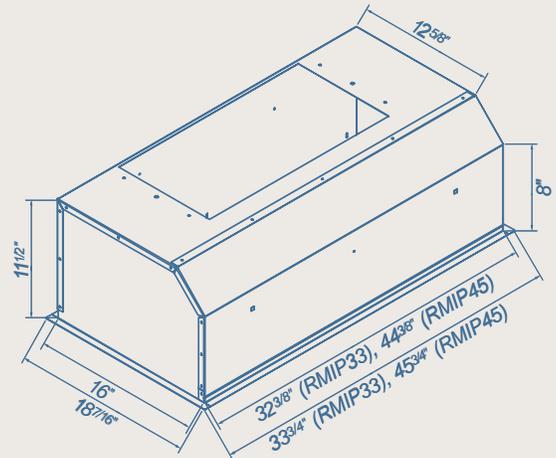


**RANGEMASTER ENCORE 64000 – SHELL**

Width	Stainless Steel	White	Biscuit	Black	Halogen*	Heat**
30"	643004	643001	643002	643023	Qty - 2	Qty - 2
36"	643604	643601	643602	643623	Qty - 2	Qty - 2
42"	644204	644201	644202	644223	Qty - 3	Qty - 2
48"	644804	644801	644802	644823	Qty - 3	Qty - 2

**SPECIFICATIONS – All Blowers Sold Separately**

Model(s)	Volts	Amps++	Blower Systems (see pages 13 and 34)
30"	120	3.8	P5, 331H, 332H, 335, 336
36"	120	3.8	P5, P8, 331H, 332H, 335, 336
42" & 48"	120	4.2	P5, P8, 331H, 332H, 335, 336

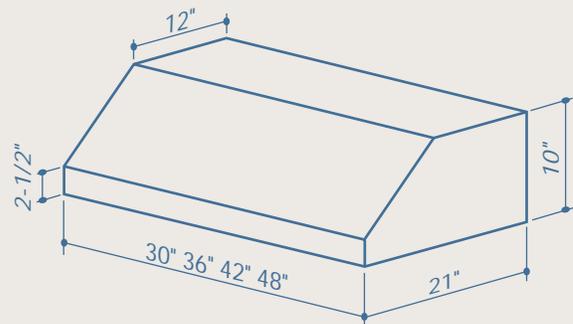

- \* Halogen lights are 50 watt PAR 20 (not included).
- \*\* Heat lamps are 175 watt infrared PAR 58 (not included). When using infrared heat lamps the optional backsplash is recommended.
- ++ Hood amps without blower. For total system amps combine hood and blower amps.



## RM60000

It is the classic choice, with options to spare. The Rangemaster Original features durable, heavy-gauge, double-wall steel construction and an easy-to-clean interior with no sharp edges. Select from six ducted blower options; 600, 1200 CFM internal (see page 13) or 600, 900, 1200, 1500 CFM external (see page 34).

- Three, 50-watt halogen lights for multi-level cooktop lighting (lamps not included)
- Two, 250-watt infrared food warming lamps keep side dishes warm while you finish preparing others (lamps not included)
- Available in your choice of colors
- Optional backsplash with fold-down wire shelves
- Optional stainless steel baffle filters
- Exclusive Heat Sentry™ automatically turns blower to high speed when high heat is detected
- Infinite-speed control with blower memory “remembers” last setting used
- Available widths: 30" (76.2 CM), 36" (91.5 CM), 48" (121.9 CM)



RM60000 Standard Filters

RM60000 shown with optional soffit chimney and backsplash

## Options


### Quality Rangemaster Options Let You Create the Look You Want and the Function You Need.

- Restaurant-quality stainless steel backsplash with fold-down shelves designed for use with RM60000 and 64000 infrared food-warming system completes the professional look and provides easy cleaning.
- Select horizontal or vertical exhausting
- Optional baffle filters on RM60000 and 64000
- Optional matching soffit chimney extends the streamline look up to a 8 foot ceiling on the RM60000

### Custom Hood Liners RMP1/RMPE

Rangemaster liners provide a beautiful way to finish your custom hood and protect your cabinetry. Designed to work with the Rangemaster RMP1/RMPE Power Packs, the liners feature a 3" adjustable nose to provide application flexibility, and 4" depth for excellent capture.

- Brushed stainless steel finish
- Available for 30", 36" and 48" widths
- Two versions for maximum flexibility in depth adjustment:  
"S" version adjusts 17-1/2" to 20-1/2"  
"L" version adjusts 20-1/2" to 23-1/2"

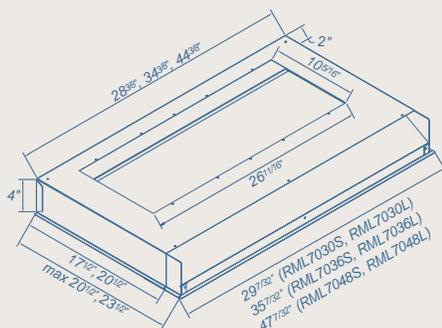

### INTERIOR BLOWER SELECTION TABLE & SPECIFICATION

Blower Model	Hood Model	Mounting	CFM	HVI	Volts	Amps	Duct Size	Duct Direction
RM325H	RM60000	Interior	600	Y	120	3.3	7" Round	V
RM326H	RM60000	Interior	1200	Y	120	5.0	4-1/2" x 18-1/2" **	V
P5	64000	Interior	500	Y	120	1.8	3-1/4" x 10"	V(H)
P8*	64000	Interior	850	Y	120	3.4	3-1/4" x 10"	V(H)

\* Not available on 30" models

\*\*Transitions to 10" round available.




FOR EXTERIOR BLOWERS, REFER TO PAGE 34.


### Custom Hood Liners RMIP

Designed to work with the Rangemaster Pro-Insert, the liners feature a 3" adjustable nose to provide application flexibility, and 4" depth for excellent capture.

- Brushed stainless steel finish
- Available for 36", 42", 48" and 60" widths
- Liners allow depth adjustment from 22-1/2" to 25-1/2"

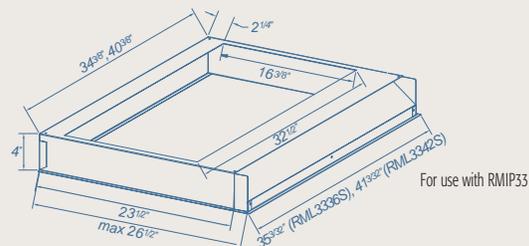


For use with RMIP33

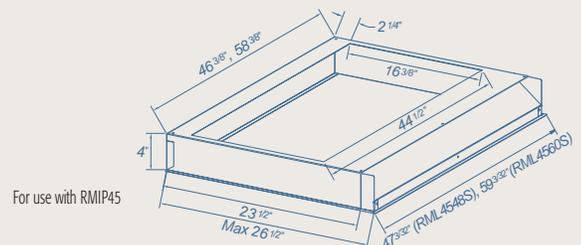

For use with RMIP45

**RANGEMASTER ORIGINAL RM60000 – SHELL**

Width	Stainless Steel	White	Black	Halogen*	Heat**
30"	RM603004	RM603001	RM603023	Qty - 3	Qty - 2
36"	RM603604	RM603601	RM603623	Qty - 3	Qty - 2
42"	RM604204	RM604201	RM604223	Qty - 3	Qty - 2
48"	RM604804	RM604801	RM604823	Qty - 3	Qty - 2
54"	RM605404	+	+	Qty - 3	Qty - 2
60"	RM606004	+	+	Qty - 3	Qty - 2
66"	RM606604	+	+	Qty - 3	Qty - 2
72"	RM607204	+	+	Qty - 3	Qty - 2

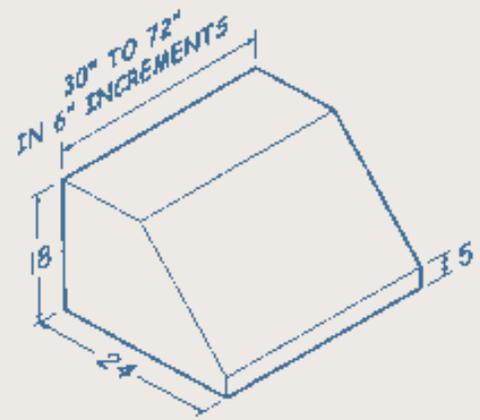

**SPECIFICATIONS – All Blowers Sold Separately**


Volts	Amps++	Blower Systems (see pages 13 and 34)
120	5.4	RM325H, RM326H, 331H, 332H, 335, 336

- + Available as special order.
- \* Halogen lights are 50 watt PAR 20 (not included).
- \*\* Heat lamps are 250 watt infrared BR40 (not included). When using infrared heat lamps the optional backsplash is recommended.
- ++ Hood amps without blower. For total system amps combine hood and blower amps.

**OPTIONS SELECTION TABLE**

Width	BACKSPLASH		SOFFIT CHIMNEY RM60000 Series Only			BAFFLE FILTERS Stainless Steel	
	Stainless Steel	White	Stainless Steel	White	Black	64000	RM60000
30"	RMP3004*	RMN3004	RMN3001	RMN3023		RBF30	RBF6030
36"	RMP3604*	RMN3604	RMN3601	RMN3623		RBF36	RBF6036
42"	RMP4204*	RMN4204	RMN4201	RMN4223		RBF42	RBF6042
48"	RMP4804*	RMN4804	RMN4801	RMN4823		RBF48	RBF6048
54"	RMP5404	RMN5404	+	+		+	RBF6054
60"	RMP6004	RMN6004	+	+		+	RBF6060
66"	RMP6604	RMN6604	+	+		+	RBF6066
72"	RMP7204	RMN7204	+	+		+	RBF6072

\* Will work with 64000 Series  
+ Available as special order

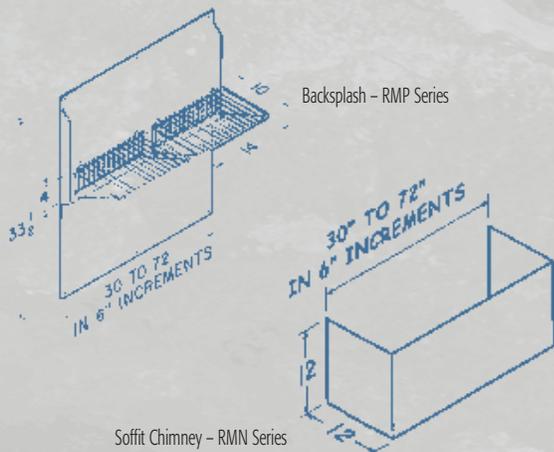

**Infrared Warming Lamp**

Keep prepared food warm while the rest of the meal is finishing with the handy infrared warming lamp and optional wire warming racks.



**Baffle Filters**

Complete the professional look with the baffle filter option.



**Backsplash**

Stainless steel backsplash makes for easy cleaning.

# *specialty*





# *The* Perfect Match...

## *Range Hoods that* Blend Right In.

Sometimes the best way to fit in is to not be seen. When you want a range hood that performs, but doesn't draw attention, the [NuTone Specialty Range Hoods](#) offer the perfect option. Downdraft styles or range hoods that tuck away under the cabinet allow you to bring them out when you are cooking and hide them away when you're done.

For a sleek, clean look and the power of a professional, the NuTone specialty range hoods clean up.



## Eclipse® 27000 and 28000

When updraft venting is impractical or a range hood detracts from the styling of your kitchen, the Eclipse downdraft system offers a sleek, trim-line style. It is ideal for cooking surfaces on islands or peninsulas. This space-saving design saves you valuable undercounter space. The Eclipse is compatible with virtually all cooktops and the flexibility of the blower discharge allows you to duct to the right, left, down or side-to-side to avoid floor joists. Access panel allows for easy cleaning.

- Choose powerful, quiet 500 CFM internal blower or 900 CFM external blower (model 332H, see page 34)
- Top cover available in your choice of finishes: stainless steel, white, biscuit or black
- Fits all standard kitchen cabinets
- Available widths: 30" (76.2 CM), 36" (91.5 CM)



## Silhouette®

The Silhouette hood fits under kitchen cabinets and slides conveniently out of sight when not in use. The compact, trim-line styling maximizes kitchen cabinet space and dramatic glass visor slides out to turn on blower. Ideal for today's contemporary-styled kitchens.

- Provides powerful ventilation performance of 300 CFM with the ultra-quiet performance of 4.5 Sones, HVI certified
- Infinite speed blower control
- Exclusive Heat Sentry™ system automatically turns blower to high speed when excess heat is detected
- Includes 3-1/4" x 10" adapter with built-in damper
- Available in your choice of finishes: white, black, biscuit or stainless steel
- Fits all standard kitchen cabinets
- Available widths: 30" (76.2 CM), 36" (91.5 CM)



Model 27000  
With 500 CFM interior blower


Model 28000  
Use with 900 CFM exterior blower (Model 332H)

**ECLIPSE® 27000 AND 28000**

To Fit Nominal Cooktop Size**	Model	Description	Cover Color
30"	273003	Interior Blower Unit	Stainless Steel
36"	273603	Interior Blower Unit	Stainless Steel
30"	283003	Exterior Blower Unit*	Stainless Steel
36"	283603	Exterior Blower Unit*	Stainless Steel
30"	273001C	Optional Cover	White
36"	273601C	Optional Cover	White
30"	273002C	Optional Cover	Biscuit
36"	273602C	Optional Cover	Biscuit
30"	273023C	Optional Cover	Black
36"	273623C	Optional Cover	Black

\* Exterior unit utilizes Model 332H Exterior-Mounted Blower, sold separately.

\*\* Cooktops, countertops and cabinets vary in dimension and support systems depending upon manufacturer. These factors may impact the Eclipse's ability to fit with every worktop/cabinet combination. Specifications subject to change without notice.

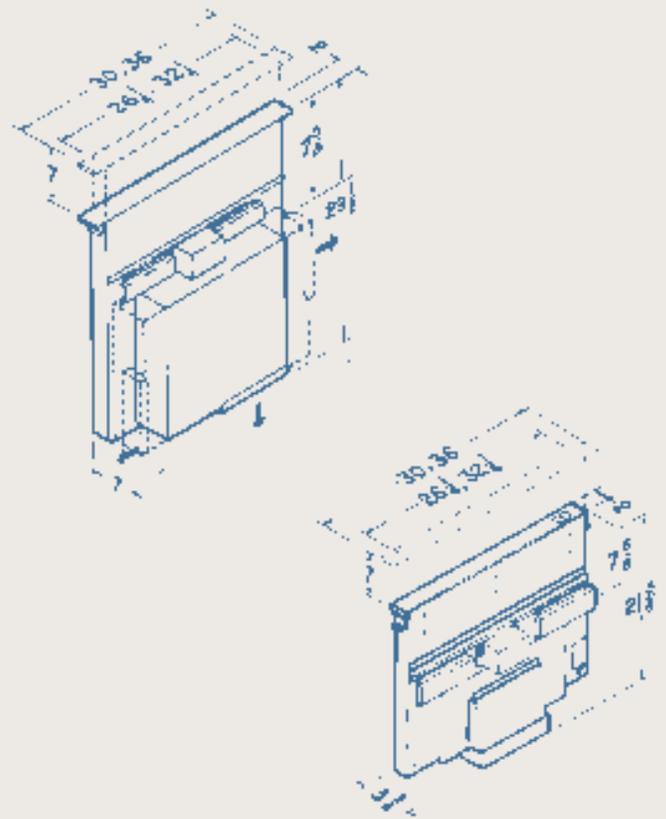

**SPECIFICATIONS**

Model(s)	Volts	Amps	CFM	Duct
27000	120	4.0	500	3-1/4" x 10"
28000 <sup>+</sup>	120	6.0	900	3-1/4" x 10"


+ The 28000 requires transition from 3/4" x 10" to 10" round before connection to the exterior blower. Exterior unit utilizes Model 332H Exterior-Mounted Blower, sold separately.

**SILHOUETTE®**

Width	White	Biscuit	Black	Stainless Steel
30"	153001	153002	153023	153004
36"	153601	153602	153623	153604

**SPECIFICATIONS**

Volts	Amps	Sones	CFM	Duct
120	3.7	4.5	300	3-1/4" x 10" (V)

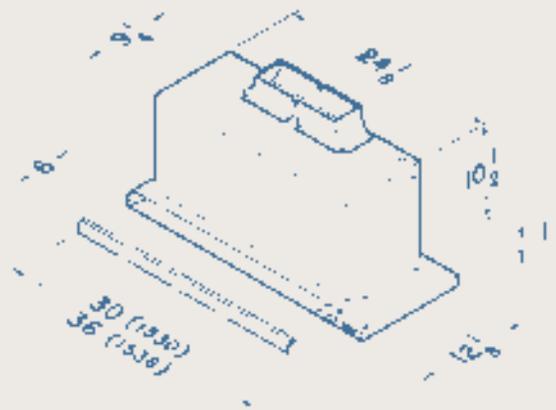

# *Creative for* Your Needs.



When your taste requires a custom approach, NuTone's line of Custom Hood Modules is the Ultimate Ventilating Solution to fit any custom range hood design. High performance integrated modules that provide the ventilation and lighting you need to finish off the practical side of your custom creation.

## Custom Hood Power Modules

Features fully enclosed design and multi-speed operation in your choice of two performance levels and colors.




### MODELS PM44 AND PM25

White	Black	Volts	Amps	Sones	CFM	Duct
PM44WW	PM44BL	120	4.0	5.5	410	3-1/4" x 10"
PM25WW	PM25BL	120	2.5	7.0	250	7" Round


### Model PM44WW, PM44BL

- Variable-speed, rotary controls
- Twin squirrel-cage blower, 410 CFM, 5.5 Sones (vertical discharge) HVI certified
- Two-level light control (60 watt incandescent bulb purchased separately)
- Black or white finish; two washable aluminum filters
- For ducted installations, includes damper/adaptor for 3-1/4" x 10" duct
- Optional non-ducted kit, Model 355 NDK (purchased separately)

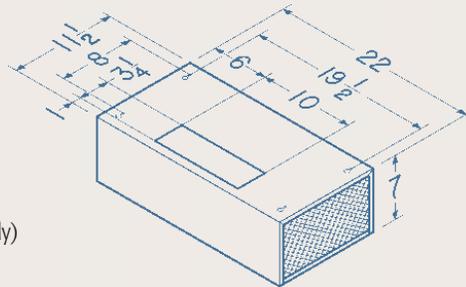

### Model PM25WW, PM25BL

- Two-speed motor with rocker switches
- 250 CFM, 7.0 Sones (vertical discharge) HVI certified
- Enclosed light (60 watt incandescent bulb purchased separately)
- Black or white finish; washable aluminum filter
- Built in 7" round duct adapter
- Optional non-ducted kit, Model 354 NDK (purchased separately)

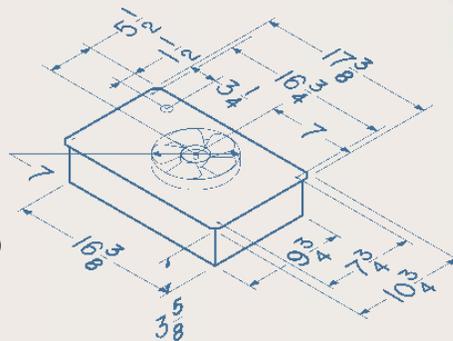

*allure*<sup>®</sup>



# Distinctive Styles...

*just for your taste.*

You have demanding taste. You are looking for a style that can take your new kitchen into tomorrow without losing its appeal. The sleek, innovative styling of [NuTone's Allure Range Hoods](#) give you the look that will make an impression today – and tomorrow.

But style isn't everything. You want a range hood that cleans the air without disrupting the whole household. The Allure line of range hoods feature quiet blowers, exceptional ventilation performance and brighter lighting of work surfaces. Allure simply performs better than any other hood.

**Unsurpassed Quiet** – No longer do you have to choose between venting and conversation. The Allure range hoods are 50% quieter than the average range hood, without sacrificing on performance. A noise-reducing motor isolation system, patented axial blade that moves slower and quieter, and its fully enclosed construction all aid to eliminate noise and vibration – without sacrificing ventilation performance. With an Allure range hood, the kitchen can remain a place where the family gathers.



**Easiest to Clean** – The design of Allure features smooth surfaces and a fully enclosed underside for easy cleaning. The DuPont Teflon® non-stick underside and removable, dishwasher-safe filters provide the easiest clean-up of any range hood available.

**Lighting** – Allure's halogen light system is designed to flood your cooking surface with a bright light. And, the low-light setting provides the perfect night light for those looking for a late night snack.

**Highly Effective Performance** – Style. Quiet. Easy cleaning. Bright light. To homeowners, they mean little if a range hood can't remove smoke and odors. That's not a worry with Allure. Its patented axial blade or centrifugal blower systems eliminate smoke and moisture more quietly and effectively than the average hood or over-the-range microwave. Plus, the Allure III includes a 400 CFM boost mode to remove even the most extreme smoke and odors. Which leads us to believe that great looks aren't the only reasons Allure will find its way into countless homes.

# Sleek, Innovative Styling

It is as fresh and modern as your decorating tastes. The NuTone Allure range hoods are designed to complement today's home styling, and have a lasting look that can hold up for years to come. With your choice of five colors, there is certain to be one to fit your unique style.



## Allure III

The ultimate Allure model, combines modern styling with advanced features like three-speed electronic control plus boost-speed mode, delay-off and filter cleaning reminder. Easy cleaning is assured because for the first time anywhere, you can have the easy cleaning of DuPont Teflon® in a range hood.



- Ultra quiet 0.4 Sones at normal speed; extra powerful 430 CFM boost, HVI 2100 certified
- Easy-to-clean DuPont Teflon® bottom pan; fully enclosed design
- Professional style filters; dishwasher-safe
- Three-level light settings; dual halogen lamp design (bulbs not included)
- Advanced Heat Sentry™ detects excessive heat and adjusts hood speed for proper ventilation
- Offers four-way convertibility 3-1/4" x 10" (horizontal and vertical), 7" round (vertical) and non-ducted. (Non-ducted filters sold separately)
- Allure non-ducted filters: 30" – BPSF30, 36" – BPSF36, 42" – BPSF42
- Available in sizes: 30", 36", 42"



### ALLURE III WS3 SERIES


Size	White	Biscuit	Almond	Black	Stainless Steel
30"	WS330WW	WS330BC	WS330AA	WS330BL	WS330SS
36"	WS336WW	WS336BC	WS336AA	WS336BL	WS336SS
42"	WS342WW	WS342BC	WS342AA	WS342BL	WS342SS

### SPECIFICATIONS

Volts	Amps	Normal Setting Sones	High Setting Sones	Boost Mode	Duct
120	2.8	0.4*	3.5*	430 CFM*	3-1/4" x 10" or 7" RD

\* Normal setting: 100 CFM, high setting: 250 CFM, Sones at boost: 7

Teflon® is a registered trademark of DuPont

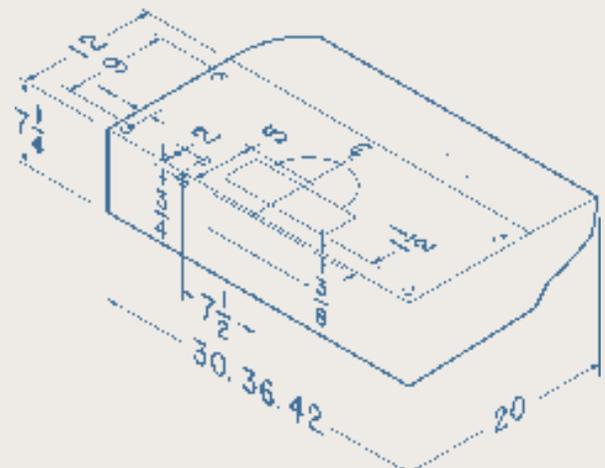

## Allure II

The Allure II provides the style and performance you demand and with DuPont Teflon®, the easy clean-up you want.



- Very quiet 0.9 Sones at normal speed; powerful 300 CFM high setting, HVI 2100 certified
- Easy-to-clean DuPont Teflon® bottom pan, fully enclosed design
- Micro-mesh filters, dishwasher-safe
- Three-level light settings; dual halogen lamp design (bulbs not included)
- Three-speed electronic control
- Standard Heat Sentry™ detects excessive heat and turns unit to high speed
- Offers four-way convertibility 3-1/4" x 10" (horizontal and vertical), 7" round (vertical) and non-ducted, (non-ducted filters sold separately)
- Allure non-ducted filters: 30" – BPSF30, 36" – BPSF36, 42" – BPSF42
- Available in sizes: 30", 36", 42"



### ALLURE II WS2 SERIES

Size	White	Biscuit	Almond	Black	Stainless Steel
30"	WS230WW	WS230BC	WS230AA	WS230BL	WS230SS
36"	WS236WW	WS236BC	WS236AA	WS236BL	WS236SS
42"	WS242WW	WS242BC	WS242AA	WS242BL	WS242SS

### SPECIFICATIONS

Volts	Amps	Normal Setting Sones	High Setting Sones	Boost Mode	Duct
120	1.9	0.9	3.5	300 CFM	3-1/4" x 10" or 7" RD

Teflon® is a registered trademark of DuPont

## Allure I

The quietest range hood in it's category, with the brilliance of halogen lighting. This isn't anything like your Mom's range hood; it's the one she wished for.



- Quiet 1.5 Sones at normal speed, 220 CFM high setting, HVI 2100 certified
- Fully enclosed design for easy cleaning
- Standard large filters, dishwasher-safe
- Two-level light setting; dual halogen lamp design (bulbs not included)
- Two-speed contoured rocker switch control
- Offers four-way convertibility 3-1/4" x 10" (horizontal and vertical), 7" round (vertical) and non-ducted, (non-ducted filters sold separately)
- Allure non-ducted filters: 30" – BPSF30, 36" – BPSF36, 42" – BPSF42
- Available in sizes: 30", 36", 42"



### ALLURE I WS1 SERIES

Size	White	Biscuit	Almond	Black	Stainless Steel
30"	WS130WW	WS130BC	WS130AA	WS130BL	WS130SS
36"	WS136WW	WS136BC	WS136AA	WS136BL	WS136SS
42"	WS142WW	WS142BC	WS142AA	WS142BL	WS142SS

### SPECIFICATIONS

Volts	Amps	Normal Setting Sones	High Setting Sones	Boost Mode	Duct
120	1.7	1.5	4.0	220 CFM	3-1/4" x 10" or 7" RD

*intermediate & economy*





# Quiet Operation

*and superior value.*

The budget-conscious also can find the quality performance in [NuTone's Intermediate and Economy Line of Range Hoods](#). Featuring the performance and reliability people expect from NuTone, they are one of the most popular choices around. Who said you can't have caviar taste within a budget? Get the most features for your money with NuTone Intermediate and Economy range hoods.



## Whispaire™

Consumer research shows that most people use their range hood less frequently because of loud fan noise. That is why the Quiet Hood was developed; to be 40% quieter.

- Patented air chamber design that reduces noise up to 40% over conventional hoods; 200 CFM, 4.5 Sones (vertical discharge), HVI 2100 certified
- Infinitely adjustable, rotary speed control
- Convertible versatility. Installs: 3-1/4" x 10" (vertical or horizontal), 7" round (vertical) or non-ducted (non-ducted filter sold separately), model WA65F
- Larger filter area captures more steam and odors
- Dual 40-watt lamps increase light distribution; night light feature adds safety (lamps not included)
- Includes 3-1/4" x 10" damper/adaptor
- Available in widths: 30", 36", 42"



## SM6500

Deluxe performance in an economical package. The infinitely adjustable speed control allows you to set the hood speed for the perfect combination of ventilation and quiet.


- 190 CFM, 7.5 Sones (3-1/4 x 10 discharge); 220 CFM (7" round discharge), HVI 2100 certified
- Convertible versatility. Installs: 3-1/4" x 10" (vertical or horizontal), 7" round (vertical) or non-ducted (non-ducted filter sold separately), model 41F
- Rotary, infinitely adjustable fan-speed control, two-level light control
- 75-watt cooktop lighting with protective lens (bulb not included)
- Includes 3-1/4" x 10" damper/adaptor
- Available in widths: 30", 36", 42"

### WHISPAIRE WA6500 SERIES

Width	White on White	Biscuit on Biscuit	Almond on Almond	Black	Stainless Steel
30"	WA6530WW	WA6530BC	WA6530AA	WA6530BL	WA6530SS
36"	WA6536WW	WA6536BC	WA6536AA	WA6536BL	WA6536SS
42"	WA6542WW	WA6542BC	WA6542AA	WA6542BL	WA6542SS

### SPECIFICATIONS

Volts	Amps	Vertical Sones	Vertical CFM	Duct
120	3.0	4.5	200	3-1/4" x 10" or 7" round

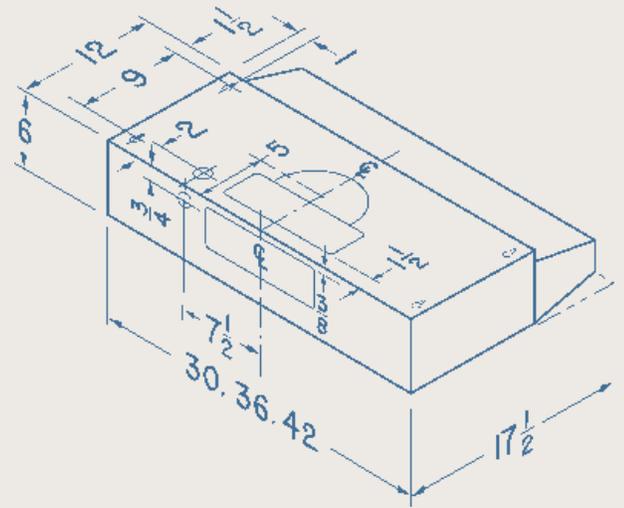


### SM6500

Width	White	White on White	Biscuit on Biscuit	Almond	Almond on Almond	Black	Stainless Steel
30"	SM6530WH	SM6530WW	SM6530BC	SM6530AL	SM6530AA	SM6530BL	SM6530SS
36"	SM6536WH	SM6536WW	SM6536BC	SM6536AL	SM6536AA	SM6536BL	SM6536SS
42"	SM6542WH	SM6542WW	SM6542BC	SM6542AL	SM6542AA	SM6542BL	SM6542SS

### SPECIFICATIONS

Volts	Amps	Sones	Vertical CFM	Duct
120	4.0	7.5	190	3-1/4" x 10"
			220	or 7" round

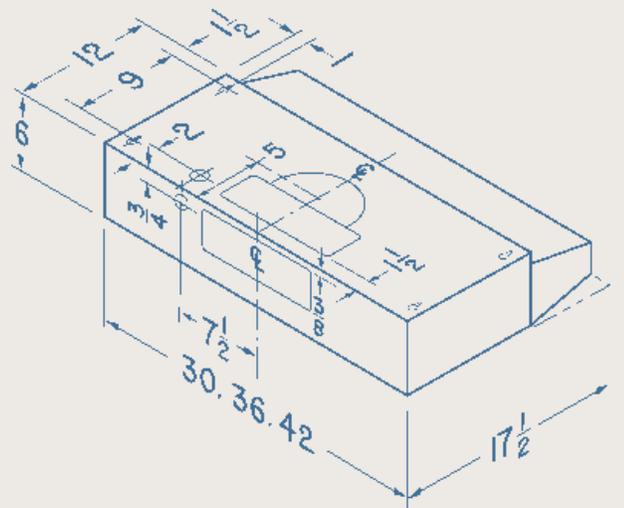

# Economy Hoods


Dependable, reliable venting performance. You can count on NuTone's Economy Range Hoods. Choose from ducted or non-ducted models in sizes and colors that meet your needs.

## RL6100



### 3-1/4" x 10" Ducted Range Hoods

- 160 CFM, 6.5 Sone (vertical or horizontal discharge) performance; HVI 2100 certified
- Dishwasher-safe aluminum grease filter
- Accepts up to 75 watt light (bulb sold separately)
- Duct connector with built-in damper included
- Available widths: 24", 30", 36", 42"

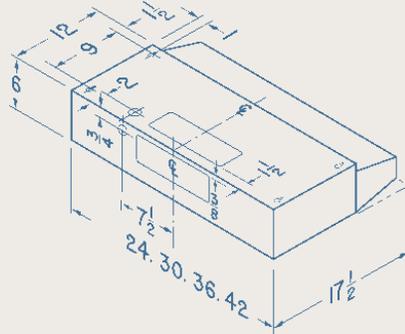

#### RL6100

Width	White	White on White	Biscuit	Almond	Stainless Steel	Black
24"	RL6124WH	RL6124WW	RL6124BT	RL6124AL	RL6124SS	-
30"	RL6130WH	RL6130WW	RL6130BT	RL6130AL	RL6130SS	RL6130BL
36"	RL6136WH	RL6136WW	RL6136BT	RL6136AL	RL6136SS	RL6136BL
42"	RL6142WH	RL6142WW	RL6142BT	RL6142AL	RL6142SS	-

#### SPECIFICATIONS


Volts	Amps	Sones	CFM	Duct
120	2.0	6.5	160	3-1/4" x 10"

## RL6100F



### Convertible Range Hoods

- Four-way convertible; installs ducted 3-1/4" x 10" (vertical and horizontal), 7" round (vertical) and non-ducted (non-ducted filter sold separately), model 41F
- 160 CFM, 6.5 Sone (3-1/4" x 10" discharge) or 190 CFM (7" round discharge) performance; HVI 2100 certified
- Dishwasher-safe aluminum grease filter
- Includes 3-1/4" x 10" damper/adaptor
- Available widths: 24", 30", 36", 42"

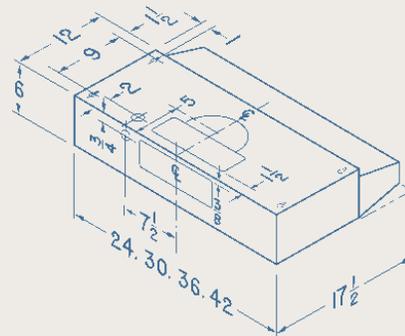

#### RL6100F

Width	White	White on White	Biscuit	Biscuit on Biscuit	Almond	Stainless Steel	Black
24"	RL6124FWH	RL6124FWW	RL6124FBT	RL6124FBC	RL6124FAL	RL6124FSS	RL6124FBL
30"	RL6130FWH	RL6130FWW	RL6130FBT	RL6130FBC	RL6130FAL	RL6130FSS	RL6130FBL
36"	RL6136FWH	RL6136FWW	RL6136FBT	RL6136FBC	RL6136FAL	RL6136FSS	RL6136FBL
42"	RL6142FWH	RL6142FWW	RL6142FBT	RL6142FBC	RL6142FAL	RL6142FSS	RL6142FBL

#### SPECIFICATIONS

Volts	Amps	Vertical Sones	CFM	Duct
120	2.0	6.5	160	3-1/4" x 10"
-	-	6.5	190	7" Round

## RL6000

Utilizes RL6100 series shell, but contains no fan, light or switches.




#### RL6000

Width	White	Biscuit	Almond	Stainless Steel
24"	RL6024WH	RL6024BT	RL6024AL	-
30"	RL6030WH	RL6030BT	RL6030AL	RL6030SS
36"	RL6036WH	RL6036BT	RL6036AL	RL6036SS
42"	RL6042WH	RL6042BT	RL6042AL	-

## RL6200

### Non-Ducted Range Hoods

- Install non-ducted only with charcoal filter, model 41F
- Accepts up to 75 watt light (bulb sold separately)
- Available widths: 21", 24", 30", 36", 42"

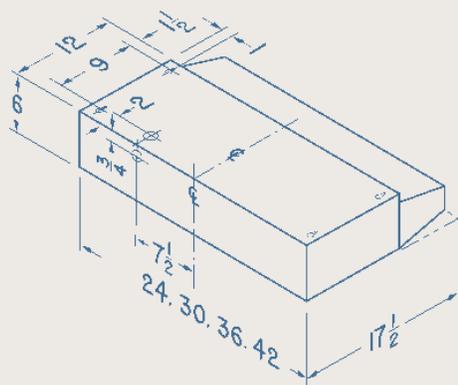

#### RL6200 Non-ducted – Charcoal Filter Included

Width	White	White on White	Biscuit	Almond	Stainless Steel	Black
24"	RL6224WH	RL6224WW	RL6224BT	RL6224AL	RL6224SS	-
30"	RL6230WH	RL6230WW	RL6230BT	RL6230AL	RL6230SS	RL6230BL
36"	RL6236WH	RL6236WW	RL6236BT	RL6236AL	RL6236SS	RL6236BL
42"	RL6242WH	RL6242WW	RL6242BT	RL6242AL	RL6242SS	-

#### SPECIFICATIONS


Volts	Amps	Sones	CFM	Duct
120	2.0	N/A	N/A	Non-ducted

Note: Also available special order, 30" models in Harvest Gold, Avocado and Coffee finishes.

## RL6300

### 7" Round Ducted Range Hoods

- Install 7" round ducted only
- 190 CFM, 6.0 Sone (vertical discharge) performance; HVI 2100 certified
- Dishwasher-safe aluminum grease filter
- Accepts up to 75 watt light (bulb sold separately)
- Built-in 7" adapter; (7" round damper sold separately)
- Available widths: 24", 30", 36", 42"
- RL6300D (Damper Series) available in all colors and sizes, includes 7" round damper

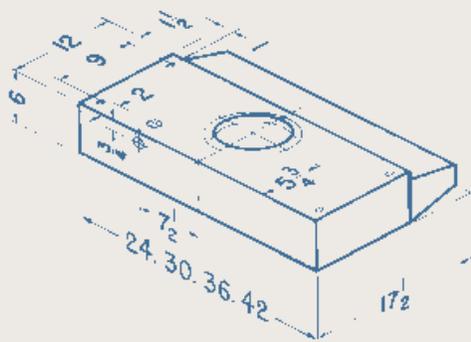

#### RL6300

Width	White	White on White	Biscuit	Almond	Stainless Steel	Black
24"	RL6324WH	RL6324WW	RL6324BT	RL6324AL	RL6324SS	-
30"	RL6330WH	RL6330WW	RL6330BT	RL6330AL	RL6330SS	RL6330BL
36"	RL6336WH	RL6336WW	RL6336BT	RL6336AL	RL6336SS	RL6336BL
42"	RL6342WH	RL6342WW	RL6342BT	RL6342AL	RL6342SS	-

#### SPECIFICATIONS

Volts	Amps	Sones	CFM	Duct
120	2.5	6.0	190	7" Round

# NuTone Replacement Filters

The most commonly requested filters are available in consumer-friendly packs. NuTone filters are made from the highest quality materials to provide the longest life possible and keep your hood operating at peak performance. NuTone also provides replacement filters for many other brands. (See the NuTone price book.)



## REPLACEMENT FILTER SELECTION TABLE & SPECIFICATIONS

Model #	Description	Type	Fits Series
BPSF30	Non-ducted filter set (qty 2) for 30" Allure	Clean Sense Charcoal w/ Indicator	WS1, WS2, WS3
BPSF36	Non-ducted filter set (qty 2) for 36" Allure	Clean Sense Charcoal w/ Indicator	WS1, WS2, WS3
BPSF42	Non-ducted filter set (qty 2) for 42" Allure	Clean Sense Charcoal w/ Indicator	WS1, WS2, WS3
BPS1FA30	Ducted Filter set (qty 2) for 30" Allure I	Aluminum	WS1
BPS1FA36	Ducted Filter set (qty 2) for 36" Allure I	Aluminum	WS1
BPS2FA30	Ducted Filter set (qty 2) for 30" Allure II	Aluminum	WS2
BPS2FA36	Ducted Filter set (qty 2) for 36" Allure II	Aluminum	WS2
BPS3FA30	Ducted Filter set (qty 2) for 30" Allure III	Aluminum	WS3
BPS3FA36	Ducted Filter set (qty 2) for 36" Allure III	Aluminum	WS3
WA65F	Non-ducted filter	Charcoal	WA6500
WA65AF	Ducted Filter	Aluminum	WA6500
41F	Non-ducted filter	Microtek High Efficiency Charcoal	RL6200H, RL6100FH, SL6200H, SM6500
BP29	Ducted Filter	Aluminum	RL6200H, RL6100FH, RL6300H, SL6200H, SM6500
BP58	Non-ducted filter	Charcoal pad	SL6200R
BP57	Combination Filter	Aluminum with Charcoal Pad & Light Lens	SL6200R
RBF30	Baffle Filter Kit for 30" Rangemaster Hood	Stainless Steel	64000
RBF36	Baffle Filter Kit for 36" Rangemaster Hood	Stainless Steel	64000
RBF42	Baffle Filter Kit for 42" Rangemaster Hood	Stainless Steel	64000
RBF48	Baffle Filter Kit for 48" Rangemaster Hood	Stainless Steel	64000
FILTEREB40	Non-ducted filter for Rangemaster	Charcoal	RM50000, RMP17004
FILTER SQUARE	Non-ducted filter for Rangemaster	Charcoal	RM51000, RM52000, RM53000
ROUND FILTER	Non-ducted filter for Rangemaster	Charcoal	61000

# NuTone Wall Shields



Almond Enamel




White Enamel



Biscuit Enamel



Stainless Steel



Black Enamel


Help keep your kitchen looking like new, with a NuTone Wall Shield.

- Provides easy clean-up of cooking splatter
- Durable finish
- Attractive, appliance-matching colors
- Sturdy aluminum with enamel finish, or 24-gauge stainless steel
- Available in 24", 30", 36", or 42" widths; all are 24" high
- Installs easily with four screws

## WALL SHIELD SELECTION TABLE & SPECIFICATION

Finish	24" Model	30" Model	36" Model	42" Model
<i>(Single-Pack)</i>				
Almond/White	SP240108	SP300108	SP360108	SP420108
Biscuit/Black	SP240223	SP300223	SP360223	SP420223
Stainless Steel	SP2404	SP3004	SP3604	SP4204
<i>(4-Pack)</i>				
Almond/White	EP240108	EP300108	-	-
Biscuit/Black	EP240223	EP300223	-	-

# Ducting / Installation Accessories

	845AL	Aluminum Roof Cap with backdraft damper for duct up to 10" square.
	437	High-capacity roof cap-up to 1200 CFM exhaust. (duct).
	843AL	Aluminum Wall Cap with backdraft damper for up to 6" round duct.
	846	Wall cap with weather louver for up to 8" round duct.
	441	Wall cap with gravity damper; 13-1/8" sq. fits 10" round duct.
	838AL	Aluminum wall cap with backdraft damper for 3-1/4" x 10" duct.
	836AL	Aluminum eave cap for 3-1/4" x 10" duct.
	895	7" round damper assembly.
	878	Damper for use in 7" round duct.
	877	Transition – 6" to 3-1/4" x 10".
	886	Transition – 7" to 3-1/4" x 10".
	423	Vertical transition; 4-1/2" x 18-1/2" to 10" round.
	424	Rear transition: 4-1/2" x 18-1/2" to 10" round.
	453	Horizontal left transition; 4-1/2" x 18-1/2" to 10" round (right-end boot).
	454	Horizontal right transition; 4-1/2" x 18-1/2" to 10" round (left-end boot).
	889	3-1/4" x 10" duct (5 pieces). Length of each - 24" long.
	839	90° elbow for 3-1/4" x 10" duct.
	418	10" adjustable elbow (individual).

# Exterior Blower Systems



These exterior blowers offer powerful ventilation performance with all the benefits of exterior mounting (roof or wall) for reduced noise.

- The 332H is recommended for the Eclipse® downdraft
- New, low-profile design fits unobtrusively with all home exterior styles
- Durable, weather-resistant all aluminum construction
- Safety screen keeps small animals and debris away from blower and motor

## EXTERIOR BLOWER SELECTION TABLE & SPECIFICATION

Blower Model	Hood Model	Mounting	CFM	HVI	Volts	Amps	Duct Size	Duct Direction
331H++	RM60000 & 64000	Exterior	600	Y	120	2.3	10" Round	V
332H++	RM60000 & 64000	Exterior	900	Y	120	5.8	10" Round	V
335++	RM60000 & 64000	Exterior	1200	Y	120	3.0	10" Round	V
336++	RM60000 & 64000	Exterior	1500	Y	120	3.8	10" Round	V

++ Model 332KR Rough-In Kit required for mounting with hood series RM60000, 64000 and RMIP. Model 421 10" in-line damper recommended.



331H, 332H



335, 336



# Index

Series	Cat Page	Description	Finishes (May not be in all widths)	Lighting	Bulb Included	Control Features	Control Type	Air-Mover Type	Width (inches)
<b>ECONOMY</b>									
RL6000	29	Rangehood Shell	WH, BT, AL, SS	NA	NA	NA	NA	NA	24, 30, 36, 42
RL6100	29	Rangehood	WH, BT, AL, SS, BL, WW	Single 75W	No	2 speed	Rocker	Fan	24, 30, 36, 42
RL6100F	29	Rangehood	WH, BT, AL, SS, BL, WW, BC	Single 75W	No	2 speed	Rocker	Fan	24, 30, 36, 42
RL6200	30	Rangehood	WH, BT, AL, SS, BL, WW	Single 75W	No	2 speed	Rocker	Fan	24, 30, 36, 42
RL6300	30	Rangehood	WH, BT, AL, SS, BL, WW	Single 75W	No	2 speed	Rocker	Fan	24, 30, 36, 42
RL6300D	30	Rangehood	WH, BT, AL, SS, WW	Single 75W	No	2 speed	Rocker	Fan	24, 30, 36, 42
<b>INTERMEDIATE</b>									
SM6500	27-28	Rangehood	WH, AL, SS, BL, WW, AA, BC	Single 75W	No	Variable speed Hi/Low light	Rotary	Fan	30, 36, 42
WA6500	27-28	Rangehood	WW, BC, AA, SS, BL	Enclosed Dual 40W	No	Variable speed Hi/Low light	Rotary	8" Axial Blade	30, 36, 42
<b>ALLURE</b>									
WS1	24	Rangehood	WW, BC, AA, SS, BL	Halogen Dual 50W	No	2 speed w/ ON indicator Hi/Low light	Rocker	10" Axial Blade	30, 36, 42
WS2	24	Rangehood	WW, BC, AA, SS, BL	Halogen Dual 50W	No	3 speed w/ LED indicator Hi/Med/Low light Heat Sentry	Electronic Push	Centrifugal Blower	30, 36, 42
WS3	23	Rangehood	WW, BC, AA, SS, BL	Halogen Dual 50W	No	3 speed + Boost Delay-off, Filter Indicator Hi/Med/Low light Advanced Heat Sentry	Electronic Push	Centrifugal Blower	30, 36, 42
<b>SPECIALTY</b>									
PM25	20	Power Module	WW, BL	Enclosed Single 60W	No	2 speed	Rocker	Fan	16-3/8
PM44	20	Power Module	WW, BL	Enclosed Single 60W	No	Variable speed Hi/Low light	Rotary	Dual Centrifugal Blower	22
15000 Silhouette	17-18	Slide Out Hood	WW, BT, BL, SS	24" Fluorescent	No	Variable speed, Heat Sentry	Slide	Dual Centrifugal Blower	30, 36
27000 Eclipse	17-18	Down Draft	WH, BT, BL	NA	NA	Variable speed	Rotary	Centrifugal Blower	30, 36
28000 Eclipse	17-18	Down Draft - Ext. Blower	WH, BT, BL	NA	NA	Variable speed	Rotary	Centrifugal Blower	30, 36
RMP1	11-12	Power Pack	SS	Halogen Dual 20W	Yes	Variable Speed, Heat Sentry	Slide	Centrifugal Blower	27-1/2
RMPE	11-12	Power Pack External Blower	SS	Halogen Dual 20W	Yes	Variable Speed, Heat Sentry	Slide	Centrifugal Blower	27-1/2
RMIP	11-12	Pro-Style Insert	SS	Halogen Dual 50W	No	Variable Speed, Heat Sentry Two Level Light	Rotary	Centrifugal Blower	32-3/8, 33-3/4 44-3/8, 45-3/4
<b>PROFESSIONAL</b>									
RM60000 Original	13-14	Professional Style Hood Choice of Int. & Ext. Blowers	SS, WH, BL	2/3 Halogen 50W Dual Heat Lamps	No	Variable speed, Heat Sentry Two Level Light	Rotary	Centrifugal Blower	30, 36, 42, 48, 54, 60, 66, 72
64000 Encore	11-12	Professional Style Hood Choice of Int. & Ext. Blowers	SS, WH, BT, BL	2/3 Halogen 50W Dual Heat Lamps	No	Variable speed, Heat Sentry Two Level Light	Rotary	Centrifugal Blower	30, 36, 42, 48

\*Mounting height is measured from the top of the cooktop to the bottom of the hood

\*\*Visible height of chimney when in the raised position

\*\*\*Minimum height is 24" when using optional RMP series backsplash

† SS=Stainless Steel, BL=Black, AL=Almond w/ Black Trim, AA=Almond on Almond, BT=Biscuit on Biscuit, WW=White on White, WH=White w/ Black Trim

‡ Normal Setting

Visible Shell Height (inches)	Mounting Height*	Mount Type	Ceiling Height Max	Duct	Filters Included	CFM/Sones (norm. setting) Vertical Rectangular	CFM/Sones (norm. setting) Horizontal Rectangular	CFM/Sones (norm. setting) Vertical Round	HVI Certified
<b>ECONOMY</b>									
6	18" to 24"	Under Cabinet	NA	Shell only	NA	-	-	-	NA
6	18" to 24"	Under Cabinet	NA	3-1/4" x 10" (V & H)	Aluminum	160 / 6.5	160 / 6.5	-	Y (2100)
6	18" to 24"	Under Cabinet	NA	3-1/4" x 10" (V & H) 7" round (V) Non-ducted	Aluminum	160 / 6.5	160 / 6.5	190 / 6.5	Y (2100)
6	18" to 24"	Under Cabinet	NA	Non-ducted	Charcoal	-	-	-	NA
6	18" to 24"	Under Cabinet	NA	7" round (V)	Aluminum	-	-	190 / 6	Y (2100)
6	18" to 24"	Under Cabinet	NA	7" round w/ damper (V)	Aluminum	-	-	190 / 6	Y (2100)
<b>INTERMEDIATE</b>									
6	18" to 24"	Under Cabinet	NA	3-1/4" x 10" (V & H) 7" round (V), Non-ducted	Aluminum	190 / 7.5	190 / 7.5	220 / 7.5	-
6	18" to 24"	Under Cabinet	NA	3-1/4" x 10" (V & H) 7" round (V), Non-ducted	Aluminum	200 / 4.5	170 / 4.5	220 / 4.5	Y (2100)
<b>ALLURE</b>									
7-1/4	18" to 24"	Under Cabinet	NA	3-1/4" x 10" (V & H) 7" round (V) Non-ducted	Aluminum	200 (110) / 4.0 (1.5) ††	190 (110) / 4.0 (1.5) †† Boost 220	210 (120) / 4.0 (1.5) ††	Y (2100)
7-1/4	18" to 24"	Under Cabinet	NA	3-1/4" x 10" (V & H) 7" round (V) Non-ducted	MicroMesh Aluminum	240 (110) / 4.5 (1.0) ††	250 (100) / 3.5 (0.9) †† Boost 300	230 (110) / 4.0 (0.8) ††	Y (2100)
7-1/4	18" to 24"	Under Cabinet	NA	3-1/4" x 10" (V & H) 7" round (V) Non-ducted	Professional Aluminum	230 (110) / 3.5 (0.3) ††	250 (100) / 3.5 (0.4) †† Boost 430	220 (100) / 4.0 (0.5) ††	Y (2100)
<b>SPECIALTY</b>									
3-5/8	18" to 24"	Built-In	NA	7" round Non-ducted kit 354NDK	Aluminum w/Light Lens	-	-	250 / 7	Y (2100)
7	18" to 24"	Built-In	NA	3-1/4" x 10" (V) Non-ducted kit 354NDK	Aluminum	410 / 5.5	-	-	Y (2100)
1	18" to 24"	Under Cabinet	NA	3-1/4" x 10" (V)	Aluminum	300 / 4.5	-	-	Y (2100)
7**	NA	Under Counter	NA	3-1/4" x 10" (V, H)	Aluminum	500 / NA	500 / NA	-	Y (2100)
7**	NA	Under Counter	NA	3-1/4" x 10" (V)	Aluminum	900 / NA See Md# 332	-	-	Y (2100)
Flush	24" to 30"	Built-In	NA	6" round (V)	Aluminum	-	-	400/NA	Y (2100)
Flush	25" to 30"	Built-In	NA	8" round (V)	Aluminum	-	-	600 to 1500 See Md# 331H, 332H, 335, 336	-
Flush	28" to 34"	Built-In	NA	See Selected Blower or (Below)	SS and Aluminum	460 and 850 See Md# P5, P8	-	600 to 1500 See Md# 331H, 332H, 335, 336	-
<b>PROFESSIONAL</b>									
18	24" - 30"	Wall	8'	7" round (V) 4-1/2" x 18" (V) 10" round (V)	Aluminum Opt.: SS Baffle	600 to 1500 See Md# RM325H, RM326H, 331H, 332H,	-	-	Y (2100)
10	18"*** - 30"	Cabinet	NA	3-1/4" x 10" (V & H) 7" round (V) 10" round (V)	Aluminum Opt.: SS Baffle	500 to 1500 See Md# P5, P8, 331H, 332H, 335, 336	500 or 850 See Md# P5, P8	-	Y (2100)



**HVI-2100 CERTIFICATION**  
NuTone Rangehoods are tested and certified by the Home Ventilating Institute. This is your assurance that each NuTone unit has been tested and found to consistently deliver the air and sound performance specified.

(Continues on Page 37)

# Index

Series	Cat Page	Description	Finishes (May not be in all widths)	Lighting	Bulb Included	Control Features	Control Type	Air-Mover Type	Width (inches)
<b>DESIGNER</b>									
61000 Ballista	5-6	Chimney Hood	SS	Halogen Dual 20W	Yes	Variable speed	Slide	Centrifugal Blower	30, 35-1/2, 48
61000EX Ballista	5-6	Chimney Hood Exterior Blowers	SS	Halogen Dual 20W	Yes	Variable speed	Slide	Centrifugal Blower	35-1/2, 48
62000 Mirage	5-6	Chimney Hood	SS with Glass	Halogen Dual 20W	Yes	Variable speed, Delay-off, Filter Indicator	Electronic Push	Centrifugal Blower	35-1/2
63000 Provisa	5-6	Island Chimney Hood	SS	Halogen Four 20W	Yes	Variable speed	Slide	Dual Centrifugal Blower	39-3/8 x 27-5/8
63000EX Provisa	5-6	Island Chimney Hood Exterior Blowers	SS	Halogen Four 20W	Yes	Variable speed	Slide	Dual Centrifugal Blower	39-3/8 x 27-5/8
RM50000	7-8	Chimney Hood	SS	Incandescent Dual 40W	Yes	Variable speed	Slide	Centrifugal Blower	30, 36
RM51000	7-8	Chimney Hood	SS	Halogen Dual 20W	Yes	Variable speed	Slide	Centrifugal Blower	35-7/16
RM52000	9-10	Chimney Hood	SS	Halogen Dual 20W	Yes	Variable speed	Slide	Centrifugal Blower	30, 36, 42
RM53000	9-10	Chimney Hood	SS	Halogen Dual 20W	Yes	Variable speed	Slide	Centrifugal Blower	30, 36, 42
RM65000	7-8	Chimney Hood	SS	Halogen Dual 20W	Yes	Variable speed, Delay-off, Filter Indicator	Electronic Push	Centrifugal Blower	35-7/16
RMDD	9-10	Rangemaster Downdraft	SS	NA	NA	Variable speed	Rotary	Centrifugal Blower	30, 36, 48
RMDEX	9-10	Rangemaster Downdraft Exterior Blowers	SS	NA	NA	Variable speed	Rotary	Centrifugal Blower	30, 36, 48
<b>BLOWERS</b>									
P5	13	Interior Blower for 64000 & RMIP	NA	NA	NA	NA	NA	Centrifugal Blower	NA
P8	13	Interior Blower for 64000 & RMIP	NA	NA	NA	NA	NA	Dual Centrifugal Blower	NA
RM325H	13	Interior Blower for RM60000	NA	NA	NA	NA	NA	Dual Centrifugal Blower	NA
RM326H	13	Interior Blower for RM60000	NA	NA	NA	NA	NA	Dual Centrifugal Blower	NA
331H	34	Exterior Blower ††† (see below)	NA	NA	NA	NA	NA	Centrifugal Blower	NA
332H	34	Exterior Blower ††† (see below), including 28000	NA	NA	NA	NA	NA	Centrifugal Blower	NA
335	34	Exterior Blower ††† (see below)	NA	NA	NA	NA	NA	Centrifugal Blower	NA
336	34	Exterior Blower ††† (see below)	NA	NA	NA	NA	NA	Centrifugal Blower	NA

\*Mounting height is measured from the top of the cooktop to the bottom of the hood

\*\*Visible height of chimney when in the raised position

\*\*\*Minimum height is 24" when using optional RMP series backsplash

† SS=Stainless Steel, BL=Black, AL=Almond w/ Black Trim, AA=Almond on Almond, BT=Biscuit on Biscuit, WW=White on White, WH=White w/ Black Trim

††† Exterior blower for 61000EX, 63000EX, RM60000, 64000, RMPE and RMDEX

Visible Shell Height (inches)	Mounting Height*	Mount Type	Ceiling Height Max	Duct	Filters Included	CFM/Sones (norm. setting) Vertical Rectangular	CFM/Sones (norm. setting) Horizontal Rectangular	CFM/Sones (norm. setting) Vertical Round	HVI Certified
<b>DESIGNER</b>									
9-3/8	24" - 30"	Wall	8' to 9'	6" round (V), Non-ducted 8" round (V) on 48" width	Stainless Steel	-	-	450 / 9 900/9.5	Y (2100)
9-3/8	24" - 30"	Wall	8' to 9'	8" round (V)	Professional Aluminum	-	-	600 to 1500 See Md# 331H, 332H, 335, 336	Y (2100)
6-3/8	24" - 30"	Wall	8' to 10'	6" round (V)	Stainless Steel	-	-	450 / 3.5	Y (2100)
10-1/4	24" - 30"	Ceiling	8' to 9' Opt. 10'	8" round (V)	Stainless Steel	-	-	900 / 9.5	Y (2100)
10-1/4	24" - 30"	Ceiling	8' to 9' Opt. 10'	8" round (V)	Professional Aluminum	-	-	600 to 1500 See Md# 331H, 332H, 335, 336	-
11-1/16	24" - 30"	Wall	8' to 9' Opt. 10'	6" round	Professional Aluminum	-	-	270 / 6.5	Y (2100)
5-1/16	24" - 30"	Wall	8' to 9' Opt. 10'	6" round	Professional Aluminum	-	-	370 / 7.0	Y (2100)
5-1/16	24" - 30"	Wall	8' to 9' Opt. 10'	6" round	Professional Aluminum	-	-	370 / 7.0	Y (2100)
3-1/8	24" - 30"	Wall	8' to 9' Opt. 10'	6" round	Professional Aluminum	-	-	370 / 7.0	Y (2100)
11-13/16	24" - 30"	Wall	8' to 9' Opt. 10'	6" round	Professional Aluminum	-	-	450 / 9.0	Y (2100)
9.5	NA	Under Counter	NA	3-1/4" x 10"	Stainless Steel	500 / NA	-	-	Y (2100)
9.5	NA	Under Counter	NA	3-1/4" x 14"	Stainless Steel	600 to 1500 See Md# 331H, 332H, 335, 336	-	-	Y (2100)

#### BLOWERS

NA	NA	Internal to Hood	NA	3-1/4" x 10" (V, H)	NA	460/10.5	500 / 10	-	Y (2100)
NA	NA	Internal to Hood	NA	3-1/4" x 14" (V, H)	NA	850/10.5	900 / 10	-	Y (2100)
NA	NA	Internal to Hood	NA	7" round (V)	NA	-	-	600 / 6.0	Y (2100)
NA	NA	Internal to Hood	NA	4-1/2" x 18" (V)	NA	1200 / 12	1200 / 12	-	Y (2100)
NA	NA	Roof or Outside Wall	NA	10" round (V)	NA	-	-	600 / NA	Y (2100)
NA	NA	Roof or Outside Wall	NA	10" round (V)	NA	-	-	900 / NA	Y (2100)
NA	NA	Roof or Outside Wall	NA	10" round (V)	NA	-	-	1200 / NA	Y (2100)
NA	NA	Roof or Outside Wall	NA	10" round (V)	NA	-	-	1500 / NA	Y (2100)



**HVI-2100 CERTIFICATION**  
NuTone Rangehoods are tested and certified by the Home Ventilating Institute. This is your assurance that each NuTone unit has been tested and found to consistently deliver the air and sound performance specified.

# NuTone® quality line of products...

QUALITY AND STYLE Door Chimes  announce all visitors with style

Range Hoods  complement your decor while ventilating your kitchen

Heaters  add warmth in drafty areas Home Ventilation  clears up

foggy windows and steamy mirrors Ceiling Fans  circulate air and add

drama to rooms Medicine Cabinets  reflect your good taste while adding extra

storage Attic Fans  control temperatures in non-vented areas Indoor

Air Quality  for a fresher, cleaner environment Ironing Centers  simplify pressing

with fold away convenience SenSonic® Home Theater  surrounds you with beautiful

music Intercoms  communicate with the push of a button Central Vacs  for

quiet performance with optimum cleaning THROUGHOUT OUR FULL LINE OF PRODUCTS.

# NuTone®

NuTone, Inc.

4820 Red Bank Road, Cincinnati, OH 45227 • 1-800-543-8687

In Canada: Broan-NuTone Canada, Inc. • 1-888-882-7626

[www.nutone.com](http://www.nutone.com)

NuTone reserves the right to change product and specifications without notice.



Catalog 99850649T  
© 2005 NuTone, Inc.  
Printed in U.S.A.  
02/2005