



# Specifications

## Heavy Duty Drill



		DP3002	DP3003	DP4000	DP4001	DP4002	DP4003
Drilling capacities	Steel	10 mm (3/8")	10 mm (3/8")	13 mm (1/2")	13 mm (1/2")	13 mm (1/2")	13 mm (1/2")
	Wood	32 mm (1-1/4")	32 mm (1-1/4")	38 mm (1-1/2")	38 mm (1-1/2")	38 mm (1-1/2")	38 mm (1-1/2")
Continuous rating	120V	800 W	800 W	800 W	800 W	800 W	800 W
	110 V, 220V, 230 V, 240 V	710 W	710 W	750 W	750 W	750 W	750 W
No load speed		0 - 1,200 min <sup>-1</sup> (rpm)	0 - 1,200 min <sup>-1</sup> (rpm)	0 - 900 min <sup>-1</sup> (rpm)	0 - 900 min <sup>-1</sup> (rpm)	0 - 600 min <sup>-1</sup> (rpm)	0 - 600 min <sup>-1</sup> (rpm)
Max. Torque		36 N.m	36 N.m	51 N.m	51 N.m	73 N.m	73 N.m
Chuck		Key	Keyless	Key	Keyless	Key	Keyless
Overall length		304 mm (12")	296 mm (11-5/8")	304 mm (12")	308 mm (12-1/8")	304 mm (12")	308 mm (12-1/8")
Net weight		2.0 kg (4.4 lbs)	1.8 kg (3.9 lbs)	2.2 kg (4.9 lbs)	2.0 kg (4.4 lbs)	2.2 kg (4.9 lbs)	2.0 kg (4.4 lbs)
Power supply cord		2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)

# Standard equipment

## Heavy Duty Drill

Model	DP3002	DP3003	DP4000	DP4001	DP4002	DP4003
Side Grip	P/N 134903-7	P/N 134903-7	P/N 134903-7	P/N 134903-7	P/N 134903-7 •134910-0	P/N 134903-7 •134910-0
Drill Chuck	P/N 193224-6	—	P/N 193228-8	—	P/N 193228-8	—
Chuck Key	P/N 763434-5	—	P/N 763434-5	—	P/N 763434-5	—
Keyless Drill Chuck	—	P/N 193226-2	—	P/N 192956-2	—	P/N 192956-2

• For European Countries

# Optional accessories

## Heavy Duty Drill

	Part No.		Part No.
Depth Gauge	321059-7	Plastic Carrying Case	824595-7

Makita Corporation

3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan

PRINTED IN JAPAN Z15128-2 2000-8

A world's leading manufacturer of power tools



Double Insulation

Reversing

# Heavy Duty Drills


**10 mm (3/8") (0~1,200 min<sup>-1</sup>) Model DP3002/DP3003**

**13 mm (1/2") (0~900 min<sup>-1</sup>) Model DP4000/DP4001**  
**(0~600 min<sup>-1</sup>) Model DP4002/DP4003**

*Makita new heavy duty drills for professional. Featuring high power motor, more torque and more durability.*



**NEW**

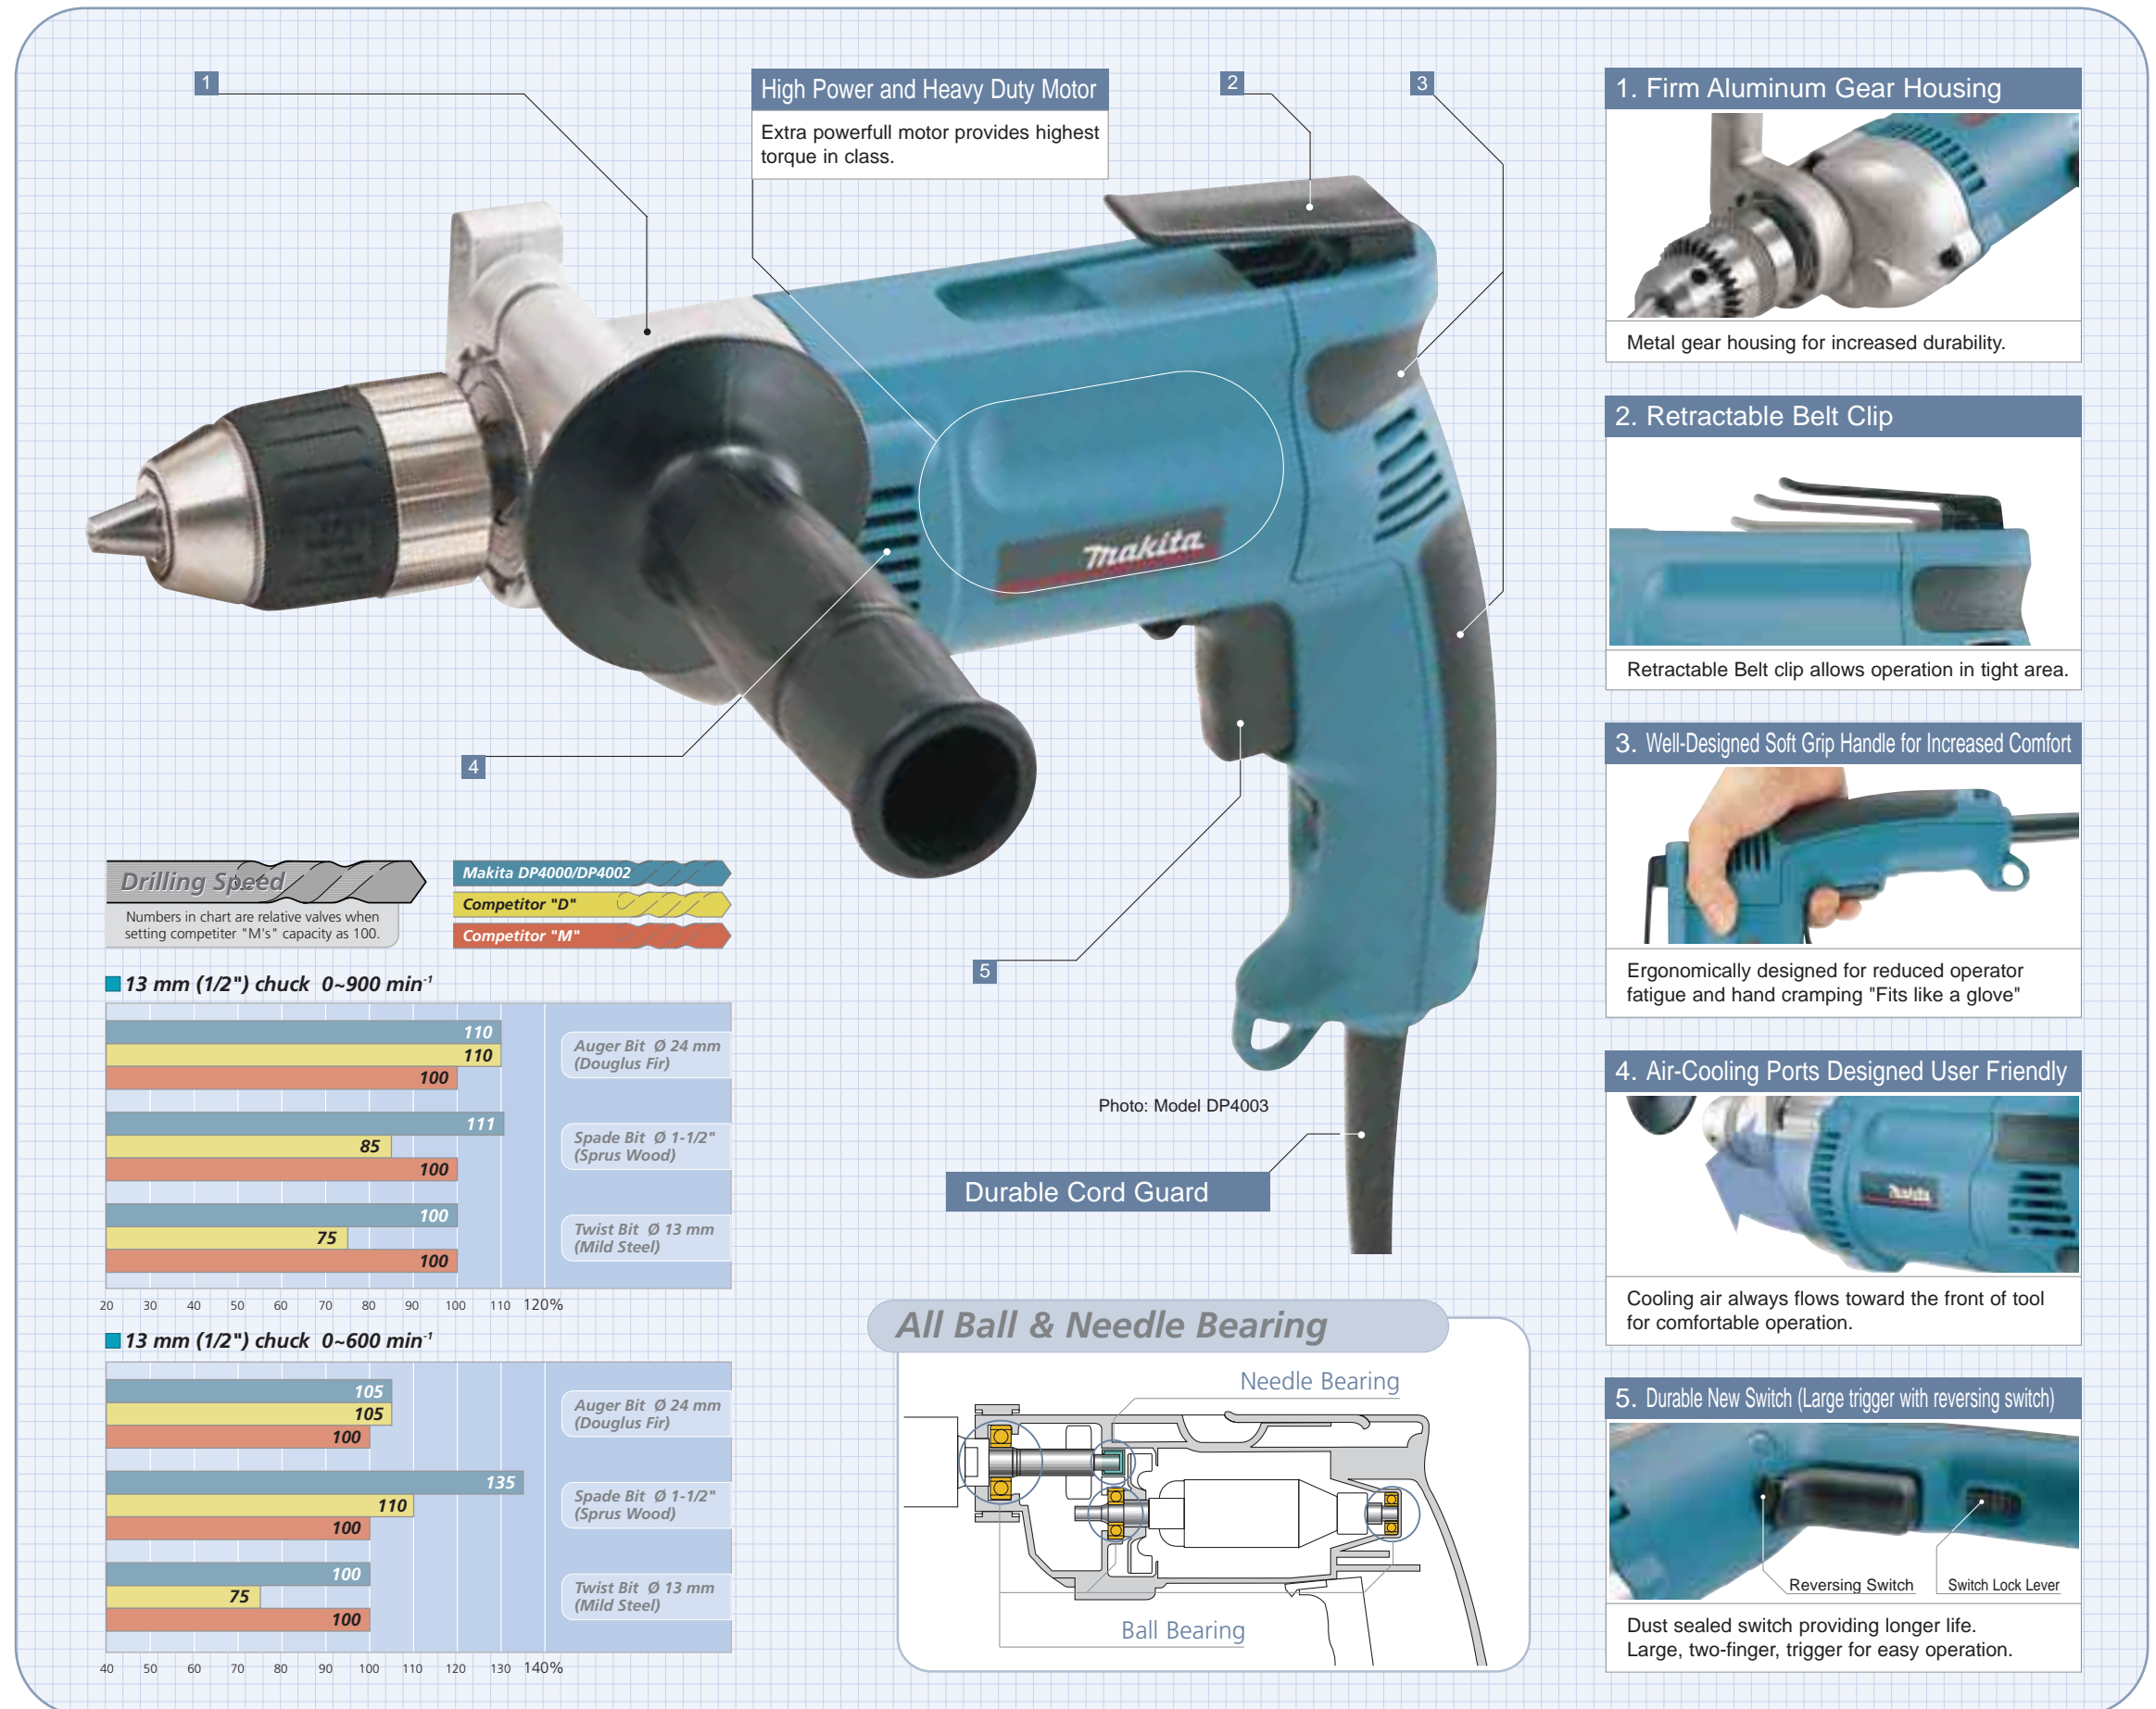**1. Firm Aluminum Gear Housing**  
Metal gear housing for increased durability.

**2. Retractable Belt Clip**  
Retractable Belt clip allows operation in tight area.

**3. Well-Designed Soft Grip Handle for Increased Comfort**  
Ergonomically designed for reduced operator fatigue and hand cramping "Fits like a glove"

**4. Air-Cooling Ports Designed User Friendly**  
Cooling air always flows toward the front of tool for comfortable operation.

**5. Durable New Switch (Large trigger with reversing switch)**  
Dust sealed switch providing longer life. Large, two-finger, trigger for easy operation.

**High Power and Heavy Duty Motor**  
Extra powerful motor provides highest torque in class.

**Durable Cord Guard**

**All Ball & Needle Bearing**

Photo: Model DP4003

**Drilling Speed**  
Numbers in chart are relative values when setting competitor "M's" capacity as 100.

Bit Type	Makita DP4000/DP4002	Competitor "D"	Competitor "M"
13 mm (1/2") chuck 0~900 min <sup>-1</sup>			
Auger Bit Ø 24 mm (Douglas Fir)	110	110	100
Spade Bit Ø 1-1/2" (Sprus Wood)	111	85	100
Twist Bit Ø 13 mm (Mild Steel)	75	100	100
13 mm (1/2") chuck 0~600 min <sup>-1</sup>			
Auger Bit Ø 24 mm (Douglas Fir)	105	105	100
Spade Bit Ø 1-1/2" (Sprus Wood)	135	110	100
Twist Bit Ø 13 mm (Mild Steel)	75	100	100

