


SONANCE®

VP67LCR
(WITHOUT GRILLE)

Sonance Visual Performance® Series

VP67LCR Home Theater Speaker

Sonance Visual Performance® Series speakers combine elegant, modern style with outstanding audio performance. New micro flange grilles have only 0.20" of trim, giving these speakers a clean, sleek appearance that seamlessly integrates into any designed space. The grilles attach via powerful magnets, for simple, quick installation. A one-step paint process saves time compared to traditional flanged speakers.

Incorporating the same drivers as the VP67 and VP67R but in a traditional dual-woofer/single-tweeter home theater speaker format, the VP67LCR makes an ideal center-channel counterpart for any Visual Performance series left

and right channel speaker pair in small or medium-sized home theater systems. And by using the VP67LCR in all three front-channel positions (left, center and right) and other Visual Performance series speakers as surround channels, an exceptionally high-performance home theater system can be assembled.

Installation is quick and easy thanks to the RotoLock® mounting system. Exclusive FastMount® tabs hold the speaker in the mounting hole during installation, allowing the installer to let go of it to pick-up tools or other items. And the VP67LCR is designed to fit between standard 16" on-center studs (the standard stud spacing in the USA).

Features:

- Micro flange steel grille has only 0.20" of ABS trim for a sleek, modern appearance. Powerful neodymium magnet grille attachment eases installation.
- Traditional dual woofer/single tweeter home theater speaker configuration.
- Visually and sonically matches other Sonance Visual Performance® Series speaker models.
- Dual carbon fiber cone woofers produce deep, powerful bass and provide high-output low-distortion music and film dialog.
- Fits standard 16" on-center stud construction.
- Exclusive new FastMount® tabs hold the speaker in the mounting hole during installation, allowing the installer to let go of the speaker to pick-up tools or other items.
- The Rotolock® mounting system makes installation quick and easy.
- A three position tweeter adjustment switch lets you balance the speaker's high-frequency energy to better complement the room's setup and acoustics.
- Grilles and frames can be painted together, saving installation time.

Specifications:

Sonance Visual Performance VP67LCR


Tweeter:	1" (25mm) Aluminum dome, Ferrofluid-cooled
Woofer:	Two 6½" (165mm) Coated carbon fiber cones with rubber surrounds and extended pole pieces
Frequency Response:	43Hz – 20kHz ±3dB
Impedance:	6 ohms nominal; 4 ohms minimum
Power Handling:	5 watts minimum; 140 Watts maximum
Sensitivity:	90dB SPL (2.83V/1 meter)
Grille Material:	Perforated Steel
Adjustments:	±3dB tweeter level
Grille Dimensions (W x H):	16" x 8¾" (406mm x 213mm)
Mounting Depth:	3⅝" (91mm)
Cutout Dim (W x H):	14⅝" x 6⅞" (371mm x 175mm)
Shipping Weight:	8 lbs. (3.6kg) Each



Sonance Visual Performance® Series

VP67LCR Home Theater Speaker

Dimensions:

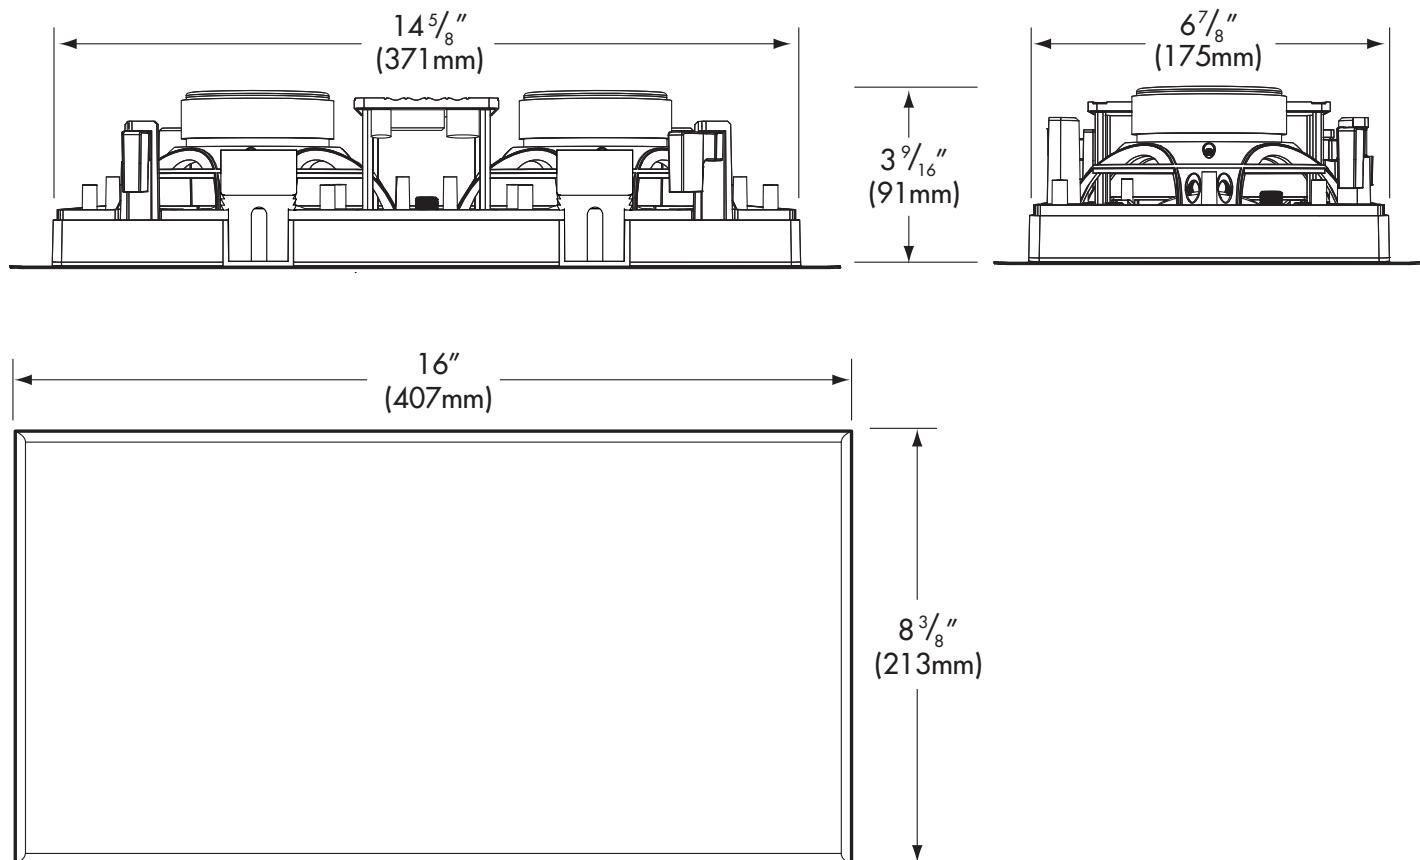

SONANCE®

212 Avenida Fabricante
San Clemente, CA 92672-7531 USA
(800) 582-7777 or (949) 492-7777
FAX: (949) 361-5151
Technical Support: (800) 582-0772
WWW.SONANCE.COM

Limited Lifetime Warranty:

Sonance warrants to the original retail purchaser only that this Sonance product will be free from defects in materials and workmanship, provided the product was purchased from a Sonance Authorized Dealer. For full warranty information, please see the Instruction Manual.

©2008 Sonance, All Rights Reserved.
Sonance, Visual Performance, FastMount and RotoLock are trademarks or registered trademarks of Dana Innovations.

Due to continuous product improvement, all features and specifications are subject to change without notice.

For the latest Sonance product information, go to:

www.sonance.com