


Lanzar

5.6" TFT LCD COLOR MONITOR

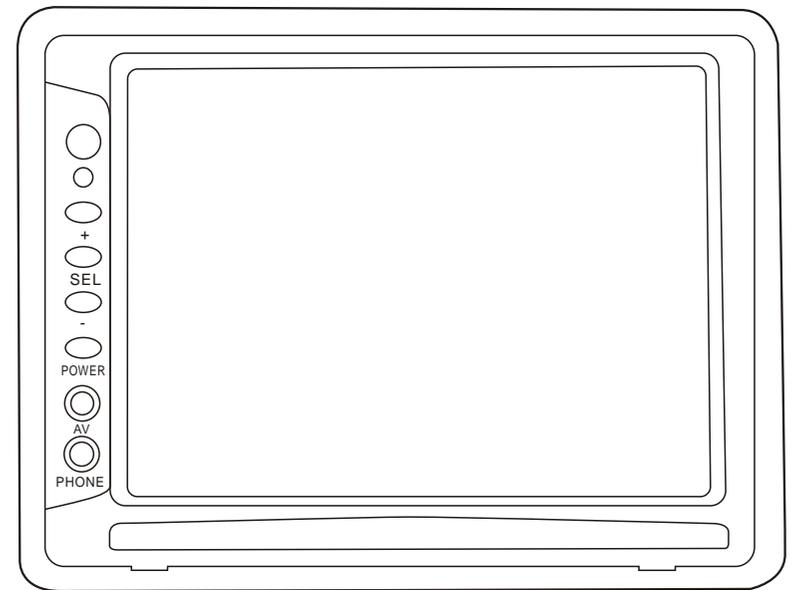


www.lanzar.com

**WARNING:
DO NOT WATCH MONITOR WHILE
VEHICLE IN MOTION IT CAN BE
HAZARDOUS**


SVHR56

Installation Guide:

1.Slide monitor into dash mount S2 and then use fastener to tighten(Optional)




2.Firmly attach dash mount on a flat surface and adjust viewing angle of monitor by tightening the fastener at the side

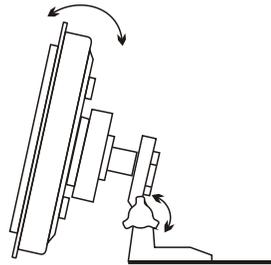

A.When you install the monitor into the seat head cushion make sure that the monitor connecting cable assembly has already been pull through by the supporting pipe.

B.Before connecting the monitor, pull the connecting cable assembly through the headrest shroud as shown in diagram2.

C.Place headrest shroud into the opening and secure it with correct fasteners.

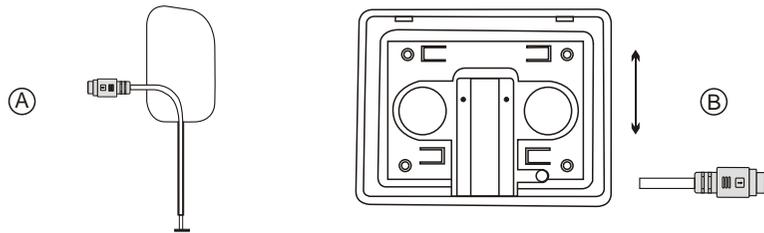

Note: Installing Method of main cable assembly

- 1.Reeve the main cable assembly through (or beside) the head rest support tube.
- 2.Secure and protect the cable assembly from damage when the head rest is adjusted.

Maintenance

To avoid electrical shock, do not open the enclosure. High voltage is present. No user serviceable parts inside the enclosure.


Do not use any chemical solvent, cleaning agent or corrosive detergent to clean away dirt on the surface of the screen. To clean off dirt or finger print, we recommend the use of a soft damp lens cleaning cloth.

Should there be requirement to replace blown fuse, do remember to disconnect all power supply and switched off the unit before replacing it with a new one. Use only correct rating fuse to avoid damaging the unit.

CAUTION


1. Do not operate the monitor at temperatures below 0°C or above 40°C
2. Keep the monitor clean and dry.
3. Always seek qualified personnel to perform repairs. Never attempt your own repairs.
4. Do not drop the monitor or expose to strong impacts.
5. Do not expose to direct sunlight for extended periods of time.

- D. Connect the connecting cable assembly to the monitor.
- E. Ensure there is no foreign material is trapped inside the enclosure, before pushing the monitor into the headrest shroud. Make sure that the monitor is securely locked in place.

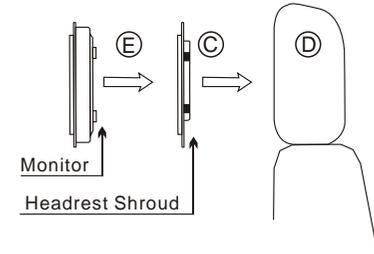


Removal:


Insert durable card between monitor and headrest shroud to remove the monitor.

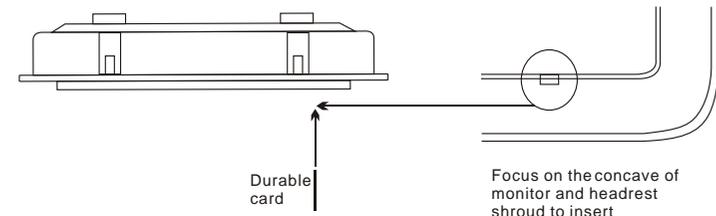


Trimount Mounting

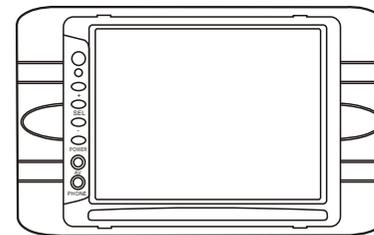

(Sun-Visor)

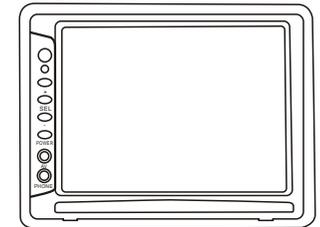


(Headrest)




(Stand)

3)、 Remote Control Operating Instruction:


- 1.mute
- 2.sleep
- 3.contrast control+
- 4.brightness control-
- 5.contrast control-
- 6.brightness control+
- 7.Hue control+
- 8.Hue control-
- 9.volume control+
- 10.volume control-
- 11.video1/video2
- 12.power on/off
- 13.color control+
- 14.color control-
- 15.mode:16:9/4:3
- 16.prference
- 17.system

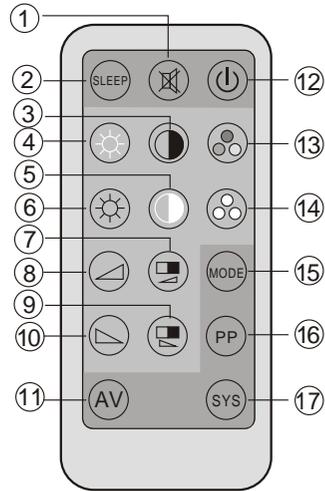

CONNECTOR

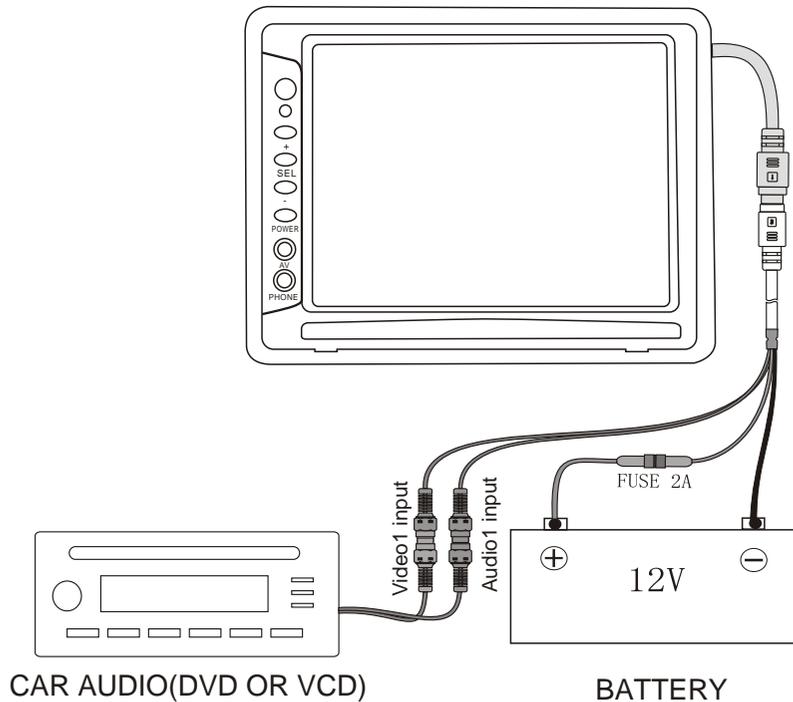

Basic Operating instructions

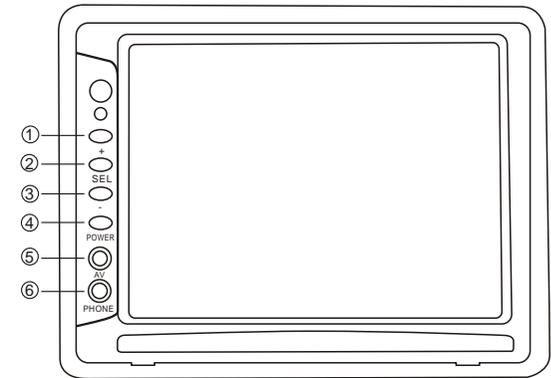

- 1.SEL+
- 2.SELCT
- 3.SEL-
- 4.POWER ON/OFF
- 5.AUDIO/VIDEO SWITCH
- 6.EARPHONE

Precautions:

- 1.This unit should be install by qualified technicians or service personnel.
- 2.this product is designed to operate with a 12V ,negative ground battery system.
- 3.Disconnect the ground wire from the battery terminal before connecting the electrical system.
- 4.Refer to the electrical connection diagram to avoid wrong connection of the electrical system. Always use authorized service center for service assistance.
- 5.Use proper insulation material to prevent short-circuiting of the supply system.
- 6.Tighten all loose wires after installation.
- 7.Refer to is operating instruction for system upgrade and operation.

Accessories Supplied

Item	Description	Q'ty	Mark
1	Monitor	1	
2	Remote Control	1	W/Battery
3	Power Cable	1	
4	AV Cable	1	
5	Bracket	1	
6	Earphone	1	
7	ACC.Bag	1	
8	Manual	1	