

PYLE[®]

OWNER'S MANUAL

7.2" TFT LCD MONITOR

7.2" HEADREST LCD MONITOR
YOU'RE NOW READY FOR
MORE FUN ON
THE ROAD THAN EVER BEFORE

PL72HBTF
WWW.PYLEAUDIO.COM

7.2" HEADREST NTSC LCD MONITOR OSD ADJUSTMENT

1. Press the POWER ON/OFF button on the monitor or remote unit to turn on the power.
 - a. Touch power switch on the monitor to select video/audio inputs.
 - b. Press power switch on the monitor 2 second to turn off the monitor
2. Press MENU button on the monitor or remote unit to active the OSD function show on the LCD screen and press again to select the adjustment item as below.
 BRIGHTNESS
 CONTRAST
 COLOR
 VOLUME
3. Press UP/DOWN button on the monitor or remote unit to increase or decrease the value of the adjustment functions for optimum viewing.
 REMOTE CONTROL UNIT
 POWER on/off

FEATURES ON SCREEN DISPLAY CONTROL
 ON SCREEN DISPLAY CONTROL
 WIDE SCREEN LCD PANEL



4. WIRE CONNECTION

Red wire: +ve
 Black wire: -ve
 Violet wire: none
 Yellow RCA Jack: Video1 In
 Yellow RCA Jack: Video2 In
 Red RCA Jack: AUDIO

5. ACCESSORIES

EXTENSION MINIDIN CABLE 1PC
 REMOTE CONTROL UNIT 1 PC
 VIDEO CABLE 1PC
 HEADREST SHROUD

6. LCD MONITOR REMOTE CONTROL

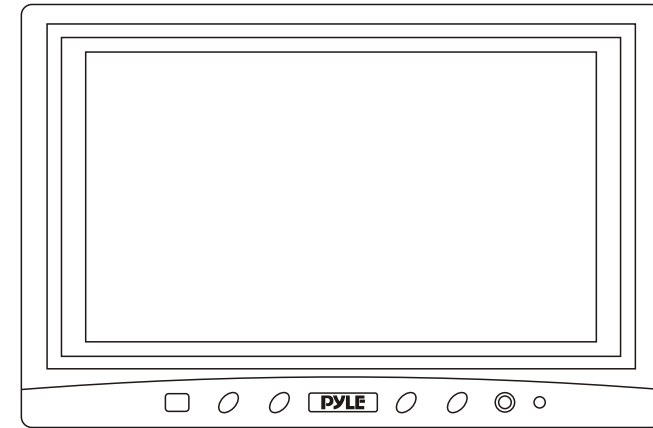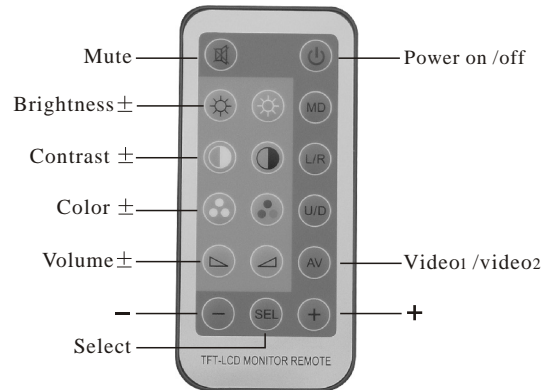

SPECIFICATIONS:

DISPLAY.....	7.2" WIDE SCREEN LCD
BACK LIGHT	BUILT IN CCFT
DOT FORMAT	960X234
VIDEO INPUT LEVEL	COMPOSITE 1.0V P-P/75 OHMS
VIDEO INPUT SYSTEMS.....	NTSC AUTO SWITCHING
POWER SOURCE.....	DC 12V +/- 15%
POWER CONSUMPTION	700Ma (max) / 10w (max)
OPERATION TEMPERATURE	-20 Celcius to+ 75 Celcius
STORAGE TEMPERATURE	-30 Celcius to+ 85 Celcius
DIMENSIONS	215 (W) x153 (H) x38 (D) mm
NET WEIGHT	0.8 KGS