





PYRAMID

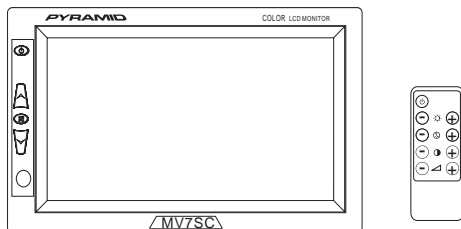

MV7SC


Thank you for purchasing the Color LCD monitor. To enjoy the features of this device and to ensure years of trouble-free operation, please read this manual carefully and follow the instructions.

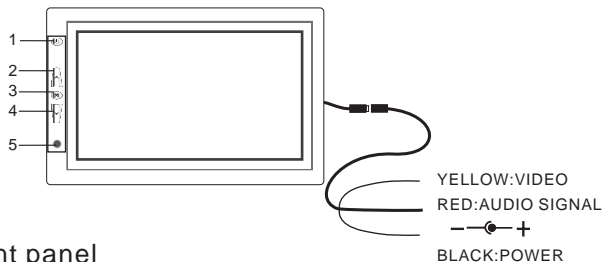

Front panel

- | | |
|-----------------------|------------------------|
| 1. Power on/off | 2. Positive adjustment |
| 3. Activation of menu | 4. Negative adjustment |
| 5. IR | |

Remote control

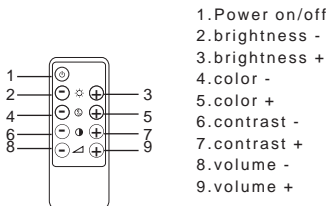

- | |
|-----------------|
| 1. Power on/off |
| 2. brightness - |
| 3. brightness + |
| 4. color - |
| 5. color + |
| 6. contrast - |
| 7. contrast + |
| 8. volume - |
| 9. volume + |

Basic operation


1. Make sure the video and power connection are properly executed.
2. Press MENU to display the adjustments in this order: Brightness-> Color-> Contrast-> Volume-> Brightness...
3. Adjust the values by press ▲▼ on the front panel.
4. The POWER button activates/deactivates the monitor. It is not necessary to disconnect the power source.

Specification

Screen size:	7.2 inch
System:	PAL & NTSC
Power source:	DC 12V +/- 10%
Power consumption:	< 7.2W
Video input:	Composition Video Signal
Operating temperature:	0-60°C
Storage temperature:	-20-80°C

Accessories

1 X bracket	1 X headrest
1 X remote control	1 X din lead
1 X user's manual	

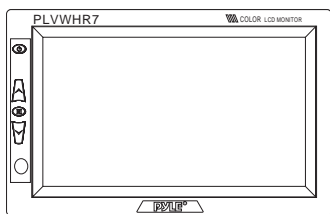

WWW.PYRAMIDCARAUDIO.COM