



Externally Mounted Ventilators – Install Quick Specs VEN150E

Installation Type & Discharge Direction

Mounted outside. Can be mounted on exterior roof or wall.

CFM Rating

1500 CFM

Minimum Duct Size

10" round

Maximum Equivalent Straight Duct Length

50 feet

Equivalent Straight Lengths

- 1 foot of 8" or 10" duct = 1 foot
- 1 foot of 3 ¼" x 14" rectangular = 1 foot
- 8" round 90 degree Elbow = 5 feet
- 10" round 90 degree Elbow = 3 feet
- Wall or Roof Cap = 2 feet

Standard Features

- Adaptable to all Wind Crest hoods
- Weather-resistant galvanized steel construction
- Thermally protected, permanently lubricated motor
- Dynamically balanced 12" diameter blower wheel
- Neoprene resilient anti-vibration mounted
- Built-in Flashing plate for roof or wall mount
- Easily removed blower cover for periodic cleaning

Ventilator Motor Ratings*

Hoods without Heat Lamps:

12.0 Amps @ 120 V AC, 60 Hz


Hoods with Heat Lamps:

16.4 Amps @ 120 V AC, 60 Hz

***20 Amps @ 120 V AC, 60 Hz required when using VEN150E ventilator.**

Ventilator Carton Weight:

VEN150E = 80 lbs.

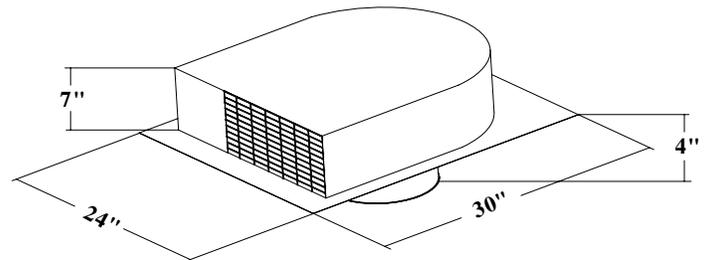


VEN150E






**Internally Mounted Ventilators – Install Quick Specs
VEN150E**




#10100 = 14" w X 4 1/4" d x 8 1/2" h
Rectangular to 8" Round duct


#10287 = 14" w X 4 1/4" d x 8 1/2" h
Rectangular to 10" Round duct




#10099 = 14" w x 4 1/4" d x 6 1/2" h
Rectangular transition




#10172 = 10" round Starting Collar



#10173 = 10" to 8" Round Adapter




#10288 = 8" Round Backdraft Damper
#10289 = 10" Round Backdraft Damper




11 1/2" h x 32 3/4" w

#10542 = Plenum Transition to 10" round (use with dual Internal or Remote blower on 48" and larger WSL, WCL, WER60 or PSL66 hoods)




11 1/2" h x 14" w

#10377 = 10" Round Rear Discharge



11 1/2" h x 16" w

#10566 = 10" Round Left Side Discharge



11 1/2" h x 16" w

#10378 = 10" Round Right Side Discharge