



Wall Mounted Hoods – Install Quick Specs WSL Series Hoods - 27” Depth

Installation Type & Discharge Direction

Wall – vertical discharge

WSL427 = 88 lbs. WSL607 = 120 lbs.

Discharge Size off Hood Top

14” x 4 1/4” rectangular

Discharge Transition – purchased separately

See “Ventilation” section for options

Standard Features

- 304 Series, 18 gauge stainless steel
- Halogen lighting (dual 50 watt lamps 30” to 48” widths/four 50 watt lamps 54” or greater widths) with Hi/Lo setting
- Commercial-grade, high luster stainless steel baffle filters
- All Stainless Steel Finish Hoods can be installed Indoors or Outdoors (see Installation Instructions)
- Widths: 30” to 60” in 6” increments

Finishes



- Stainless Steel (S)
- Stainless Steel with Polished Chrome Accents (SPC)

Optional Upgrades


- 250 Watt Heat Lamp Fixtures (add “H” to hood model number) e.g. WSL304SH
- 6” or 12” Canopy Extensions in matching finish (Model(s): 6CE30S or 12CE30S for 30” wide hood in stainless steel finish).
NOTE: Specify desired canopy height, width and finish when ordering.
- Chrome or Brass Rolled Pot Rails (Model(s): ACCBRC or ACCBRB) – *indoor use only*
- Stainless Steel Back Splash with drop-down chrome racks supports a maximum of 30 lbs. (BS plus width – e.g. BS30)

Hood Carton Weight:

WSL307 = 73 lbs. WSL487 = 100 lbs.
WSL367 = 81 lbs. WSL547 = 110 lbs.

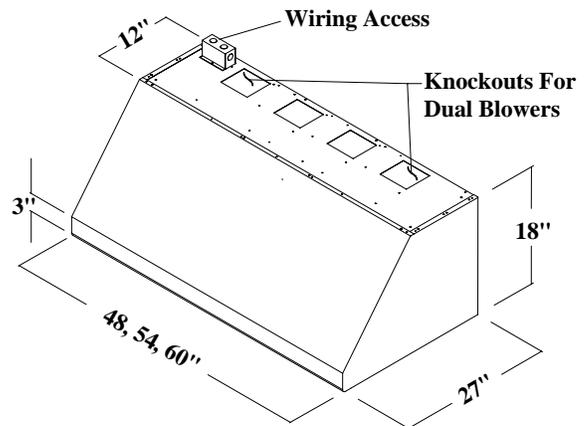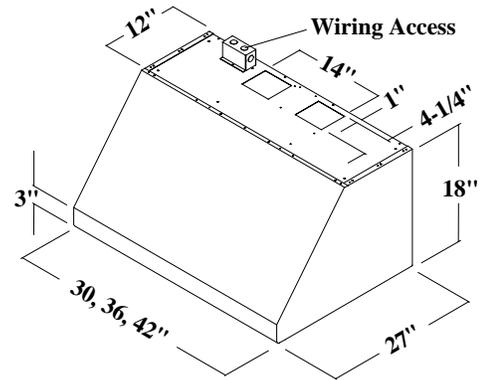

WSL Hoods

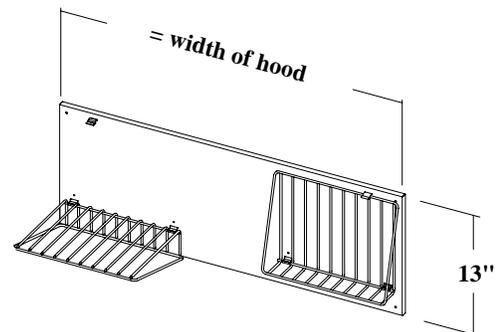

“BS” Warming Shelf Accessory with Chrome Racks



**Wall Mounted Hoods – Install Quick Specs
WSL Series Hoods - 27” Depth (cont.)**

Maximum Power Supply Required*

15 Amps @ 120 V AC, 60 Hz
20 Amps @ 120 V AC, 60 Hz (when used with VEN150E remote ventilator)

**Electrical rating is maximum required for any combination of ventilator, lighting and heat lamps.*

Outdoor Electrical Requirements

Damp outdoor installations require a fault interrupter circuit connection.

Hood Lighting Rating

- 30” to 48” widths: 100 watts w/halogen lights or 600 watts w/halogen + heat lamps
- 54” and 60” widths: 200 watts w/halogen lights or 700 watts w/halogen + heat lamps

Ventilator Options

640 CFM, Internal Blower: VEN060I**
1000 CFM, Remote Blower: VEN100E
1500 CFM, Remote Blower: VEN150E

Ventilator Motor Ratings

VEN060I: 2.8 Amps @ 120 V AC, 60 Hz**
VEN100E: 8 Amps @ 120 V AC, 60 Hz
VEN150E: 12 Amps @ 120 V AC, 60 Hz


**Two VEN060I internal ventilators can be installed in WSL hoods 48” or wider. This installation requires part #10220 dual wire harness. Refer to the installation instructions for full details.

Ventilator Dimensions & Accessory Transitions (see Ventilator section)


CUSTOMER SPECIFICATION:

Hood Width Specified & finish:
(e.g.WSL304S)
Add Keep Hot Lamps: (e.g. WSL304SH)
Add Special Edge Finish to Stainless Models: (i.e. WSL304SHSPC)

Accessories Selected: (e.g. Back splash with racks, chrome or brass rails, canopy extensions)

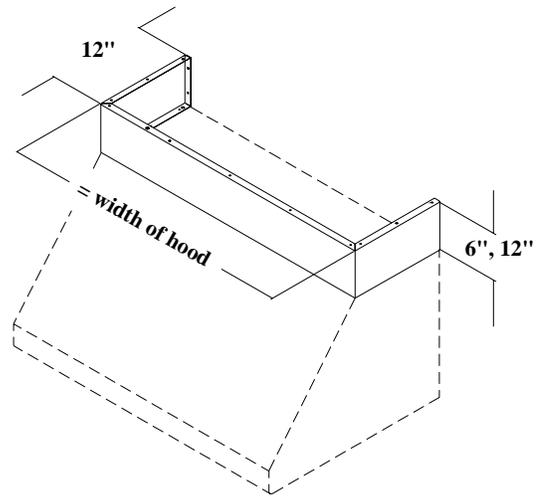

“CE” Canopy Extensions (6” or 12” height) for WSL hoods

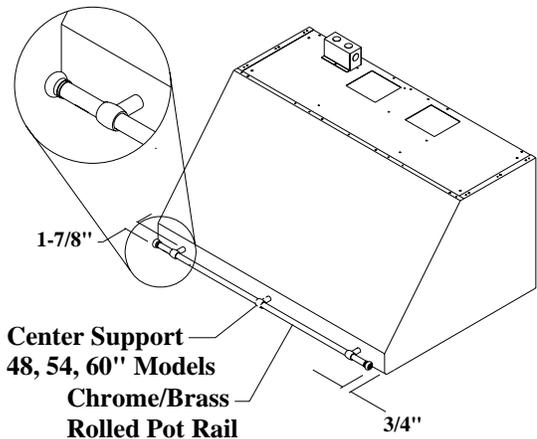

Final Hood Model Selected:

Add Any Accessories:

Specify Ventilator Selected & Transitions: