

RANGE COMPOSITION

A range of central hoods guaranteeing a rational and versatile solution to extraction problems over most cooking appliances. The sloped front gives them a neat appearance while taking up less space, making them particularly suitable for small kitchens. The range consists of hoods with 6 different lengths (2000, 2400, 2800, 3200, 3600 and 4000 mm) and 2200 mm deep.



BLOCK - B line - 2200 mm

304 AISI CENTRAL TYPE HOODS **ZANUSSI** PROFESSIONAL



FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in 304 AISI stainless steel.
- ◆ Labyrinth filters in 304 AISI stainless steel easily removable for cleaning. Labyrinth filters guarantee constant filtration to avoid clogging and protect against fire.

- ◆ Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- ◆ External panels with upturned edges to avoid injuries.
- ◆ Blind panels in 304 AISI stainless steel for a correct exhaustion.
- ◆ The outlet holes are sized in order to minimize drops in pressure.

- ◆ Pressure gauging for perfect calibration.
- ◆ Condensate collection tray in 304 AISI stainless steel.
- ◆ Eyebolts and screw anchors for ceiling installation.
- ◆ Prearranged for installation of lighting.

| TECHNICAL DATA | | | | | | |
|-----------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| CHARACTERISTICS | MODELS | | | | | |
| | BC2220DT 642369 | BC2224DT 642370 | BC2228DT 642371 | BC2232DT 642372 | BC2236DT 642373 | BC2240DT 642374 |
| External dimensions - mm | | | | | | |
| width | 2000 | 2400 | 2800 | 3200 | 3600 | 4000 |
| depth | 2200 | 2200 | 2200 | 2200 | 2200 | 2200 |
| height | 500 | 500 | 500 | 500 | 500 | 500 |
| Air Capacity - mc/h | 5600 | 6700 | 7800 | 8900 | 10000 | 11100 |
| Net weight - kg. | 76 | 84 | 99 | 102 | 111 | 120 |
| INCLUDED ACCESSORIES | | | | | | |
| 304 S/S BLIND PANEL 400X500H MM | 2 | | | | 2 | 2 |
| 304 S/S LABYRINTH FILTER H=500 MM | 8 | 8 | 10 | 12 | 12 | 14 |

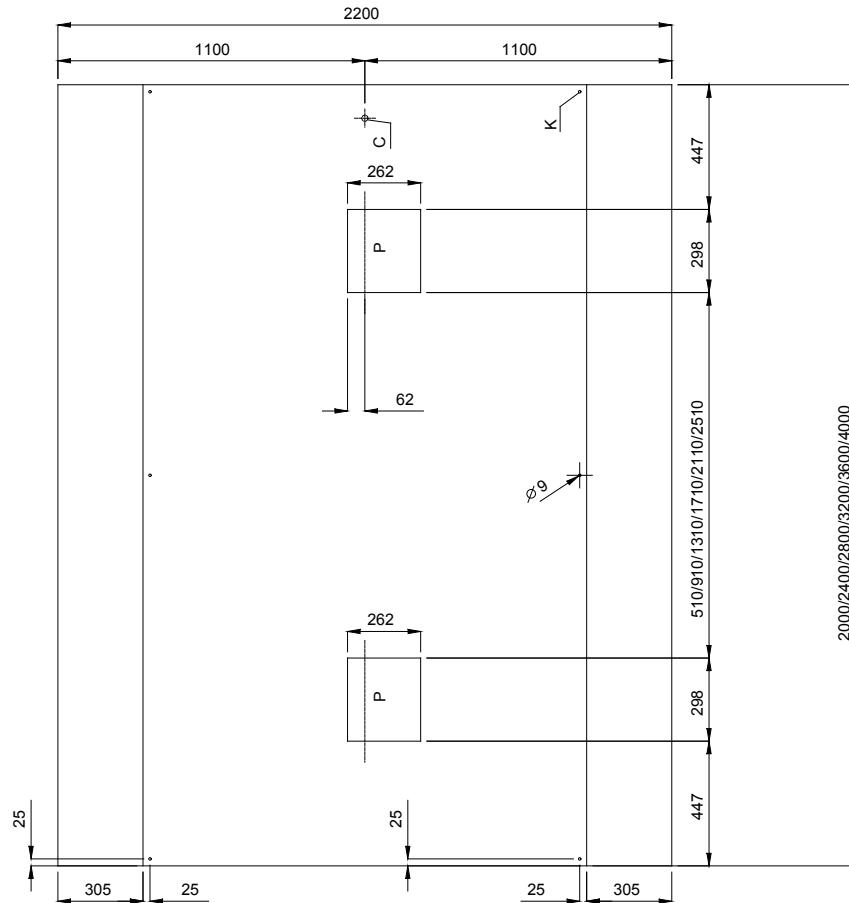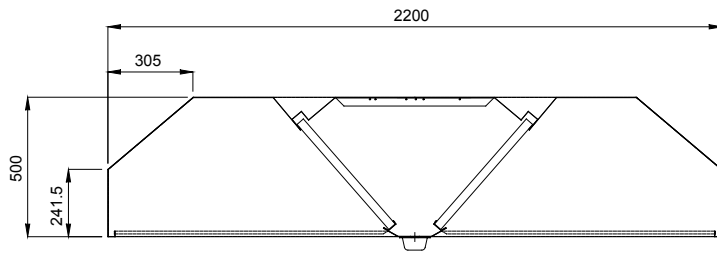

| OPTIONAL ACCESSORIES | | | | | | |
|--|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| ACCESSORIES | MODELS | | | | | |
| | BC2220DT 642369 | BC2224DT 642370 | BC2228DT 642371 | BC2232DT 642372 | BC2236DT 642373 | BC2240DT 642374 |
| 27-WATT LIGHTING FIXTURE W/1 LAMP-IP 65 | 680804 | 680804 | | | 680804 | 680804 |
| 36-WATT LIGHTING FIXTURE W/1 LAMP-IP 65 | | | 680805 | 680805 | 680805 | 680805 |
| DRAIN FOR HOODS DIAM.1/2"(M) WITH PLUG | 640409 | 640409 | 640409 | 640409 | 640409 | 640409 |
| FAN FOR VENTIL HOODS+DUCTED EXTRACT UNIT | 640748 | 640748 | 640748 | 640748 | 640748 | 640748 |
| SPEED VARIATOR FOR MOTORS UP TO 1.7 KW | 640686 | 640686 | 640686 | 640686 | 640686 | 640686 |



www.zanussiprofessional.com